



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 158(3) EPC

(43) Date of publication:
30.11.2005 Bulletin 2005/48

(51) Int Cl.7: **F15B 11/08, F15B 15/18**

(21) Application number: **04716722.6**

(86) International application number:
PCT/JP2004/002660

(22) Date of filing: **03.03.2004**

(87) International publication number:
WO 2004/079205 (16.09.2004 Gazette 2004/38)

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR**
Designated Extension States:
AL LT LV MK

(72) Inventor: **YOGO, Teruaki Kabushiki Kaisha Opton
Aichi 489-8645 (JP)**

(30) Priority: **03.03.2003 JP 2003056258**


(74) Representative: **Liesegang, Roland
FORRESTER & BOEHMERT
Pettenkoferstrasse 20-22
80336 München (DE)**

(71) Applicant: **Kabushiki Kaisha Opton
Aichi 489-8645 (JP)**

(54) **HYDRAULIC DEVICE**

(57) A fluid pressure apparatus is obtained whose installation position is not restricted. The fluid pressure apparatus is provided with a fluid pressure pump (1) driven by an electric motor (6) and rotatable in both directions. Both ports of the fluid pressure cylinder are respectively connected to both ports of a fluid pressure pump (1) through a pair of pipe lines. A sliding cavity (38) is formed between an outer cylinder (32) and the inner cylinder (34), and is divided into a preload chamber (50) and a tank chamber (18) by the piston (44) slidably inserted in the sliding cavity (38). The tank cham-

ber (18) and the pair of pipe lines are connected through check valves respectively provided in directions so as to allow discharge from the tank chamber (18). The tank chamber (18) is preloaded with air pressure introduced into the preload chamber (50). In addition, a fluid pressure pump (1) is disposed in the inner cylinder (34). The fluid pressure pump (1) is a swash plate piston pump. The outer cylinder (32) and the inner cylinder (34) are arranged coaxially with the rotating shaft 42 of the electric motor (6). The outer cylinder (32) and the inner cylinder (34) are mounted on the electric motor (6).

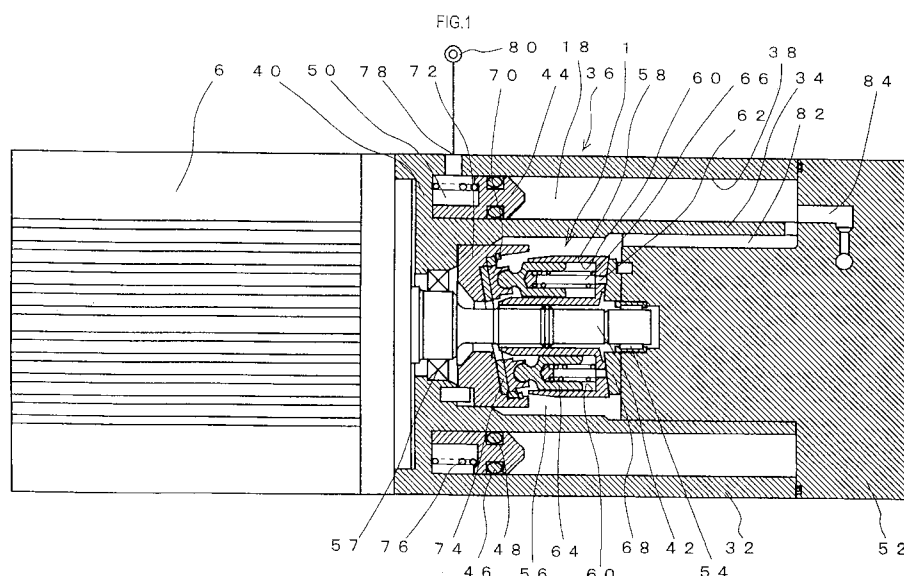

Description

Technical Field

[0001] The present invention relates to a fluid pressure apparatus in which both ports of a fluid pressure pump, driven by an electric motor and rotatable in both directions, are respectively connected to both ports of a fluid pressure actuator through a pair of pipe lines.

Background Art

[0002] There are known conventional fluid pressure apparatus, such as one shown in Publication of Unexamined Japanese Patent Application No. 10-26101 (page 2, FIG. 2), in which both ports of a fluid pressure pump driven, by an electric motor and rotatable in both directions, are respectively connected to both ports of a fluid pressure actuator through a pair of pipe lines. In this fluid pressure apparatus, a fluid pressure tank and a pair of pipe lines are connected through check valves oriented in respective directions to allow the flow from the fluid pressure tank. The sealed fluid pressure tank is preloaded by introducing air pressure.

[0003] According to such a conventional fluid pressure apparatus, however, a supply pipe connected to an air pressure source is connected to the sealed fluid pressure tank, and air pressure is introduced directly to the sealed fluid pressure tank. This leads to a problem that in the installation of the fluid pressure tank, it is necessary for an air layer formed in the fluid pressure tank to be located in an upper position. In other words, the installation position of the fluid pressure tank is restricted.

[0004] An object of the present invention is to provide a fluid pressure apparatus whose installation position is not restricted.

Disclosure of Invention

[0005] To achieve the above mentioned object, the present invention has taken the following measures: there is provided a fluid pressure apparatus provided with a fluid pressure pump driven by an electric motor and rotatable in both directions, both ports of a fluid pressure actuator and both ports of the fluid pressure pump being respectively connected through a pair of pipe lines, wherein a sliding cavity is formed between an outer cylinder and an inner cylinder. The sliding cavity is divided into a preload chamber and a tank chamber by a piston slidably inserted in the sliding cavity. The tank chamber and the pair of pipe lines are connected through check valves respectively provided in directions so as to allow discharge from the tank chamber. The tank chamber is preloaded with the air pressure introduced into the preload chamber, and the fluid pressure pump is disposed in the inner cylinder.

[0006] The fluid pressure pump may be a swash plate pump. Also, it may be possible to arrange the outer cyl-

inder and the inner cylinder coaxially with a rotating shaft of the electric motor, and mount the outer cylinder and the inner cylinder on the electric motor. Furthermore, the tank chamber may communicate with the inside of the inner cylinder. Alternatively, a top end of the rotating shaft of the electric motor may be rotatably supported by a lid member closing one end of the outer cylinder and one end of the inner cylinder.

10 Brief Description of Drawings

[0007] Fig. 1 is a cross-sectional view of a fluid pressure apparatus as an embodiment of the present invention; and

15 **[0008]** Fig. 2 is a hydraulic circuit diagram of the fluid pressure apparatus according to the present embodiment.

[0009] Best Mode for Carrying Out the Invention

[0010] An embodiment of the present invention will be described below in detail based on the drawings.

20 **[0011]** As shown in FIG. 2, a fluid pressure pump 1 is a swash plate piston pump that can be rotated in both directions. During a rotation in a forward direction, an operating fluid is drawn in from the side of a first port 2 and discharged from the side of a second port 4. During a rotation in a reverse direction, the operating fluid is drawn in from the side of the second port 4 and discharged from the side of the first port 2. The fluid pressure pump 1 is connected so as to be rotationally driven by an electric motor 6, such as a servomotor.

30 **[0012]** A head side pipe line 8 and a rod side pipe line 10 are respectively connected to the first port 2 and the second port 4. The head side pipe line 8 is connected to a head side port 14 of a fluid pressure cylinder 12 of a single-rod type, while the rod side pipe line 10 is connected to a rod side port 16 of the fluid pressure cylinder 12. Other than the fluid pressure cylinder 12 of a single-rod type, any fluid actuator may be employed, such as a fluid pressure cylinder of a double-rod type and a fluid pressure motor.

40 **[0013]** An after-mentioned tank chamber 18 is connected to the head side pipe line 8 through a pilot check valve 20. The pilot check valve 20 is oriented in a direction to allow the flow from the tank chamber 18 toward the head side pipe line 8. The pilot check valve 20 is connected so as to introduce the fluid pressure in the rod side pipe line 10 as a pilot pressure, and be opened to make the head side pipe line 8 communicate with the tank chamber 18 when the fluid pressure in the rod side pipe line 10 is increased.

50 **[0014]** Also, the rod side pipe line 10 is connected to the tank chamber 18 through a pilot check valve 22. The pilot valve 22 is oriented in a direction to allow the flow from the tank chamber 18 toward the rod side pipe line 10. The pilot check valve 22 is connected so as to introduce the fluid pressure in the head side pipe line 8 as a pilot pressure, and be opened to make the rod side pipe line 10 communicate with the tank chamber 18 when the

fluid pressure in the head side pipe line 8 is increased. In the present embodiment, the head side pipe line 8 and the rod side pipe line 10 are connected to the tank chamber 18 through relief valves 24, 26, respectively. The relief valves 24, 26 may be provided when necessary.

[0015] As shown in FIG. 1, there is provided a tank body 36 including a tubular outer cylinder 32 and a tubular inner cylinder 34 having a smaller diameter than the outer cylinder 32 and being formed within the outer cylinder 32. The outer diameter of the outer cylinder 32 is designed to be approximately the same as the outer diameter of the electric motor 6. The outer cylinder 32 and the inner cylinder 34 are arranged coaxially with each other.

[0016] A ring-shaped sliding cavity 38 is formed between the outer cylinder 32 and the inner cylinder 34, one end of the ring-shaped sliding cavity 38 being closed by a wall 40.

[0017] The wall 40 is mounted on one end of the electric motor 6, and thereby the tank body 36 is fixed to the electric motor 6. A rotating shaft 42 of the electric motor 6 is provided so as to be positioned coaxially with the outer cylinder 32 and the inner cylinder 34.

[0018] A ring-shaped piston 44 sealed by O-rings 46, 48 is slidably inserted in the sliding cavity 38. The sliding cavity 38 is divided into a preload chamber 50, on the side of the wall 40, and the tank chamber 18 by the piston 44. A lid member 52 is mounted to the other end of the sliding cavity 38 defined by the outer cylinder 32 and the inner cylinder 34, thereby closing the tank chamber 18. The lid member 52 is also inserted inside the inner circumference of the inner cylinder 34 so as to rotatably support a top end of the rotating shaft 42, through a bearing 54.

[0019] A pump chamber 56 is formed by being enclosed by the inner cylinder 34, the wall 40, and the lid member 52. The rotating shaft 42, sealed by a seal 57, penetrates the pump chamber 56. A cylinder block 58, engagingly attached to and integrally rotatable with the rotating shaft 42, is disposed within the pump chamber 56. The cylinder block 58 is provided with a plurality of cylinder holes 60 bored in the axial direction. Through holes 62 are respectively bored adjacent to the cylinder holes 60, and pistons 64 are slidably inserted into the respective cylinder holes 60, so that cylinder chambers 66 are formed by the cylinder holes 60 and the pistons 64.

[0020] A valve plate 68 is provided between the cylinder block 58 and the lid member 52, such that the through holes 62 may communicate with the first port 2 and the second port 4 through a not-shown pair of port holes formed in the valve plate 68 in accordance with the rotation of the cylinder block 58.

[0021] On the other hand, a shoe 70, provided to be spherically connected to one end of each of the pistons 64, is designed to slide on an anti-friction member 74 attached to a swash plate 72. The swash plate 72 is firm-

ly attached to the wall 40 of the tank body 36 so as to be restricted from rotation.

[0022] A coil spring 76, housed in the preload chamber 50, biases the piston 44 toward the tank chamber 18. The preload chamber 50, which is connected to a connection port 78, is connected to an air pressure source 80 through the connection port 78. The tank chamber 18, communicating with the pump chamber 56 through a communication path 82, is connected to the above-mentioned pilot check valves 20 and 22, and relief valves 24 and 26, through a connecting duct 84.

[0023] Next, the operation of the above described fluid apparatus in the present embodiment will be described.

[0024] When the electric motor 6 is rotated in a forward direction, the rotating shaft 42 rotates together with the cylinder block 58. This causes each shoe 70 to slide on the anti-friction member 74 and each piston 64 to slide within the sliding hole 60 in accordance with the inclination of the swash plate 72, thereby changing the volume of the cylinder chamber 66. So that, an operating fluid is drawn through the first port 2 and a pressure fluid is discharged through the second port 4.

[0025] Accordingly, the operating fluid is drawn from the head side port 14 of the fluid pressure cylinder 12 through the head side pipe line 8 into the first port 2 of the fluid pressure pump 1. Also, the pressure fluid is supplied from the second port 4, through the rod side pipe line 10, and the rod side port 16 to the fluid pressure cylinder 12.

[0026] Then, a cylinder rod 86 is driven in a pulling direction. In this case, the amount of the operating fluid discharged from the head side port 14 is different from the amount of the pressure fluid flowing in from the rod side port 16 by the volume of the cylinder rod 86. The excess amount of the operating fluid is discharged through the head side pipe line 8 to the tank chamber 18, since the pilot check valve 20 is opened by the operation of the pilot pressure from the rod side pipe line 10. In this regard, the operation speed and the moving amount of the fluid pressure cylinder 12 can be controlled by controlling the electric motor 6.

[0027] When the electric motor 6 is rotated in a reverse direction, the operating fluid is drawn from the second port 4 of the fluid pressure pump 1 through the rod side port 16 of the fluid pressure cylinder 12, and the rod side pipe line 10, while the pressure fluid is supplied to the fluid pressure cylinder 12 through the first port 2, the head side pipe line 8, and the head side port 14. Accordingly, the cylinder rod 86 is driven in a pushing direction.

[0028] In this case, the amount of the operating fluid discharged from the rod side port 16 is different from the amount of the pressure fluid flowing in from the head side port 14 by the volume of the cylinder rod 86 in the same manner as described above. The deficient amount of the operating fluid is supplied from the tank chamber 18 to the rod side pipe line 10 through the pilot

check valve 22, since the pressure in the rod side pipe line 10 is decreased, and thereby the pilot check valve 22 is opened. Specifically, the operating fluid is supplied to the rod side pipe line 10 through the pilot check valve 22 due to the preload applied to the tank chamber 18, which prevents the occurrence of cavitation on the drawing side of the fluid pressure pump 1.

[0029] In contrast, when the rotation of the electric motor 6 is stopped, the pressure fluid is not discharged from the fluid pressure pump 1. Accordingly, both pilot check valves 20 and 20 are opened by the operating fluid pressure in the tank chamber 18 due to the preload of the compressed air from the air pressure source 80. Thereby, the pressure in the tank chamber 18 is introduced into the head side pipe line 8 and the rod side pipe line 10.

[0030] As a result, the fluid pressure is introduced through both ports 14 and 16 of the fluid pressure cylinder 12, and the cylinder rod 86 is made difficult to move by a small external force even if the external force is applied to the cylinder rod 86 and, therefore, is prevented from deflecting. Also, since the tank chamber 18 is preloaded by the piston 44 regardless of the installation position of the tank body 36, there is no restriction on the installation position of the fluid pressure apparatus. In addition, since the circular tank chamber 18 is provided outside the fluid pressure pump 1, a sufficient volume of the tank chamber 18 can be secured and downsizing of the fluid pressure apparatus can be achieved.

[0031] The present invention is not limited to the above described embodiment, but may be practiced in various forms within the scope and not depart from the gist of the present invention.

[0032] As described in detail above, the fluid pressure apparatus of the present invention presents an advantage that an appropriate preload pressure can be applied regardless of its installation position as well as an advantage that downsizing can be achieved.

Industrial Applicability

[0033] According to the present invention, there is provided a fluid pressure apparatus capable of applying an appropriate preload pressure regardless of its installation position and capable of being downsized.

Claims

1. A fluid pressure apparatus provided with a fluid pressure pump driven by an electric motor and rotatable in both directions, both ports of a fluid pressure actuator and both ports of the fluid pressure pump being respectively connected through a pair of pipe lines, wherein a sliding cavity is formed between an outer cylinder and an inner cylinder, the sliding cavity being divided into a preload chamber and a tank

chamber by a piston slidably inserted in the sliding cavity,

wherein the tank chamber and the pair of pipe lines are connected through check valves respectively provided in directions so as to allow discharge from the tank chamber, the tank chamber being preloaded with the air pressure introduced into the preload chamber,

and wherein the fluid pressure pump is disposed in the inner cylinder.

2. The fluid pressure apparatus as set forth in claim 1, wherein the fluid pressure pump is a swash plate piston pump.
3. The fluid pressure apparatus as set forth in claim 1 or claim 2, wherein the outer cylinder and the inner cylinder are arranged coaxially with a rotating shaft of the electric motor, and the outer cylinder and the inner cylinder are mounted on the electric motor.
4. The fluid pressure apparatus as set forth in claim 1 to claim 3, wherein the tank chamber communicates with the inside of the inner cylinder.
5. The fluid pressure apparatus as set forth in claim 1 to claim 4, wherein a top end of the rotating shaft of the electric motor is rotatably supported by a lid member closing one end of the outer cylinder and one end of the inner cylinder.


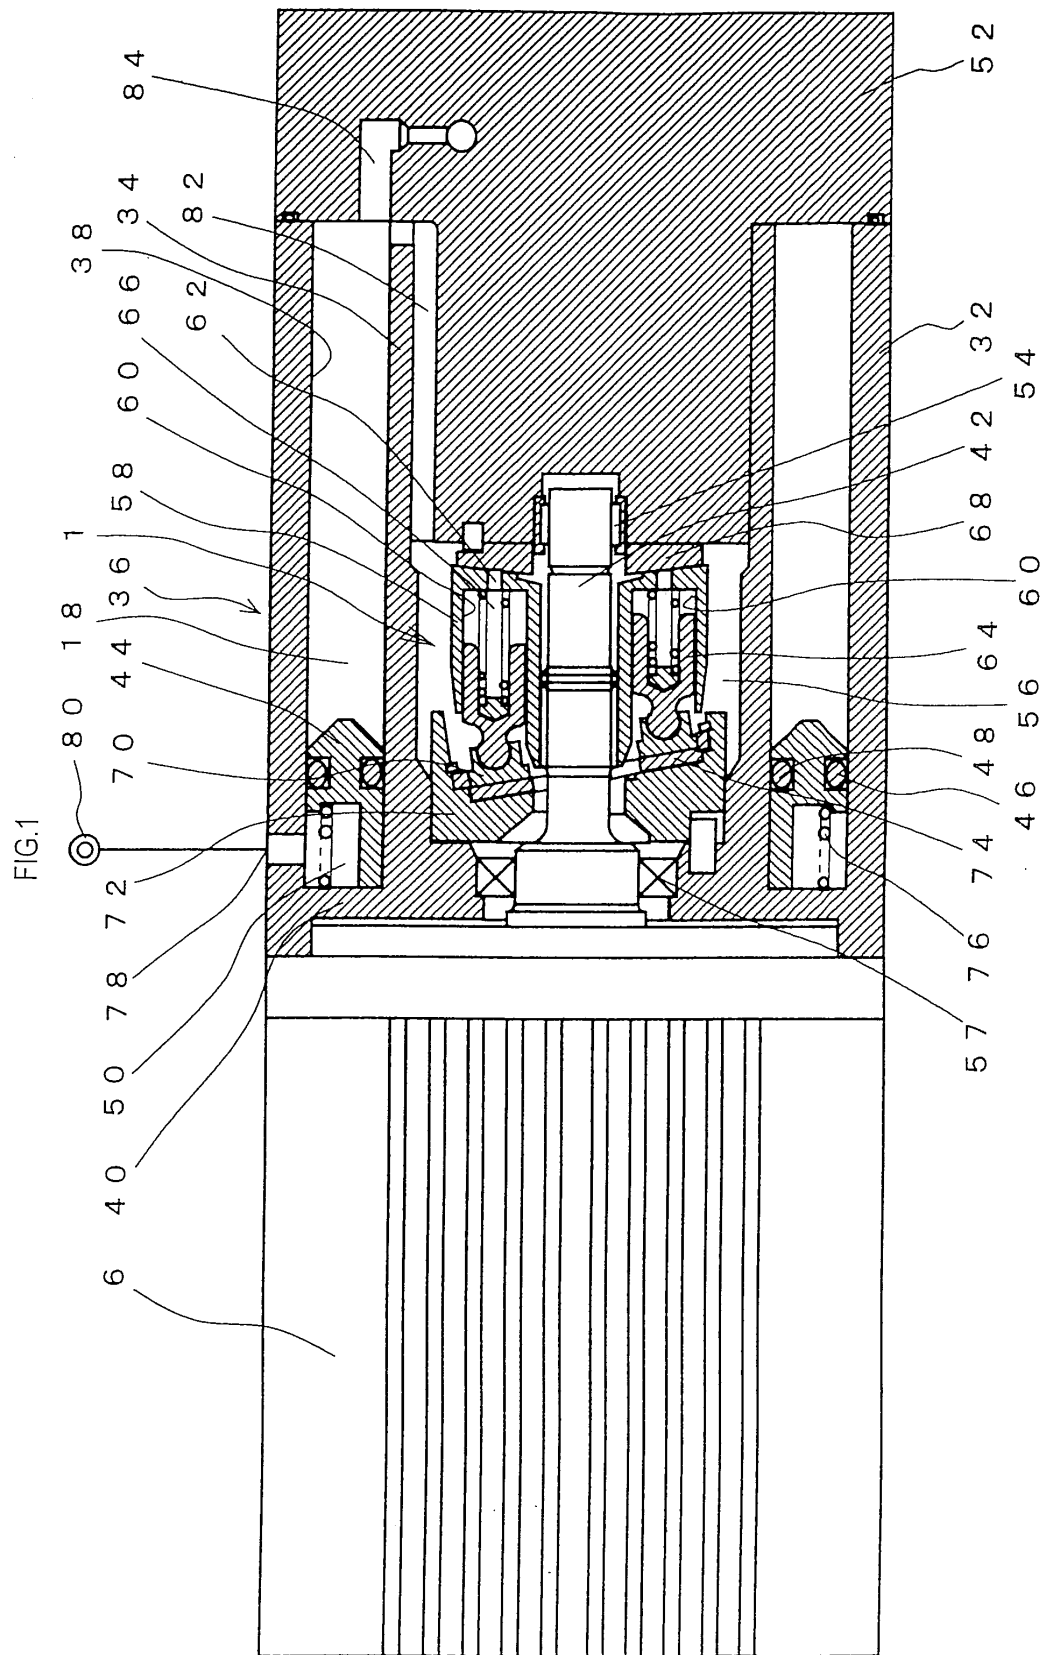


FIG.2

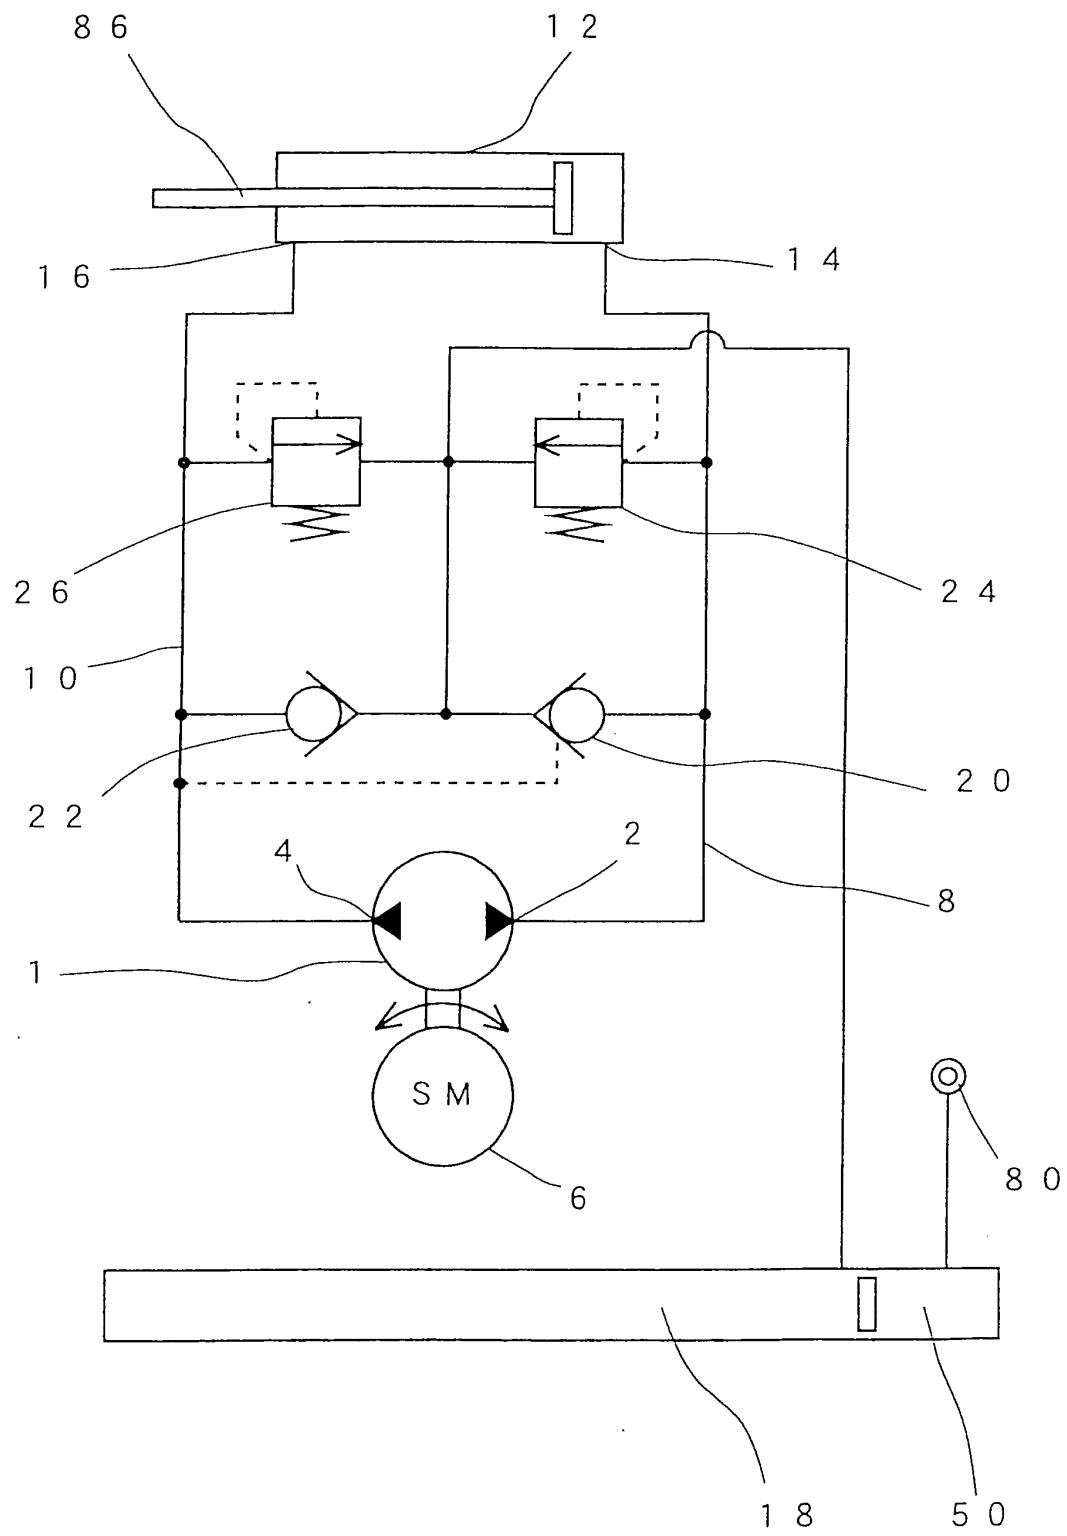

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2004/002660

A. CLASSIFICATION OF SUBJECT MATTER Int.Cl ⁷ F15B11/08, F15B15/18 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) Int.Cl ⁷ F15B11/00-11/22, F15B15/18 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1926-1996 Toroku Jitsuyo Shinan Koho 1994-2004 Kokai Jitsuyo Shinan Koho 1971-2004 Jitsuyo Shinan Toroku Koho 1996-2004 Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 10-026101 A (Kabushiki Kaisha Oputon), 27 January, 1998 (27.01.98), Fig. 2 (Family: none)	1-5
Y	US 2457467 A (CONS VULTEE AIRCRAFT CORP.), 28 December, 1948 (28.12.48), Fig. 1 (Family: none)	1-5
Y	Microfilm of the specification and drawings annexed to the request of Japanese Utility Model Application No. 43266/1987 (Laid-open No. 150102/1988) (Taiyo Tekko Co., Ltd.), 03 October, 1988 (03.10.88), (Family: none)	1-5
☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 27 May, 2004 (27.05.04)		Date of mailing of the international search report 15 June, 2004 (15.06.04)
Name and mailing address of the ISA/ Japanese Patent Office		Authorized officer
Facsimile No.		Telephone No.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2004/002660

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 61-294201 A (Matsushita Electric Industrial Co., Ltd.), 25 December, 1986 (25.12.86), Fig. 1; 'outer cylinder 1', 'inner cylinder 2', 'piston 4', 'gas chamber 5', 'oil chamber 6' (Family: none)	1-6
Y	JP 63-176880 A (Kabushiki Kaisha Ogura), 21 July, 1988 (21.07.88), Fig. 2 (Family: none)	5
A	JP 3-000304 A (PARKER HANNIFIN CORP.), 07 January, 1991 (07.01.91), Figs. 1, 5 & EP 0395420 A2 & US 5144801 A & DE 69012403 D	1-6
A	JP 9-60607 A (Kabushiki Kaisha Oputon), 04 March, 1997 (04.03.97), Fig. 1 (Family: none)	1-6