



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 605 550 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
14.12.2005 Bulletin 2005/50

(51) Int Cl.7: **H01R 12/16**

(21) Application number: **05019128.7**

(22) Date of filing: **15.04.1999**

(84) Designated Contracting States:
BE CH DE DK ES FI FR GB IE IT LI NL SE

(30) Priority: **17.04.1998 US 82091 P**
25.09.1998 US 160900

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
03028187.7 / 1 401 055
99106269.6 / 0 951 102

(71) Applicant: **FCI**
78000 Versailles (FR)

(72) Inventors:
• **Clark, Stephen L.**
Dillsburg, Pennsylvania 17019 (US)

- **Ortega, Jose L.**
Camp Hill, Pennsylvania 17011 (US)
- **Shuey, Joseph B.**
Camp Hill, Pennsylvania 17011 (US)
- **Brown III, John B.**
Mechanicsburg, Pennsylvania 17055 (US)

(74) Representative: **Beetz & Partner**
Steinsdorfstrasse 10
D-80538 München (DE)

Remarks:

This application was filed on 02.09.2005 as a
divisional application to the application mentioned
under INID code 62.

(54) **Matable electrical connectors having signal and power capabilities**

(57) The present invention relates to an electrical connector for power applications, the connector comprising: a) an insulative housing (76), b) a plurality of cavities (84, 86, 88) disposed in said insulative housing defined by a series of housing walls, and c) a power contact (10) disposed in each one of said plurality of cavities (84, 86), said power contact (10) comprising a pair of opposed contact walls defined by a first planar panel (28), a second planar panel (30), a medial space between the first planar panel and the second planar panel, a first flexible beam (18) adjoining the first planar panel (30), a second flexible beam (20) adjoining the second

planar panel (28), and separated contact terminals (32, 34, 36, 38) that each extend from the first planar panel (28) and the second planar panel (30) in a direction perpendicular to the first flexible beam (18) and the second flexible beam (20).

The first and second flexible beams (18, 20) define a heat flow path therebetween, heat dissipation can occur from the heat flow path defined between the first flexible beam (18) and the second flexible beam (20), and at least one of the first planar panel (30) and the second planar panel (28) is spaced from an adjacent housing wall such that heat dissipation can also occur from an exterior contact surface.

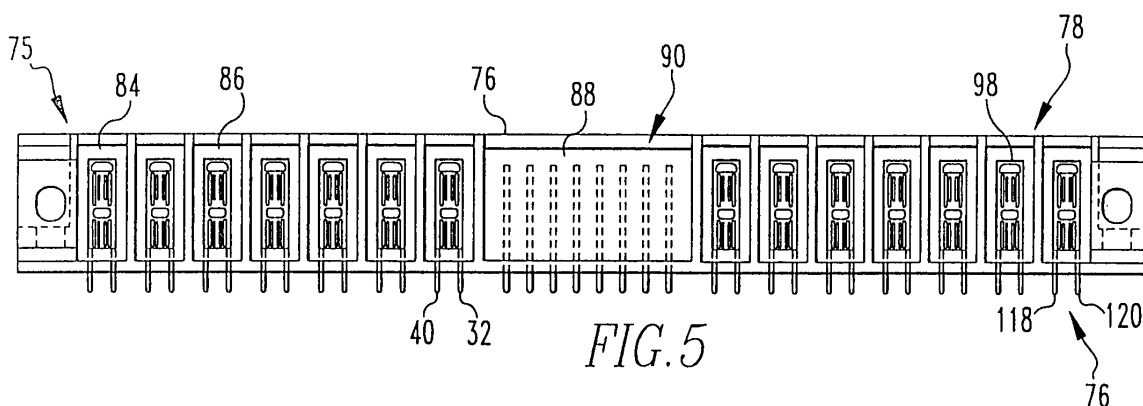


FIG. 5

EP 1 605 550 A1

Description

1. Field of the Invention:

[0001] The present invention relates to electrical connectors and more particularly to electronic power connectors especially, useful in circuit board or backplane interconnection systems.

2. Brief Description of Prior Developments:

[0002] Designers of electronic circuits generally are concerned with two basic circuit portions, the logic or signal portion and the power portion. In designing logic circuits, the designer usually does not have to take into account any changes in electrical properties, such as resistance of circuit components, that are brought about by changes in conditions, such as temperature, because current flows in logic circuits are usually relatively low. However, power circuits can undergo changes in electrical properties because of the relatively high current flows, for example, on the order of 30 amps or more in certain electronic equipment. Consequently, connectors designed for use in power circuits must be capable of dissipating heat (generated primarily as a result of the Joule effect) so that changes in circuit characteristics as a result of changing current flow are minimized. Conventional plug contacts in circuit board electrical power connectors are generally of rectangular (blade-like) or circular (pin-like) cross-section. These are so-called "singular-mass" designs. In these conventional singular-mass blade and pin configurations, the opposing receptacle contacts comprise a pair of inwardly urged cantilever beams and the mating blade or pin is located between the pair of beams. Such arrangements are difficult to reduce in size without adversely effecting heat dissipation capabilities. They also provide only minimal flexibility to change contact normal forces by adjustment of contact geometry.

[0003] There is a need for a small contact which efficiently dissipates heat and which has readily modifiable contact normal forces.

Summary of the Invention

[0004] The present invention relates to electrical connectors that comprises a receptacle having an insulative housing and at least one conductive receptacle contact comprising a pair of spaced walls forming a plug contact receiving space. A mating plug comprises an insulative housing and at least one conductive contact having a pair of spaced walls which form a projection engageable in the plug receiving space of the receptacle contact. The contacts employ a "dual mass" principle that provides a greater surface area available for heat dissipation, principally by convection, as compared with "single-mass" contacts. This arrangement provides an air flow path through spaced portions of the contacts of the

plug and receptacle connectors when mated.

Brief Description of the Drawings

[0005] The present invention is further described with reference to the accompanying drawings in which:

Fig. 1 is a perspective view of a plug contact;
 Fig. 2 is a side elevational view of the plug contact shown in Fig. 1;
 Fig. 3 is a perspective view of a receptacle contact;
 Fig. 4 is a side elevational view of the receptacle contact shown in Fig. 3;
 Fig. 5 is a front elevational view of a plug connector;
 Fig. 6 is a top plan view of the plug connector shown in Fig. 5;
 Fig. 7 is an end view of the plug connector shown in Fig. 5;
 Fig. 8 is a top front perspective view of the plug connector shown in Fig. 5;
 Fig. 9 is a top rear perspective view of the plug connector shown in Fig. 5;
 Fig. 10 is a front elevational view of a receptacle connector;
 Fig. 11 is a top plan view of the receptacle connector shown in Fig. 10;
 Fig. 12 is an end view of the receptacle connector shown in Fig. 10;
 Fig. 13 is a top front perspective view of the receptacle connector shown in Fig. 10;
 Fig. 14 is a top rear perspective view of the receptacle connector shown in Fig. 10;
 Fig. 15 is a front perspective view of a second embodiment of plug connector;
 Fig. 16 is a rear perspective view of the plug connector of Fig. 15;
 Fig. 17 is an isometric view of a plug contact used in the connector of Fig. 15, with the contact still attached to a portion of the strip material from which it was formed;
 Fig. 18 is a side cross-sectional view of the plug connector of Fig. 15;
 Fig. 19 is a front perspective view of a receptacle connector matable with the plug connector of Fig. 15;
 Fig. 20 is a rear perspective view of the receptacle connector shown in Fig. 19;
 Fig. 21 is an isometric view of a receptacle contact used in the connector shown in Fig. 19, with the contact still attached to a portion of the metal strip from which it was formed;
 Fig. 22 is a side cross-sectional view of the receptacle connector shown in Fig. 19;
 Fig. 22a is a partial cross-sectional view taken along line AA of Fig. 22;
 Fig. 22b is a partial cross-sectional view taken along line BB of Fig. 22;
 Fig. 23 is a front perspective view of a third embodiment

iment of plug connector;

Fig. 23a is a cross-sectional view of an alternative arrangement for securing a contact in a housing;

Fig. 24 is a front perspective view of a receptacle connector adapted to mate with the plug connector with Fig. 23;

Fig. 25 is a front elevational view of another embodiment of receptacle connector;

Fig. 26 is a bottom respective view of the connector shown in Fig. 25;

Fig. 27 is an isometric view of a receptacle contact used in the connectors illustrated in the Figs. 25 and 26;

Fig. 28 is a cross-sectional view of a connector as shown in Fig. 25; and

Fig. 29 is a cross-sectional view of an embodiment employing stacked contacts in the plug and receptacle connectors.

Detailed Description of the Preferred Embodiments

[0006] Referring to Figs. 1 and 2, a plug contact 10 for use in a plug connector is shown. This plug contact has two opposed major side walls 12 and 14. A front projection, identified generally by numeral 16, has an upper section 18 and a lower section 20. Each of these upper and lower sections comprises a pair of opposed cantilever beams, each beam having inwardly converging proximal section 22, arcuate contact section 24 and a distal section 26. The opposed distal sections 26 are preferably parallel to each other. The distal sections can be positioned slightly apart when the beams are in relaxed condition, but come together when the beams are deflected as the front projection is inserted into a receptacle contact (as explained below). This provides over-stress protection for the beams during mating. The side walls also include planar panels 28 and 30. Terminals 32, 34, 36 and 38 extend from an edge of panel 28. Terminal 40 extends from panel 30, along with a plurality of like terminals (not shown). Terminals 32-40 can comprise through hole, solder-to-board pins (as shown), press fit pins or surface mount tails. The panels 28 and 30 are connected by upper arcuate bridging elements 42 and 44. A medial space 46, adapted for air flow, is defined between the panels 28 and 30. The contact 10 is stamped or otherwise formed as a single piece from a strip of suitable contact materials such as phosphor bronze alloys or beryllium copper alloys.

[0007] Referring to Figs. 3 and 4, receptacle contact 48 is shown. This receptacle contact has opposed, preferably planar and parallel side walls 50 and 52. These walls extend forwardly in a front projecting portion 54, that forms a medial plug receiving space 56. The distance between walls 50 and 52 at portion 54 is such that the projection 16 of the plug contact 10 is receivable in the plug contact receiving space 56, with the beams being resiliently deflected toward the center plane of contact 10. The deflection causes the beams to develop out-

wardly directed forces, thereby pressing the arcuate portions 24 against the inside surfaces of the portions 54 forming the receiving space 56, to develop suitable contact normal force. The side walls 50 and 52 also include, respectively, panels 58 and 60. Extending from panel 58 there are terminals 62, 64, 66 and 68. Extending from panel 60 there is terminal 70 as well as several other terminals (not shown). These terminals are essentially the same as previously described terminals 32-40. The side walls 50 and 52 are joined together by generally arcuate bridging elements 72 and 74. Preferably, the receptacle contact is also stamped or otherwise formed in a single piece from a strip of phosphor bronze alloy or beryllium copper alloy.

[0008] Figs. 5-9 illustrate a plug connector 75 having an insulative plug housing 76. The housing 76 includes a front side 78 having a plurality of power contact apertures 84 and 86. The front projection or mating portion 16 (Figs. 1 and 2) of the plug contacts is disposed in apertures 84, 86. The plug contacts 10 are retained in the housing 76 by an interference fit between the contact and the housing. This is accomplished by having the dimension H (Fig. 2), the dimension between bottom edge of wall 12 and the top of bridging element 42, slightly greater than the dimension of the cavity in housing 76 that receives this portion of plug contact 10. The front side 78 may also include a signal pin array opening 88 for housing a signal pin array designated generally as numeral 90. The housing 76 also includes a number of rear vertical partitions, such as partitions 92 and 94, which form power contact retaining slots 96 for housing the plug contacts 98. The opposed medial vertical partitions 100 and 102 form between them a rear signal pin array space 104 for housing the rear portion 106 of the signal pins. The housing 76 also includes opposed rear mounting brackets 108 and 110 which have respectively mounting apertures 112 and 114. The plug contacts 10 have terminals 32, 34, 36, 38 and 40 extending below a bottom edge 80 of housing 76. The edge 80 forms a mounting interface, along which the housing is mounted to a printed circuit board or other structure on which the connector is mounted.

[0009] Referring to Figs. 10-14, a receptacle connector 128 is shown. Receptacle 128 has an insulative housing 129 with a front side 130 including a plurality of silos 131 having contact openings, such as openings 136 and 138. The front side 130 forms a mating interface of the connector 128 for mating with plug connector 75. The silos 131 are configured and sized to be received in openings 84, 86 of connector 75. The front portions 54 (Figs. 3-4) of the receptacle contacts are disposed within silos 131 and openings 134, 136 are sized and configured to receive the upper and lower sections 18 and 20 of plug contacts 10. The front side 130 has a signal pin receiving area 140 with signal pin receiving apertures. The housing 129 also has a plurality of rear partitions, such as partitions 144 and 146, which form contact retaining slots 148 for housing receptacle contacts

48. Signal pin housing 152 receives a signal receptacle contact array 154. The housing 129 also includes opposed rear mounting brackets 156 and 158 which have, respectively, mounting apertures 160 and 162. The receptacle contact terminals 62, 64, 66, 68 and 70 extend beneath surface 137, that forms the mounting interface of receptacle connector 128.. The front side 130 of the housing 128 also has a plurality of vertical spaces 176 and 178, disposed between silos 131.

[0010] The receptacle contacts 48 are retained in housing 129 by an interference fit in essentially the same manner as previously described with respect to plug contacts 10. Retaining the contacts in this fashion allows substantial portions of the walls 12, 14 of the plug contact and walls 58, 60 of the receptacle contact to be spaced from surrounding parts of the respective housings 76 and 129. This leaves a substantial proportion of the surface area of both contacts (including the plug contacts), exposed to air, thereby enhancing heat dissipation capabilities, principally through convection. Such enhanced heat dissipation capabilities are desirable for power contacts.

[0011] Fig. 15 shows another plug connector 200 embodying the invention. In this embodiment, the housing 202, preferably formed of a molded polymeric material, has a front face 204 that forms the mating interface of the connector. The face 204 includes a plurality of openings, such as openings 206, formed in a linear array.

[0012] Referring to Fig. 16, the plug connector 200 includes a plurality of plug contacts 208. The contacts 208 are inserted from the rear of the housing into cavities 212 that extend from the rear of the housing toward the front of the housing. When the contacts 208 are fully inserted into the housing 202, the contact portions 210 with contacts 208 are disposed in the openings 206.

[0013] Referring to Fig. 17, the plug contact 208 is similar in many respects to the plug contacts shown in Fig. 1. It includes spaced panel-like walls 214, 216 that preferably are planar and substantially parallel. The walls 214, 216 are joined by a front bridging element 218 and a rear bridging element 220. In this embodiment, the contact section 210 is formed by two opposed cantilevered beams 211 that extend from front edges of the walls 214, 216. Preferably, each wall includes a fixing tang 224 formed along a bottom of the edge of the wall. The walls 214, 216 also include lateral positioning elements, such as bent tangs 222, for centering the contact within cavities 212 in housing 202. Each wall also includes a positioning feature, such as raised lug 234.

[0014] The front bridging element 218 includes a rearwardly extending retention arm 228 that is cantilevered at its proximal end from the bridging element. Arm 228 includes a locating surface 230 at its distal end.

[0015] Terminals, such as through-hole pins 226, extend from the bottom edge of each wall 214, 216. The terminals 226 can be solder-to-board pins (as shown) or can comprise press fit or other types of terminals.

[0016] As can be seen from Fig. 17, the contacts 208

can be formed from sheet stock by stamping and forming the part from a strip of metallic stock suitable for forming electrical contacts. The contacts 208 can be retained on a carrier strip S for gang insertion or separated from the strip prior to insertion into a housing.

[0017] Referring to Fig. 18, the contact 208 is inserted into housing 202 from the rear into cavities 212 (Fig. 16). The contact 208 is located (in the vertical sense of Fig. 18) by engagement of the bottom edge 215 (Fig. 17) against surface 232 of the housing and by engagement of the top edges of the lugs 234 with the rib 236 in the upper part of the housing. The contact is maintained centered within the cavity 212 by the lateral tangs 222 that engage side walls of the cavity 212. The contact 208 is longitudinally locked in the housing (in the direction of contact mating) by means of the spring arm 228 that is deflected downwardly by the rib 236 of the housing during insertion and then resiles upwardly to position the stop surface 230 at its distal end against or near the forward surface of the rib 236.

[0018] The downwardly extending tang 24 is preferably received in a slot 225 in the housing, the width of the slot being substantially the same as the thickness of the tang 224. By capturing the tang 224 in the slot 225, deformation of the wall section, as might occur when the cantilever arms 211 of the contact section are urged toward each other, is limited to the portion of the walls 212, 216 disposed forwardly of the tangs 224. This enhances control of the contact normal forces generated by deflection of the cantilever arms 211.

[0019] As shown in Fig. 18, the terminals 226 extend below the bottom surface 238 of the housing 202, which bottom surface defines a mounting interface of the connector, along which it is mounted on a printed circuit board.

[0020] Figs. 19 and 20 show a receptacle connector for mating with the plug connector illustrated in Figs. 15-18. The receptacle connectors 240 include an insulative housing 242 that comprises an array of receptacle silos 244. The front surfaces 246 of the silos are substantially coplanar and form a mating interface of the connector. Each silo has an opening 248 for receiving the contact section 210 of the plug contacts 208 of the mating connector. The plurality of receptacle contacts 250 are mounted in the housing 242, preferably by insertion from the rear into cavities 252. As shown in Fig. 20, preferably the top wall 254 of the housing does not extend fully to the rear of the connector housing, thereby leaving substantial openings in the cavities 252.

[0021] The receptacle contact for receptacle connector 240 is illustrated in Fig. 21. The contact 250 is similar in basic form to the receptacle contact 48 illustrated in Figs. 3 and 4. It includes two opposed walls 254, 256 that are preferably substantially planar and parallel, thereby forming between them a contact receiving and air flow space. The walls 254, 256 are joined by a front bridging element 258 and a rear bridging element 260. The front bridging element 258 includes a resilient latch-

ing arm that is cantilevered at its proximal end from bridging element 258 and carries at its distal end the latching or locking surface 264. As described previously, the receptacle contact 250 can be formed in a single, unitary piece, by stamping and forming the contact from a strip. As mentioned previously, the contacts can be inserted into the housing while attached to carrier strip S or after being separated therefrom.

[0022] Fig. 22 is cross-sectional view showing a receptacle contact 250 inserted into housing 242. As shown, the locating tang 266 is positioned with its forward surface against the locating surface 272 in the bottom wall of the housing 242, thereby positioning the contact in its forward-most position. As the contact is inserted in the housing, the latching arm 262 is caused to resile downwardly when it engages the latching portion 278 of the housing. As the latching arm 262 resiles upwardly after it passes the latching section 278, the locking surface 264 engages a raised rib 280 (Fig. 22b) thereby locking the contact against rearward movement with respect to the housing. The terminals 268 extend beyond the surface 270 that forms the mounting interface of connector 240.

[0023] As illustrated in Figs. 22a and 22b, the forward portions of the walls 254, 256 are disposed along inside side walls of the silos 44. At the forward surface 246 of each silo, a plug contact receiving opening 248 is formed. The opening includes a pair of lips 274 that are coplanar with or extend just slightly beyond the inside surfaces of the walls 254, 256. This arrangement provides the benefit of lowered initial insertion forces when the connectors 200 and 240 are mated. As the silos 244 enter the openings 206 (Fig. 15), the contact sections 210 formed by the cantilevered arms 211 first engage the surfaces of lips 274. Because the coefficient of friction between the cantilevered arms 22 and the plastic lips 274 is relatively lower than the coefficient friction between the cantilevered arms and the metal walls 254, 256, initial insertion force is minimized.

[0024] Fig. 23 shows another embodiment of plug connector 290. In this embodiment, the housing 292 has a single front opening 294 in which the contact sections 296 of the plug contacts are disposed. The housing also includes a plurality of openings 298 in the top wall of the housing. As shown in Fig. 23a, the bridging element 218 and locating lug 234 engage the top surface 301 of the contact receiving cavity and the bottom surface 295 of the cavity in an interference fit. The arm 228 deflects downwardly as the contact is inserted into the housing and the arm engages portion 303. When the arm 228 clears portion 303, the arm resiles upwardly to locate stop surface 230 adjacent surface 299, thereby locking the contact against retraction. The openings 298 are positioned above the latching arms 228 (Fig. 18), to allow the arm 228 to be moved from a retention position and the contacts to be withdrawn from the housing. This can be accomplished by insertion of a suitable tool (not shown) through opening 298. Openings 298 can also

provide air flow passages for enhancing heat dissipation.

[0025] Fig. 24 illustrates a receptacle connector 300 adapted to mate with plug connector 290. The receptacle connector 230 employs a housing 302 having a continuous front face 304, rather than a plurality of silos as in previous embodiments. The entire front face 304 of the connector 300 is received in opening 294, with the contact sections 296 inserted into openings 305 of face 304. Openings 306 in the top wall of the housing allow access to the latching arms of the receptacle contacts (not shown) as described in the previous embodiment.

[0026] The embodiment of Fig. 24 and also the embodiment of Figs. 25 and 26 are meant for use in a vertical configuration, as opposed to a right angle configuration. The housing 302 of connector 300 (Fig. 24) has a bottom side 307. Preferably, a plurality of standoff surfaces 309 form a mounting interface, along which the housing is mounted on a substrate, such as a printed circuit board. Similarly, the housing of connector 320 has a bottom surface 321 with standoffs 323. Appropriate receptacle contacts 322 (Fig. 7) are inserted into the housings of connectors 300 and 320 from the bottom sides 307 and 321, respectively.

[0027] Fig. 27 shows a receptacle contact 322 comprising a pair of preferably planar parallel walls 324, 326 that form between them a contact receiving space for receiving plug contacts of the type previously described. This contact has terminals 328 extending from a rear edge of each of the walls. As shown in Fig. 28, the contact 322 is received in housing 330 in a manner similar to that previously described, wherein the resilient latching arm locks the contact against downward (in the sense of Fig. 28) movement, while a locating surface 334 locates the contact in the opposite direction with respect to the housing. The terminals 328 extend beyond the plane of the mounting interface of the connector housing for insertion into through holes in the printed circuit board.

[0028] Fig. 29 shows an embodiment employing two sets of contacts at each location, in a stacked configuration. The receptacle connector 340 has a housing formed of insulative material. The housing 342 includes a mating interface having a plurality of openings 341. Each of the openings 341 open into cavities in housing, which cavities receive substantially identical receptacle contacts 344a and 344b. Each of the contacts 344a and 344b is similar in general construction to the receptacle contacts previously described, there being a pair of such contacts in each cavity, generally aligned along the side walls thereof, to form a gap between generally parallel plate sections 346. The plate sections 346 have two opposed edges 348 and 350, one of which carries a retention feature, such as interference bump 352. The receptacle contact sections 356 are retained in the housing by suitable means, such as an interference fit created by the bump 352. Each contact section 356 includes a generally coplanar wall section 354. The wall sections

354 are joined by a bridge section 355. Suitable terminals, such as press fit terminals 356 extend from an edge of the wall section 354, in the case where the connector 340 is to be used in a vertical configuration.

[0029] The mating plug connector 360 includes a molded polymeric body 361 that receives a pair of plug contacts, such as upper plug contact 362 and the lower plug contact 376. These plug contacts are configured generally in the manner previously described, namely, being formed of a pair of spaced wall sections 364 and 368 respectively joined by bridging elements and carrying opposed contact beams 366 and 380 to engage the spaced receptacle plates 346. The plug contact 362 includes a single, relatively long, or several, relatively short, bridging elements 376 that join two opposed plates 364. The bottom edge 372 of each of the plates 364 includes retention structure, such as an interference bump 374. The plug contact 362 is retained in its cavity within housing 361 by an interference fit between the bridging elements 376 and the interference bump 374, although it is contemplated that other retention mechanisms could be utilized. Similarly, lower plug contacts 376 comprise a pair of coplanar wall or panel members 378 joined by one or more bridging elements 382. The lower edge 384 of each wall 378 includes an interference bump 386, that functions to create an interference fit, as previously described. Suitable terminals 368 and 380 extend from each of the panels 364 and 368, beyond the mounting interface 363 of the housing 361, for associating each of the contacts 362 and 376 with electrical tracks on the printed circuit board on which the plug 360 is to be mounted.

[0030] The previously described receptacle and plug contacts may be plated or otherwise coated with corrosion resistant materials. Also, the plug contact beams may be bowed slightly in the transverse direction to enhance engagement with the contact receiving surfaces of the receptacle contacts.

[0031] The "dual-mass" construction of both receptacle and blade contacts, employing opposing, relatively thin walls, allows for greater heat dissipation as compared with prior "singular-mass" designs. In comparison with "singular mass" connectors of similar size and power handling capabilities, the "dual mass" connectors, as disclosed have approximately two times the surface area. The enhanced current flow and heat dissipation properties result from the contacts having greater surface area available for convection heat flow, especially through the center of the mated contacts. Because the plug contacts have an open configuration, heat loss by convection can occur from interior surfaces by passage of air in the gap between these surfaces.

[0032] The contacts also contain outwardly directed, mutually opposing receptacle beams and dual, peripherally located, mating blades, in a configuration which can allow for flexibility in modifying contact normal forces by adjustment the contact connector geometry. This can be accomplished by modifying the bridging ele-

ments to change bend radius, angle, or separation of the walls of the contacts. Such modifications cannot be accomplished with conventional singular-mass beam/blade configurations wherein the opposing receptacle contacts are inwardly directed, and the mating blade is located in the center of said beams.

[0033] Such dual, opposing, planar contact construction also allows for easier inclusion of additional printed circuit board attachment terminals with more separation between terminals, compared to an equivalent "singular-mass" bulk designs. The use of relatively larger plates in the plug and receptacle contacts gives this opportunity for providing a plurality of circuit board terminals on each contact part. These lessens constriction of current flow to the printed circuit board, thereby lowering resistance and lessening heat generation.

[0034] The use of a compliant plug mating section allows the receptacle contacts to be placed in a protected position within the molded polymeric housing for safety purposes. This feature is of further benefit because it allows minimization of amount of polymeric material used in making the housing. This lowers material costs and enhances heat dissipation. Also, by retaining the contacts in the housing in the manner suggested, thick wall structures can be avoided and thin, fin like structures can be utilized, all of which enhances heat dissipation from the connectors. Additionally, first-make, last break functionality can be incorporated easily into disclosed connector system by modifying the length of the mating portion of the plug contacts or by changing the length of the plug-receiving portion of the receptacle contacts.

[0035] The arch connection structure between opposing rectangular contact sections also allows for attachment of retention means, such as a resilient arm structure as shown in one of the current embodiments, in a manner that does not limit current flow or hinder contact heat dissipation capability.

[0036] It will also be appreciated that the plug and receptacle contacts may be manufactured from closely similar or identical blanks thereby minimizing tooling requirements. Further, the plug or receptacle connectors can easily be associated with cables, by means of paddle boards.

[0037] While the present invention has been described in connection with the preferred embodiments of the various figures, it is to be understood that other similar embodiments may be used or modifications and additions may be made to the described embodiment for performing the same function of the present invention without deviating therefrom. Therefore, the present invention should not be limited to any single embodiment, but rather construed in breadth and scope in accordance with the recitation of the appended claims.

Claims

1. An electrical connector for power applications, the connector comprising:

a) an insulative housing (76);
 b) a plurality of cavities (84, 86, 88) disposed in said insulative housing defined by a series of housing walls; and
 c) a power contact (10) disposed in each one of said plurality of cavities (84, 86), said power contact (10) comprising a pair of opposed contact walls defined by a first planar panel (28), a second planar panel (30), a medial space between the first planar panel and the second planar panel, a first flexible beam (18) adjoining the first planar panel (30), a second flexible beam (20) adjoining the second planar panel (28), and separated contact terminals (32, 34, 36, 38) that each extend from the first planar panel (28) and the second planar panel (30) in a direction perpendicular to the first flexible beam (18) and the second flexible beam (20),

characterized in that the first and second flexible beams (18, 20) define a heat flow path therebetween, heat dissipation can occur from the heat flow path defined between the first flexible beam (18) and the second flexible beam (20), and at least one of the first planar panel (30) and the second planar panel (28) is spaced from an adjacent housing wall such that heat dissipation can also occur from an exterior contact surface.

2. The housing of claim 1, wherein the two spaced apart contact walls (28, 30) face each other.

3. An electrical connector, comprising:

a) a housing (292), comprising:

i) a contact receiving cavity (294); and
 ii) a top wall including a heat dissipation through-hole (298) formed therein that is fluidly connected to said contact receiving cavity (294); and

b) an electrically conductive contact (216) positioned in said contact receiving cavity (294), said electrically conductive contact (216) comprising a first contact wall, a second contact wall opposing said first contact wall, and a medial space between said first and second contact walls, a first flexible beam adjoining the first contact wall, and a second flexible beam adjoining the second contact wall,

characterized in that the first and second flexible beams each have a width, the first and sec-

ond flexible beams define a heat flow path therebetween, the heat flow path being unobstructed in a widthwise direction of the first and second flexible beams, and at least a portion of said first and second contact walls are positioned in the housing (294) below said heat dissipation through-hole (298).

4. The electrical connector of claim 3, wherein at least one of said first and second contact walls is spaced away from adjacent housing structure bounding said contact receiving cavity (294) such that a heat dissipation channel is formed between said at least one of said first and second contact walls and said adjacent housing structure.

5. The electrical connector of claim 4, wherein said heat dissipation channel is fluidly connected to said heat dissipation through-hole (298).

6. The electrical connector of claim 3, wherein at least one of said first and second contact walls includes a lateral positioning element (222) for spacing it from a cavity wall of said contact receiving cavity.

7. The electrical connector of claim 3, wherein said contact receiving cavity (294) includes a cavity wall having a lateral positioning element for spacing one of said first and second contact walls from said cavity wall.

8. A connector system, comprising:

(i) a connector (290), comprising:

a) an insulative housing (292);
 b) a plurality of cavities (294) disposed in said insulative housing (292) defined by a series of housing walls; and
 c) a power contact (216) disposed in each one of said plurality of cavities (294), said power contact comprising a pair of opposed contact walls defined by a first planar panel, a second planar panel, a medial space between the first planar panel and the second planar panel, a first flexible beam extending from the first planar panel, and a second flexible beam extending from the second planar panel;

characterized in that heat dissipation can occur from interior contact surfaces by passage of air in the medial space and at least one of the first planar panel and the second planar panel is spaced from an adjacent housing wall such that heat dissipation can also occur from an exterior contact surface; and

(ii) a mating connector (300), comprising:

- a) an insulative housing (302);
- b) a plurality of cavities (305) disposed in said insulative housing (302) of the mating connector (300), the cavities being defined by a series of housing walls; and 5
- c) a plurality of receptacle contacts for receiving the first and second flexible beams of respective ones of the power contacts (216), each of the receptacle contacts being disposed in a respective one of said plurality of cavities (305) disposed in said insulative housing (302) of the mating connector (300), each of said receptacle contacts comprising a pair of opposed contact walls defined by a first planar panel, a second planar panel, and a medial space between the first planar panel and the second planar panel of the receptacle contact; 10 15 20

heat dissipation can occur from interior contact surfaces of the receptacle contacts by passage of air in the medial spaces of the receptacle contacts and at least one of the first planar panel and the second planar panel of each of the receptacle contacts is spaced from an adjacent housing wall of the mating connector such that heat dissipation can also occur from an exterior contact surface of the receptacle contact. 25 30

9. A connector system, comprising:



a connector (290), comprising: 35




- a) a housing (292), comprising:
 - i) a contact receiving cavity (294); and
 - ii) a top wall including a heat dissipation through-hole (298) formed therein that is fluidly connected to said contact receiving cavity (294); and 40
- b) an electrically conductive contact (296) 45 positioned in said contact receiving cavity (294), said electrically conductive contact (296) comprising a first contact wall, a second contact wall opposing said first contact wall, a medial space between said first and second contact walls, a first flexible beam adjoining the first contact wall, and a second flexible beam adjoining the second contact wall, **characterized in that** at least a portion of said first and second contact walls are positioned in the housing (292) below said heat dissipation through-hole (298); 50 55


and


a mating connector (300), comprising:

- a) a housing (302), comprising:
 - i) a contact receiving cavity (305); and
 - ii) a top wall including a heat dissipation through-hole (306) formed therein that is fluidly connected to said contact receiving cavity of the mating connector; and
- b) a receptacle contact for receiving the first and second flexible beams, the receptacle contact being positioned in said contact receiving cavity (305) of the mating connector (300), said receptacle contact comprising a first contact wall, a second contact wall opposing said first contact wall of the receptacle contact, and a medial space between said first and second contact walls of the receptacle contact, **characterized in that** at least a portion of said first and second contact walls of the receptacle contact (300) are positioned in the housing (302) of the mating connector (300) below said heat dissipation through-hole (306) of the housing (302) of the mating connector (300).

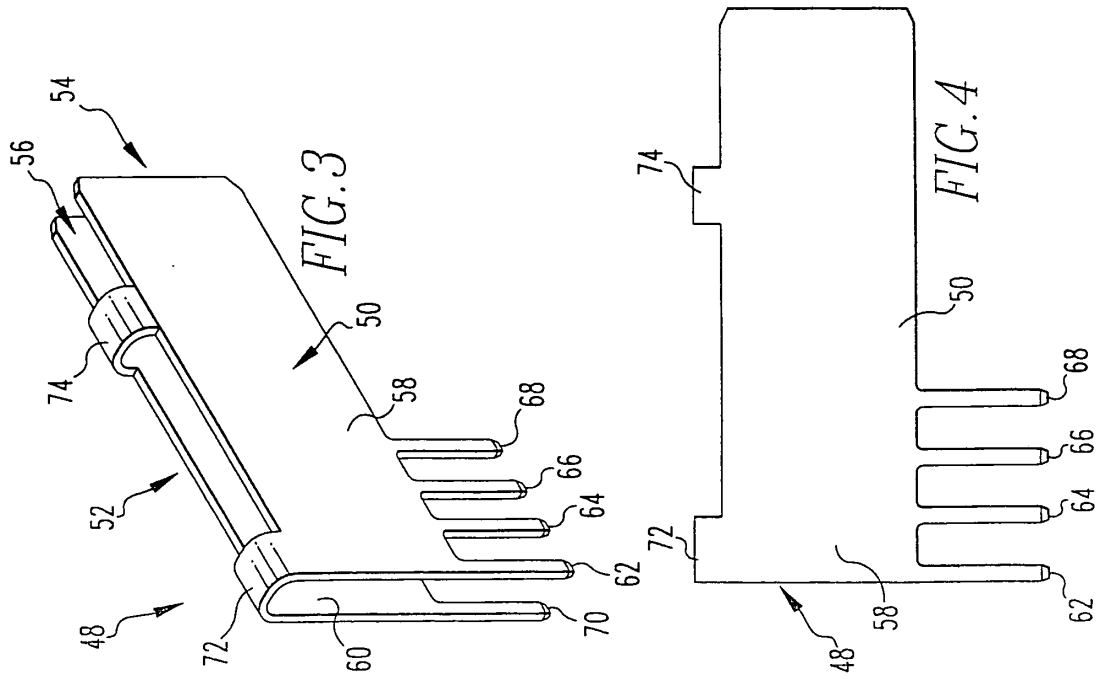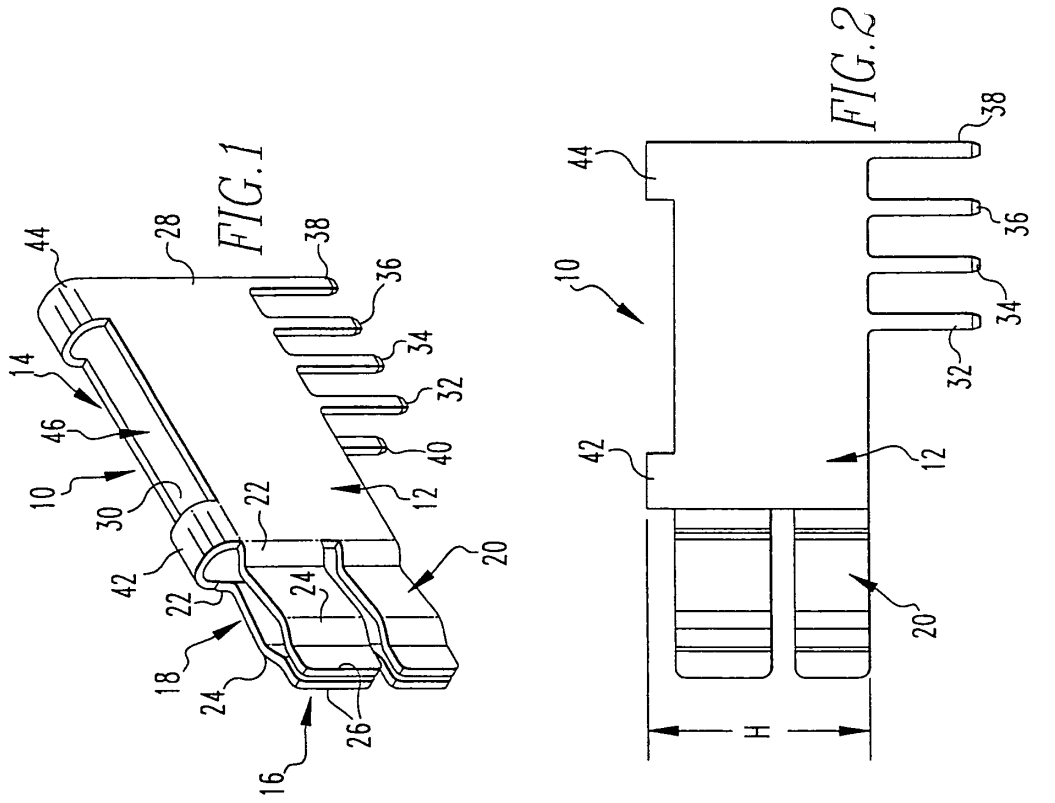

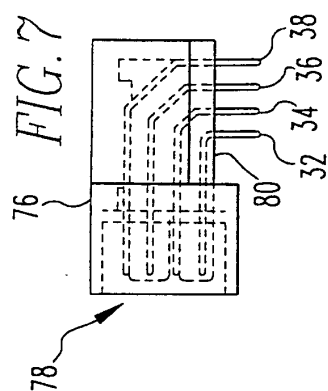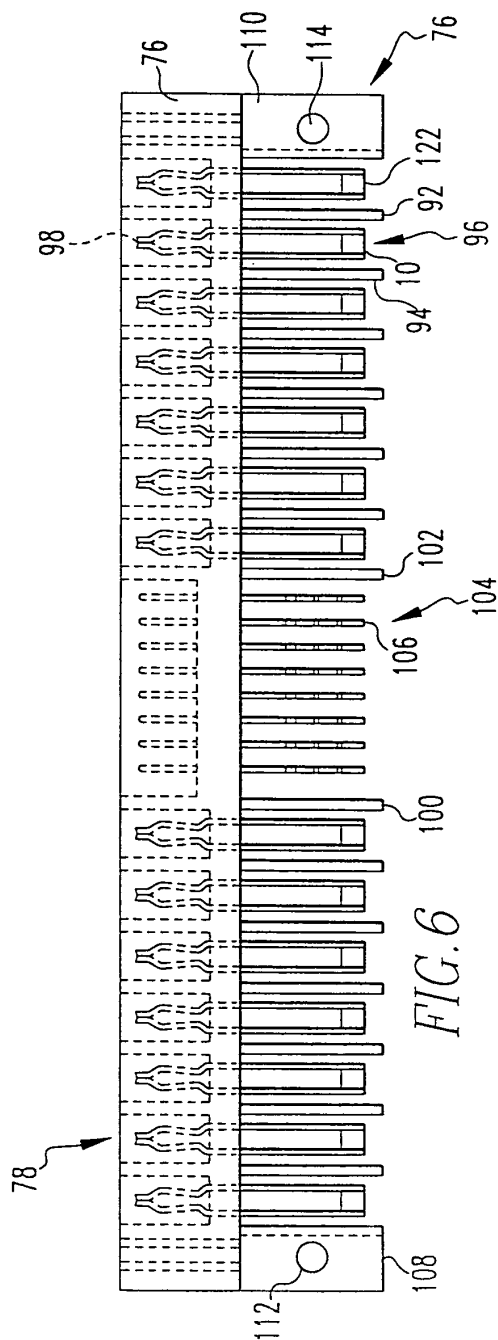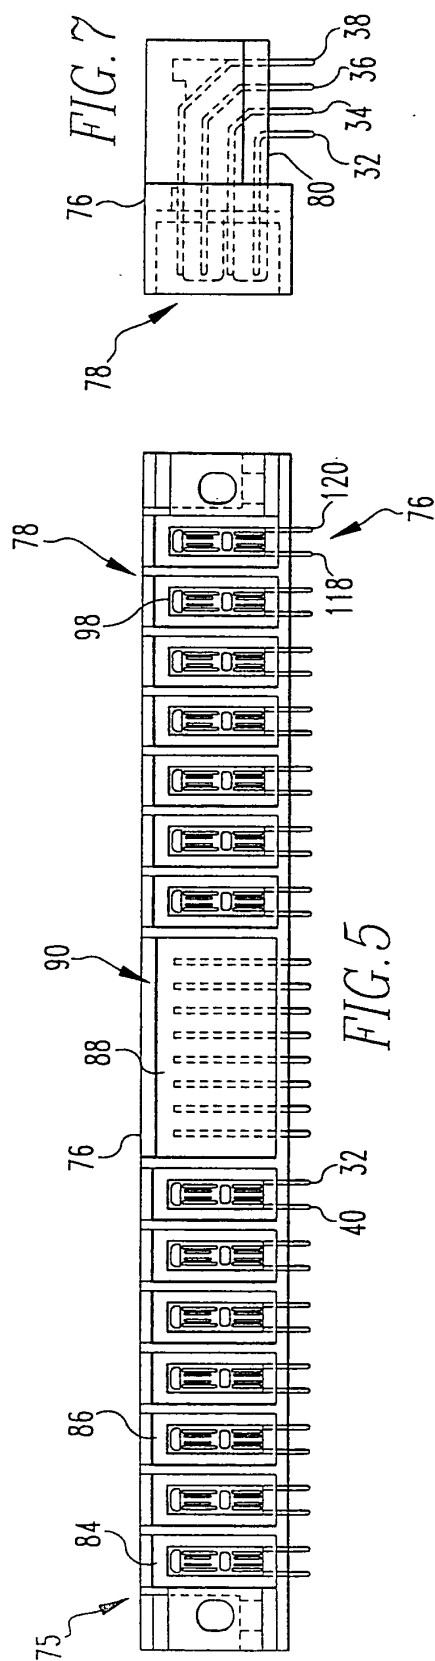

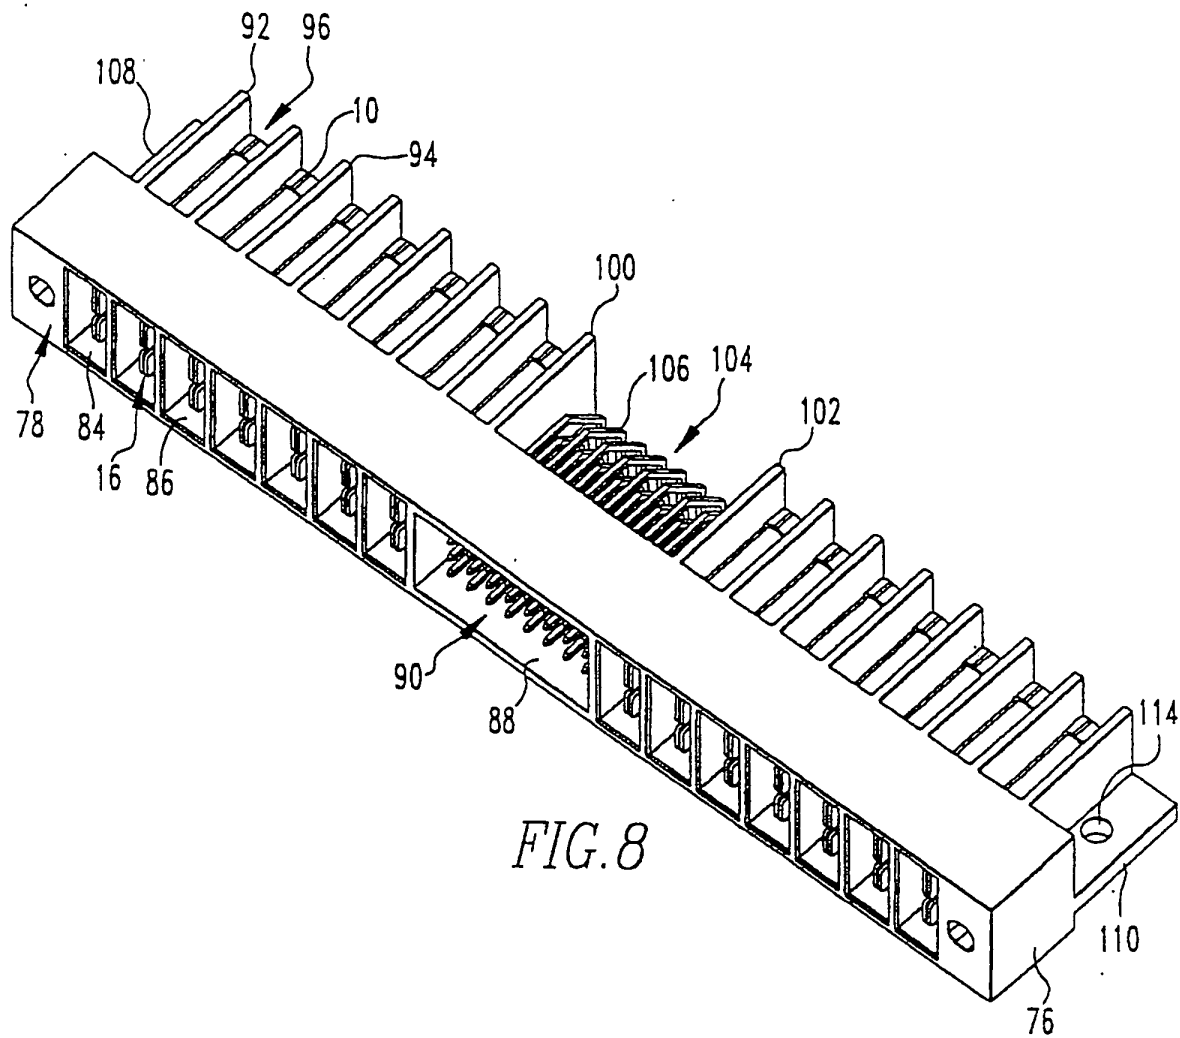

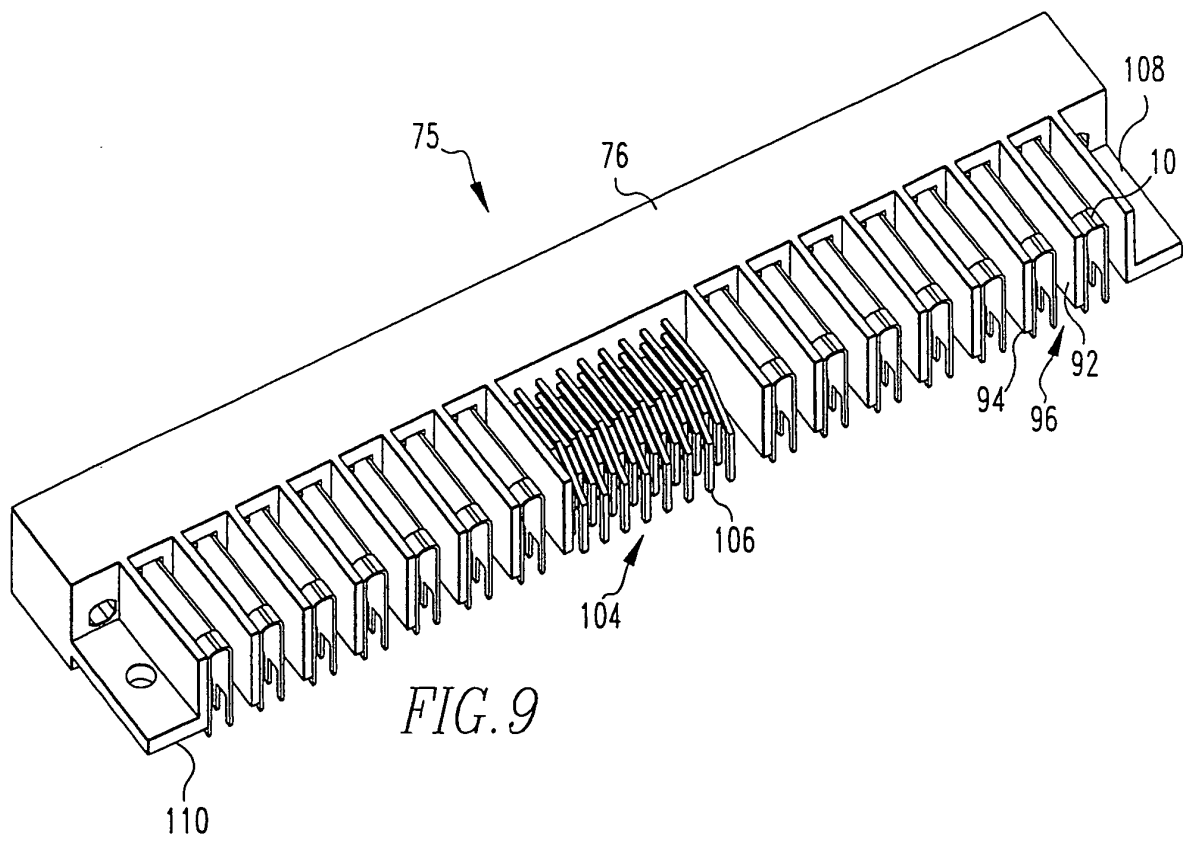

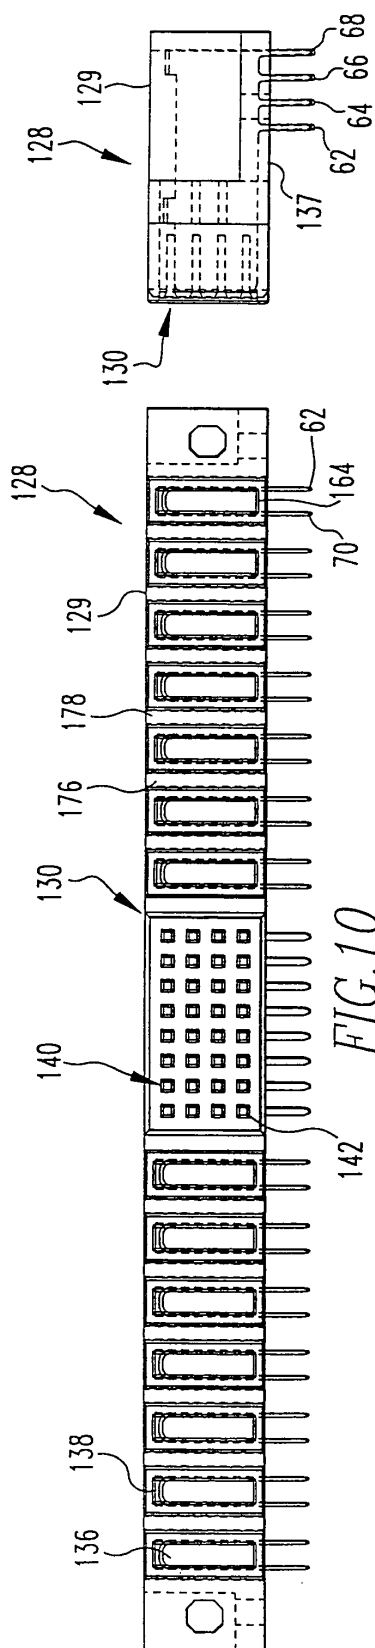


FIG. 10

FIG. 12

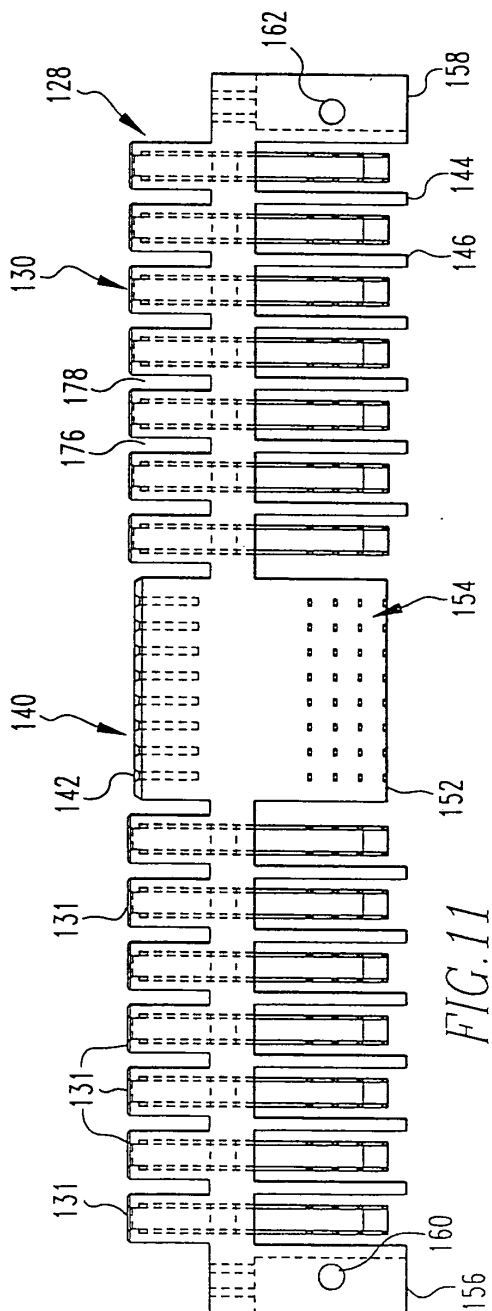
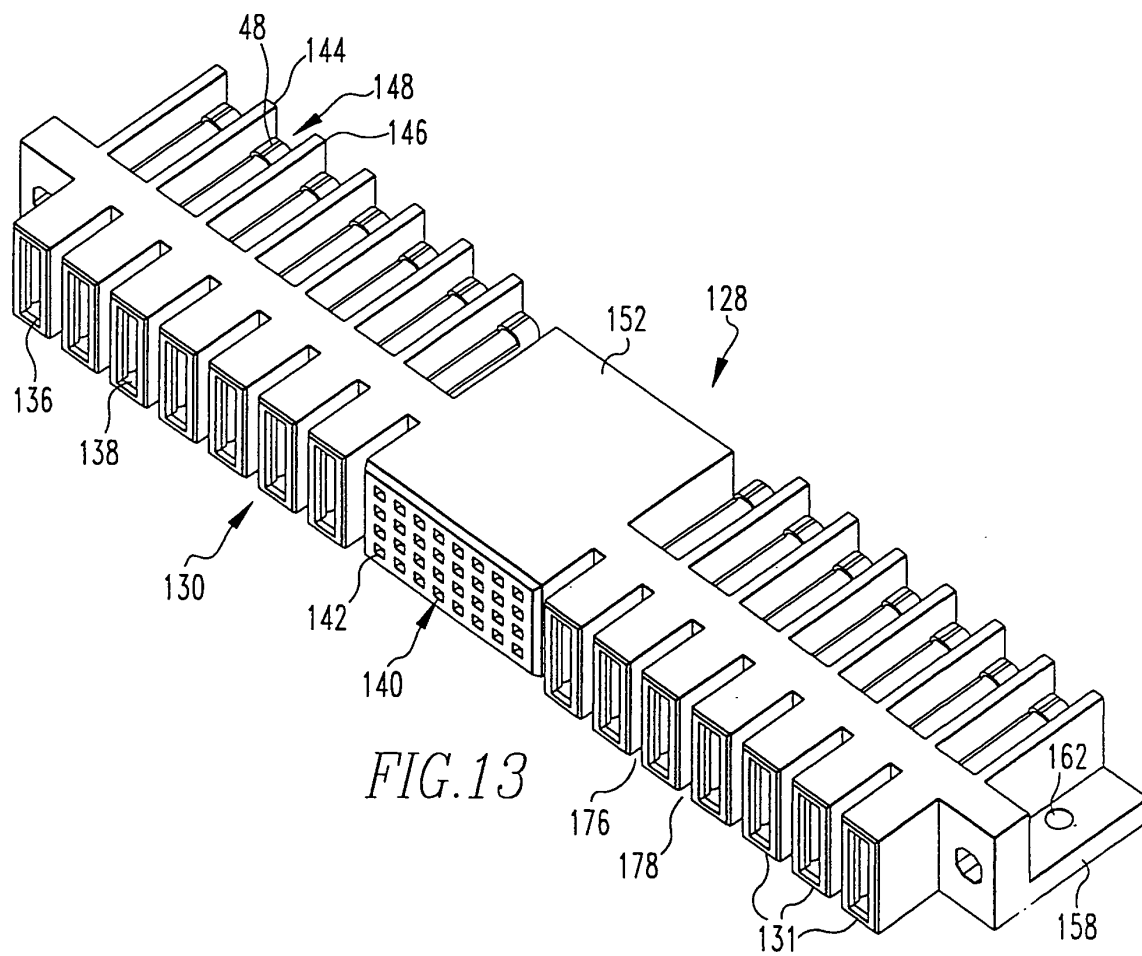
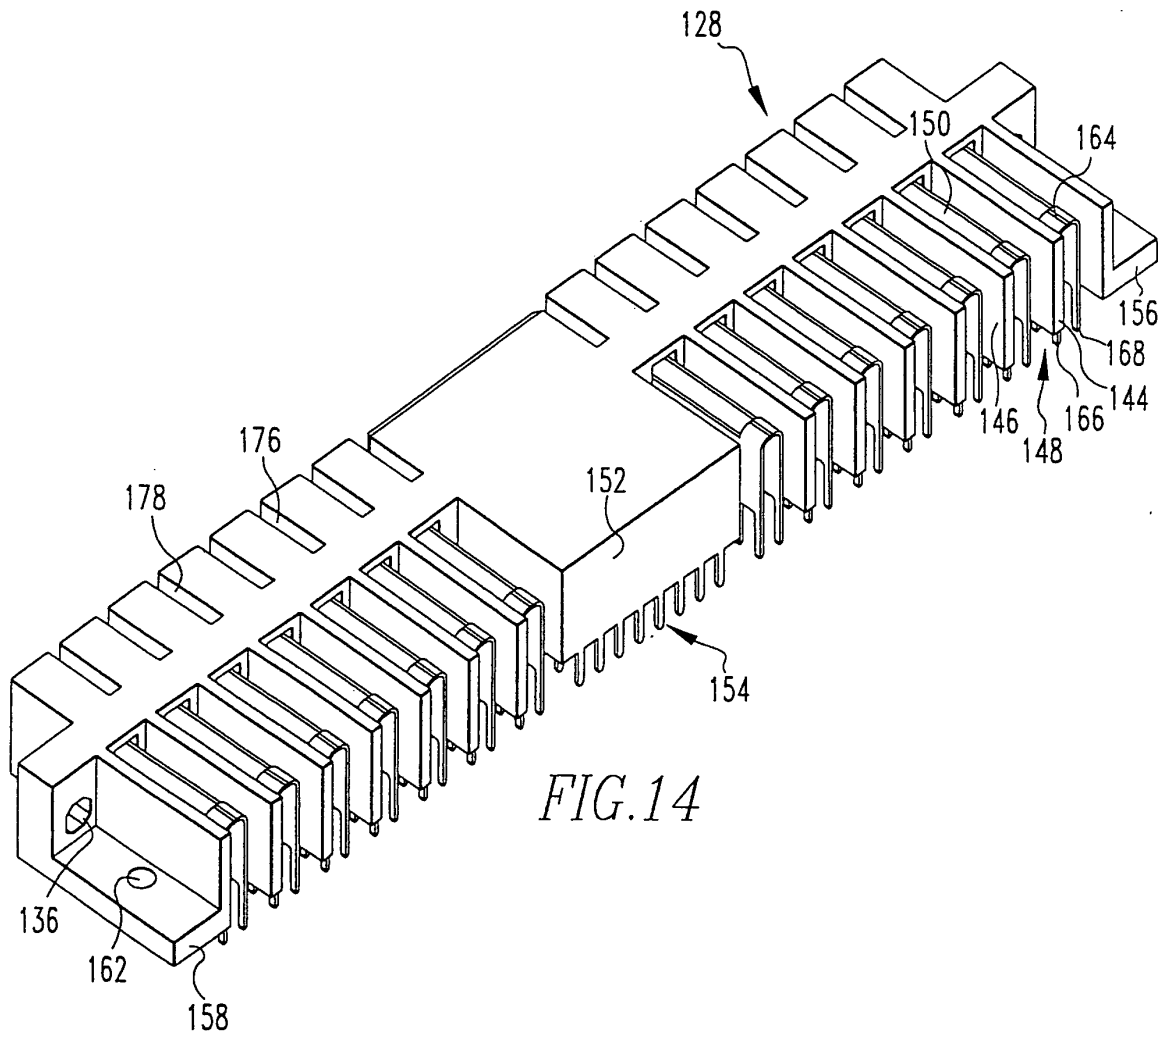
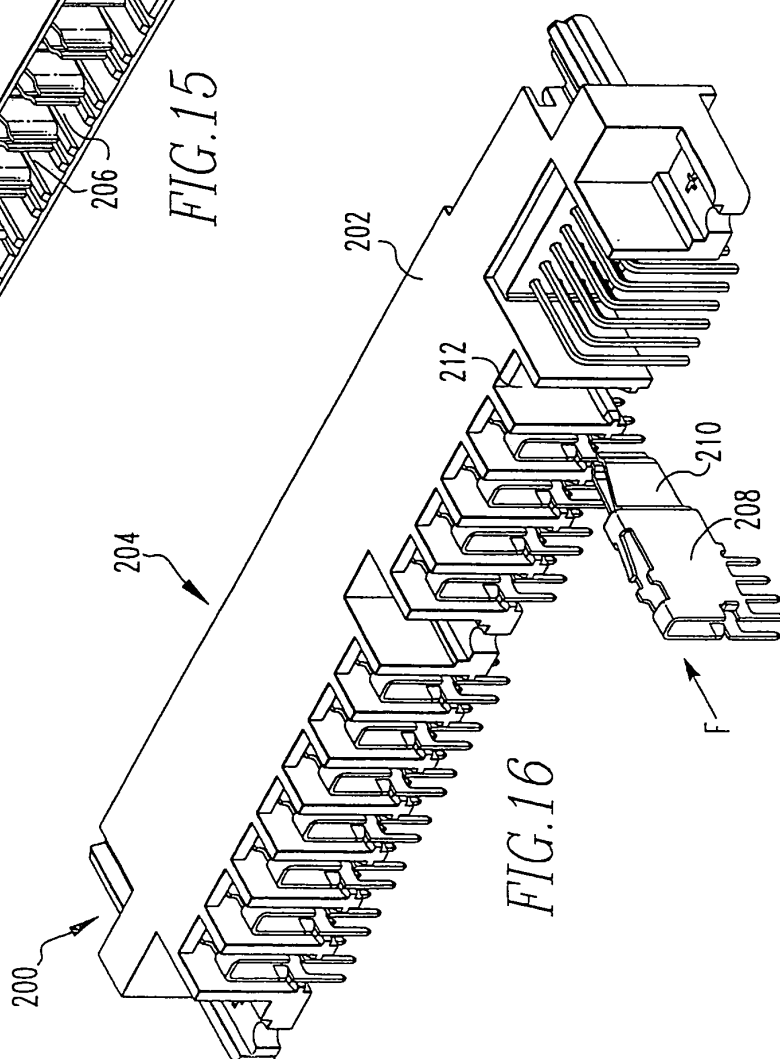
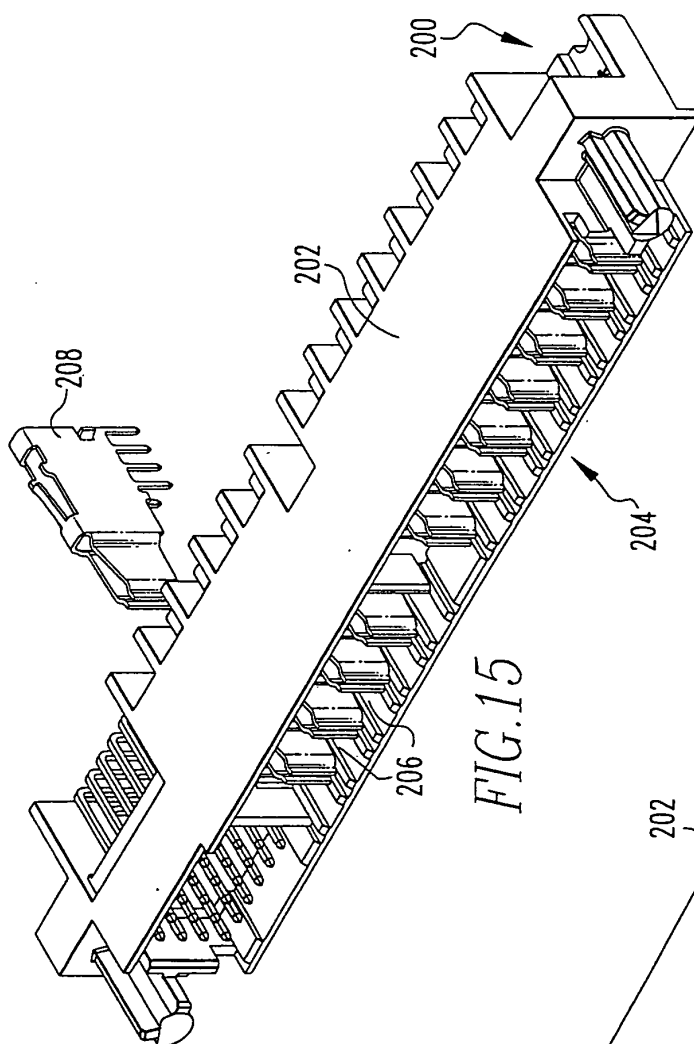


FIG. 11







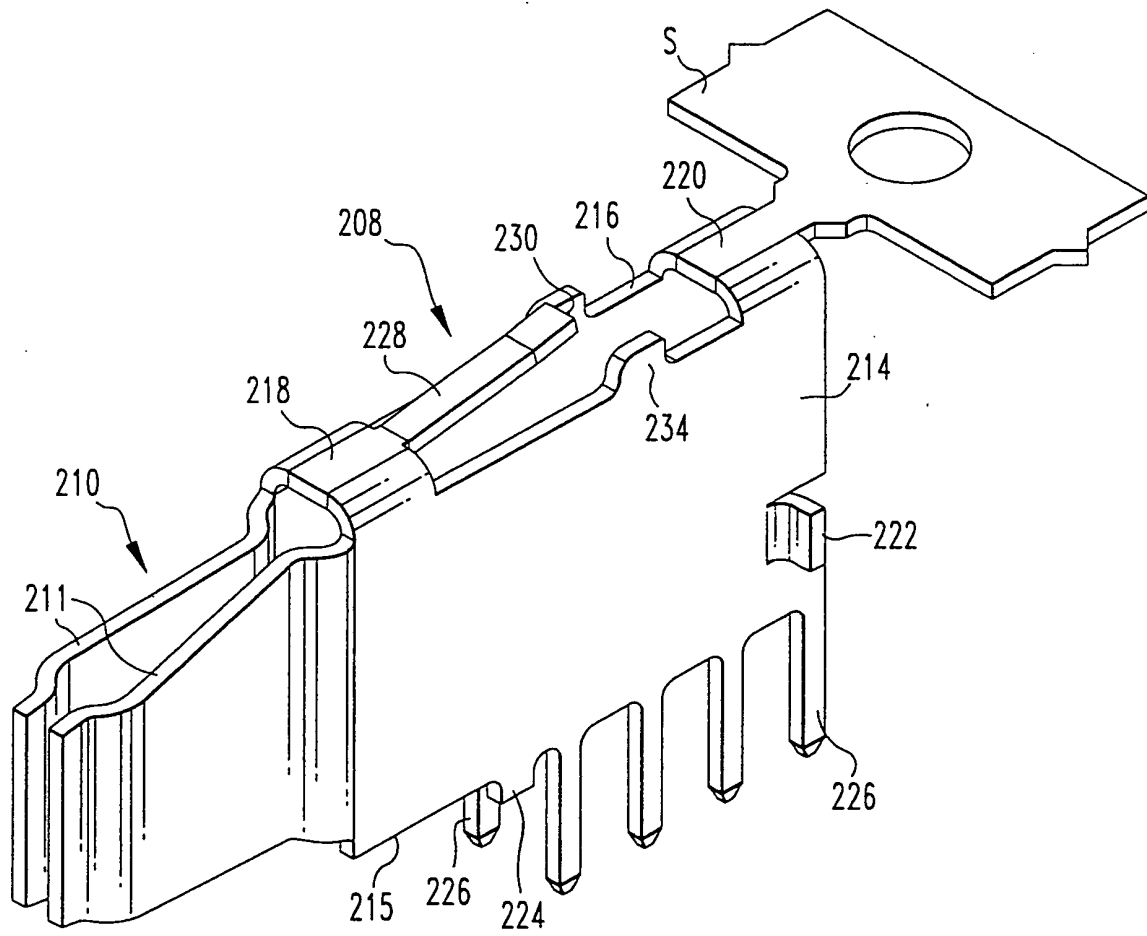
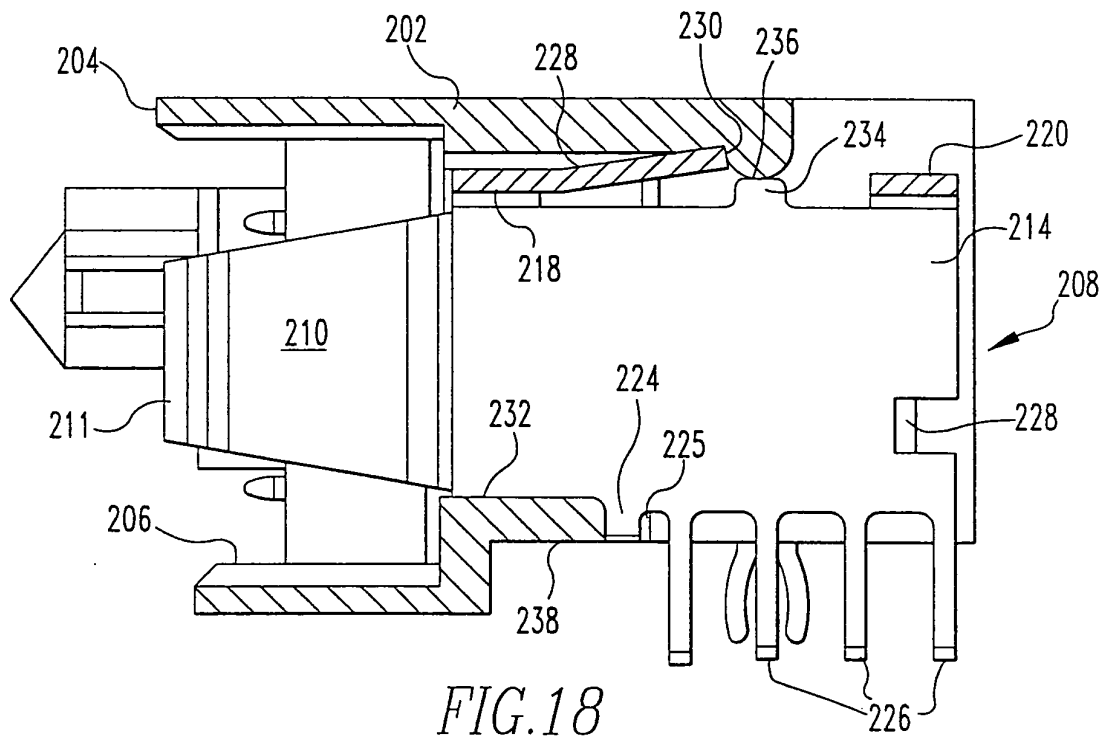
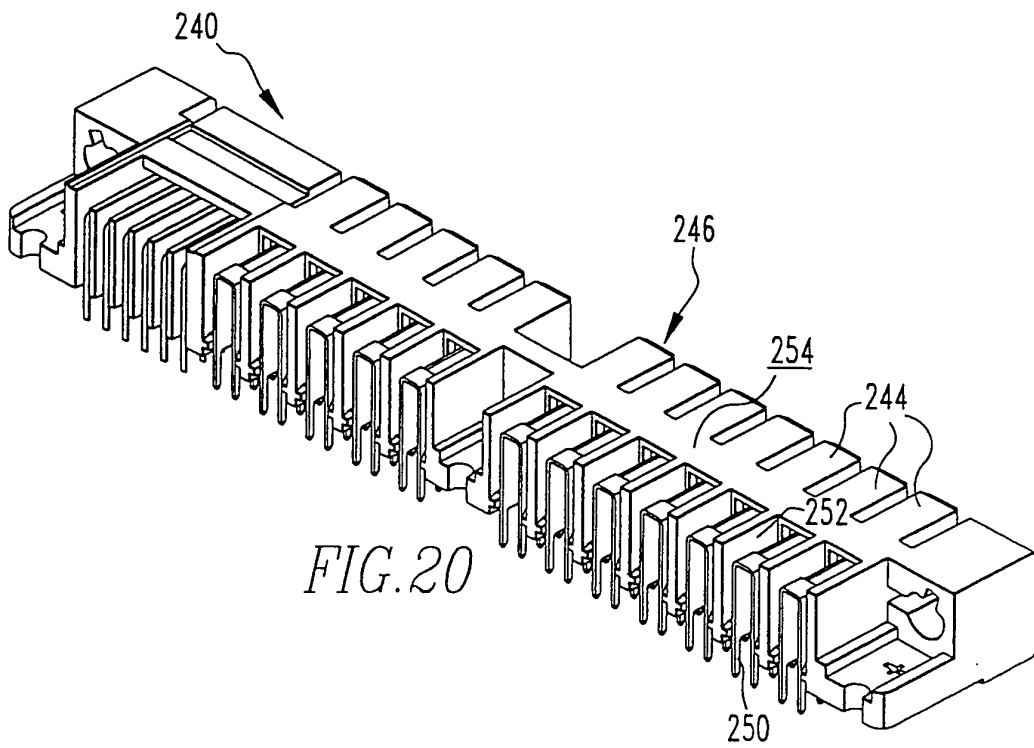
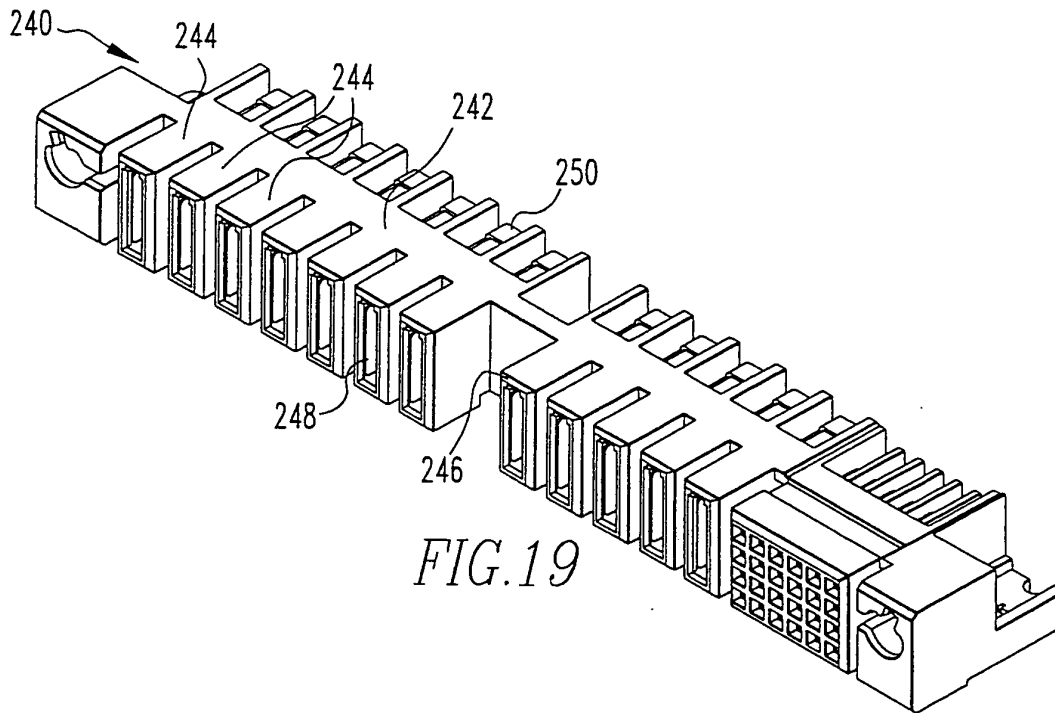


FIG.17





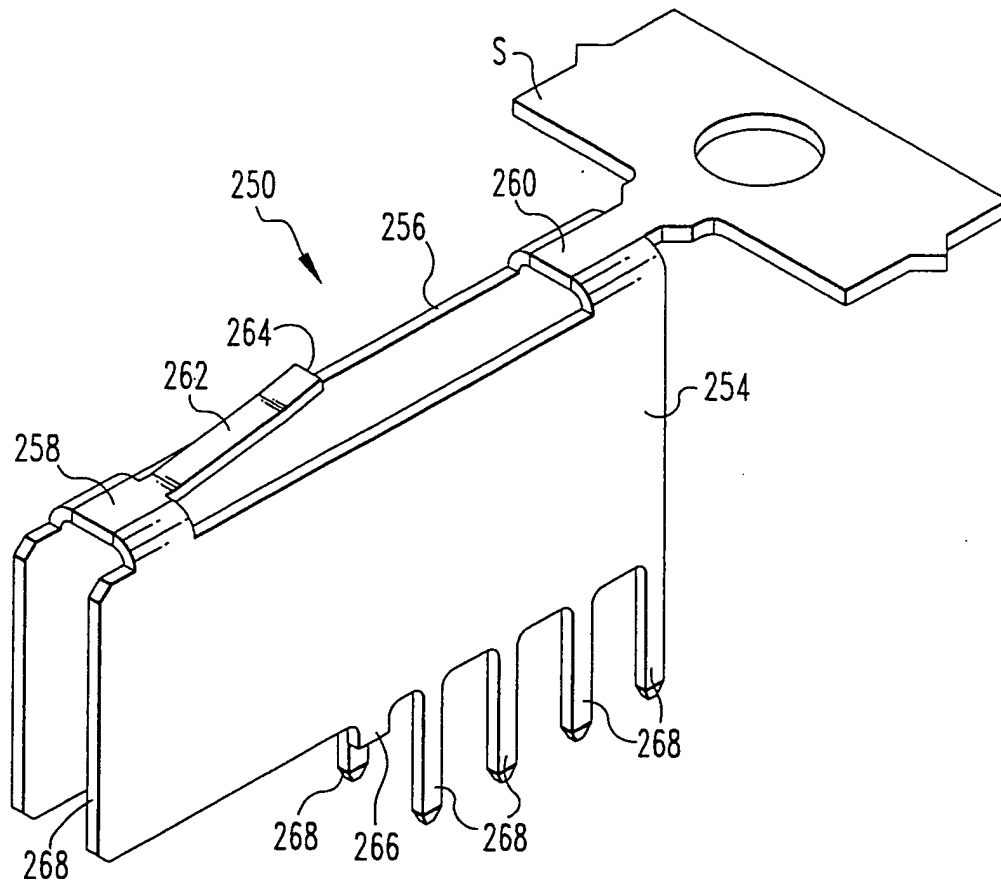
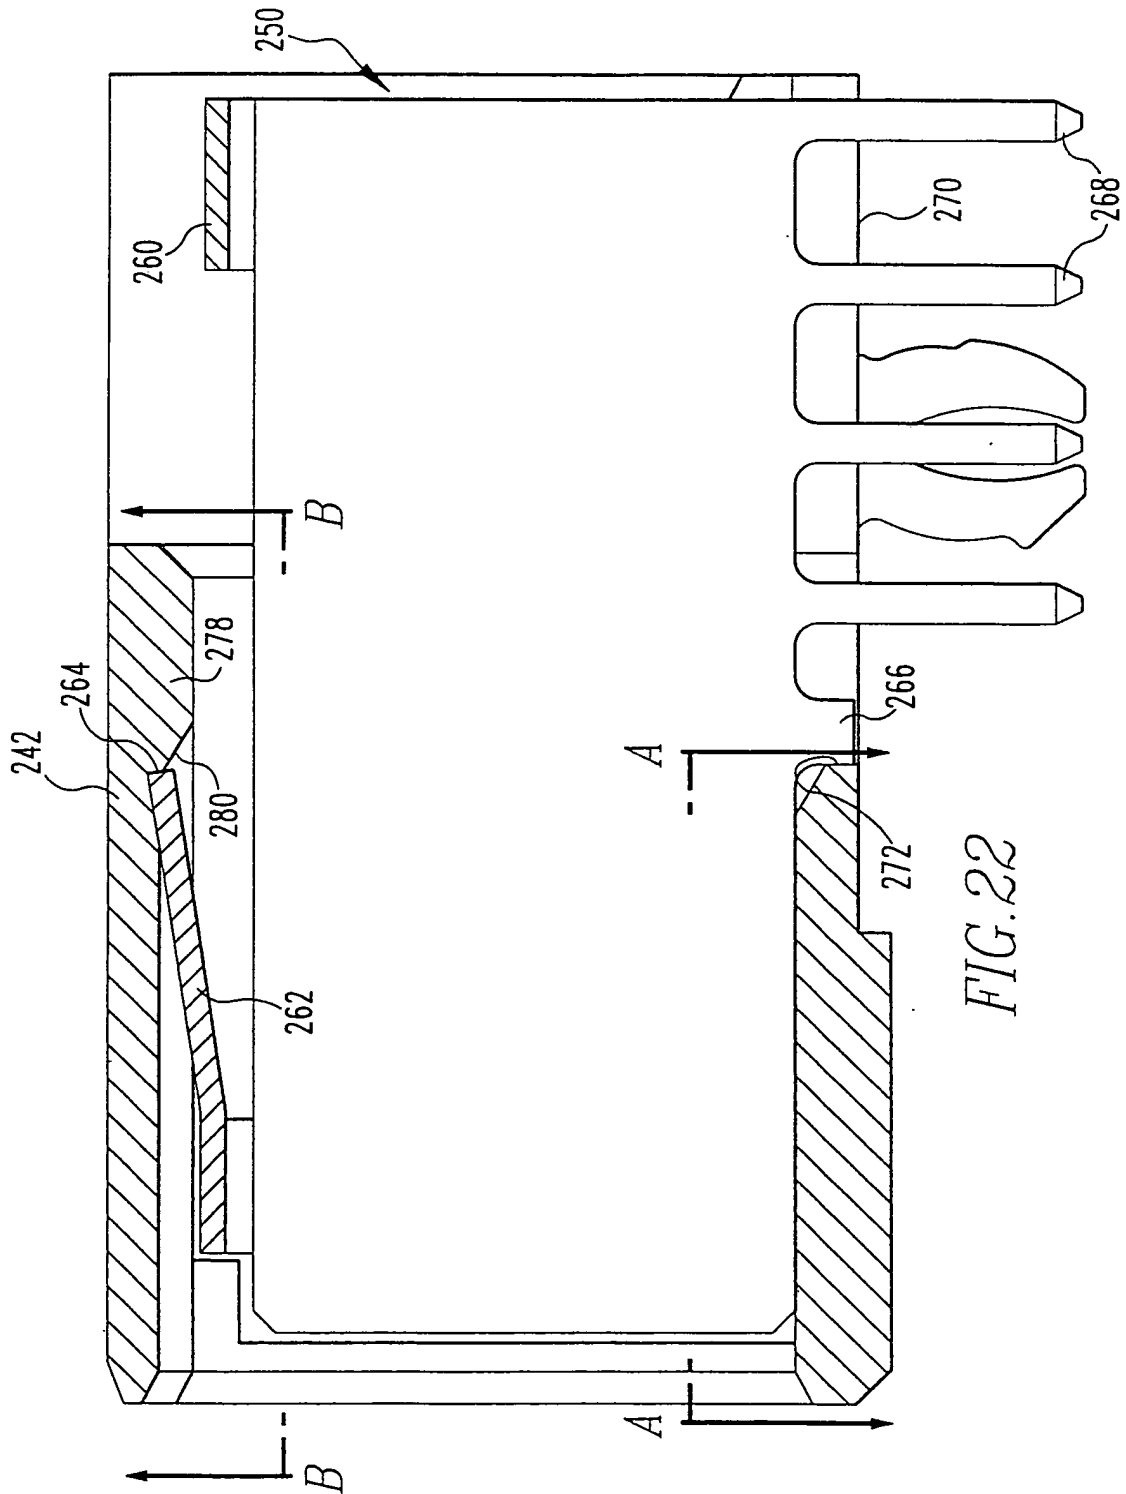


FIG. 21



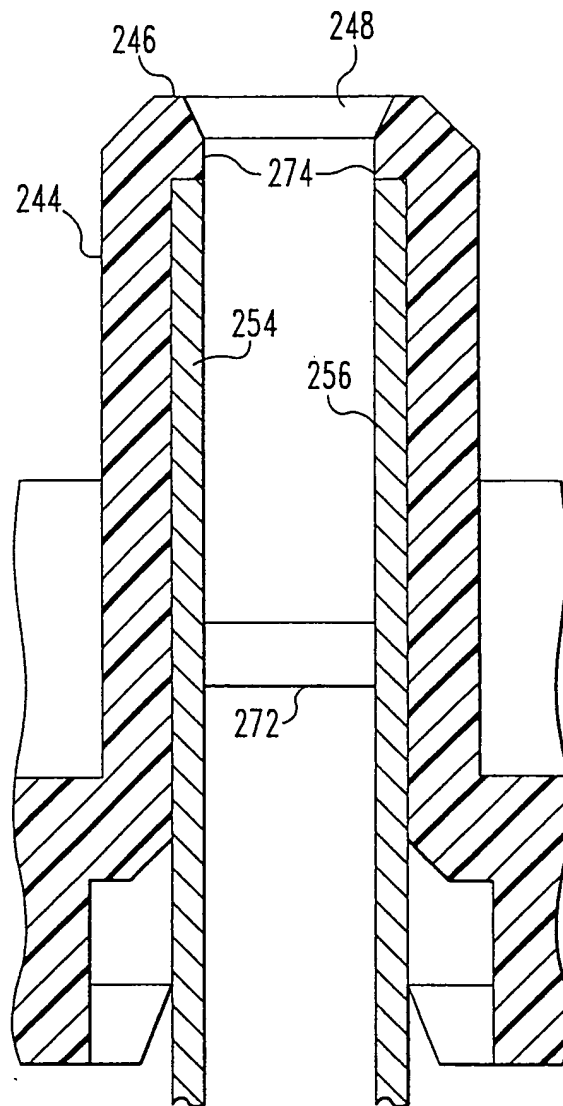


FIG. 22a

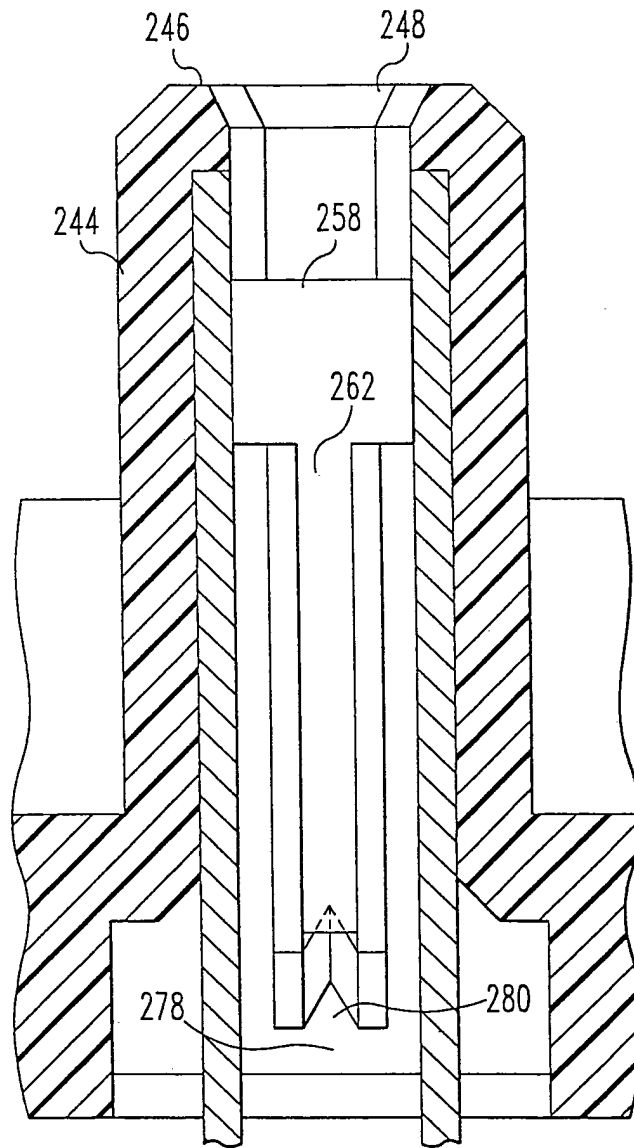
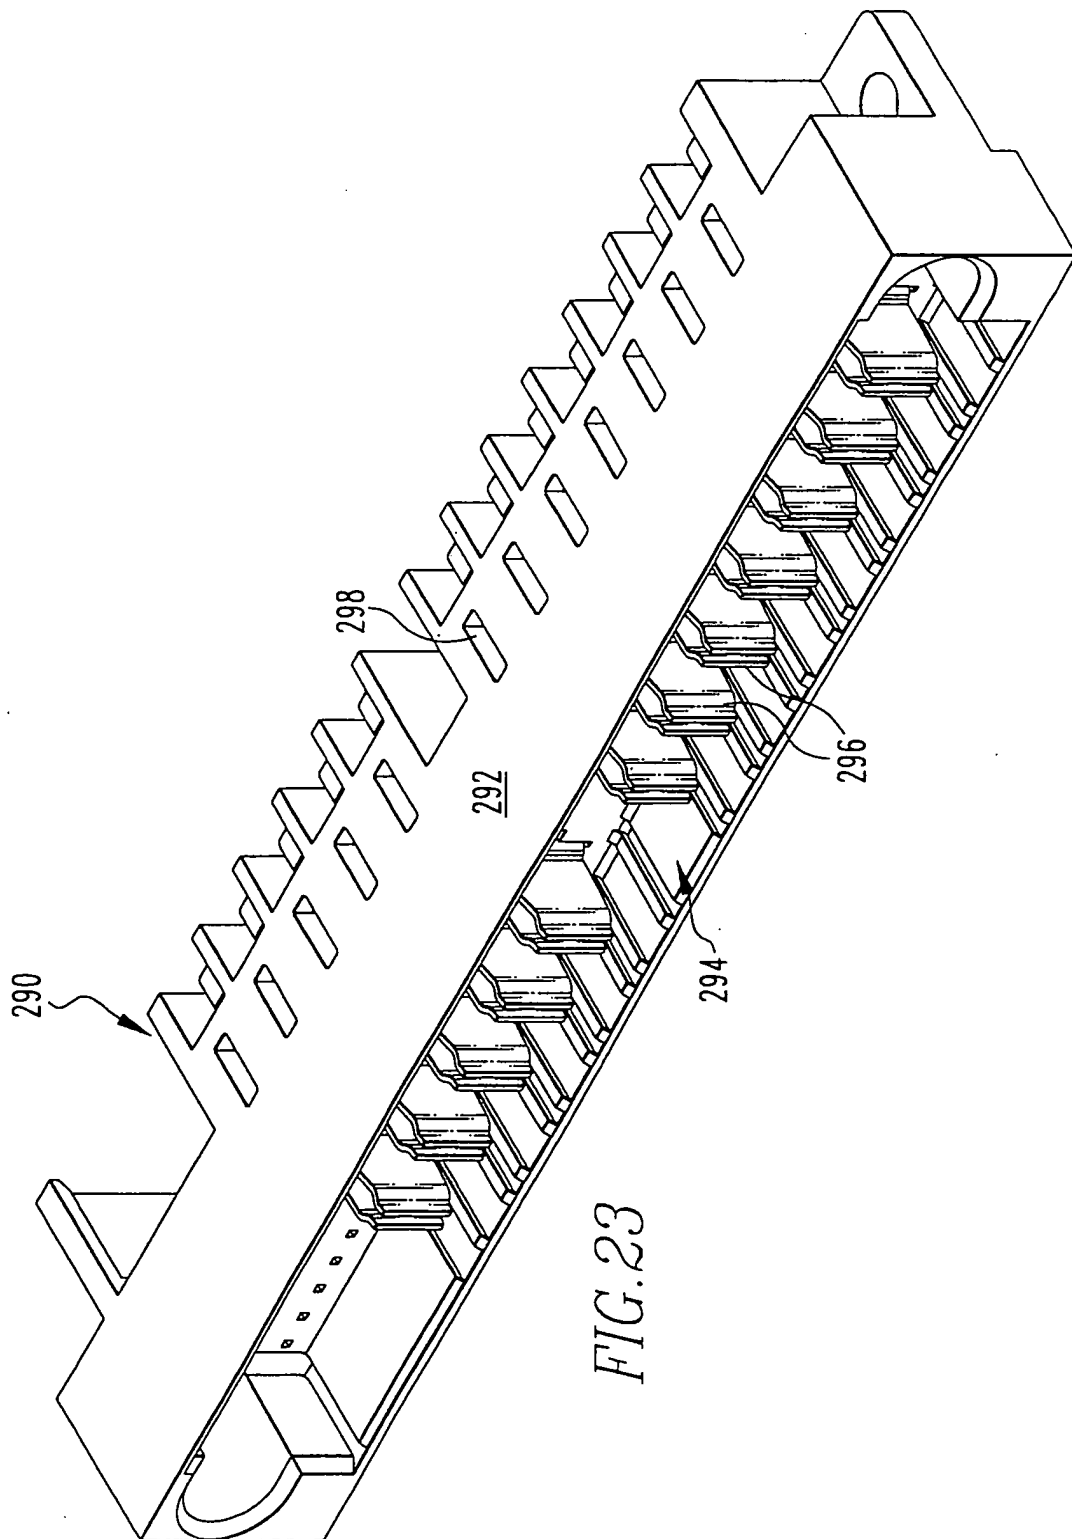


FIG. 22b



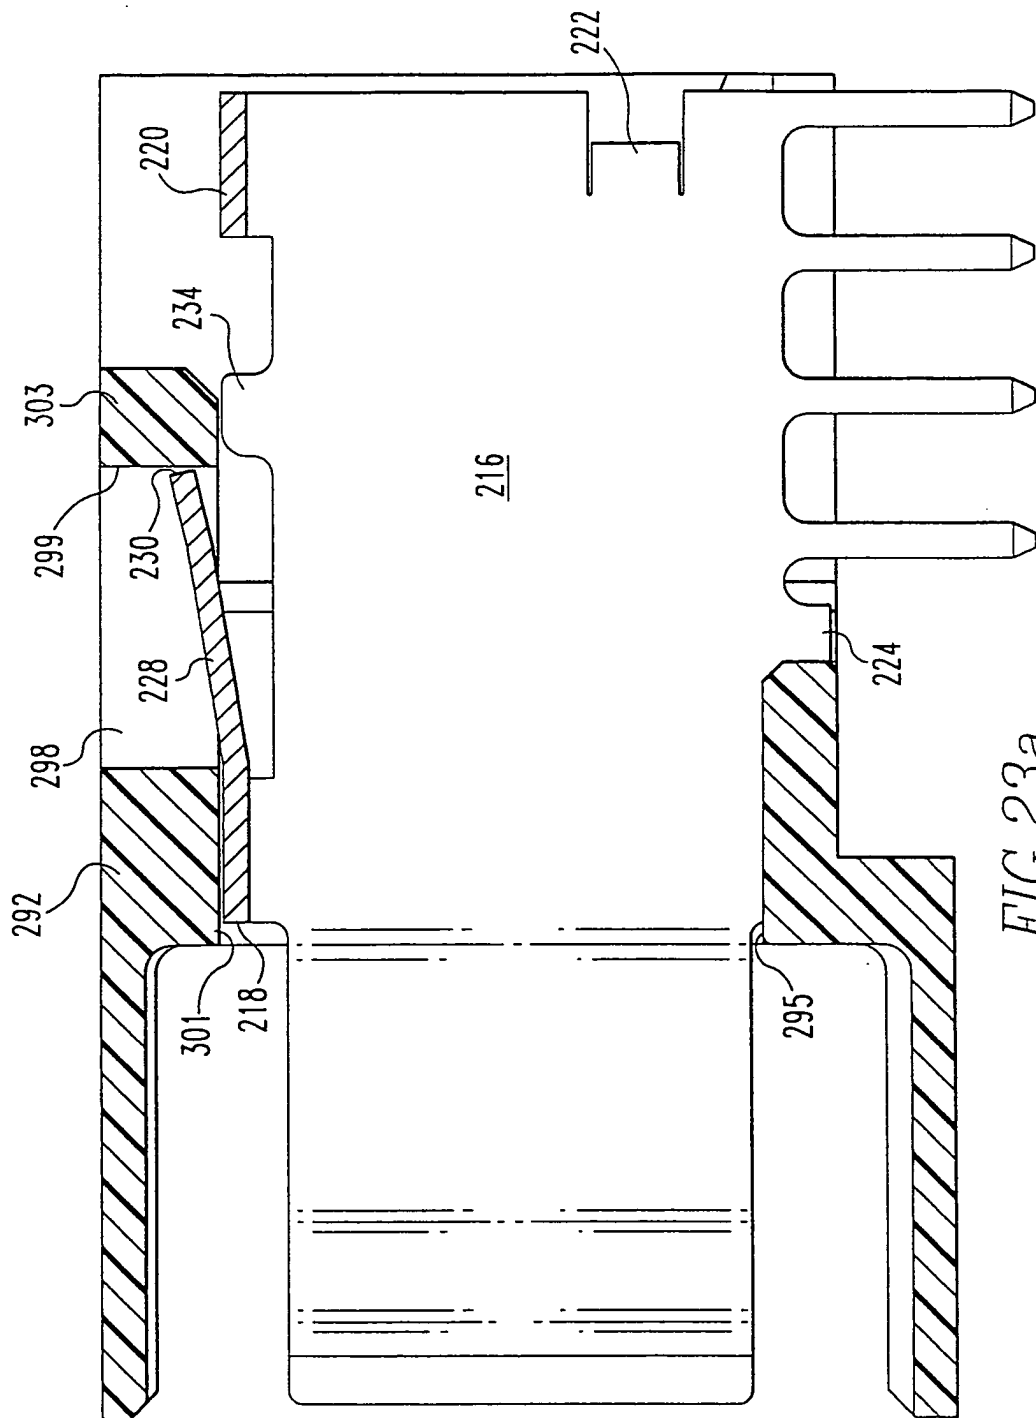
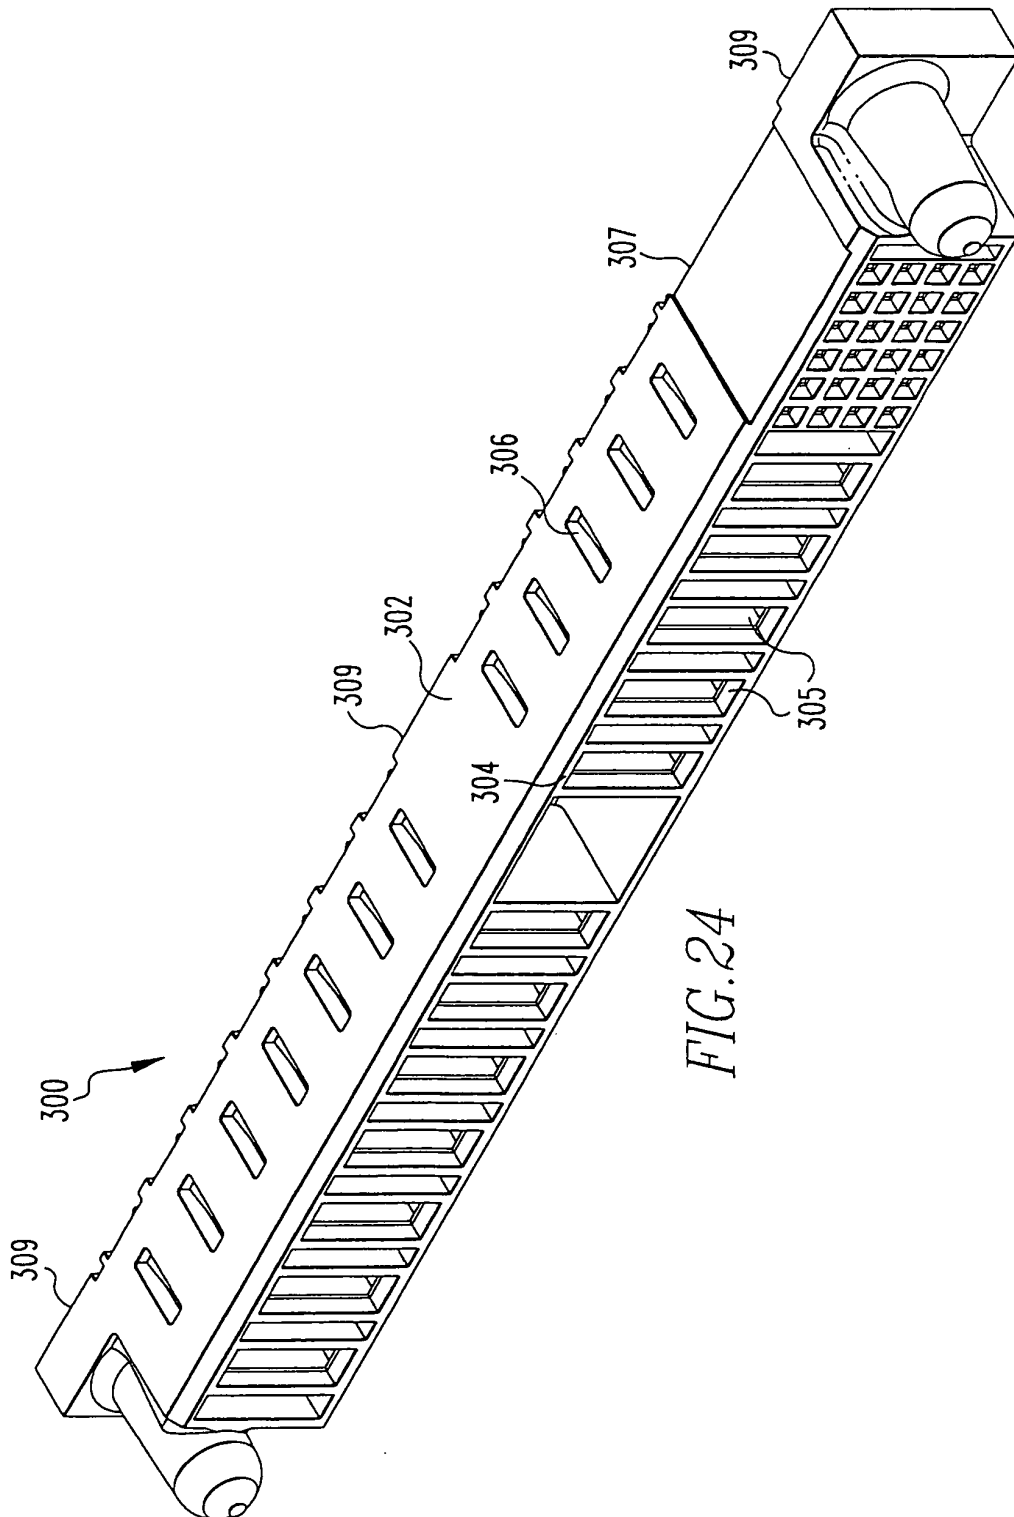
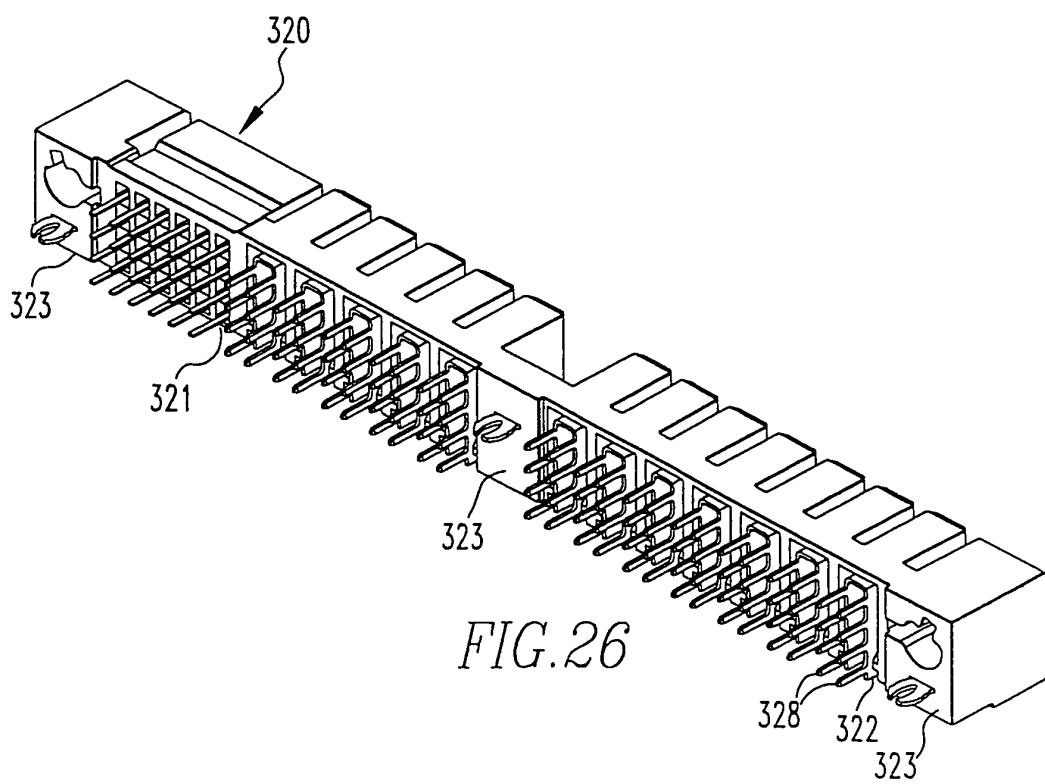
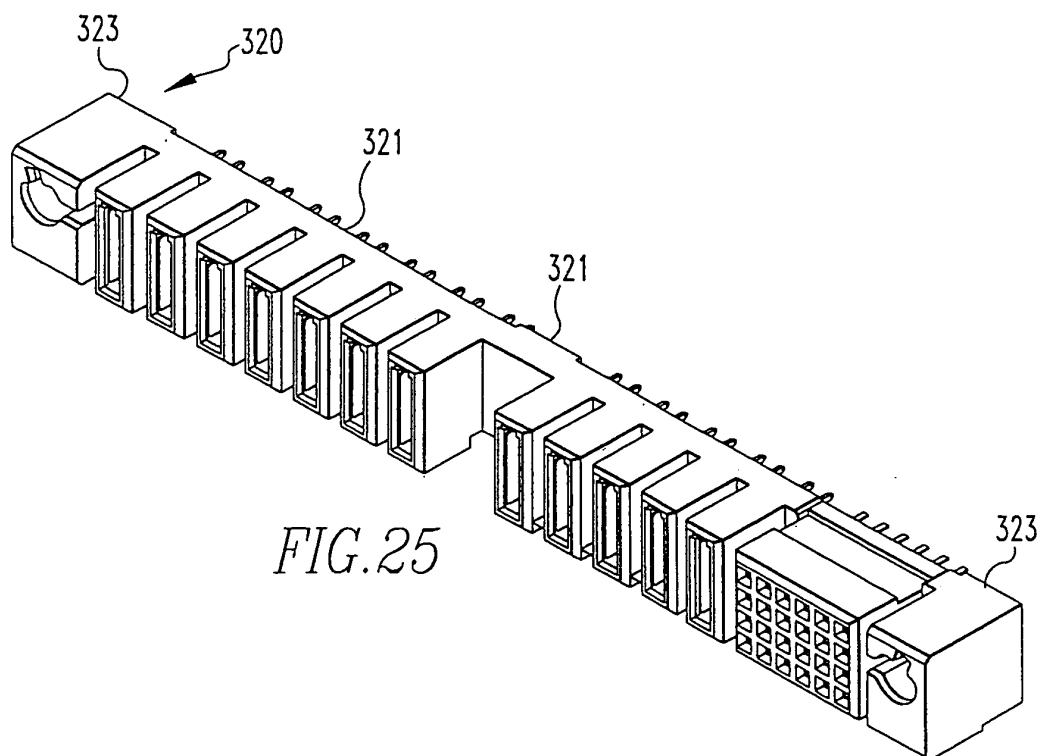
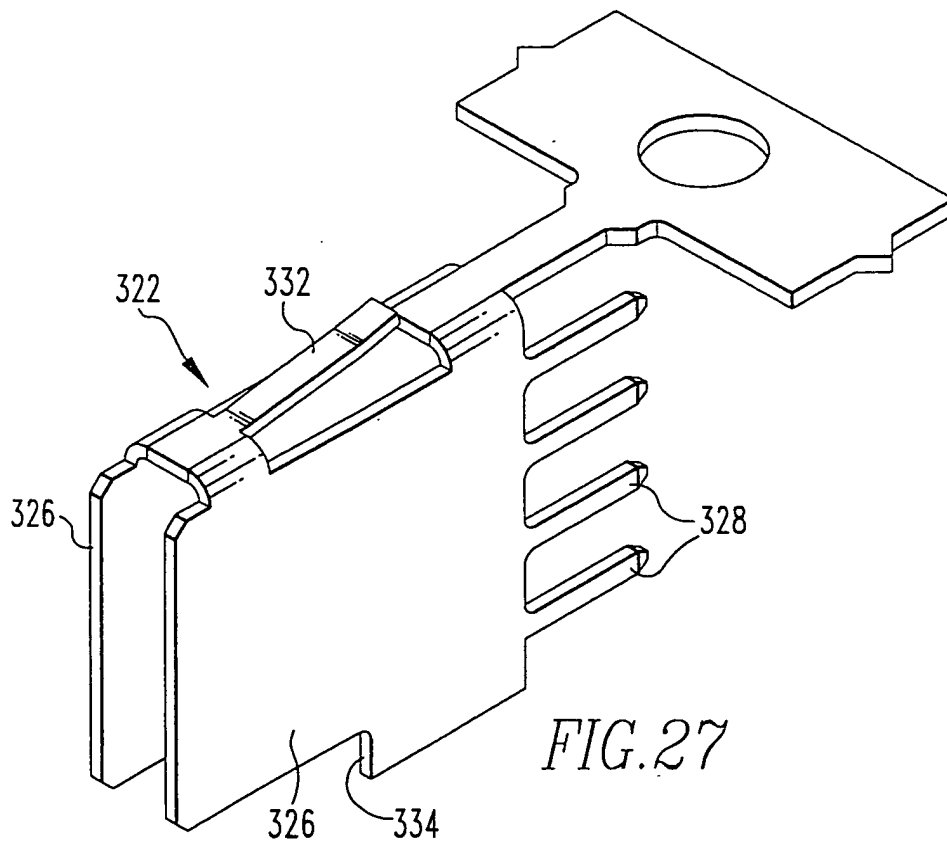


FIG. 23a







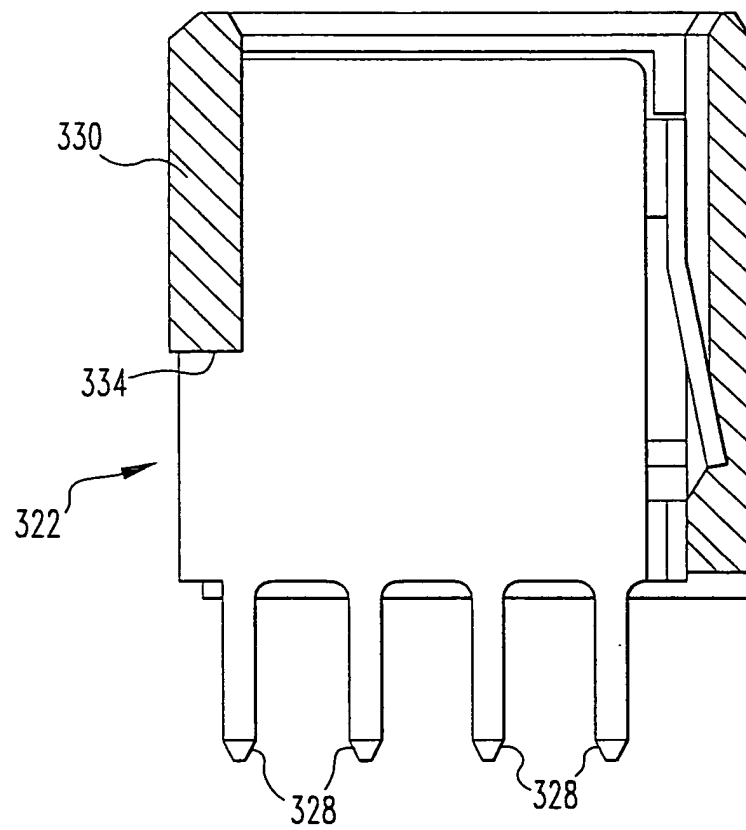


FIG. 28

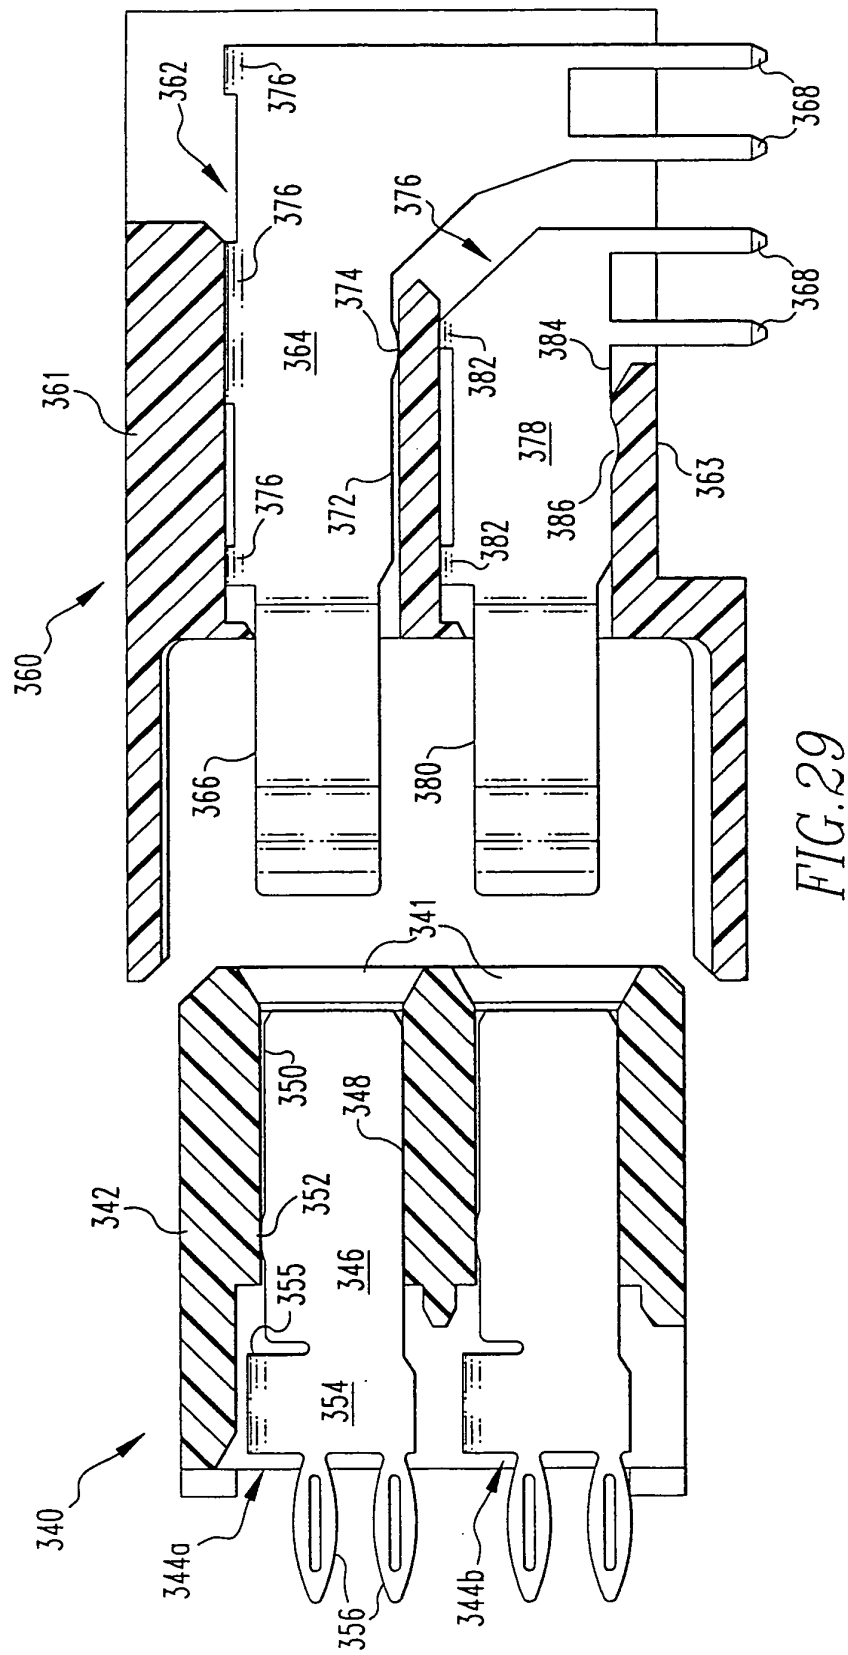


FIG. 29



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 05 01 9128

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 295 843 A (DAVIS ET AL) 22 March 1994 (1994-03-22) * the whole document *	1,8	H01R12/16
A	----- US 5 549 480 A (CHENG ET AL) 27 August 1996 (1996-08-27) * figures 3-4a *	1,2	
A	----- US 5 618 187 A (GOTO ET AL) 8 April 1997 (1997-04-08) * claims; figures 1-7 *	1,2,8,9	
A	----- US 4 820 169 A (WEBER ET AL) 11 April 1989 (1989-04-11) * claims; figures *	1-9	
A	----- US 5 605 476 A (MCNAMARA ET AL) 25 February 1997 (1997-02-25) * claims; figures *	1-9	
A	----- US 5 152 700 A (BOGURSKY ET AL) 6 October 1992 (1992-10-06) * claims; figures 1,2 *	1,2	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	----- US 5 403 206 A (MCNAMARA ET AL) 4 April 1995 (1995-04-04) * figures *	1,2,8,9	H01R H05K
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 4 October 2005	Examiner Durand, F
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

2

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 05 01 9128

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-10-2005

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5295843	A	22-03-1994	CN 1094859 A	09-11-1994
			DE 69414428 D1	17-12-1998
			DE 69414428 T2	12-05-1999
			EP 0607920 A2	27-07-1994
			JP 6231821 A	19-08-1994
			KR 248680 B1	15-03-2000
			US 5785557 A	28-07-1998

US 5549480	A	27-08-1996	US 5816861 A	06-10-1998

US 5618187	A	08-04-1997	NONE	

US 4820169	A	11-04-1989	NONE	

US 5605476	A	25-02-1997	NONE	

US 5152700	A	06-10-1992	NONE	

US 5403206	A	04-04-1995	CA 2119500 A1	03-10-1994
			DE 4410047 A1	06-10-1994
			FR 2706223 A1	16-12-1994
			GB 2276989 A	12-10-1994
			JP 2739922 B2	15-04-1998
			JP 7312271 A	28-11-1995
			US 5484310 A	16-01-1996
