



(11) **EP 1 608 253 B2**

(12) **NEW EUROPEAN PATENT SPECIFICATION**
After opposition procedure

(45) Date of publication and mention
of the opposition decision:
23.10.2019 Bulletin 2019/43

(45) Mention of the grant of the patent:
16.03.2011 Bulletin 2011/11

(21) Application number: **04721133.9**

(22) Date of filing: **17.03.2004**

(51) Int Cl.:
A47L 9/02 *(2006.01)* **A47L 9/06** *(2006.01)*

(86) International application number:
PCT/EP2004/002748

(87) International publication number:
WO 2004/082449 (30.09.2004 Gazette 2004/40)

(54) **ACCESSORY FOR VACUUM-CLEANER HOUSEHOLD APPLIANCES**
ZUBEHÖRTEIL FÜR HAUSHALTSSTAUBSAUGER
ACCESSOIRE POUR APPAREIL ELECTROMENAGER TYPE ASPIRATEUR

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR**

(30) Priority: **18.03.2003 IT MO20030075**

(43) Date of publication of application:
28.12.2005 Bulletin 2005/52

(73) Proprietor: **New Ermes Europe S.r.l.**
21020 Crosio della Valle (VA) (IT)

(72) Inventor: **Pineschi, Massimiliano**
41010 Villanova (IT)

(74) Representative: **Colombo, Stefano Paolo et al**
Marchi & Partners S.r.l.
Via Vittor Pisani, 13
20124 Milano (IT)

(56) References cited:
EP-A- 0 783 866 EP-A1- 0 504 443
EP-A2- 0 783 866 WO-A1-02/085174
GB-A- 1 077 574 US-A- 1 838 481
US-A- 3 992 747 US-A- 4 833 752
US-A- 5 392 491 US-A1- 2002 184 726
US-B1- 6 305 046

- **PATENT ABSTRACTS OF JAPAN** vol. 1997, no. 06, 30 June 1997 (1997-06-30) -& JP 09 028638 A (OHARA EISAKU), 4 February 1997 (1997-02-04)
- **PATENT ABSTRACTS OF JAPAN** vol. 1998, no. 06, 30 April 1998 (1998-04-30) -& JP 10 052386 A (AZUMA KOGYO KK), 24 February 1998 (1998-02-24)

EP 1 608 253 B2

Description

[0001] This invention relates to a cleaner accessory for vacuum-cleaner household appliances.

[0002] Have been known for some time vacuum-cleaner household appliances that, in order to perform their function better, are equipped by the manufacturers with accessories to be applied to the ends of the pipes that usually protrude from the body of the household appliance and that are usually connected with the suction motor unit thereof. The above-said accessories comprise nozzles with more or less wide openings, brushes with different shapes and dimensions, rigid and flexible mouths and other things. One of the problems that is most keenly felt by users is that even using particularly high-performance vacuum-cleaner household appliances, the dust is not completely sucked because a certain quantity of dust is raised into the air by the action of contact of the accessory with the surface to be cleaned and then falls again when this action ceases.

[0003] Furthermore, a certain quantity of air is ejected from the body of the vacuum-cleaner, which contributes to create whirls in the environment, which tend to raise the dust. It is, therefore, necessary to improve prior-art cleaning systems.

[0004] A cleaner accessory is disclosed in JP 09028638 A.

[0005] One technical aim of the present invention is to eliminate the drawbacks of the prior art.

[0006] In particular, it would be desirable to limit the raising of dust from the surface to be cleaned.

[0007] One object of the invention is to find a cleaning accessory for vacuum-cleaner household appliances that enables a more complete cleaning action to be performed. This aim and these objectives are all achieved by this cleaner accessory for vacuum-cleaner household appliances as defined in the claims.

[0008] The invention may be better understood and implemented with reference to the attached drawings, which illustrate a non-limiting example of implementation of the invention, wherein:

Figure 1 is a perspective view of the cleaning accessory for vacuum-cleaner household appliances;

Figure 2 is a partially sectioned view, taken along a plane II-II of Figure 1.

[0009] With particular reference to the above-said figures, a cleaner accessory 1 comprises a pipe union 2 for engaging the cleaner accessory 1 with the end of a conventional suction pipe 3 with which vacuum-cleaner household appliances are provided, a central support element 4 for supporting a disposable cloth 5 that can be removably fitted to the central element 4 and that can be integrally fixed to the above said engaging pipe union 2 by fixing means 6.

[0010] The disposable cloth 5 is of the prior-art type and made of fabrics in synthetic-paper fibre (so-called

TNT fabrics) and it may be dry or dampened, in such a way as to be able to also perform washing action during removal of the dust.

[0011] The particular structure of disposable clothes of this type causes the dust attraction, which is in this way significantly removed without being dispersed in the air. Together with this central support element 4, are provided at least one pair of suction mouths 7 parallel supported on the above-said pipe union 2 at opposite sides in relation with the central element 4; the suction mouths 7 are supported by and connected to the pipe union 2 by a pair of connecting pipe elements 8 that are elbow-shaped. The fixing means 6 comprises at least a shank 9 that is rigidly interposed between the pipe union 2 and the central support element 4.

[0012] The pipe union 2 comprises a first pipe segment 102, a second pipe segment 202, a third pipe segment 302 that are all consecutive to one another and are interconnected to one another in a flexible manner; the first segment 102 rotationally receives the second segment 202. The third segment 302 is received in a rotational manner in the second segment 202. The configuration of the segments is such that the first segment 102 is substantially at right angles to a surface to be cleaned.

[0013] The central element 4 comprises a flattened plate 10 whereupon the disposable cloths 5 can be wrapped up and fixed in a removable manner by relative attaching means 11 located at least on the top face of the flattened plate 10.

[0014] The attaching means 11 comprises a series of recesses 111 provided at their respective inlets with elastically forcible tongues (non visible in the drawings because of the particular perspective) for the pressure insertion and the retention of the edges of the disposable cloths 5.

[0015] In a second possible embodiment, the attaching means 11 can comprise a plurality of small tabs in a material having an adhesive contact and a pull-away removal with the edges of the disposable cloths 5, of the type known as Velcro®.

[0016] In a further third possible embodiment of the invention, the attaching means 11 may comprise a plurality of pliers elements for fastening the edges of the disposable cloths 5.

[0017] Between the flattened plate 10 and the suction mouths 7 slits or interstices 12 are defined for the passage of the edges of the disposable cloths 5 that are wrapped around the flattened plate 10 for using the disposable cloths 5. Both the flattened plate 10 and the suction mouths 7 have a rectangular shape with the longer sides parallel to one another, and each one of them is provided with means 13 for sliding contact with the surface to be cleaned. Furthermore, the bottom faces of the suction mouths 7 and of the flattened plate 10 are substantially on the same plane as one another.

[0018] The operation of the invention is intuitively deductible from the above disclosure and is as follows: the user engages the pipe union 2 with a conventional suck-

ing hose of a vacuum-cleaner household appliance and applies to the flattened plate 10 a disposable cloth 5 of the type that is usually commercially available, forcibly inserting the edges of the disposable cloth 5 into the recesses 111 provided for the purpose on the top face of the flattened plate 10 that is thus wrapped by the cloth 5 itself.

[0019] For the insertion, the edges of the disposable cloth are passed through the slits or interstices 12 defined for this purpose between the larger parallel and mutually facing sides of the suction mouths 7 and of the flattened plate 10.

[0020] The user then activates the motor of the vacuum-cleaner household appliance and simultaneously rubs the surface to be cleaned with the cleaner accessory 1, thereby obtaining two actions practically simultaneous: a first dust removing action with the disposable cloth 5, a second suction action of any dust that has been raised. It should be noted that the double rotating articulated joint provided between the sections 102 and 202 enables the user to rotate the cleaning accessory 1 in any direction in relation to the end of the suction hose 3 that is normally furnished with a conventional vacuum-cleaner household appliance, and thus to reach with the cleaning accessory 1 even the most hidden areas of the surfaces to be cleaned. It has been established that the disclosed invention achieves the proposed objects.

[0021] The device thus conceived can be modified and varied in numerous ways that all fall within the protective scope defined by the claims.

[0022] Furthermore, all the details are replaceable by other technically equivalent details.

[0023] In practice, the materials used and the shapes and dimensions can be of any type according to need without thereby falling outside the protective scope of the present invention.

[0024] It is also pointed out that according to the state of the art, to have a similar cleaning result, there is provided only to use on the surface to be cleaned a vacuum cleaner with which is performed a first stage of suction of substantially rough and subsequently a brush for the finishing operations.

[0025] Such a manner of proceeding is extremely long and tiresome in addition to requiring both the vacuum cleaner and the brush.

[0026] By contrast, according to the invention, both the rough cleaning and finishing cleaning actions are obtained with a sole tool at one stroke.

Claims

1. Accessory for vacuum-cleaner household appliances, comprising suction mouths means (7) for sucking particles to be removed from a surface to be cleaned by making said particles to travel through conduit means (2) communicating with said suction mouth means (7), further comprising in an outer position

with respect to said suction mouth means (7), removable capturing means (4,5) for capturing further particles that have to be removed from said surface, said capturing means comprising a support element (4) provided with attaching means (11) by which a capturing organ (5) can be assembled on/disassembled from said support element (4), wherein said suction mouth means comprises at least two suction mouths (7) parallel supported by opposite parts to said support element (4), wherein said support element (4) comprises a flattened plate (10) and wherein between said flattened plate (10) and said suction mouths (7) interstices (12) are defined that are large enough to permit the passage of edges of said capturing organ (5) that are wrapped around said flattened plate (10).

2. Accessory according to claim 1, wherein said capturing organ comprises a cloth (5).

3. Accessory according to claim 1, wherein said support element (4) has rib means (9) that interconnects said support element (4) with said conduit means (2).

4. Accessory according to claim 1, wherein said conduit means (2) comprises at least two conduit segments (8), each conduit segment (8) leading to a respective suction mouth (7).

5. Accessory according to claim 1, wherein said attaching means (11) comprises a plurality of recesses (111) provided at their respective inlets with elastically forcible tongues for the pressure insertion and retention of edges of said capturing organ (5).

6. Accessory according to any one of claims 1 or 4, wherein said attaching means (11) comprises a plurality of small tabs of a material having an adhesive contact with the edges of said capturing organ (5) that are removable by pulling.

7. Accessory according to any one of claims 1, 5 or 6, wherein said attaching means (11) comprises a plurality of pliers elements for fastening the edges of said capturing organ (5).

8. Accessory according claim 1, wherein said support element (4) and said suction mouth means (7) have a rectangular plan shape with sides that are parallel to one another.

9. Accessory according to anyone of claims 1, or 8 wherein said suction mouth means (7), are supported in such a way as to offer their own greater side arranged parallel to the greater side of said support element (4).

10. Accessory according to anyone of the preceding

claims, wherein suction mouth means (7), and said support element (4) have at least bottom sides that are substantially on the same plane as one another.

Patentansprüche

1. Zubehörteil für Haushaltsstaubsauger, mit Ansaugmundmitteln (7) zum Ansaugen von zu entfernenden Teilchen von einer zu reinigenden Oberfläche, indem die Teilchen dazu gebracht werden, durch ein Leitungsmittel (2), das mit den Ansaugmundmitteln (7) in Verbindung ist, zu wandern, ferner mit entfernbaren Auffangmitteln (4, 5) in einer Außenposition in Bezug auf die Ansaugmundmittel (7), um weitere Teilchen aufzufangen, die von der Oberfläche zu entfernen sind, wobei die Auffangmittel ein Stützelement (4) aufweisen, das mit Befestigungsmitteln (11) versehen ist, mit denen ein Auffangkörper (5) mit dem Stützelement (4) zusammengesetzt/davon entfernt werden kann, wobei die Ansaugmundmittel zumindest zwei Ansaugmünder (7) aufweisen, die durch dem Stützmittel (4) gegenüberliegende Teile parallel gehalten werden, wobei das Stützmittel (4) eine abgeflachte Platte (10) aufweist und wobei zwischen der abgeflachten Platte (10) und dem Ansaugmundmittel (7) Zwischenräume (12) definiert sind, die groß genug sind, um den Durchtritt von Kanten des Auffangkörpers (5) zu erlauben, welche um die abgeflachte Platte (10) umgeschlagen sind.
2. Zubehörteil nach Anspruch 1, wobei der Auffangkörper ein Gewebe (5) aufweist.
3. Zubehörteil nach Anspruch 1, wobei das Stützelement (4) ein Rippenmittel (9) aufweist, welches das Stützelement (4) mit dem Leitungsmittel (2) verbindet.
4. Zubehörteil nach Anspruch 1, wobei das Leitungsmittel (2) zumindest zwei Leitungssegmente (8) aufweist, und jedes Leitungssegment (8) zu einem entsprechenden Ansaugmund (7) führt.
5. Zubehörteil nach Anspruch 1, wobei das Befestigungsmittel (11) eine Mehrzahl von Ausnehmungen (111) aufweist, die an ihren jeweiligen Einlässen mit unter Zwang elastischen Zungen versehen sind, um die Kanten des Auffangkörpers (5) unter Druck einzusetzen und zurückzuhalten.
6. Zubehörteil nach Anspruch 1 oder 4, wobei das Befestigungsmittel (11) eine Mehrzahl von kleinen Laschen aus einem Material mit einem adhäsiven Kontakt mit den Kanten des Auffangkörpers (5), die durch Abziehen entfernbar sind, aufweist.
7. Zubehörteil nach einem der Ansprüche 1, 5, 6, wobei

das Befestigungsmittel (11) eine Mehrzahl von Zangelementen zum Befestigen der Kanten des Auffangkörpers (5) aufweist.

8. Zubehörteil nach Anspruch 1, wobei das Stützelement (4) und das Ansaugmundmittel (7) eine rechteckige Grundrissform mit Seiten, die zueinander parallel sind, aufweisen.
9. Zubehörteil nach einem der Ansprüche 1 oder 8, wobei die Ansaugmundmittel (7) derart gehalten werden, so dass deren größere Seite in paralleler Anordnung zu der größeren Seite des Stützelementes (4) liegt.
10. Zubehörteil nach einem der vorstehenden Ansprüche, wobei die Ansaugmundmittel (7) und das Stützelement (4) zumindest Unterseiten aufweisen, die im Wesentlichen auf der gleichen Ebene wie die andere liegen.

Revendications

1. Accessoire pour appareils électroménagers de type aspirateur, comprenant des moyens d'embout d'aspiration (7) pour aspirer des particules à retirer d'une surface à nettoyer en faisant circuler lesdites particules à travers des moyens de conduit (2) communiquant avec lesdits moyens d'embout d'aspiration (7), comprenant en outre dans une position externe par rapport auxdits moyens d'embout d'aspiration (7), des moyens de capture amovibles (4, 5) pour capturer d'autres particules qui doivent être retirées de ladite surface, lesdits moyens de capture comprenant un élément de support (4) prévu avec des moyens de fixation (11) grâce auxquels un organe de capture (5) peut être monté sur / démonté dudit élément de support (4), dans lequel lesdits moyens d'embout d'aspiration comprennent au moins deux embouts d'aspiration (7) parallèles, supportés par des parties opposées audit élément de support (4), dans lequel ledit élément de support (4) comprend une plaque aplatie (10) et dans lequel entre ladite plaque aplatie (4) et lesdits embouts d'aspiration (7), on définit des interstices (12) qui sont assez grands pour permettre le passage des bords dudit organe de capture (5) qui sont enroulés autour de ladite plaque aplatie (10).
2. Accessoire selon la revendication 1, dans lequel ledit organe de capture comprend un tissu (5).
3. Accessoire selon la revendication 1, dans lequel ledit élément de support (4) a des moyens de nervure (9) qui interconnectent ledit élément de support (4) avec lesdits moyens de conduit (2).

4. Accessoire selon la revendication 1, dans lequel lesdits moyens de conduit (2) comprennent au moins deux segments de conduit (8), chaque segment de conduit (8) conduisant jusqu'à un embout d'aspiration (7) respectif. 5
5. Accessoire selon la revendication 1, dans lequel lesdits moyens de fixation (11) comprennent une pluralité d'évidements (111) prévus au niveau de leurs entrées respectives, avec des languettes pouvant être forcées élastiquement, pour l'insertion et la retenue par pression des bords dudit organe de commande (5). 10
6. Accessoire selon l'une quelconque des revendications 1 à 4, dans lequel lesdits moyens de fixation (11) comprennent une pluralité de petites languettes d'un matériau ayant un contact adhésif avec les bords dudit organe de capture (5) qui peuvent être retirés par traction. 15 20
7. Accessoire selon l'une quelconque des revendications 1, 5 ou 6, dans lequel lesdits moyens de fixation (11) comprennent une pluralité d'éléments de pinces pour fixer les bords dudit organe de capture (5). 25
8. Accessoire selon la revendication 1, dans lequel ledit élément de support (4) et lesdits moyens d'embout d'aspiration (7) ont une forme plane rectangulaire avec des côtés qui sont parallèles entre eux. 30
9. Accessoire selon l'une quelconque des revendications 1 ou 8, dans lequel lesdits moyens d'embout d'aspiration (7) sont supportés de sorte qu'ils offrent leur plus grand côté agencé parallèlement au plus grand côté dudit élément de support (4). 35
10. Accessoire selon l'une quelconque des revendications précédentes, dans lequel lesdits moyens d'embout d'aspiration (7) et ledit élément de support (4) ont au moins des bords inférieurs qui sont sensiblement sur le même plan que l'autre. 40

45

50

55

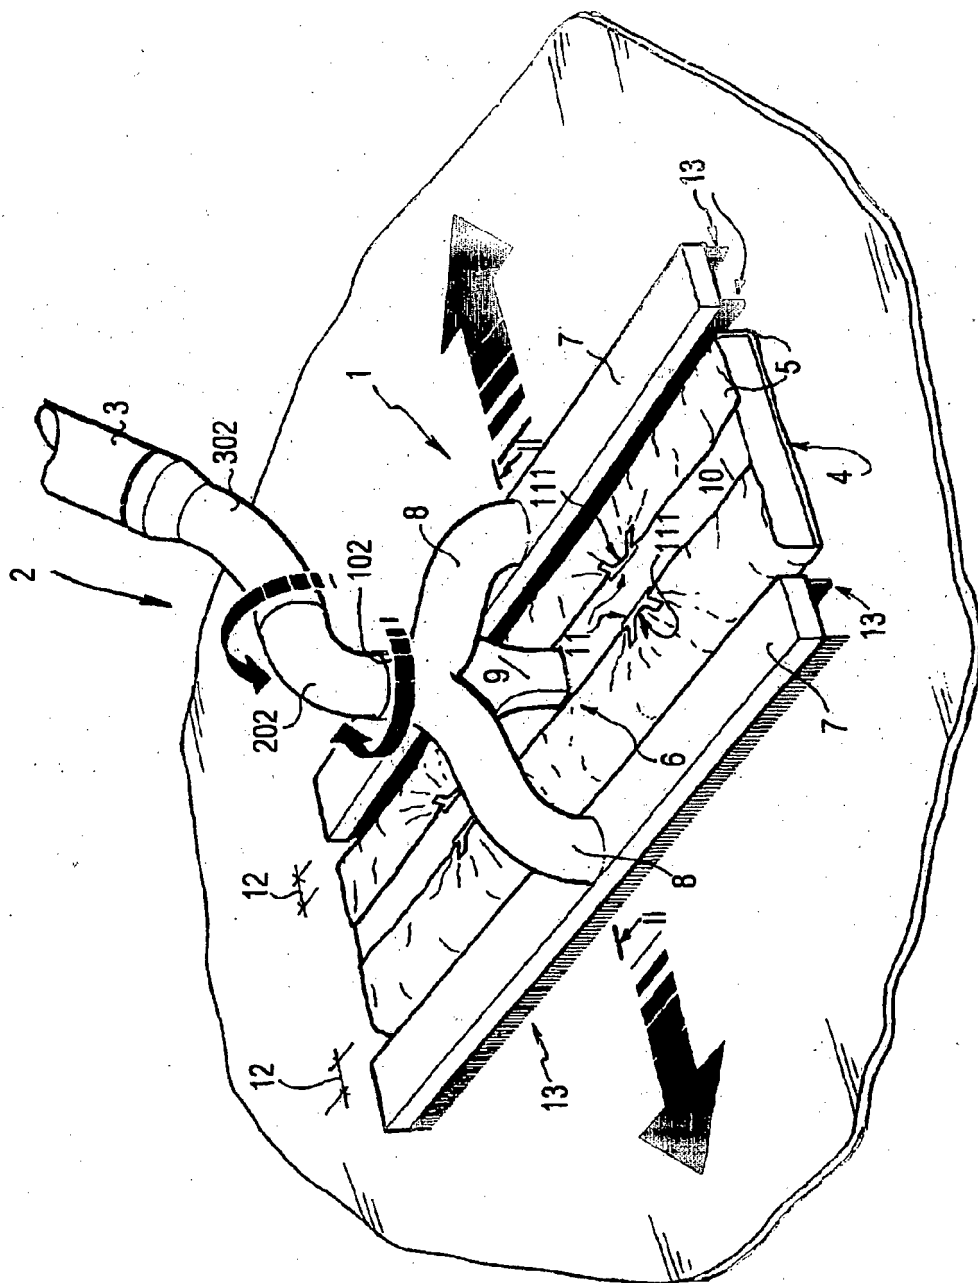


Fig. 1

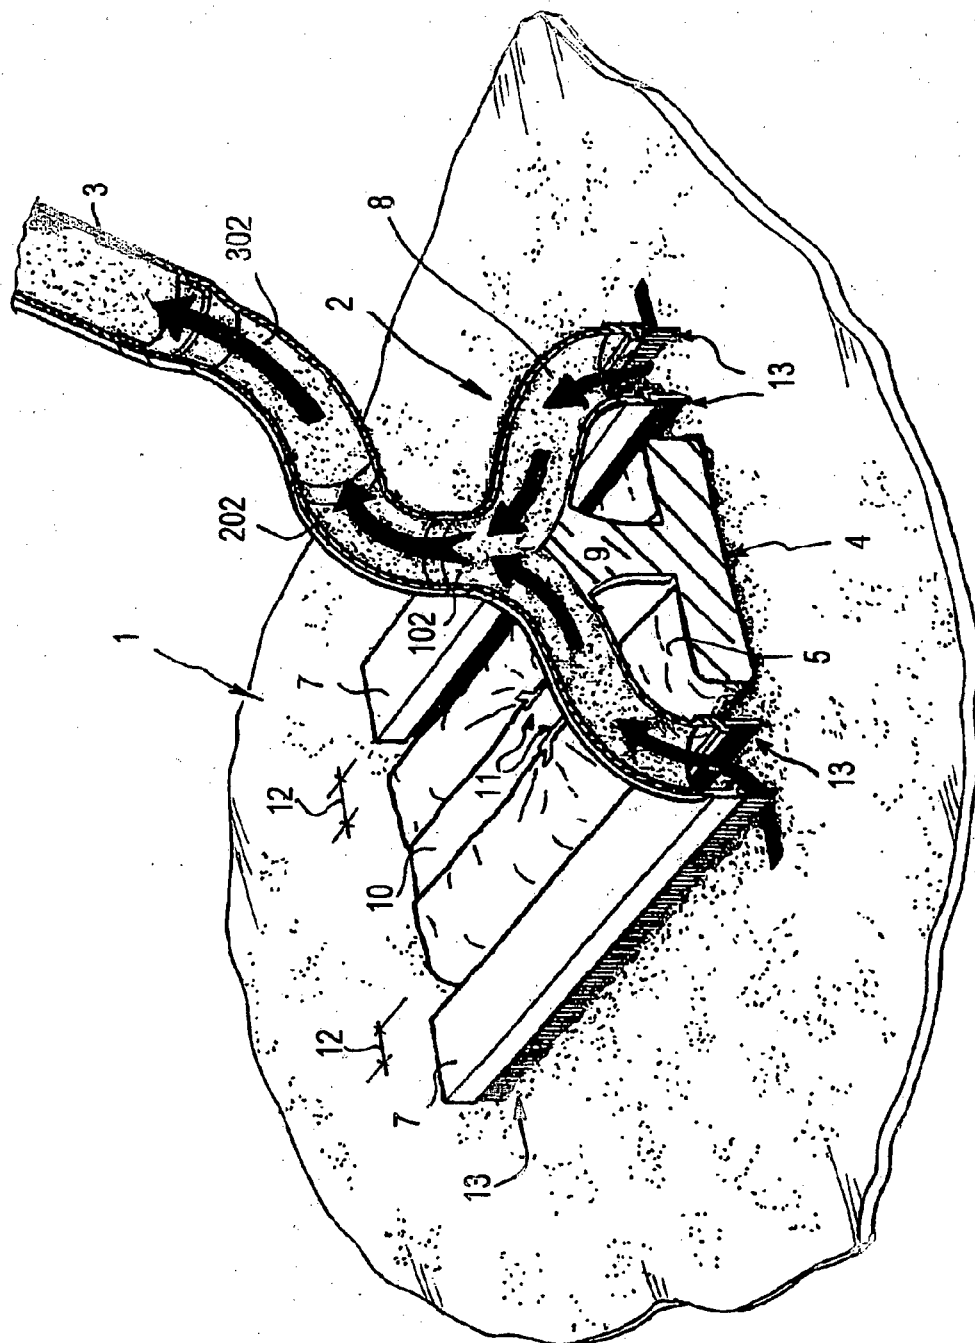


Fig. 2

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 09028638 A [0004]