



(11) **EP 1 609 979 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
03.11.2010 Bulletin 2010/44

(51) Int Cl.:
F02M 47/02 ^(2006.01) **F02M 57/02** ^(2006.01)
F02M 59/10 ^(2006.01) **F02M 59/46** ^(2006.01)
F02M 61/16 ^(2006.01)

(21) Application number: **05012225.8**

(22) Date of filing: **07.06.2005**

(54) **Injector for fuel injection unit**

Injektor für Kraftstoffeinspritzeinheit

Injecteur pour ensemble d'injection de combustible

(84) Designated Contracting States:
DE FR GB

(30) Priority: **21.06.2004 JP 2004182252**

(43) Date of publication of application:
28.12.2005 Bulletin 2005/52

(73) Proprietor: **DENSO CORPORATION**
Kariya-city, Aichi-pref., 448-8661 (JP)

(72) Inventors:
• **Taguchi, Tooru**
c/o DENSO CORPORATION
Kariya-city
Aichi-pref., 448-8661 (JP)

• **Matsumoto, Shuichi**
c/o DENSO CORPORATION
Kariya-city
Aichi-pref., 448-8661 (JP)
• **Oodaira, Shougo**
c/o DENSO CORPORATION
Kariya-city
Aichi-pref., 448-8661 (JP)

(74) Representative: **TBK-Patent**
Bavariaring 4-6
80336 München (DE)

(56) References cited:
EP-A- 1 388 666 **WO-A-01/53692**
DE-A1- 1 815 260 **DE-A1- 10 160 191**
GB-A- 2 072 306 **US-A- 4 957 085**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 609 979 B1

Description

[0001] The present invention relates to an injector for a fuel injection unit for an internal combustion engine according to the preamble of claim 1 and especially relates to the injector suitable for a common rail type fuel injection unit.

[0002] A common rail type fuel injection system is known which has a common rail identical to respective cylinders and accumulating high-pressure fuel therein for a diesel engine. The high-pressure fuel is pressure-fed from a fuel supply pump, adjusted to be a predetermined pressure in the common rail and injected at predetermined timings into the respective cylinders by driving injectors. Generally, the injectors configured for use with the common rail injects fuel through injection holes by lifting a nozzle needle up and down. An actuator drives a control valve to increase and decrease a backpressure of the nozzle needle to lift the nozzle needle up and down.

[0003] A structure of the injectors for the common rail type fuel injection system is disclosed, for example, in JP-2002-257002-A and its counterpart US-6,840,466-B2. The structure is configured to drive the control valve by amplifying a displacement of the actuator by a hydraulic power transmission unit. The hydraulic power transmission unit comprises a first piston having a large diameter, a second piston having a small diameter and a displacement amplifying chamber accumulating actuation fluid in a chamber formed between the first and second pistons. The hydraulic power transmission unit controls the backpressure of the nozzle needle by communicating a backpressure chamber of the nozzle needle selectively to a low-pressure fuel passage or a high-pressure fuel passage. The actuator is realized by a piezoelectric actuator, for example, which has a fine response to deliver high performance in fuel injection control.

[0004] In the injector is leakage fuel leaked through high-pressure sealing portions of respective components and a sliding portion of the control valve and leakage fuel discharged from the control chamber for applying the backpressure to the nozzle needle to start fuel injection. An injector body is provided with the low-pressure fuel passage for collecting and discharging the leakage fuel and the high-pressure fuel passage in which the high-pressure fuel is supplied from the common rail. These fuel passages can be formed, for example, at a side of the actuator and the hydraulic power transmission unit disposed along a center axis of the injector body.

[0005] Current demand to raise fuel injection pressure exposes the high-pressure fuel passage to larger stress and requires to increase strength of a periphery of the high-pressure fuel passage. In accordance with the demand, it is considered, for example, to shift center axes of the actuator and the hydraulic power transmission unit eccentrically to the center axis of the injector body as shown in FIGS. 3A and 3B. In FIG. 3A, an injection nozzle portion 103 is disposed at a lower end portion of the injector body B. A nozzle needle 6 is disposed slidably in

and coaxially with the injector body B. As shown in FIG. 3B, the injector body B has a longitudinal hole 31 for installing the actuator 3 and the hydraulic power transmission unit 4 eccentrically to the injector body B and a high-pressure fuel passage 1 penetrating through a thick wall portion at a side of the longitudinal hole 31. Low-pressure fuel passages 2 are formed at plural positions in the thick wall portion around the longitudinal hole 31 to be separated from the high-pressure fuel passage 1. The actuator 3 and the hydraulic power transmission unit 4 form a driving portion 101 to drive a control valve portion 102 disposed below the driving portion 101.

[0006] In the structure as described above, the eccentric arrangement of the actuator 3 and the hydraulic power transmission unit 4 extends a space at a side of these components. Thus, it is possible to increase strength of the injector body B by disposing the high-pressure fuel passage 1 in the space to spare a relatively thick wall around the high-pressure fuel passage 1. An engine head H on which the injector body B is mounted, however, limits an outer diameter of the injector body B. In order to dispose the longitudinal hole 31 for installing actuator 3 and the hydraulic power transmission unit 4 and the high-pressure fuel passage 1 respectively having enough diameters and wall thicknesses, the low-pressure fuel passage 2 must be formed thin as shown in the cross-sectional view of FIG. 3B. Further, a complicated work is necessary to form a relatively long low-pressure fuel passage 2' connecting the low-pressure fuel passage 2 to a fuel drain port 21 at an upper side portion of the injector body B to discharge the leakage fuel to outside.

[0007] According to the prior art disclosed in WO 01/53692 A, an injector for a fuel ejection unit is provided which comprises an injector body member, an actuator and a hydraulic power transmission unit for transmitting an actuating force of the actuator to the valve for controlling a fuel injection. In this construction, a low-pressure fuel passage groove is formed in a bobbin-like shaped member, which is inserted in the longitudinal hole formed in the injector body member. Further, the low-pressure fuel passage groove has an annular cross-section so as to surround the bobbin-like shaped member.

[0008] It is the object of a present invention to provide an injector for a fuel injection unit having a compact size and sufficient strength by securing sufficient diameters and wall thicknesses of an installation hole for installing an actuator and a hydraulic power transmission unit and for the high-pressure fuel passage which can be formed in a simple manufacturing process.

[0009] The object is solved by an injector having the combination of the features of claim 1. Further advantageous developments of the present invention are defined in the dependent claims.

[0010] The injector for a fuel injection unit according to the present invention has an injection body member, an actuator and a hydraulic power transmission unit. The hydraulic power transmission unit transmits an actuating

force of the actuator to a valve for controlling a fuel injection.

[0011] The injector further comprises a longitudinal hole, a high-pressure fuel passage, a low-pressure fuel chamber and a low-pressure fuel passage groove. The longitudinal hole is formed in the injector body member and installs the actuator and the hydraulic power transmission unit therein. The high-pressure fuel passage is formed in the injector body member at a radial side of the longitudinal hole to supply a high-pressure fuel for the fuel injection. The low-pressure fuel chamber is provided in the longitudinal hole and communicated to an outer leakage passage. The low-pressure fuel passage groove is formed on an inner circumferential face of the longitudinal hole to extend in a longitudinal direction of the longitudinal hole and to communicate with the low-pressure fuel chamber and a low-pressure fuel passage for discharging a leakage fuel leaked in the injector.

[0012] Other features and advantages of the present invention will be appreciated, as well as methods of operation and the function of the related parts, from a study of the following detailed description, the appended claims, and the drawings, all of which form a part of this application. In the drawings:

FIG. 1A is a cross-sectional view showing an entire structure of an injector according to an embodiment of the present invention;

FIG. 1B is a cross-sectional view of the injector according to the embodiment taken along a line IB - IB in FIG. 1A;

FIG. 2A is a graph showing a relation between a diameter of a low-pressure fuel passage (a worked bore) and an overlap depth;

FIG. 2B is a cross-sectional view of an overlapped portion of a longitudinal hole and a groove explaining the overlap depth and a contact angle;

FIG. 3A is a cross-sectional view showing an entire structure of a conventional injector; and

FIG. 3B is a cross-sectional view of the conventional injector taken along a line IIIB - IIIB in FIG. 3A.

[0013] Described in the following is an embodiment applying an injector according to the present invention to a common rail injection system for a diesel engine. FIG. 1A is a diagram showing an entire structure of the injector I. FIG. 1B is a cross-sectional view taken along a line IB - IB in FIG. 1A. The injector I is fixed in a mounting hole provided in a cylinder head H of an engine to inject fuel into respective cylinders. In FIG. 1A, the injector I comprises a driving portion 101 having a piezoelectric actuator 3 and a hydraulic power transmission unit 4, a control valve portion 102 having a valve 5 with three-way valve structure and an injection nozzle portion 103 having a nozzle needle 6. The driving portion 101 has an injector body B1, which is an injector body member, to install the piezoelectric actuator 3 and the hydraulic power transmission unit 4 therein. A valve body B3 of the control

valve portion 102 is disposed at a lower end side of the injector body B1 to interpose a passage forming member B2 therebetween. A nozzle body B5 of the injection nozzle portion 103 is disposed at a lower end side of the valve body B3 to interpose a passage forming member B4 therebetween. These body members B1 to B5 are fastened and fixed to each other in oil-tight state by retainers (not shown).

[0014] The injector I has a high-pressure fuel passage 1 formed in a longitudinal direction thereof for fuel supply. The high-pressure fuel passage 1 is connected via a fuel supply port 11 opening at an upper side portion of the injector body B1 to an outer common rail (not shown). The common rail accumulates fuel pressure-fed from a high-pressure fuel supply pump at a predetermined high pressure corresponding to an injection pressure. Further, a fuel drain port 21 opens at an upper side portion of the injector body B1 to return leakage fuel from the injector I via a leakage fuel passage (not shown) to a fuel tank (not shown).

[0015] The injection nozzle portion 103 retains a nozzle needle 6 having a stepped shape slidably in a cylinder provided in the body member B5. A space around a lower small diameter portion of the nozzle needle 6 forms an oil accumulation chamber 62. High-pressure fuel is supplied from a common rail to the oil accumulation chamber 62 through a high-pressure fuel passage 1 connected to a side wall of the oil accumulation chamber 62. A lower center portion of the body member B5 has a sac portion 63 and injection holes 64 to penetrate a wall forming the sac portion 63. When the nozzle needle 6 is at a lowermost position, a conically shaped tip portion of the nozzle needle 6 seats on a nozzle seat 65 provided at a boundary portion between the oil accumulation chamber 62 and the sac portion 63 to shut the sac portion 63 and interrupt fuel supply from the oil accumulation chamber 62 to the injection holes 64. Fuel injection commences by a lift up of the nozzle needle 6 apart from the nozzle seat 65 to open the sac portion 63.

[0016] A space defined by an upper end face of the nozzle needle 6 and an inner wall face of the cylinder forms a control chamber 61 for controlling a backpressure of the nozzle needle 6. The control chamber 61 is supplied with fuel as control oil from a passage 12 connected to the high-pressure fuel passage 1 through a valve chamber of the control valve portion 102, a passage 13 and an orifice 14 to generate the backpressure of the nozzle needle 6. Further, the control chamber 61 is connected via an orifice 15 to the high-pressure fuel passage 1 at any time. The backpressure pushes the nozzle needle 6 downward together with a spring 66 installed in the control chamber 61 to urge the nozzle needle 6 in a valve closing direction. High-pressure fuel in the oil accumulation chamber 62 pushes the nozzle needle 6 upward to urge the nozzle needle 6 in a valve opening direction.

[0017] The control valve portion 102 has a valve 5 having three-way valve structure. A large diameter valve portion of the valve 5 is disposed in a valve chamber 51

connected to the control chamber 61 at any time. A lower portion of the valve 5 is shaped as sort of a piston and slides in a cylinder formed in the body member B3. A lower end portion of the cylinder is a spring chamber 54 for installing a spring 55 urging the valve 5 upward. The valve chamber 51 has a low-pressure side seat 52 on a top face thereof and a high-pressure side seat 53 on a bottom face thereof. The valve 5 selectively seats on any one of these seats 52, 53. The large diameter valve portion of the valve 5 has two conical faces for seating on these seats 52, 53.

[0018] Each of the passage forming member B2 and the body member B3 is provided with a low-pressure fuel passage 23 penetrating an approximately center portion thereof in a longitudinal direction. The low-pressure fuel passage 23 is connected via a passage 24 to the spring chamber 54 and via a passage 25 to a passage downstream the low-pressure side seat 52. When the valve 5 lifts down, the passage 24 discharges fuel in the spring chamber 54 therethrough to smooth a valve opening motion of the valve 5. The control valve portion 102 discharges fuel via these passages 24, 25 to the low-pressure fuel passage 23. In addition, leakage fuel from the control chamber 61 at an upper end portion of the injection nozzle portion 103 also flows into the fuel passage 23.

[0019] In accordance with a seat position of the valve 5 switched by the driving portion 101, pressure in the control chamber 61 connected to the valve chamber 51, that is, the backpressure of the nozzle needle 6 increases and decreases. When the valve 5 is at an upper end position to close the low-pressure side seat 52, the control chamber 61 is connected via the high-pressure side seat 53 to the high-pressure fuel passage 1 to act hydraulic pressure to the nozzle needle 6 in the valve closing direction. When the valve 5 is pushed down to close the high-pressure side seat 53 to open the low-pressure side seat 52, the control chamber 61 is connected via the low-pressure side seat 52 to the low-pressure fuel passage 2 to decrease the backpressure of the nozzle needle 6.

[0020] The driving portion 101 transmits the driving force of the piezoelectric actuator 3 as an actuator to the valve 5 in the control valve portion 102 with the hydraulic power transmission unit 4. The piezoelectric actuator 3 is installed in an upper portion of the longitudinal hole 31 formed in the injector body B1. The hydraulic power transmission unit 4 is installed in a lower portion of the longitudinal hole 31. The piezoelectric actuator 3 has a conventional structure including a piezostack in which piezoceramic layers such as PZT and electrode layers are alternately stacked. The piezoelectric actuator 3 extends and shrinks in the stacking direction of the layers (up and down direction) and is charged and discharged by a driving circuit (not shown).

[0021] As shown in FIG. 1B, the injector body B1 has an approximately cylindrical shape and the longitudinal hole 31 is provided eccentric to the center axis of the injector body B. Thus, the injector body B1 has a thick wall portion at a side of the longitudinal hole 31. The high-

pressure fuel passage 1 is provided approximately at a center of the thick wall portion. This is to secure enough wall thickness around the high-pressure fuel passage 1. As shown in FIG. 1A, each of the high-pressure fuel passage 1, the longitudinal hole 31 and the injector body B1 is disposed approximately in parallel to the center axis of the injector body B. The longitudinal hole 31 and the piezoelectric actuator 3 form a low-pressure fuel chamber 22 having an annular shape therebetween. A passage 27 connected to the fuel drain port 21 opens to the low-pressure fuel chamber 22.

[0022] The hydraulic power transmission unit 4 includes a large diameter piston 42 and a small diameter piston 44 slidably installed in the cylindrically shaped cylinder member 41 and an oil-tight chamber 43 accumulating actuating oil between the pistons 42, 44. The large diameter piston 42 has an upper flange portion protruding above the cylinder member 41 to be in contact with a lower end face of the piezoelectric actuator 3. A spring 45 is interposed between the flange portion and an upper end face of the cylinder member 41 to apply a predetermined primary load via the large diameter piston 42 to the piezoelectric actuator 3. Thus, the large diameter piston 42 slides upward and downward in contact with and integrally with the piezoelectric actuator 3 in accordance with an extension and shrinkage of the piezoelectric actuator 3.

[0023] A valve spring 46 is disposed in the oil-tight chamber 43 to urge the small diameter piston 44 downward. The small diameter piston 44 has a pin-shaped lower portion extending into the passage-forming member B2 to be in contact with an upper end face of the valve 5 in the valve chamber 51. Thus, when the piezoelectric actuator 3 extends to push the large diameter piston 42 downward, the pressure is transformed into hydraulic pressure and transmitted to a small diameter piston 44 to amplify the displacement. By using the hydraulic power transmission unit 4, the displacement of the piezoelectric actuator 3 is amplified in accordance with a ratio of pressure-receiving areas of the large diameter piston 42 and the small diameter piston 44.

[0024] As shown in FIG. 1A, an annular-shaped passage is formed around the pin-shaped lower portion of the small diameter piston 44 to be connected to the low-pressure side seat 52. The passage 25 connected to the low-pressure fuel passage 23 opens to the annular-shaped passage. An upper end of the low-pressure fuel passage 23 is connected to a low-pressure fuel passage groove 26 opening to a lower end face of the injector body B1. As shown in FIG. 1B, the low-pressure fuel passage groove 26 includes a plurality of depressed grooves 32 having approximately half-round cross-section formed to overlap with a periphery of the longitudinal hole 31 to be the low-pressure fuel passage 23.

[0025] The low-pressure fuel passage groove 26 is formed at a periphery of the longitudinal hole 31 at a side of the high-pressure fuel passage 1, that is, approximately at a radial center portion of the injector body B1 in

which relatively large wall thickness can be spared. Thus, even when the sectional area of the low-pressure fuel passage groove 26 is relatively large, the high-pressure fuel passage 1 is provided with a surrounding wall with enough thickness. Further, an upper end of the low-pressure fuel passage groove 26 is disposed higher than the upper end face of the cylinder member 41 installed in the longitudinal hole 31. Accordingly, the upper end of the low-pressure fuel passage groove 26 opens to the low-pressure fuel chamber 22 to form a flow path from the low-pressure fuel passage 23 via the low-pressure fuel passage groove 26, the low-pressure fuel chamber 23 to the low-pressure fuel drain port 21.

[0026] Next, the operation of the injector having the above-described structure will be described. FIG. 1A depicts a state in which the piezoelectric actuator 3 is electrically discharged and shrunk and the valve 5 is at an upper end position to close the low-pressure side seat 52. In this state, a communication between the passage 25 connected to the low-pressure fuel passage 23 and the valve chamber 51 is interrupted, so that the pressure in the control chamber 61 is increased by fuel flowing from the high-pressure fuel passage 1 via the orifice 15, the passage 12, valve chamber 51, the passage 13 or the orifice 14. The pressure in the control chamber 61 and the restitutive force of the spring 66 seats the nozzle needle 6 onto the nozzle seat 65 to interrupt a communication between the injection hole 64 and the oil accumulation chamber 62.

[0027] In this state, by supplying current to the piezoelectric actuator 3, the piezoelectric actuator 3 extends to move the large diameter piston 42 downward and to pressurize the actuating oil (light oil in this embodiment) in the oil-tight chamber 43. The pressure of the actuating oil moves the small diameter piston downward to push the valve 5 down. Thus, the control chamber 61 becomes communicated via the valve chamber 51, the low-pressure side seat 52, the passage 25 with the low-pressure fuel passage 23 to decrease the pressure in the control chamber 4. When a force urging the nozzle needle 5 downward exceeds a force urging the nozzle needle 5 upward, the nozzle needle 5 lifts off the valve seat to start fuel injection.

[0028] In the above-described structure, the injector body B1 is provided with the longitudinal hole 31 installing the piezoelectric actuator 3 and the displacement transmission unit 4 to be eccentric thereto, an enough space is spared at the side of the longitudinal hole 31 to form the high-pressure fuel passage 1 therein. In addition, a space in the longitudinal hole 31 is used as the low-pressure fuel chamber 22 forming a part of the passage for discharging the leakage fuel and the groove 32 integrally provided at the periphery of the longitudinal hole 31 as the low-pressure fuel groove 22 connected to the low-pressure fuel passage for collecting the leakage fuel from the control valve portion 102 and the fuel injection nozzle portion 103, it is easier to spare and form a sectional area of the low-pressure fuel passage (the sectional area of

the low-pressure fuel passage groove 26) relative to the structure shown in FIGS. 3A and 3B. Further, the low-pressure fuel passage groove 26 may be short as long as it is communicated with the low-pressure fuel chamber 23. Thus, it is possible to decrease a machining length of the groove 32 and the length of the passage 27 for communicating the low-pressure fuel passage 2 to the fuel drain port 21. Thus, it is possible to secure the sectional area of flow passages and the wall thickness and to improve the workability.

[0029] As shown in FIG. 1B, it is useful to dispose the radial centers of the high-pressure fuel passage 1, the longitudinal hole 31 and the injector body B1 on an imaginary identical line and to dispose a plurality of the low-pressure fuel passage grooves 26 symmetrically at an upper and lower sides with respect to the imaginary identical line to spare enough thickness of the respective passages and secure enough strength of the periphery of the respective passages. This structure of the low-pressure fuel passage groove 26 can be formed by an ordinary boring work. For example, a round shaped bore is worked to form the low-pressure fuel passage groove 26 at first, then the longitudinal hole 31 is formed to overlap with the bore formed for the low-pressure fuel passage groove 26. It is also possible to form the low-pressure fuel passage groove 26 by a subsequent work process such as electric discharge machining.

[0030] The shape and size of the low-pressure fuel passage groove 26 is determined in accordance with a necessary sectional area of the flow passage and so on. Specifically, in the conventional structure as shown in FIG. 3B, a bore worked for the low-pressure fuel passage 2 has a diameter of 2.2 mm and a depth of 100 mm. In the structure of the present invention as shown in FIG. 1B, the diameter of the round shaped bore, a part of which the low-pressure fuel passage groove 2, has a diameter of 3.5 mm and a depth of 45 mm. In an indicator of L/D {(working length) / (working diameter)} generally used for estimating workability, the ratio of {(the indicator in the conventional structure) / (the indicator of the present invention)} equals $1/3.5$, which shows an improvement in workability in the present invention.

[0031] Further, FIG. 2A shows a relation between the diameter of the low-pressure fuel passage and the overlap degree to secure an equivalent sectional area of the flow path relative to a conventional one. The diameter of the low-pressure fuel passage is the diameter of the round bore, a part of which is the groove 32 in FIG. 2B, and the overlap degree is the depth of an overlap portion between the round bore and the longitudinal hole 31. A solid line in FIG. 2A is the overlapped depth in a case that the sectional area of the flow path is equivalent to the conventional one. If the overlapped depth is decreased, the sectional area of the flow path becomes larger than the conventional one. When the overlapped depth is smaller than this overlap degree, a contact angle shown in the figure (the angle at which tangential lines of the longitudinal hole 31 and the low-pressure fuel pas-

sage groove 26 meet at an intersection thereof) becomes smaller to cause the trimming burrs in the work process. A dotted line in the FIG. 2A shows the overlap degree when the contact angle is 90 degrees. It is desirable to set the contact angle equal to or larger than 90 degrees to restrict the generation of the trimming burrs, by setting the overlapped depth larger than this overlap degree.

[0032] Accordingly, in view of the sectional area of the flow passage and the workability, it is desirable to design so that the diameter of the low-pressure fuel passage and the overlap depth are disposed between the solid line and the dotted line in the figure. Specifically, as shown in FIG. 2, in a case that a round bore, a part of which is the low-pressure fuel passage groove 2, has a diameter of 3.5 mm, it is useful to set the overlapped depth to 2 mm for increasing the sectional area of the flow path and the contact angle and hence decreasing the trimming burrs and improving the workability.

[0033] A piezoelectric actuator is applied in the above-described embodiment. An actuator in the present invention, however, is not limited to the piezoelectric actuator. Magneto-striction actuator and the like may be applied which has a magneto-striction element generating a displacement by flowing electricity similar to the piezoelectric actuator. Further, it is not always necessary to apply a three-way valve for the valve. The invention may have other structures to open and close the nozzle needle by other methods. It is natural to change the structures such as the control valve portion, the injection nozzle portion and others.

Claims

1. An injector (I) for a fuel injection unit comprising:

an injector body member (B1);
an actuator (3); and
a hydraulic power transmission unit (4) for transmitting an actuating force of the actuator (3) to a valve (5) for controlling a fuel injection, the injector (I) **characterized in** further comprising:
a longitudinal hole (31) formed in the injector body member (B1) and installing the actuator (3) and the hydraulic power transmission unit (4) therein;
a high-pressure fuel passage (1) formed in the injector body member (B1) at a radial side of the longitudinal hole (31) to supply a high-pressure fuel for the fuel injection; and
a low-pressure fuel chamber (22) provided in the longitudinal hole (31) and communicated to an outer leakage passage,

characterized in that:

the injector body member (B1) has a low-pressure fuel passage groove (26) formed on an in-

ner circumferential face of the longitudinal hole (31) to extend in a longitudinal direction of the longitudinal hole (31) and to communicate with the low-pressure fuel chamber (22) and a low-pressure fuel passage (23) for discharging a leakage fuel leaked in the injector (I);
the longitudinal hole (31) has a cross-section of an approximately round shape; and
the low-pressure fuel passage groove (26) has a cross-section of an approximately one half of a round shape such that another half of the round shape overlaps with the cross-section of the longitudinal hole (31).

2. The injector (I) according to claim 1, wherein a center axis of the longitudinal hole (31) is eccentric to a center axis of the injector body member (B1).

3. The injector (I) according to claim 1 or 2, wherein radial centers of the injector body member (B1), the longitudinal hole (31) and the high-pressure fuel passage (1) are disposed approximately on an imaginary identical line.

4. The injector (I) according to any one of claims 1 to 3, wherein a plurality of the low-pressure fuel passage grooves (26) are formed on a periphery of the longitudinal hole (31), the plurality of the low-pressure fuel passage grooves (26) being symmetrically disposed with respect to a line of symmetry passing through radial centers of the longitudinal hole (31) and the high-pressure fuel passage (1).

5. The injector (I) according to any one of claims 1 to 4, wherein:

the hydraulic power transmission unit (4) has a piston member (42, 44) sliding in a cylinder member (41) to drive the valve (5);
the cylinder member (41) of the hydraulic power transmission unit (4) is fixed in an end portion of the longitudinal hole (31) at a side of the valve (5); and
the low-pressure fuel passage groove (26) is formed on the inner circumferential face around the cylinder member (41) to have length larger than a length of the cylinder member (41) in the longitudinal direction of the longitudinal hole (31).

6. The injector (I) according to any one of claims 1 to 5, wherein a tangential line of the longitudinal hole (31) and a tangential line of the low-pressure fuel passage groove (26) meet at an angle equal to or larger than 90 degrees at an intersection of a circumference of the longitudinal hole (31) and a circumference of the low-pressure fuel passage groove (26).

7. The injector (I) according to any one of claims 1 to 6, wherein the actuator (3) is a piezoelectric actuator.

Patentansprüche

1. Injektor (I) für eine Kraftstoffeinspritzeinheit, der Folgendes aufweist:

ein Injektorkörperbauteil (B1);
einen Aktuator (3); und
eine Hydraulikkraftübertragungseinheit (4) zum Übertragen einer Betätigungskraft des Aktuators (3) an ein Ventil (5) zum Steuern einer Kraftstoffeinspritzung, wobei der Injektor (I) ferner durch Folgendes **gekennzeichnet** ist:

ein längs laufendes Loch (31), das in dem Injektorkörperbauteil (B1) ausgebildet ist und das den Aktuator (3) und die Hydraulikkraftübertragungseinheit (4) darin installiert;

einen Hochdruckkraftstoffdurchgang (1), der in dem Injektorkörperbauteil (B1) an einer radialen Seite des längs laufenden Lochs (31) ausgebildet ist, um einen Hochdruckkraftstoff für die Kraftstoffeinspritzung zuzuführen; und

eine Niederdruckkraftstoffkammer (22), die in dem längs laufenden Loch (31) vorgesehen ist und mit einem äußeren Leckdurchgang in Verbindung steht,

dadurch gekennzeichnet, dass:

das Injektorkörperbauteil (B1) eine Niederdruckkraftstoffdurchgangsnut (26) aufweist, die in einer Innenumfangsfläche des längs laufenden Lochs (31) ausgebildet ist, um sich in einer Längsrichtung des längs laufenden Lochs (31) zu erstrecken und um mit der Niederdruckkraftstoffkammer (22) und einem Niederdruckkraftstoffdurchgang (23) zum Abgeben eines Leckkraftstoffs in Verbindung zu stehen, der in den Injektor (I) läuft;

das längs laufende Loch (31) einen Querschnitt einer ungefähr runden Form aufweist; und

die Niederdruckkraftstoffdurchgangsnut (26) einen Querschnitt von ungefähr einer Hälfte einer runden Form aufweist, so dass sich eine andere Hälfte der runden Form mit dem Querschnitt des längs laufenden Lochs (31) überlappt.

2. Injektor (I) nach Anspruch 1, wobei eine Mittelachse des längs laufenden Lochs (31) zu einer Mittelachse

des Injektorkörperbauteils (B1) exzentrisch ist.

3. Injektor (I) nach Anspruch 1 oder 2, wobei radiale Mitten des Injektorkörperbauteils (B1), des längs laufenden Lochs (31) und des Hochdruckkraftstoffdurchgangs (1) ungefähr an einer imaginären identischen Linie angeordnet sind.

4. Injektor (I) nach einem der Ansprüche 1 bis 3, wobei eine Vielzahl der Niederdruckkraftstoffdurchgangsnuten (26) an einem Umfang des längs laufenden Lochs (31) ausgebildet sind, wobei die Vielzahl der Niederdruckkraftstoffdurchgangsnuten (26) symmetrisch mit Hinblick auf eine Symmetrielinie angeordnet sind, die durch radiale Mitten des längs laufenden Lochs (31) und des Hochdruckkraftstoffdurchgangs (1) hindurchführt.

5. Injektor (I) nach einem der Ansprüche 1 bis 4, wobei:

die Hydraulikkraftübertragungseinheit (4) ein Kolbenbauteil (42, 44) aufweist, das in einem Zylinderbauteil (41) gleitet, um das Ventil (5) anzutreiben;

das Zylinderbauteil (41) der Hydraulikkraftübertragungseinheit (4) an einem Endabschnitt des längs laufenden Lochs (31) an einer Seite des Ventils (5) befestigt ist; und

die Niederdruckkraftstoffdurchgangsnut (26) an der Innenumfangsfläche um das Zylinderbauteil (41) herum ausgebildet ist, um eine Länge größer als eine Länge des Zylinderbauteils (41) in der Längsrichtung des längs laufenden Lochs (31) aufzuweisen.

6. Injektor (I) nach einem der Ansprüche 1 bis 5, wobei eine tangentielle Linie des längs laufenden Lochs (31) und eine tangentielle Linie der Niederdruckkraftstoffdurchgangsnut (26) sich bei einem Winkel gleich wie oder größer als 90° an einem Schnittpunkt eines Umfangs des längs laufenden Lochs (31) und eines Umfangs der Niederdruckkraftstoffdurchgangsnut (26) treffen.

7. Injektor (I) nach einem der Ansprüche 1 bis 6, wobei der Aktuator (3) ein piezoelektrischer Aktuator ist.

Revendications

1. Injecteur (I) pour une unité d'injection de carburant comprenant :

un élément formant corps d'injecteur (B1) ;

un actionneur (3) ; et

une unité de transmission de puissance hydraulique (4) pour transmettre une force d'actionnement de l'actionneur (3) à une soupape (5) afin

de commander une injection de carburant, l'injecteur (I) étant **caractérisé en ce qu'il** comprend en outre :

un trou longitudinal (31) formé dans l'élément formant corps d'injecteur (B1) et dans lequel l'actionneur (3) et l'unité de transmission de puissance hydraulique (4) sont installés ;
un passage de carburant à haute pression (1) formé dans l'élément formant corps d'injecteur (B1) sur un côté radial du trou longitudinal (31) pour fournir un carburant à haute pression pour l'injection de carburant ; et
une chambre de carburant à basse pression (22) placée dans le trou longitudinal (31) et communiquant avec un passage extérieur de fuite,

caractérisé en ce que :

l'élément formant corps d'injecteur (B1) a une rainure de passage de carburant à basse pression (26) formée sur une face périphérique intérieure du trou longitudinal (31) de manière à s'étendre dans une direction longitudinale du trou longitudinal (31) et à communiquer avec la chambre de carburant à basse pression (22) et un passage de carburant à basse pression (23) afin d'évacuer un carburant de fuite fuyant dans l'injecteur (1) ;
le trou longitudinal (31) a une section présentant une forme approximativement ronde ; et
la rainure de passage de carburant à basse pression (26) a une section présentant une forme correspondant approximativement à une moitié d'une forme ronde de sorte qu'une autre moitié de la forme ronde recouvre la section du trou longitudinal (31).

2. Injecteur (I) selon la revendication 1, dans lequel un axe central du trou longitudinal (31) est décalé par rapport à un axe central de l'élément formant corps d'injecteur (B1).
3. Injecteur (I) selon la revendication 1 ou 2, dans lequel les centres radiaux de l'élément formant corps d'injecteur (B1), du trou longitudinal (31) et du passage de carburant à haute pression (1) sont disposés approximativement sur une même ligne imaginaire.
4. Injecteur (I) selon l'une quelconque des revendications 1 à 3, dans lequel une pluralité de rainures de passage de carburant à basse pression (26) est formée sur une périphérie du trou longitudinal (31), la

pluralité de rainures de passage de carburant à basse pression (26) étant disposée symétriquement par rapport à une ligne de symétrie passant par les centres radiaux du trou longitudinal (31) et du passage de carburant à haute pression (1).

5. Injecteur (I) selon l'une quelconque des revendications 1 à 4, dans lequel :

l'unité de transmission de puissance hydraulique (4) a un élément formant piston (42, 44) coulissant dans un élément formant vérin (41) pour commander la soupape (5) ;
l'élément formant vérin (41) de l'unité de transmission de puissance hydraulique (4) est fixé dans une portion d'extrémité du trou longitudinal (31) sur un côté de la soupape (5) ; et
la rainure de passage de carburant à basse pression (26) est formée sur la face périphérique intérieure autour de l'élément formant vérin (41) de façon à présenter une longueur plus grande qu'une longueur de l'élément formant vérin (41) dans la direction longitudinale du trou longitudinal (31).

6. Injecteur (I) selon l'une quelconque des revendications 1 à 5, dans lequel une ligne tangentielle du trou longitudinal (31) et une ligne tangentielle de la rainure de passage de carburant à basse pression (26) se croisent à un angle supérieur ou égal à 90 degrés à une intersection entre une circonférence du trou longitudinal (31) et une circonférence de la rainure de passage de carburant à basse pression (26).
7. Injecteur (I) selon l'une quelconque des revendications 1 à 6, dans lequel l'actionneur (3) est un actionneur piézoélectrique.

FIG. 1A

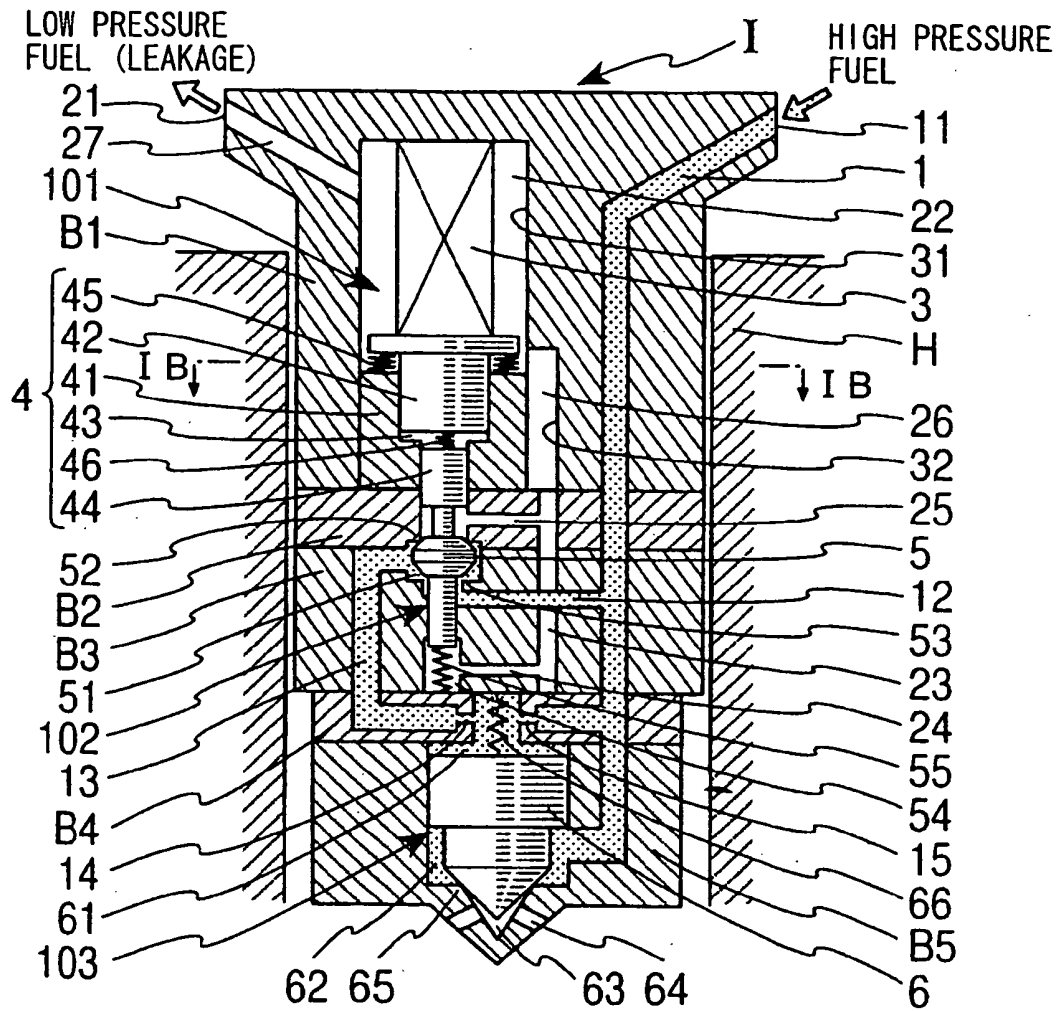


FIG. 1B

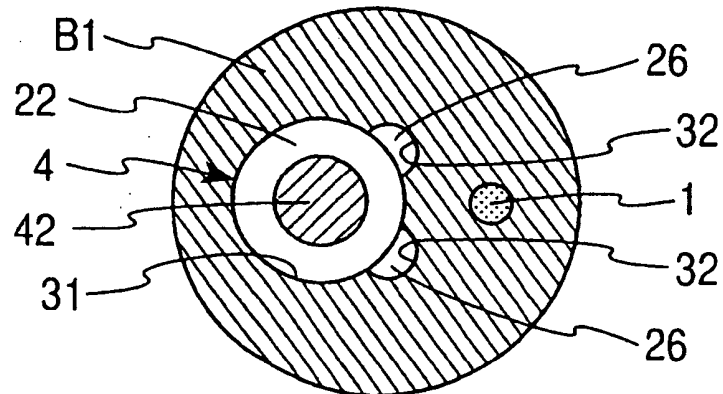


FIG. 2A

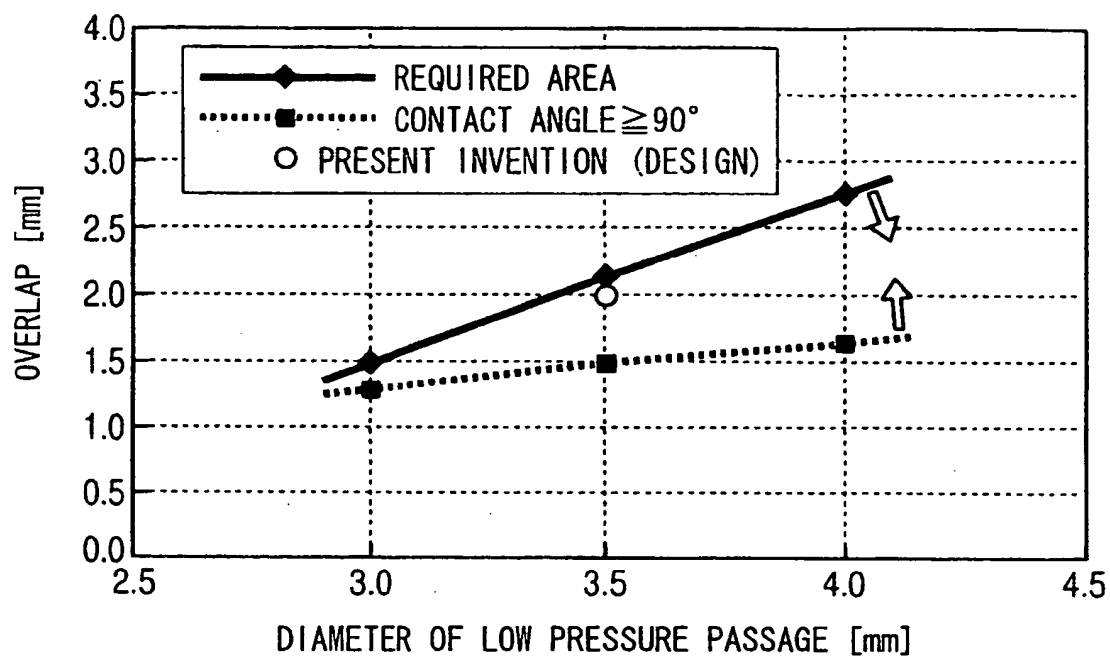


FIG. 2B

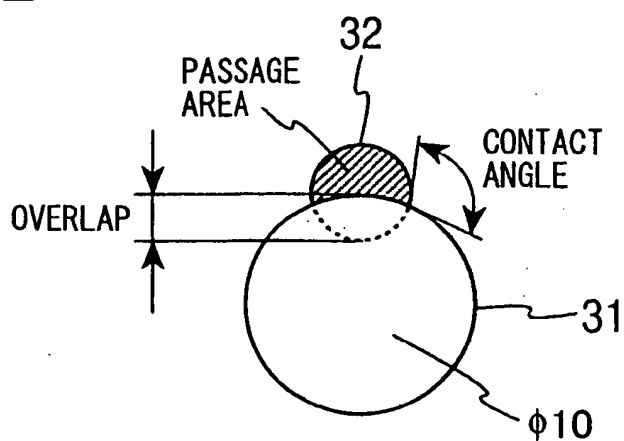


FIG. 3A


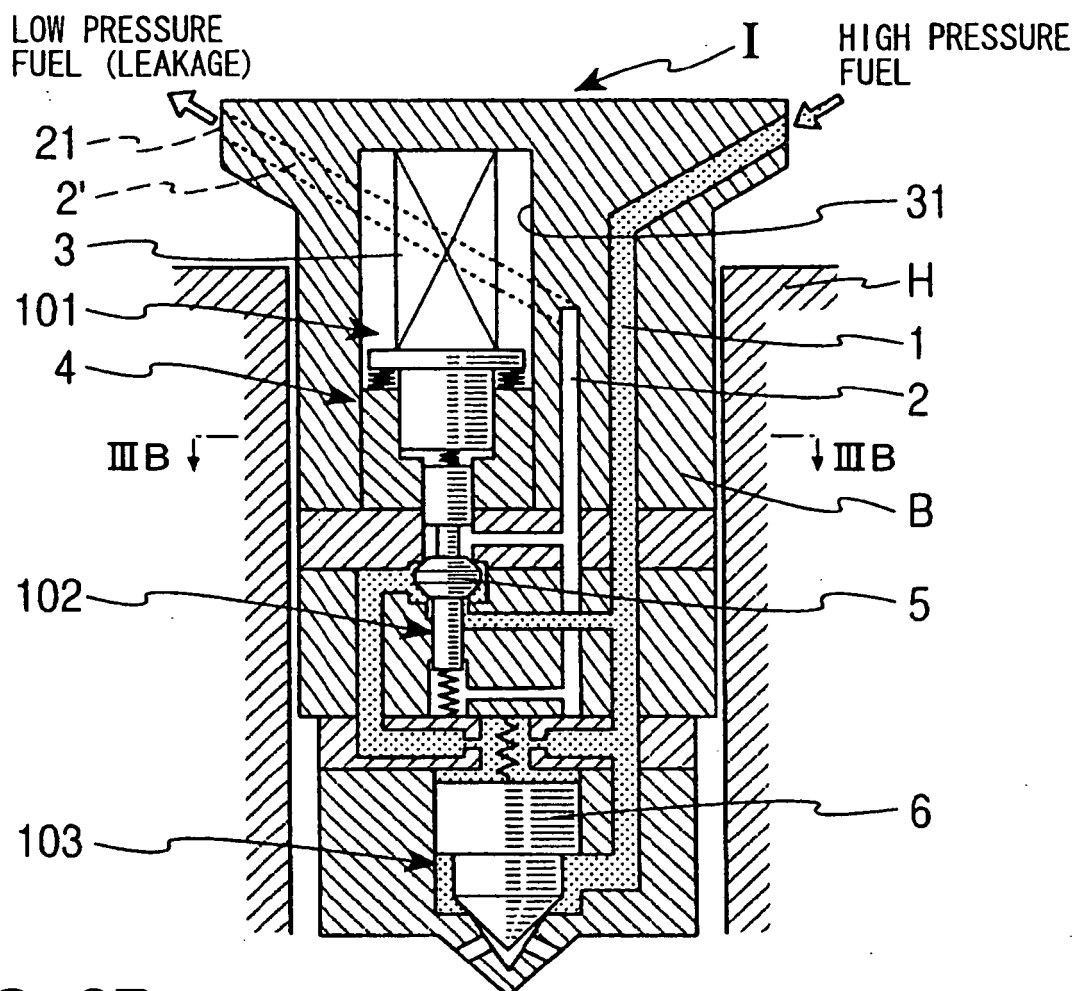


FIG. 3B

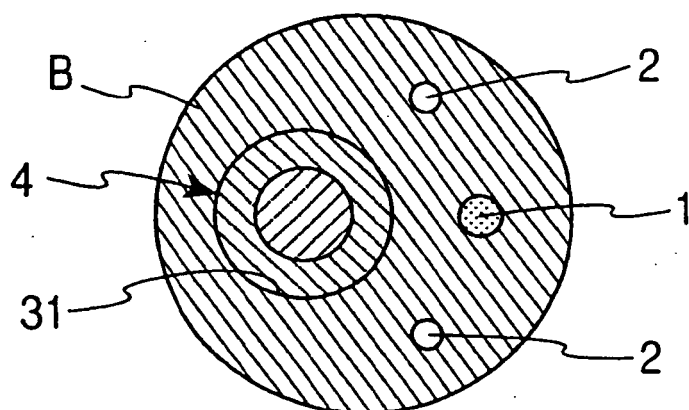

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2002257002 A [0003]
- US 6840466 B2 [0003]
- WO 0153692 A [0007]