



(12) **CORRECTED EUROPEAN PATENT APPLICATION**

published in accordance with Art. 158(3) EPC

Note: Bibliography reflects the latest situation

(15) Correction information:

Corrected version no 1 (W1 A1)
INID code(s) 71

(51) Int Cl.:

B23G 5/06 (1968.09)

(48) Corrigendum issued on:

10.05.2006 Bulletin 2006/19

(86) International application number:

PCT/JP2004/002543

(43) Date of publication:

04.01.2006 Bulletin 2006/01

(87) International publication number:

WO 2004/080637 (23.09.2004 Gazette 2004/39)

(21) Application number: **04716346.4**

(22) Date of filing: **02.03.2004**

(84) Designated Contracting States:

DE FR GB IT

(30) Priority: **14.03.2003 JP 2003070488**

(71) Applicants:

- **Yamawa Mfg. Co., Ltd.**
Chuo-ku
Tokyo 104-0031 (JP)
- **Kennametal, Inc.**
Latrobe, PA 15650-0231 (US)

- **MITSUI, M.,**
Yamawa Mfg. Co., Ltd.
Tokyo 1040031 (JP)
- **HENDERER, Willard E.**
Evans, GA 30809 (US)

(74) Representative: **Paget, Hugh Charles Edward et al**

Mewburn Ellis LLP
York House
23 Kingsway
London WC2B 6HP (GB)

(72) Inventors:

- **AKAKI, S.,**
Yamawa Mfg. Co., Ltd.
Tokyo 1040031 (JP)

(54) **HIGH-SPEED PROCESSING TAP**

(57) A high-speed forming tap (1) for cutting and forming a female screw by cutting edges (E) of a screw portion (2) fed in synchronous with the rotation of a machine tool. The high-speed forming tap is **characterized in that** chamfers (CF) are provided at a bevel lead (2a) of the screw part (2). The chamfers (CF) start from the cutting edge (E) and are provided along ridgelines (R) between a crest face (2e) and flanks, or a following flank (2c) and a leading flank (2d). This structure enables the shape of the edges of the tap leading portion to be stably maintained and high-speed, smooth female screw cutting with high accuracy, and provides a tap with long life.

FIG. 1a

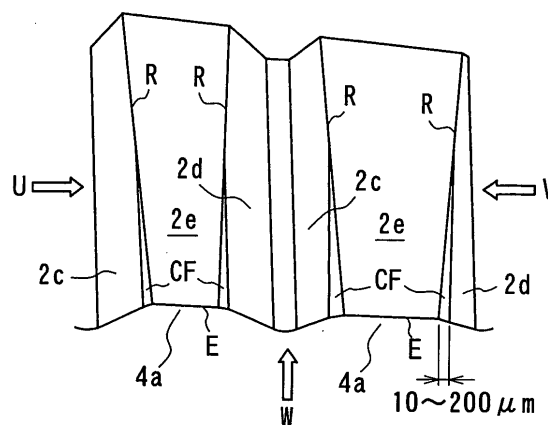


FIG. 1b

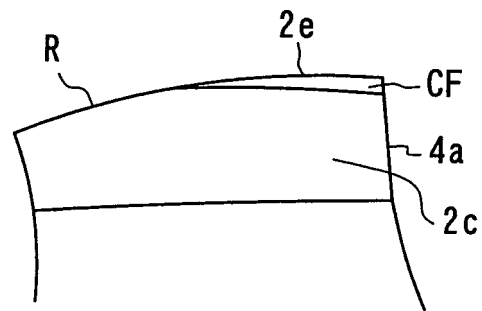


FIG. 1c

