



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 614 852 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**

published in accordance with Art. 158(3) EPC

Note: Bibliography reflects the latest situation

(15) Correction information:

Corrected version no 1 (W1 A1)
INID code(s) 72

(51) Int Cl.:

E21B 7/28 (1980.01)

(48) Corrigendum issued on:

12.04.2006 Bulletin 2006/15

(86) International application number:

PCT/RU2004/000117

(43) Date of publication:

11.01.2006 Bulletin 2006/02

(87) International publication number:

WO 2004/090277 (21.10.2004 Gazette 2004/43)

(21) Application number: **04724469.4**

(22) Date of filing: **30.03.2004**

(84) Designated Contracting States:

DE FR GB IT

(30) Priority: **11.04.2003 RU 2003110466**

(71) Applicant: **Otkrytoe Aktsionernoe Obschestvo**
"Tatneft" Im.

V.D. Shashina

Tatarstan, 423450 (RU)

• **KAVEEV, Khamit Zagirovich**

Tatarstan, 423450 (RU)

• **ABDRAKHMANOV, Gabdrashit Sultanovich**

Tatarstan, 423230 (RU)

• **KHAMITIANOV, Nigmatian Khamitovich**

Tatarstan, 423230 (RU)

• **KASHAPOV, Ilgiz Kamaevich**

Tatarstan, 423230 (RU)

• **ABDRAKHMANOV, Ruslan Gabdrashitovich**

Moscow, 117036 (RU)

(72) Inventors:

• **TAKHAUTDINOV, Shafagat Fakhrazovich**
Tatarstan, 423450 (RU)

• **IBRAGIMOV, Nail Gabdulbarievich**
Tatarstan, 423450 (RU)

(74) Representative: **HOFFMANN EITLE**

Patent- und Rechtsanwälte

Arabellastrasse 4

81925 München (DE)

(54) **HOLE OPENER**

(57) The invention relates to drilling technique, in particular, to devices for borehole reaming within a specified interval.

The housing has radial holes and a central straight-through channel, in which a spring-loaded rod with holes in the upper and lower parts is located, where the upper holes are covered in extension of the operating elements into working position. On the outer surface of the housing the inclined slots are made, in which legs are fastened with journals, fastened in supports, and on which journals rolling cutters are fixed. The supports are rigidly connected with cylindrical pistons, arranged in inclined bores of the housing, which chambers communicate with its central straight-through channel and are isolated from the annulus. Pistons are connected with the rod by sliders. And the sliders have a possibility of radial movements with respect to the rod and vertical movements in slots of the housing.

The invention increases serviceability and reliability of the reamer.

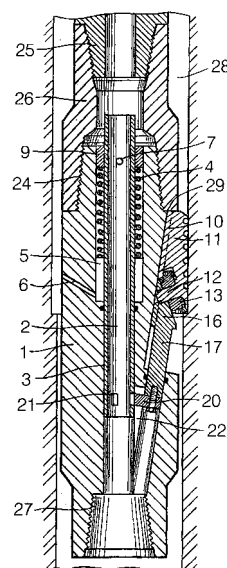


FIG. 2

EP 1 614 852 A8