



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 628 361 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
22.02.2006 Bulletin 2006/08

(51) Int Cl.:
H01Q 19/10 (2006.01)

(21) Application number: **04019411.0**

(22) Date of filing: **16.08.2004**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR**
Designated Extension States:
AL HR LT LV MK

(71) Applicant: **Accton Technology Corporation**
Hsinchu-City 300,
Taiwan (CN)

(72) Inventor: **Lee, Chang-Jung**
Longtan Township
Taoyuan Cty 325
Taiwan (CN)

(74) Representative: **Schaeberle, Steffen**
Hoefer & Partner,
Patentanwälte,
Gabriel-Max-Strasse 29
81545 München (DE)

(54) Antenna reflector structure

(57) An antenna reflection structure including a plate, a side wall and a protrusion is disclosed. The side wall is generally perpendicular to the plate and the protrusion respectively. And a concave slot is formed by the side wall, the plate and the protrusion. The antenna can be fixed on the plate. The concave slot controls the transmitting direction of the electromagnetic waves transmitted from the antenna so that multi-reflection of the electromagnetic waves in the concave slot occurs and the electromagnetic waves can be transmitted in a desired single direction with the aid of the protrusion. Therefore, the antenna reflection structure can yield higher gain value and better directivity. In addition, the antenna reflection structure further provides the characteristics of being easy to process and minimize

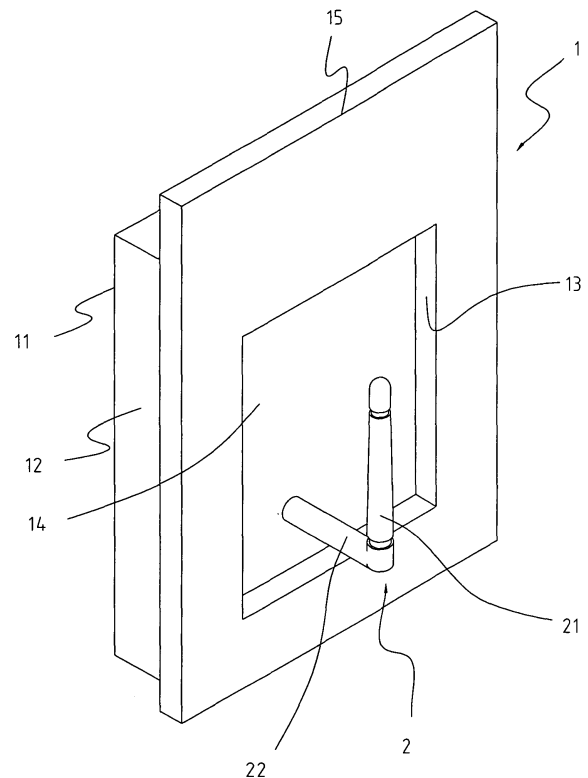


FIG. 1

EP 1 628 361 A1

Description

[0001] This application incorporates by reference of Taiwan application Serial No. 92217568, filed Sep. 30, 2003, the subject matter of which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

Field of the Invention

[0002] The present invention relates to an antenna reflection structure, and more particularly, to an antenna reflection structure having a concave slot.

Description of the Related Art

[0003] In general, an antenna reflection structure is mainly used to reflect and guide electromagnetic waves from an antenna to transmit in a desired direction. To achieve this goal, conventionally, spherical surface, paraboloid or other special curved surface is adopted as the reflecting surface of the antenna reflection structure. Thus, after the antenna sends out the electromagnetic waves from the focal of the curved surface, the curve surface reflects electromagnetic wave to transmit in a desired direction. Therefore, the directivity and the gain value of the antenna are enhanced.

SUMMARY OF THE INVENTION

[0004] Most of the conventional antenna reflection structures are spherical, paraboloid or other special curved surface. For controlling the position of the focal point precisely and maintaining equal curvature of each part of the curved surface, the manufacture of the curved surface becomes very difficult, and more often, the cost is raised. In addition, the antenna reflection structure with this type of curved surface is hard to be minimized in size due to the difficulty in manufacturing. It is therefore an object of the invention to provide an antenna reflection structure with simple manufacturing process and effective reflecting result.

[0005] Accordingly, it is an objective of the present invention to provide an antenna reflection structure for reflecting electromagnetic wave emitted from an antenna. There is provided an antenna reflection structure comprising: a plate, a side wall and a protrusion. The side wall joins to the rim of the plate and surrounds the plate. The protrusion joins to the side wall and surrounds the rim of the side wall. The protrusion extends out from side wall and is substantially perpendicular to the plate, and the side wall is substantially perpendicular to the plate and protrusion. Accordingly, a concave slot is formed by the plate, the side wall and the protrusion. By the way of several reflection of electromagnetic wave emitted from antenna to the concave slot, and transmit towards the opening direction of the concave slot, the higher gain

value and the directivity are obtained. Moreover, the antenna reflection structure also provides the some characteristics such as simple manufacturing, good directivity and easy minifying.

[0006] The following are some functions and outcomes based on the antenna reflection structure of the present invention: 1. the antenna reflection structure according to the present invention is formed by the plate, herein the easy manufacturing and the low cost characteristics are provided; 2. according to the antenna reflection structure of the present invention, the higher gain value, directivity and better communication quality are obtained; and 3. the antenna reflection structure of the present invention is easy to have a minified design due to its uncomplicated form.

[0007] The objects, and functions of the invention will become more apparent from the following detailed description. The following description is made with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, illustrate embodiment(s) of the invention and together with the description serve to explain the principle of the invention. In the drawings:

[0009] FIG. 1 is a three dimensional view of an antenna reflection structure according to a preferred embodiment of the present invention.

[0010] FIG. 2 is a front view of an antenna reflection structure according to a preferred embodiment of the present invention.

[0011] FIG.3 shows the I-I cross-sectional view of the antenna reflection structure as shown in FIG 2.

[0012] FIG.4 is a side view of the antenna reflection structure according to a preferred embodiment of the present invention.

[0013] FIGs 5(a) and 5(b) show the field shapes of E-plane and H-plane of the antenna reflection structure coupled with sleeve antenna at 2.4GHz according to the present invention.

[0014] FIGs 6(a) and 6(b) show the field shapes of E-plane and H-plane of the antenna reflection structure coupled with the sleeve antenna at 2.45GHz according to the present invention.

[0015] FIGs 7(a) and 7(b) show the field shape of E-plane and H-plane of the antenna reflection structure coupled with the sleeve antenna at 2.5GHz according to the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0016] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings.

[0017] FIG 1 is a three-dimensional view of an antenna

reflection structure according to a preferred embodiment of the present invention. FIG. 2 is a front view of an antenna reflection structure according to a preferred embodiment of the present invention. FIG.3 shows the cross-sectional view of the I-I cross section of the antenna reflection structure as shown in FIG 2. As illustrated in the foregoing drawings, the antenna reflection structure includes a plate 11, a side wall 12 and a protrusion 13. One side 12a of the side wall 12 joins to the rim 11a of the plate 11 and surrounds the plate 11, while the protrusion 13 joins to the other side 12b of the side wall 12 and surrounds the side wall 12. The protrusion 13 extends out from the side wall 12 and is substantially parallel to the plate 11. Besides, the side wall 12 is substantially perpendicular to the plate 11 and protrusion 13; therefore, the plate 11, the side wall 12 and the protrusion 13 could form a concave slot 14 for containing the antenna 2.

[0018] The direction of electromagnetic wave emitted from the antenna can be limited by the concave slot 14. Electromagnetic wave perpendicularly transmitted to the plate 11 will be directly reflected out from the concave slot 14. Electromagnetic wave transmitted to the plate 11 in a direction other than perpendicular to the plate 11 and electromagnetic wave transmitted to other parts of the concave slot 14, such as side wall 12, will finally be reflected out of the concave slot 14 substantially in a single direction with the aid of the protrusion 13. The protrusion 13 acts to limit the direction of the electromagnetic wave. The protrusion 13 blocks the diversely distributed electromagnetic wave and makes the electromagnetic wave reflected back to the concave slot 14 and finally transmitted out of the concave slot 14 in a single direction. Therefore, most electromagnetic wave was transmitted in a single direction, namely through the opening end of the concave slot 14. That is mainly because the multi-reflection of the diversely distributed electromagnetic wave in the concave slot 14. Therefore, the directivity and the gain value of the antenna are enhanced.

[0019] The preferred material for the plate 11, the side wall 12, and the protrusion 13 can be metal or other material capable of reflecting electromagnetic wave. Also, the plate 11, the side wall 12 and the protrusion 13 can be independent units and assembled to form the concave slot 14. Preferably, the plate 11, the side wall 12 and the protrusion 13 are formed as an integral, by ways of sheet metal, founding or power metallurgy.

[0020] Moreover, the shape of the plate 11 can be rectangular, circular, or elliptical but is not limited thereto. Any shape of the plate 11 capable of generating the expected shapes of the radiation fields can be used. Besides, the panel 15 can be disposed on the side wall 12 for fixing the antenna reflection structure 1 onto the other structures.

[0021] Referring to FIG 2 and FIG 3, the antenna 2 can be disposed on the plate 11 directly. The antenna 2 can be an omnidirectional antenna which enables part of electromagnetic wave to transmit to the concave slot 14. The antenna 2 is preferably a sleeve antenna and the

connecting base 22 is fixed onto one site of the plate 11 so that the sleeve antenna is substantially located at the center of the plate. Thus, a better radiation field can be generated. However, the types of antenna 2 are not limited thereto. Other types of omnidirectional or directional antennas could also be used.

[0022] Moreover, as shown in the FIG 4, the radiation field generated by the antenna 2 can be controlled by adjusting the relative position of the antenna 2 and the antenna reflection structure 1 to tune the angle of the electromagnetic waves emitted into the concave slot 14.

[0023] FIG 5(a) and FIG 5 (b) show the resulting field shapes of E-plane and H-plane at 2.4GHz respectively, while the antenna 2 is a sleeve antenna. In the field shape distribution of the E-plane, the maximum gain value is 9.07dBi at 8° , and the minimum gain value is -33.13dBi at 179° , while the average gain value is 1.28dBi. In the field shape distribution of the H-plane, the maximum gain value is 8.80dBi at 358° , and the minimum gain value is - 33.11dBi at 157° , while the average gain value is 2.20dBi.

[0024] FIG 6(a) and FIG 6 (b) show resulting field shapes of E-plane and H-plane at 2.45GHz respectively, while the antenna 2 is a sleeve antenna. In the field shape distribution of the E-plane, the maximum gain value is 8.67dBi at 7° , and the minimum gain value is -32.76dBi at 176° , while the average gain value is 0.73dBi. In field shape distribution of the H-plane field, the maximum gain value is 8.32dBi at 1° , and the minimum gain value is -31.31dBi at 161° while the average gain value is 1.67dBi.

[0025] FIG 7(a) and FIG 7(b) show the resulting field shapes of E-plane and H-plane at 2.5GHz respectively, while the antenna 2 e is a sleeve antenna. In the field shape distribution of the E-plane, the maximum gain value is 9.01 dBi at 7° , and the minimum gain value is -41.54dBi at 178° , while the average gain value is 1.01dBi. In field shape distribution of the H-plane, the maximum gain value is 8.64dBi at 1° , and the minimum gain value is - 24.48dBi at 167° while the average gain value is 1.95dBi. Therefore, it is known by the FIGs 5~7, the higher gain value and better directivity are obtained at 2.4~2.5GHz according to the antenna reflection structure of the present invention.

[0026] While the invention has been described by way of example and in terms of a preferred embodiment, it is to be understood that the invention is not limited thereto. On the contrary, it is intended to cover various modifications and similar arrangements and procedures, and the scope of the appended claims therefore should be accorded the broadest interpretation so as to encompass all such modifications and similar arrangements and procedures.

Claims

1. An antenna reflection structure for reflecting electromagnetic wave emitted by an antenna comprising:

a plate with a rim;
 a side wall with a rim, the side wall extending
 from the rim of the plate and being substantially
 perpendicular to the plate; and
 a protrusion ,which extends from the rim of the
 side wall and is parallel to the plate and is sub-
 stantially perpendicular to the side wall, wherein
 the protrusion, the plate and the side wall form
 a concave slot to contain the antenna and reflect
 the electromagnetic waves from the antenna.

2. The antenna reflection structure as claimed in claim
 1, wherein the plate, the side wall and the protrusion
 are made of metal. 15
3. The antenna reflection structure as claimed in claim
 1, wherein the plate, the side wall and the protrusion
 are formed as an integral. 20
4. The antenna reflection structure as claimed in claim
 1, wherein the plate is rectangular. 25
5. The antenna reflection structure as claimed in claim
 1, wherein the plate is circular. 30
6. The antenna reflection structure as claimed in claim
 1 further comprising a panel connected to the side
 wall for fixing the antenna reflection structure. 35
7. The antenna reflection structure as claimed in claim
 1, wherein the antenna is fixed on the plate. 40
8. The antenna reflection structure as claimed in claim
 1, wherein the antenna is an omnidirectional anten-
 na. 45
9. The antenna reflection structure as claimed in claim
 8, wherein the antenna is a sleeve antenna. 50
10. The antenna reflection structure as claimed in claim
 1, wherein the antenna is a directional antenna. 55

45

50

55

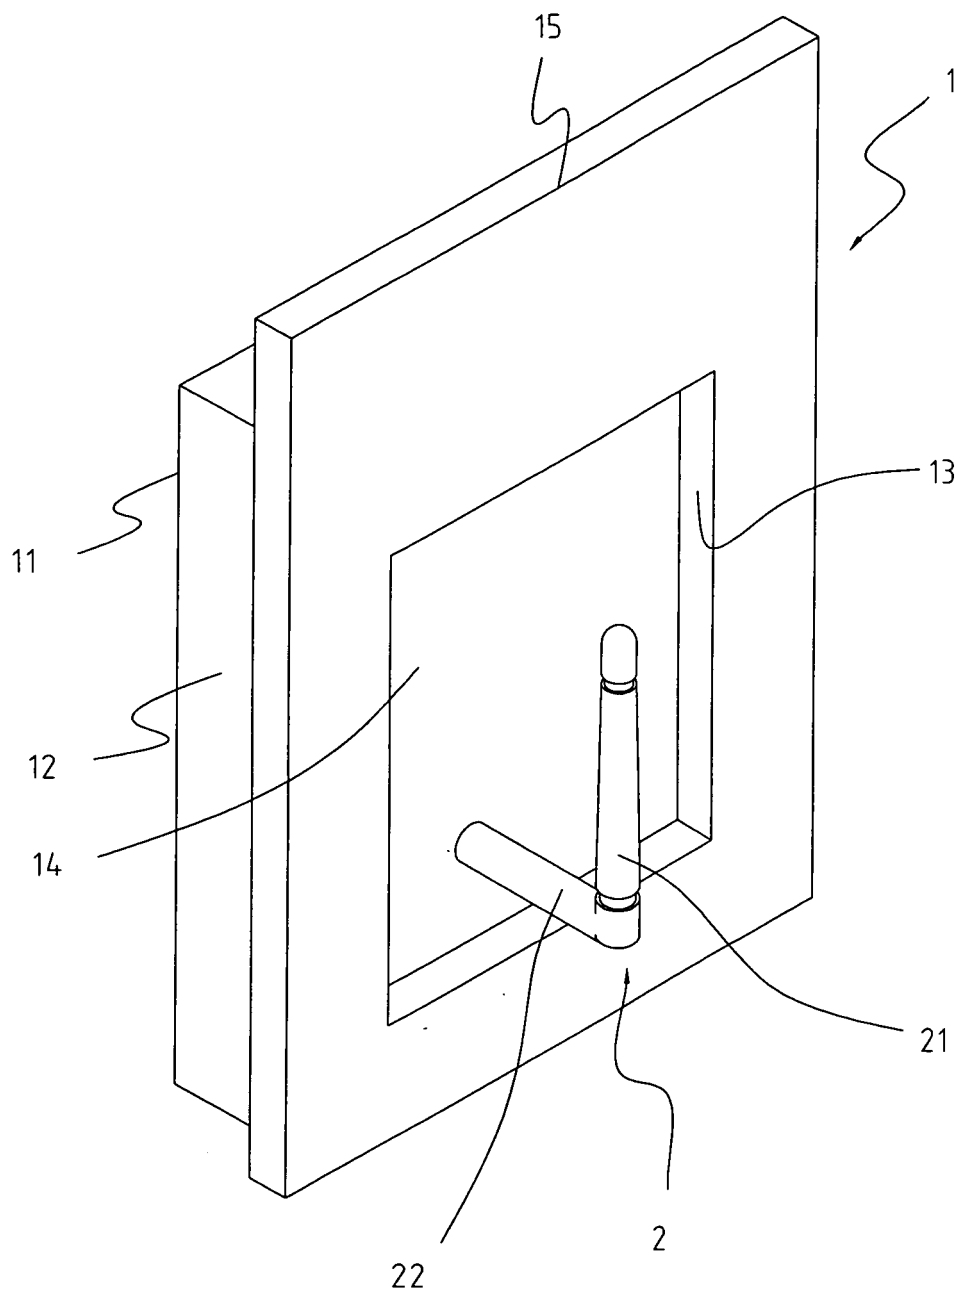


FIG. 1

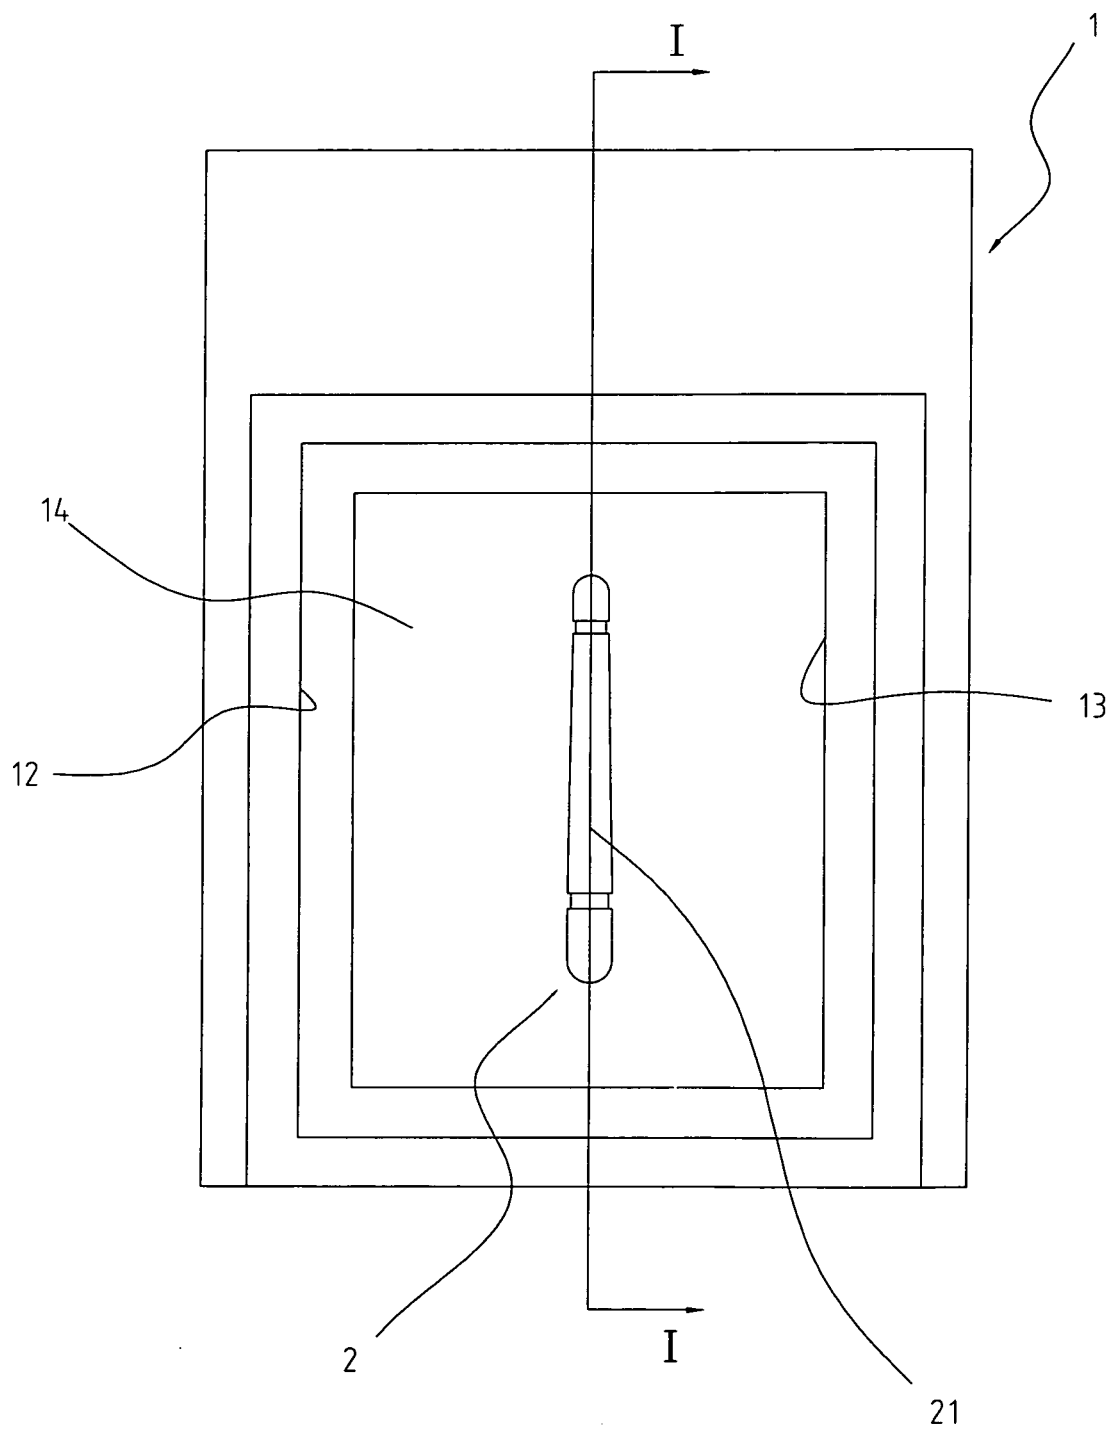


FIG. 2

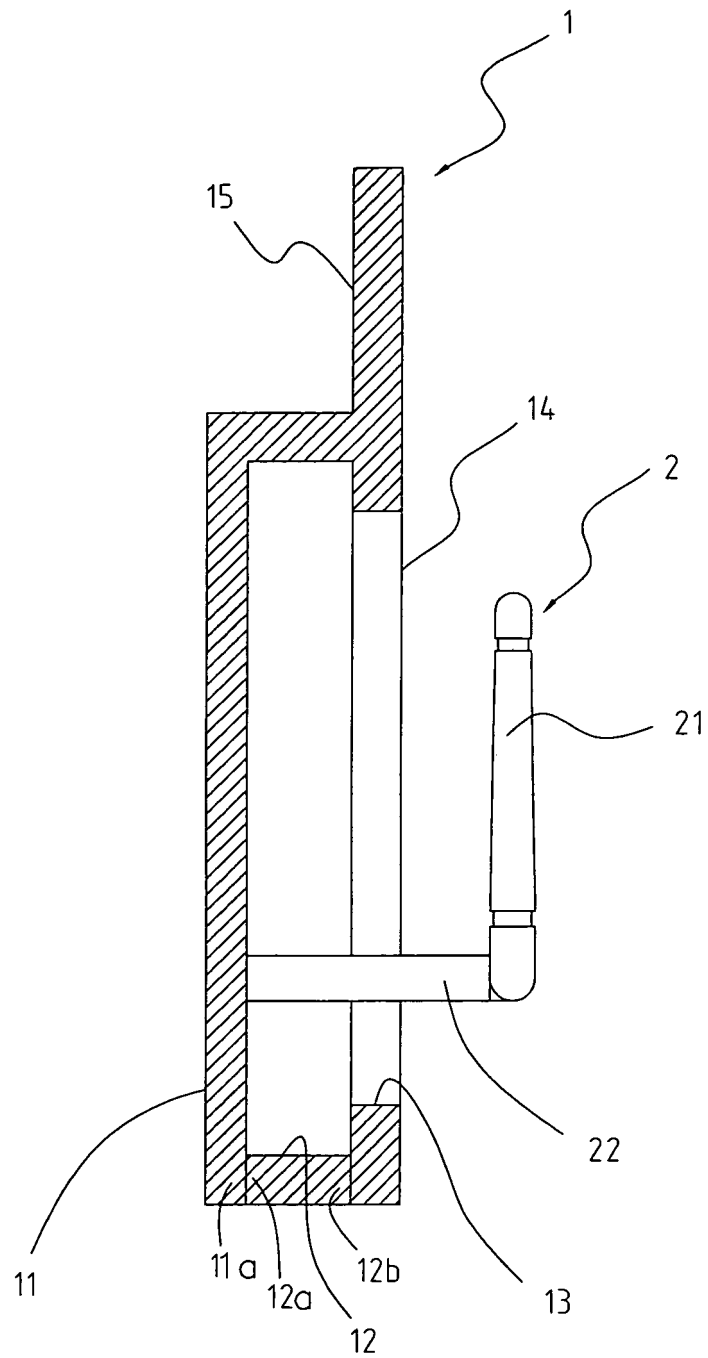


FIG. 3

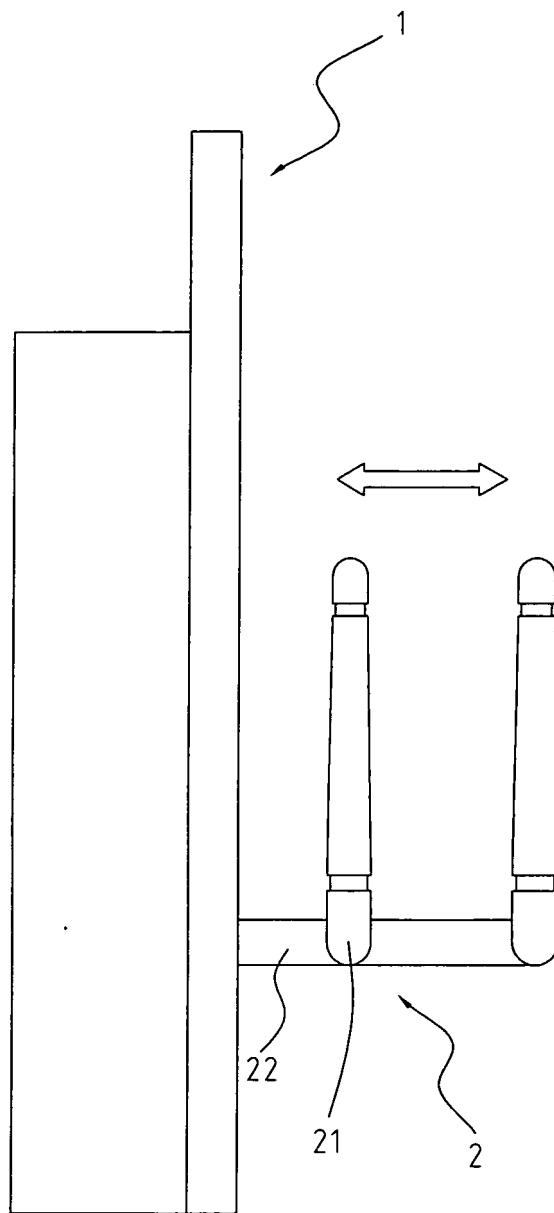


FIG. 4

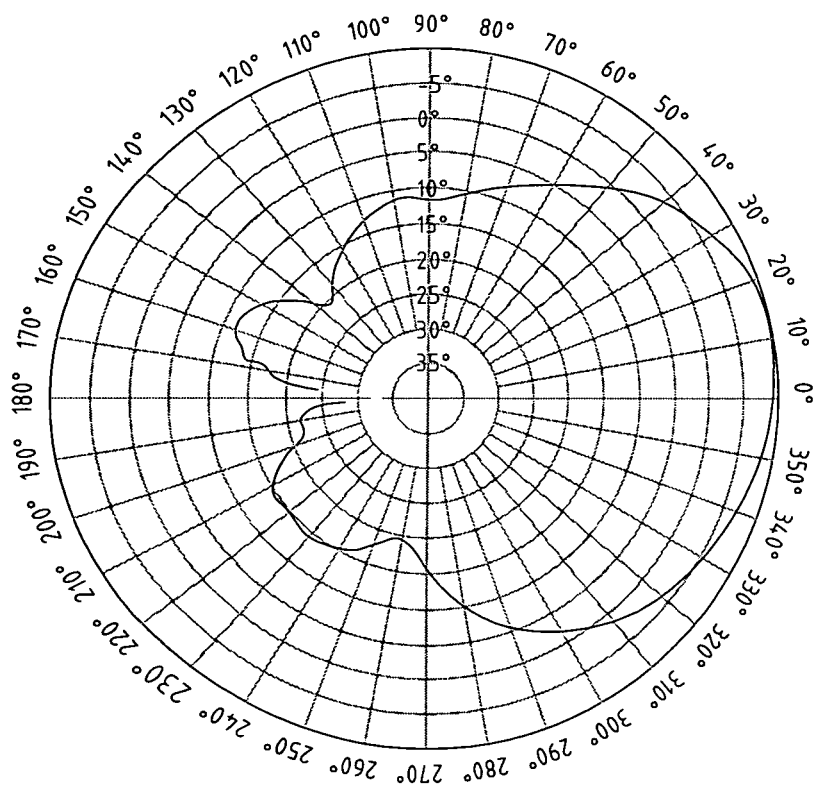


FIG. 5a

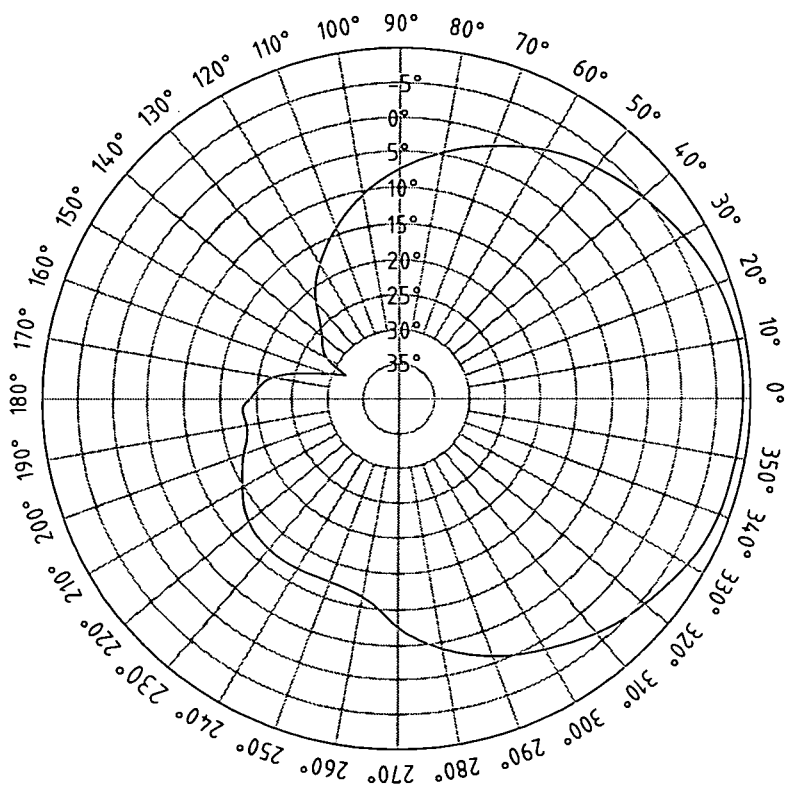


FIG. 5b

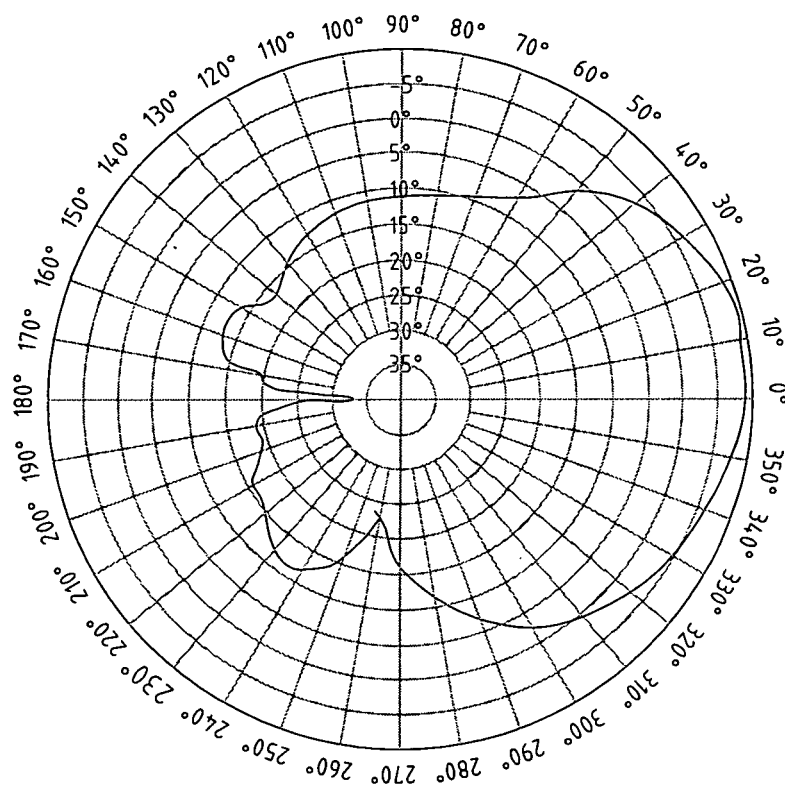


FIG. 6a

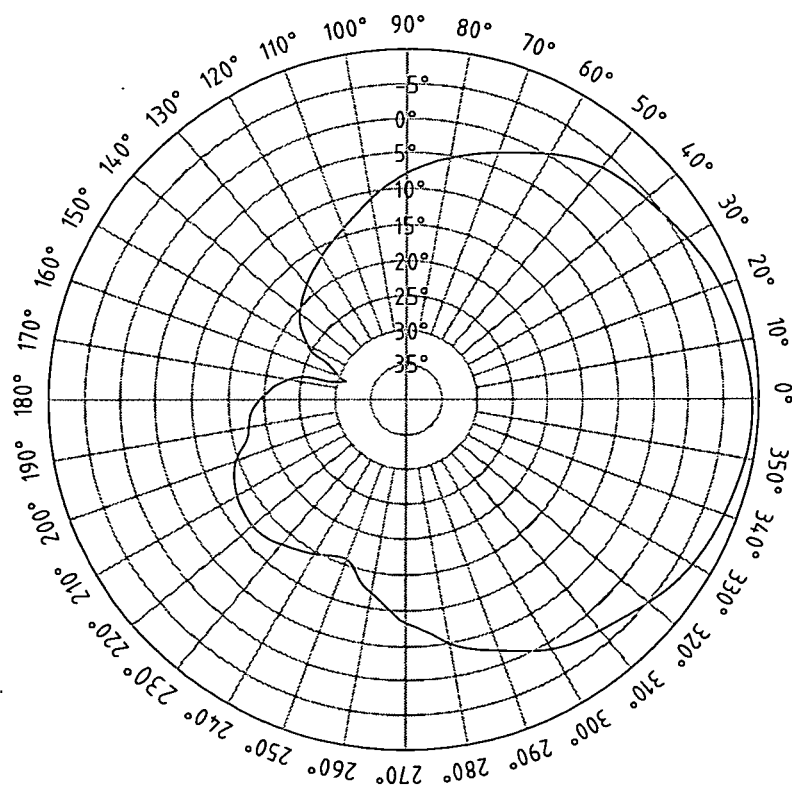


FIG. 6b

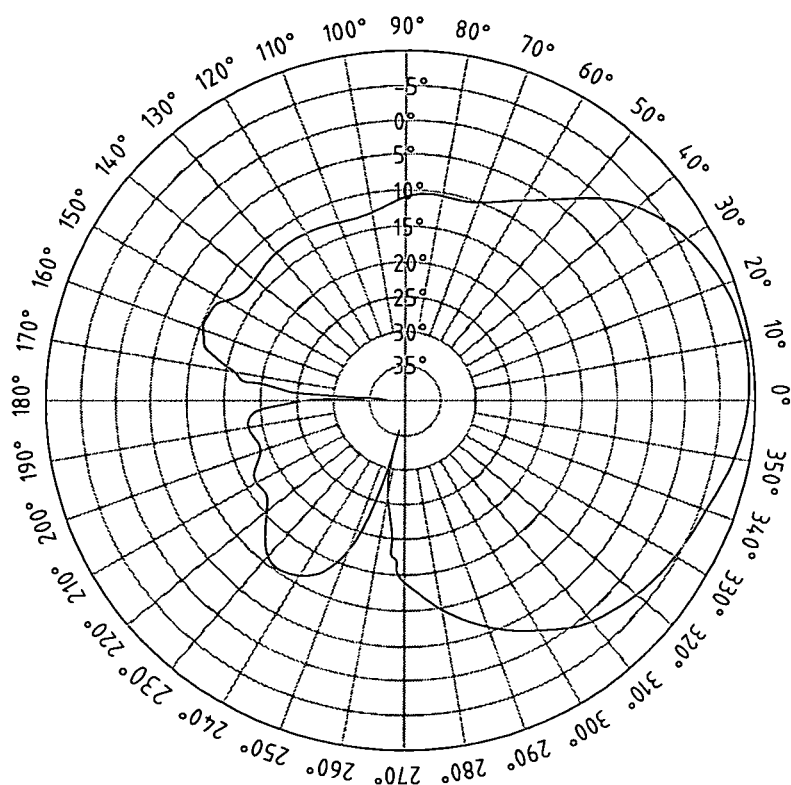


FIG. 7a

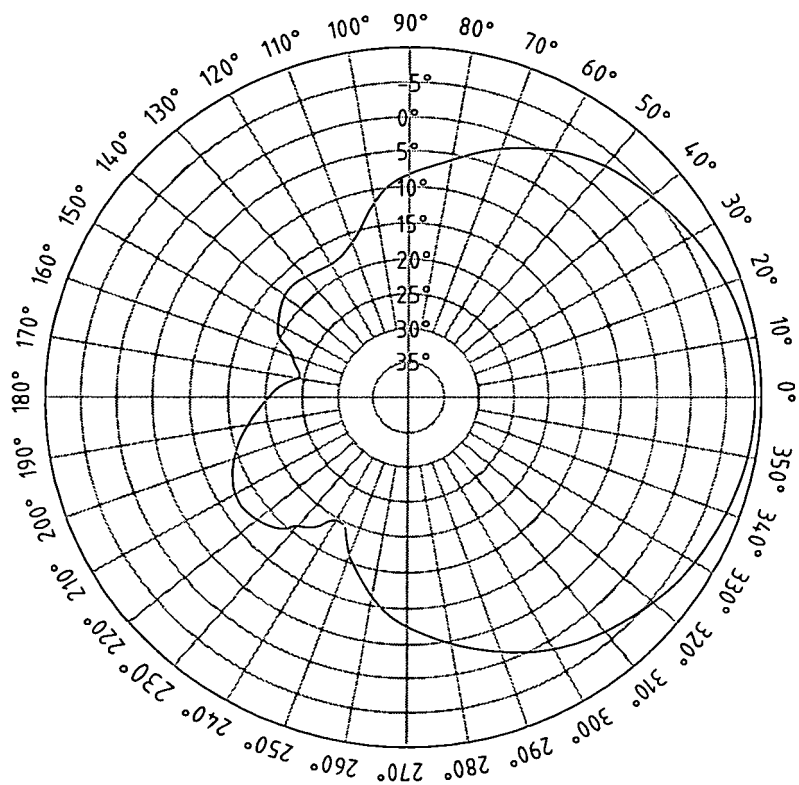


FIG. 7b



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 04 01 9411

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 2004/056818 A1 (SLEDKOV VICTOR ALEKSANDROVICH) 25 March 2004 (2004-03-25) * paragraphs [0008], [0013], [0049], [0053]; claim 1; figure 6 *	1-10	H01Q19/10
X	EP 1 193 794 A (HARADA IND CO LTD) 3 April 2002 (2002-04-03) * paragraphs [0019] - [0022], [0034] - [0039]; figures 3,4,8,9 *	1-10	
X	US 5 423 072 A (IWASHITA MASAKAZU ET AL) 6 June 1995 (1995-06-06) * column 1, line 6 - column 2, line 33; figure 1 *	1-10	
X	EP 1 227 538 A (MATSUSHITA ELECTRIC IND CO LTD) 31 July 2002 (2002-07-31) * abstract; claim 1; figures 1,12 *	1-10	
A	WO 98/36472 A1 (TELEFONAKTIEBOLAGET LM ERICSSON) 20 August 1998 (1998-08-20) * page 21, line 6 - page 23, line 21; figure 7 *	1-10	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H01Q
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
The Hague		26 January 2005	Fredj, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 01 9411

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-01-2005

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2004056818 A1	25-03-2004	EP 1406348 A2	07-04-2004
		JP 2004120760 A	15-04-2004

EP 1193794 A	03-04-2002	JP 2002100926 A	05-04-2002
		CA 2329458 A1	26-03-2002
		EP 1193794 A2	03-04-2002
		US 2002036589 A1	28-03-2002

US 5423072 A	06-06-1995	JP 2973719 B2	08-11-1999
		JP 6037693 A	10-02-1994

EP 1227538 A	31-07-2002	CN 1369930 A	18-09-2002
		DE 60200301 D1	06-05-2004
		DE 60200301 T2	05-08-2004
		EP 1227538 A1	31-07-2002
		JP 2002305410 A	18-10-2002
		US 2002135522 A1	26-09-2002

WO 9836472 A1	20-08-1998	SE 508513 C2	12-10-1998
		SE 508537 C2	12-10-1998
		AU 6234498 A	08-09-1998
		AU 6234598 A	08-09-1998
		CA 2280759 A1	20-08-1998
		CN 1252175 T	03-05-2000
		EP 0960452 A1	01-12-1999
		JP 2001511974 T	14-08-2001
		SE 9700536 A	15-08-1998
		SE 9701460 A	15-08-1998
		WO 9836473 A1	20-08-1998
		US 6023244 A	08-02-2000
