



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 635 125 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
15.03.2006 Bulletin 2006/11

(51) Int Cl.:
F24H 1/18 (2006.01)

(21) Application number: **04021836.4**

(22) Date of filing: **14.09.2004**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR**
Designated Extension States:
AL HR LT LV MK

(74) Representative: **Volpert, Marcus et al**
Zeitler - Volpert - Kandlbinder
Patentanwälte
Herrnstrasse 44
80539 München (DE)

(71) Applicant: **Lee, Ming-Tsung**
Tainan City (TW)

Remarks:
Amended claims in accordance with Rule 86 (2) EPC.

(72) Inventor: **Lee, Ming-Tsung**
Tainan City (TW)

(54) Quick heater for drinking water

(57) A quick heater for drinking water includes a helical water pipe 1 defining a narrow space 12 therebetween for fitting an electric heating tube 2 and having a water inlet 10 and a water outlet 11. The water pipe 1 and the electric heating tube 2 are wrapped up with a support base 3 having its outer side bored with plural holes 30 respectively for the opposite ends of the water pipe 1 and two wire connecting terminals 20 of the electric heating tube 2 to extend out therethrough. The support base 3 has plural lugs 32 at the inner side for support a container 4 with a water intake pipe 40 and a water-releasing pipe 41, the water intake pipe 40 connected with the water outlet 11 of the water pipe 1. When cool water gets into the water pipe 1, it flows circularly therein and is heated by the electric heating tube 2, and then conveyed to the container 4 for use through the water intake pipe 40.

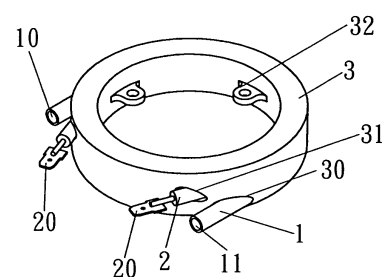
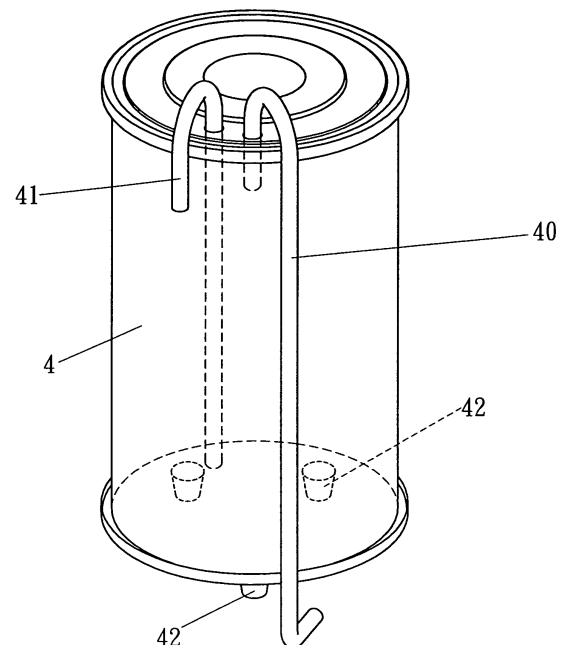


FIG.4

EP 1 635 125 A1

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] This invention relates to a quick heater for drinking water, particularly to one provided with a helical water pipe and defining a narrow space between two overlapped pipe portions for an electric heating tube to be fitted therein. The water pipe has its opposite ends respectively formed with a water inlet and a water outlet. After the water pipe and the electric heating tube are combined together, their outer side is wrapped up with a support base that has its outer side bored with two insert holes and two wire terminal holes respectively for the water inlet and the water outlet of the water pipe and two wire terminals of the electric heating tube to extend out therethrough. The support base has its inner annular side provided with plural lugs for supporting and positioning a container thereon. The container is provided with a water intake pipe and a water-releasing pipe, and the water intake pipe is connected with the water outlet of the water pipe. Thus, when water gets into the water pipe through the water inlet, it will flow circularly therein to be heated by the electric heating tube, and then the hot water is conveyed to the container through the water outlet of the water pipe and the water intake pipe of the water container. Thus, a user can get the hot water for use through the water-releasing pipe of the container. Additionally, the boiled water in the container can be kept hot all the time.

2. Description of the Prior Art

[0002] In most cases, a teapot is put on a gas stove or an electric heater to have the water inside heated and after the water in the teapot boils, gas or electricity is cut off and hot drinking water is poured out of the teapot for use. However, if the water in the teapot is used up, it is necessary to have the teapot filled with water to be boiled again. In addition, a common teapot is unable to always keep the drinking water hot; therefore, when the water in the teapot cools down, it has to be heated again, thus consuming much time and causing much trouble.

SUMMARY OF THE INVENTION

[0003] The objective of the invention is to offer a quick heater for drinking water, not only able to heat drinking water quickly, but also able to keep drinking water hot all the time.

[0004] The quick heater for drinking water in the present invention includes a water pipe, an electric heating tube, a support base and a container. The water pipe is made of stainless steel shaped helical and defining a narrow space between two overlapped pipe portions, having one end formed with a water inlet and the other

end formed with a water outlet. The electric heating tube is fitted in the narrow space between two pipe bodies, having its opposite ends respectively provided with a wire connecting terminal. The support base is wrapped around the outer side of the combined body of the water pipe and the electric heating tube and has its outer side bored with two insert holes and two wire terminal holes respectively for the water inlet and the water outlet of the water pipe and two wire connecting terminals of the electric heating tube to extend out therethrough. The support base further has its inner annular side provided with plural lugs. The container is positioned on the support base and provided with a water intake pipe and a water-releasing pipe, with the water intake pipe connected with the water outlet of the water pipe.

BRIEF DESCRIPTION OF DRAWINGS

[0005] This invention will be better understood by referring to the accompanying drawings, wherein:

Fig. 1 is a perspective view of a water pipe and an electric heating tube separated from each other in the present invention;

Fig. 2 is a perspective view of the water pipe and the electric heating tube combined together in the present invention;

Fig. 3 is a perspective view of the water pipe and the electric heating tube combined together and having their outer side wrapped up with a support base in the present invention;

Fig. 4 is a perspective view of the support base and a container separated from each other in the present invention; and,

Fig. 5 is a perspective view of the quick heater for drinking water in a using condition in the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0006] A preferred embodiment of a quick heater for drinking water in the present invention, as shown in Figs. 1, 2 and 3, includes a water pipe 1, an electric heating tube 2, a support base 3 and a container 4 combined together.

[0007] The water pipe 1 is made of stainless steel, shaped helical and defines a narrow space 12 between two overlapped pipe portions. The water pipe 1 has one end formed with a water inlet 10 and the other end a water outlet 11.

[0008] The electric heating tube 2 of aluminum alloy is fitted in the narrow space 12 of the water pipe 1 and has its opposite ends respectively provided with a wire connecting terminal 20.

[0009] The support base 3 is wrapped around the outer side of the combined body of the water pipe 1 and the electric heating tube 2 and has its outer side bored with

two insert holes 30 and two wire terminal holes 31. The two insert holes 30 are respectively for the water inlet 10 and the water outlet 11 of the water pipe 1 to extend out therethrough, while the two wire terminal holes 31 are respectively for the opposite wire connecting terminals 20 of the electric heating tube 2 to extend out therethrough. The support base 3 is further provided with plural lugs 32 spaced apart on the inner annular side.

[0010] The container 4 to be supported and positioned on the support base 3 is provided with a water intake pipe 40 and a water-releasing pipe 41. The water intake pipe 40 is connected with the water outlet 11 of the water pipe 1, and the water-releasing pipe 41 has one end extending to a position near the bottom in the container 4. Further, the container 4 has plural positioning studs 42 fixed under the bottom and matching with the lugs 32 of the support base 3.

[0011] In assembling, firstly, the electric heating tube 2 is fitted in the narrow space 12 of the helical water pipe 1, as shown in Fig. 2. Then, the combined body of the water pipe 1 and the electric heating tube 2 has its outer side wrapped up with the support base 3 of aluminum alloy, letting the water inlet 10 and the water outlet 11 of the water pipe 1 respectively extend out of the two insert holes 30 and the two wire connecting terminals 20 of the electric heating tube 2 respectively extend out of the two wire terminal holes 31 of the support base 3 to be connected with an electric source, as shown in Fig. 4. Next, the container 4 is assembled on the support base 3, letting the positioning studs 42 under the bottom of the container 4 fixed on the lugs 32 of the support base 3 and the water intake pipe 40 of the container 4 connected with the water inlet 10 of the water pipe 1, as shown in Fig. 5. Thus, when cool water gets into the water pipe 1 through the water inlet 10, it will flow circularly therein and heated by the electric heating tube 2, and then the hot water is conveyed to the container 4 through the water outlet 11 of the water pipe 1 and the water intake pipe 40 of the container 4. Thus, a user can get the hot drinking water out of the container 4 for use through the water-releasing pipe 41. In addition, the drinking water in the container 4 can be kept hot all the time.

[0012] While the preferred embodiment of the invention has been described above, it will be recognized and understood that various modifications may be made therein and the appended claims are intended to cover all such modifications that may fall within the spirit and scope of the invention.

Claims

1. A quick heater for drinking water comprising:

a water pipe made of stainless steel, said water pipe having one end formed with a water inlet and the other end formed with a water outlet, said water pipe shaped helical and forming a

narrow space between two overlapped pipe portions;

an electric heating tube fitted in said narrow space of said water pipe, said electric heating tube having its opposite ends respectively provided with a wire connecting terminal;

a support base wrapped around the outer side of the combined body of said water pipe and said electric heating tube, said support base having its outer side bored with two insert holes and two wire terminal holes, said two insert holes respectively for said water inlet and said water outlet of said water pipe to extend out therethrough, said two wire terminal holes respectively for said two wire connecting terminals of said electric heating tube to extend out therethrough, said support base provided with plural lugs at the inner side; and,

a container assembled on said support base, said container provided with a water intake pipe and a water releasing pipe, said water intake pipe connected with said water outlet of said water pipe.

2. The quick heater for drinking water as claimed in Claim 1, wherein said support base is made of aluminum alloy.

3. The quick heater for drinking water as claimed in Claim 1, wherein said water releasing pipe of said container has one end extending to a location near the bottom in said container, and said container has plural positioning studs fixed under the bottom and matching with said lugs of said support base.

Amended claims in accordance with Rule 86(2) EPC.

1. Quick heater for drinking water comprising:

a water pipe (1) made of stainless steel, said water pipe (1) having one end formed with a water inlet (10) and the other end formed with a water outlet (11), said water pipe (1) shaped helical and forming a narrow space (12) between two overlapped pipe portions;

an electric heating tube (2) fitted in said narrow space (12) of said water pipe (1), said electric heating tube (2) having its opposite ends respectively provided with a wire connecting terminal (20);

a support base (3) wrapped around the outer side of the combined body of said water pipe (1) and said electric heating tube (2), said support base (3) having its outer side bored with two insert holes (30) and two wire terminal holes (31), said two insert holes (30) respectively for said water inlet (10) and said water outlet (11)

of said water pipe (1) to extend out therethrough,
said two wire terminal holes (31) respectively for
said two wire connecting terminals (20) of said
electric heating tube (2) to extend out there- 5
through, said support base (3) provided with plu-
ral lugs (32) at the inner side; and
a container (4) assembled on said support base
(3), said container (4) provided with a water in-
take pipe (40) and a water releasing pipe (41), 10
said water intake pipe (40) connected with said
water outlet (11) of said water pipe (1).

2. Quick heater according to claim 1, **characterized**
in that said support base (3) is made of aluminum 15
alloy.

3. Quick heater according to claim 1 or 2,
characterized in that said water releasing pipe (41)
of said container (4) has one end extending to a lo- 20
cation near the bottom in said container (4), and said
container (4) has plural positioning studs (42) fixed
under the bottom and matching with said lugs (32)
of said support base (3).

25

30


35

40

45

50

55

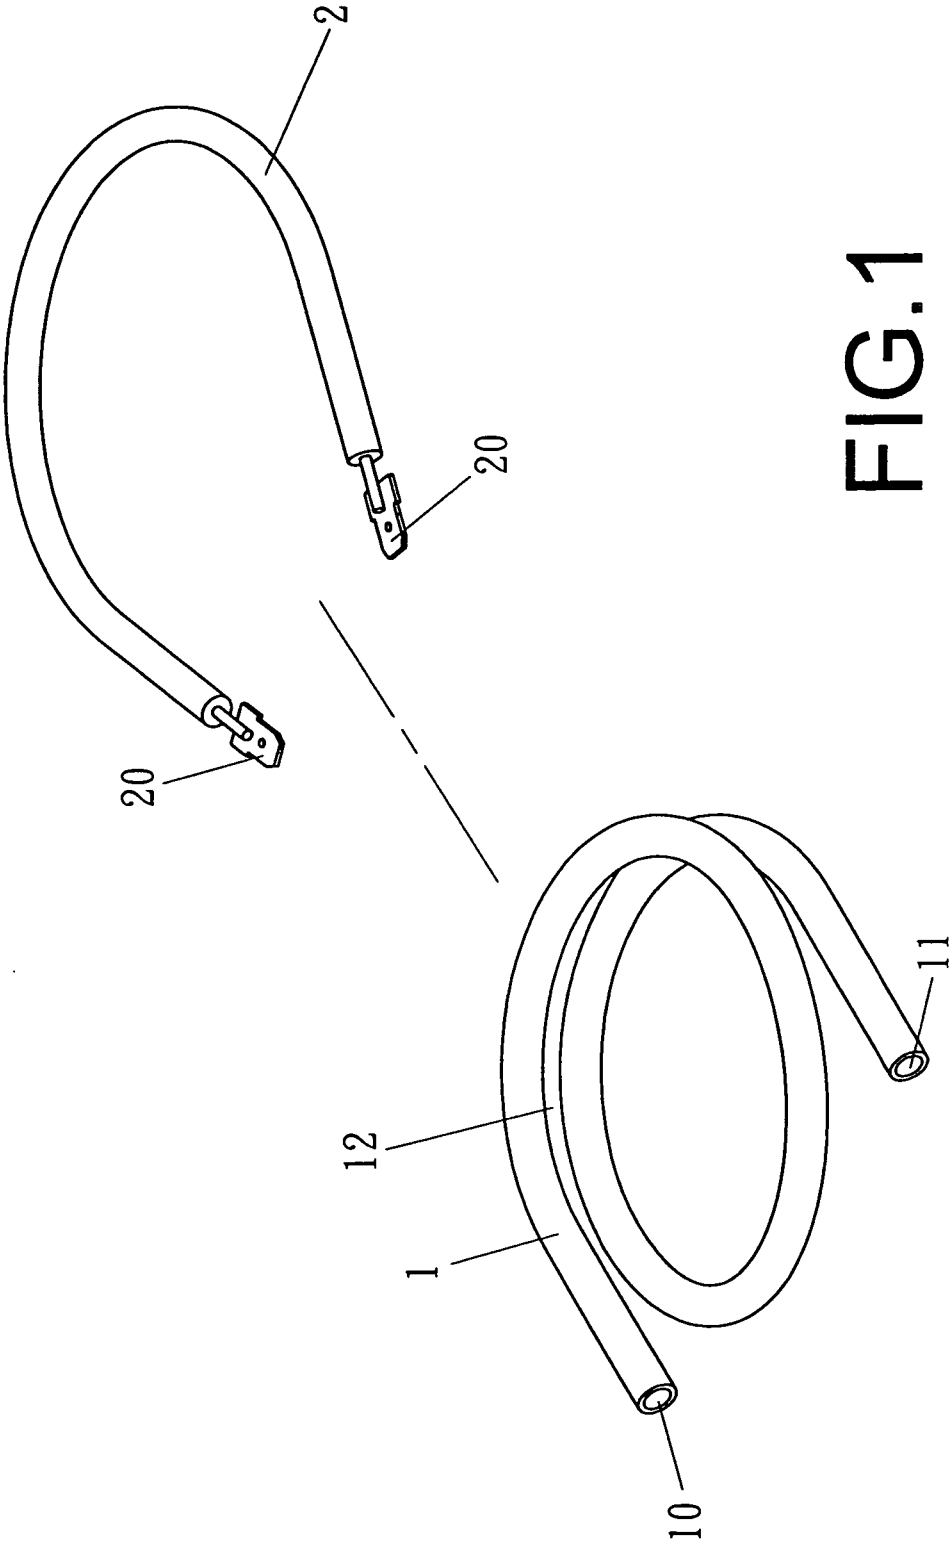

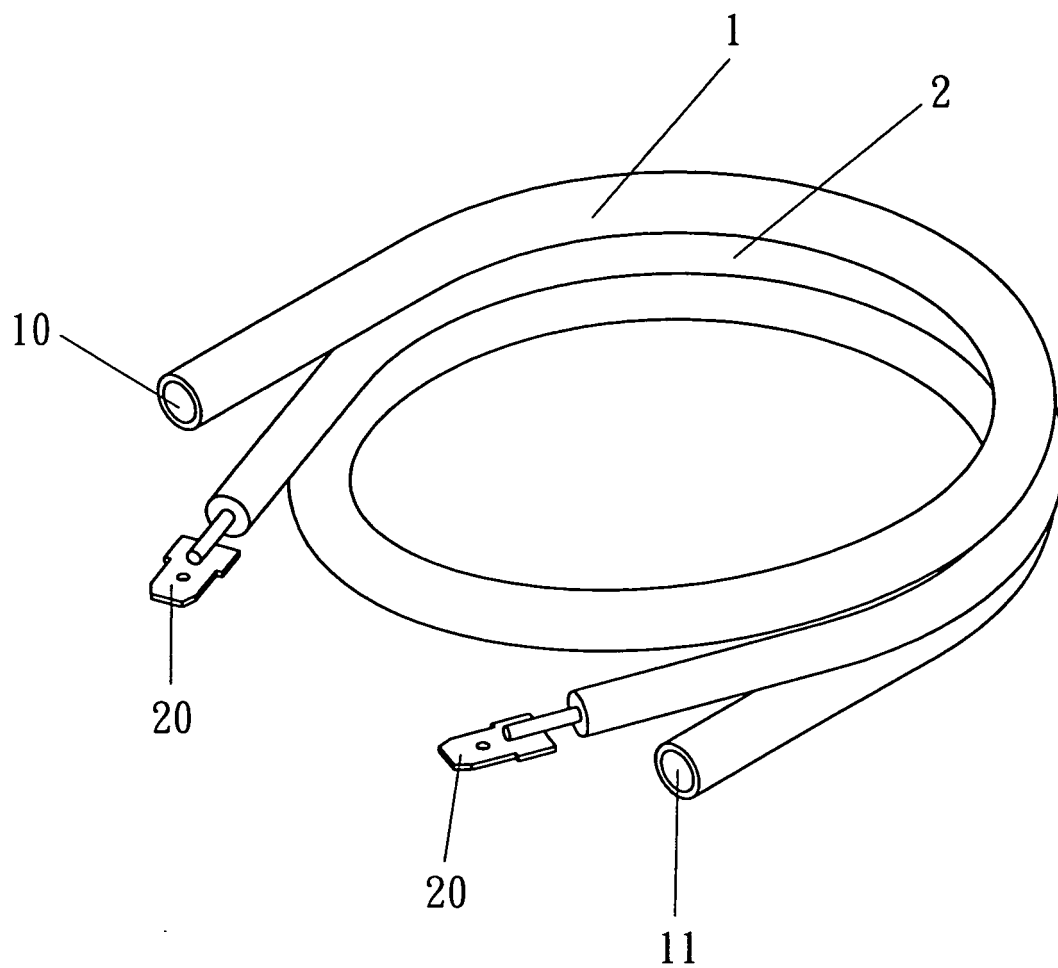


FIG.2

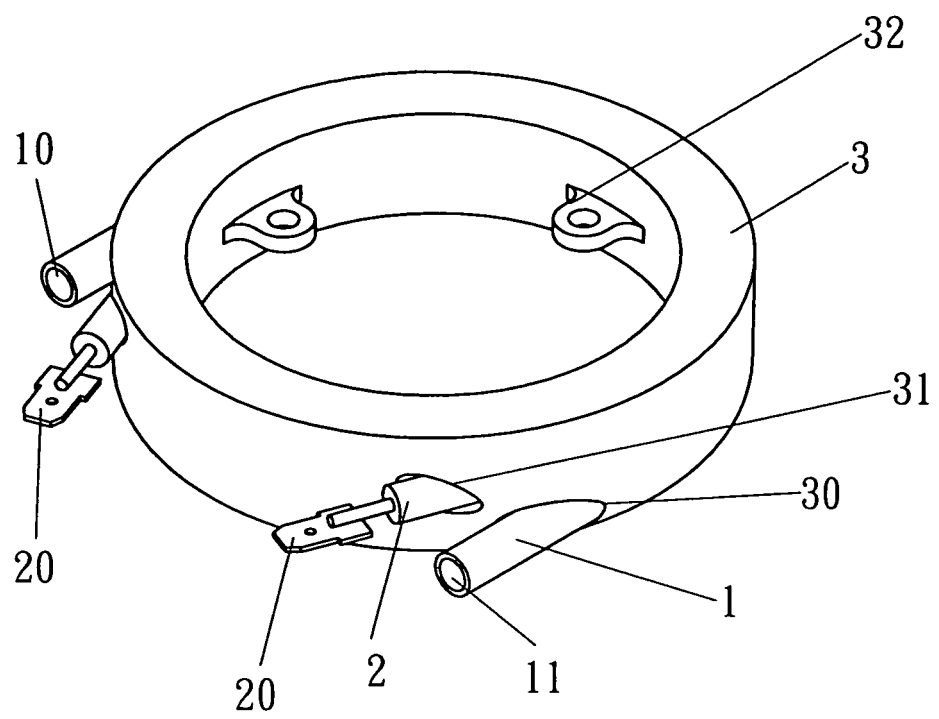


FIG.3

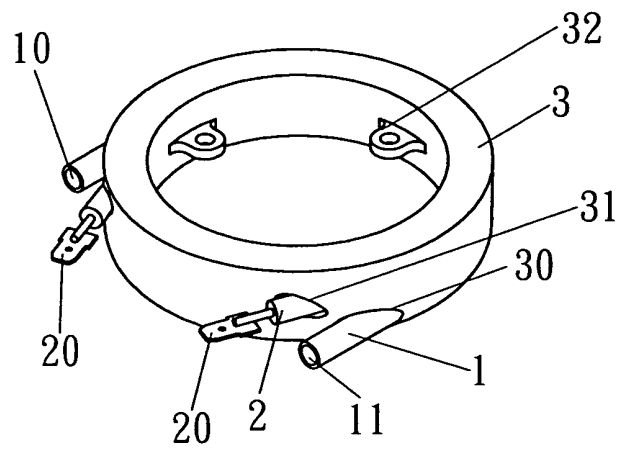
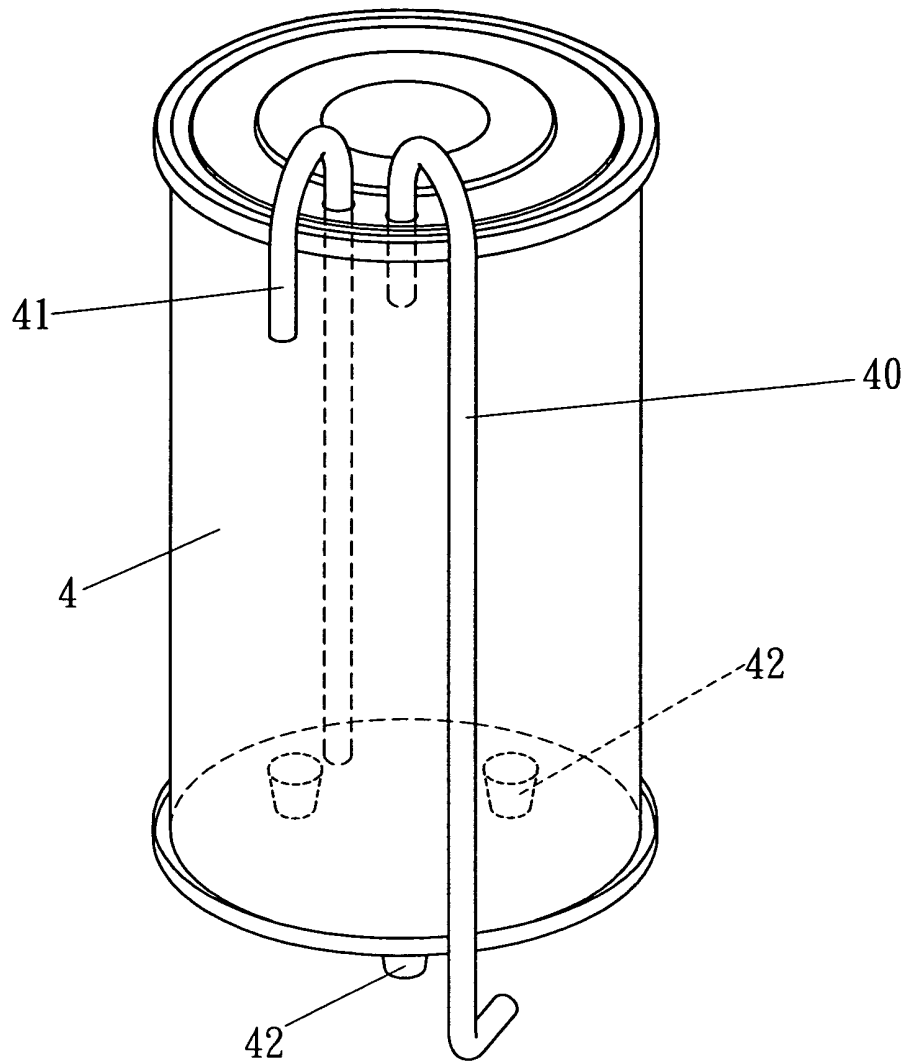


FIG.4

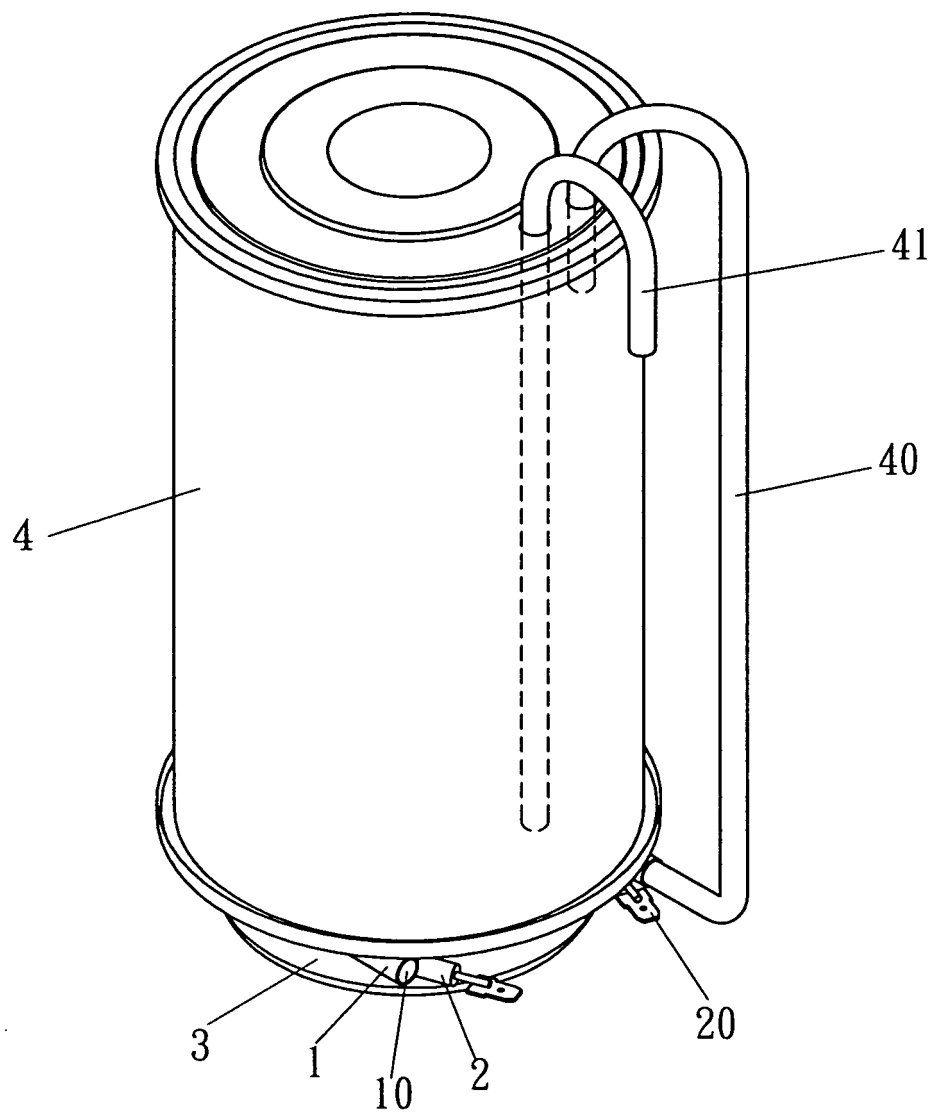


FIG.5



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 04 02 1836

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	DE 28 53 153 A1 (BOSCH-SIEMENS HAUSGERAETE GMBH) 12 June 1980 (1980-06-12) * claim 1 * -----	1	F24H1/18
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			F24H A47J
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 21 February 2005	Examiner Van Gestel, H
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03.82 (P04C01)

21-02-2005

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 2853153	A1	12-06-1980	NONE

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82