(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) **EP 1 639 583 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
21.04.2010 Bulletin 2010/16

(21) Application number: **04774017.0**

(22) Date of filing: **25.06.2004**

(51) Int Cl.:
G11B 7/007 *(2006.01)*

(86) International application number:
PCT/KR2004/001548

(87) International publication number:
WO 2005/001822 (06.01.2005 Gazette 2005/01)

(54) **INFORMATION STORAGE MEDIUM AND METHOD AND APPARATUS FOR RECORDING/ REPRODUCING DATA**

INFORMATIONSSPEICHERMEDIUM UND VERFAHREN UND VORRICHTUNG ZUM AUFZEICHNEN/WIEDERGEBEN VON DATEN

SUPPORT DE STOCKAGE DE DONNEES ET PROCEDE ET DISPOSITIF D'ENREGISTREMENT/ LECTURE DE DONNEES

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU MC NL PL PT RO SE SI SK TR

(30) Priority: **28.06.2003 KR 2003042998**

(43) Date of publication of application:
29.03.2006 Bulletin 2006/13

(73) Proprietor: **SAMSUNG ELECTRONICS CO., LTD.**
Suwon-si,
Gyeonggi-do 442-742 (KR)

(72) Inventor: **Lee, Kyung-Geun**
Bundang,
Seongnam-si,
Gyeonggi-do 463773 (KR)

(74) Representative: **Waddington, Richard et al**
Appleyard Lees,
15 Clare Road
Halifax HX1 2HY (GB)

(56) References cited:
EP-A- 1 280 141
EP-A- 1 288 924
JP-A- 10 222 874
JP-A- 10 320 784
KR-A- 2004 067 406
US-A1- 2002 181 376
US-A1- 2003 002 420

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 639 583 B1

Description

Technical Field

[0001] The present invention relates to an information storage medium and method and apparatus for reoording/reproducing data, and, more particularly, to an information storage medium on which information regarding whether additional information has been written to either or both of lead-in and lead-out areas in the form of wobbling pits is recorded, and an apparatus and method for recording/reproducing data on/from the information storage medium.

Background Art

[0002] In general, an optical information storage medium such as an optical disk has become widely adopted as a data recording medium of an optical pickup system for non-contact recording/playback. For example, compact disks (CDs) and digital versatile disks (DVDs) are two types of optical disks that are classified depending on data recording capacity. Examples of optical disks facilitating writing, erasing, and reading of information include 650 MB CD-Reoordable (CD-R), CD-Rewritable (CD-RW), 4.7GB DVD+RW, DVD-Random Access Memory (RAM), and DVD-R/RW. Examples of read-only disks include 650MB CD-ROM and 4.7GB DVD-ROM. In addition, a Hgh Definition-DVD (HD-DVD) with a recording capacity of over 20 GB is currently being developed.

[0003] Various types of the information storage media described above have standardized specifications so as to be compatible with other types of media, and thus increase user convenience and reduce costs. For storage media not yet defined by a specification, efforts toward standardization are being made. In particular, development of a new format providing reverse compatibility and consistency with existing storage media is needed.

Disclosure of Invention

Technical Problem

[0004] In conventional storage media, data is recorded in the form of pits or groove wobbles. Here, the pits are hollow portions physically impressed in the surface of a substrate during the manufacture of a disk, and the groove wobbles are formed in a wave pattern called a wobble that is used to record data. While a pit signal is detected as the sum signal, a groove wobble signal is detected as a push-pull signal. Since a signal channel varies depending on whether data is recorded in the form of pits or groove wobbles, it is highly desirable to separately record information in the form in which data is recorded.

[0005] EP-A-1 280 141 and US 2002/0181376 describe optical discs having areas carrying additional user data.

Technical Solution

[0006] The present invention provides an information storage medium on which information regarding whether additional information is recorded as wobbling pits is recorded, and an apparatus to record/reproduce, and a method of recording/reproducing, data to/from the information storage medium.

[0007] Additional aspects and/or advantages of the invention will be set forth in part in the description which follows and, in part, will be obvious from the description, or may be learned by practice of the invention.

[0008] According to an aspect of the present invention, there is provided an information storage medium having a lead-in area, a user data area, and a lead-out area, wherein information regarding whether additional information is recorded as wobbling pits is recorded on at least a portion of at least one of the lead-in and the lead-out areas.

[0009] The information regarding whether additional information is recorded as wobbling pits may be written to a region of the at least one of the lead-in and the lead-out areas in which disk-related information is recorded.

[0010] The information recorded as the wobbling pits may be modulated in a different way than the information not recorded as wobbling pits.

[0011] The additional information recorded as the wobbling pits may comprise at least one of identification (ID) of a type of the information storage medium, a serial number, a type of content recorded, a manufacturer of the medium, and copy protection data.

[0012] According to another aspect of the present invention, there is provided an information storage medium having a lead-in area, a user data area, and a lead-out area, wherein information regarding whether additional information is recorded other than in pits is recorded on at least a portion of at least one of the lead-in and the lead-out areas.

Advantageous Effects

[0013] The data recording/reproducing apparatus enables information about recording of additional information to be recorded on an information storage medium and the additional information to be quickly and precisely reproduced therefrom using the recorded information.

Description of Drawings

[0014] These and/or other aspects and advantages of the present invention will become apparent and more readily appreciated from the following description of the embodiments, taken in conjunction with the accompanying drawings of which:

[0015] FIG. 1 is a schematic diagram showing the physical layout of a conventional recordable high-density

information storage medium;

[0016] FIG. 2 is a schematic diagram showing the layout structure of an information storage medium according to an embodiment of the present invention;

[0017] FIGS. 3A and 3B show wobbling pits and non-wobbling pits formed in the information storage medium cf FIG. 2 according to two embodiments of the present invention;

[0018] FIG. 4 is a flowchart illustrating a method of recording and/or reproducing data according to an embodiment of the present invention;

[0019] FIG. 5 is a block diagram of an apparatus to record and/or reproduce information about recording of additional information according to an embodiment of the present invention; and

[0020] FIG. 6 is a block diagram showing an exemplary configuration of the data recording/reproducing apparatus of FIG. 5.

Mode for Invention

[0021] Reference will now be made in detail to the embodiments of the present invention, examples of which are illustrated in the accompanying drawings, wherein like reference numerals refer to the like elements throughout. The embodiments are described below to explain the present invention by referring to the figures.

[0022] Referring to FIG. 1, a conventional recordable information storage medium includes a lead-in area 110, a user data area 120, and a lead-out area 130. The storage medium includes grooves 123 and lands 125. Here, user data may be written only in the grooves 123, or both in the grooves 123 and on the lands 125.

[0023] Meanwhile, when read-only data is recorded in the lead-in area 110, wave-like high frequency and low frequency wobble signals 105 and 106 having fixed frequencies are continuously recorded on the sidewalls of the lands 125 and/or the grooves 123 instead of pits. Here, to write or read data, a beam L follows the grooves 123 and/or lands 125 (tracks).

[0024] In particular, the lead-in area 110 or the lead-out area 130 has a read-only region containing disk-related information and a recordable region. While the disk-related information is recorded in the high frequency wobbles 105, the recordable region of the lead-in or lead-out area 110 or 130 and the user data area 120 have the low frequency wobbles 106. Reference numeral 127 represents a recording mark formed on the user data area 120.

[0025] The read-only data recorded in the lead-in or lead-out area 110 or 130 can be reproduced using a push-pull channel, and user data recorded in the user data area 120 can be reproduced using a sum channel.

[0026] The data recorded in the lead-in or lead-out area 110 or 130 is modulated using a bi-phase modulation method, whereas the user data is modulated using a run length limit (RLL) modulation method, which will be described later. In the bi-phase modulation, the state of each bit is determined according to whether a signal state changes within a given period. For example, a 0 bit is represented by no change in the phase of a groove wobble while a 1 bit is represented by a change in phase. Since 1 or 0 is represented depending on whether the state or phase of a signal changes between two possible states or phases within a given period, this is called 'bi-phase modulation'. While the phase modulation of groove wobbles has been described above, it is possible to modulate the phase of various other patterns.

[0027] To achieve consistency in a modulation technique with the recordable optical information storage medium, the layout structure of a read-only information storage medium according to an embodiment of the present invention may be as shown in FIG. 2.

[0028] Referring to FIG. 2, the read-only information storage medium includes a user data area 13 in which user data is recorded, a lead-in area 10 located in an inner area relative to the user data area 13, and a lead-out area 15 located in an outer area relative to the user data area 13. Data is recorded in the form of pits in the lead-in area 10, the user data area 13, and the lead-out area 15.

[0029] In particular, as shown in FIG. 3A, data is recorded in wobbling pits 8 in a portion or all of one or both of the lead-in and lead-out areas 10 and 15. In an area excluding the portion or area formed with the wobbling pits, data can be recorded as non-wobbling pits 9. Alternatively, as shown in FIG. 3B, data may be recorded as the non-wobbling pits 9 on a portion or all of the lead-in area 10. The wobbling pits 8 are a sequence of pits arranged in a wave pattern, while the non-wobbling pits 9 are arranged in a line pattern.

[0030] The wobbling pits 8 contain data recorded as pits and additional information recorded in wobbles. Here, the additional information appended to the data recorded in the form of pits may contain at least one of identification (ID) of the type of an information storage medium, a serial number, the type cf content recorded, a manufacturer of the medium, and data (or a special algorithm) used to prevent copying to another storage medium. In contrast, the non-wobbling pits 9 contain only data recorded as pits, with no additional appended information.

[0031] The information storage medium according to this embodiment of the present invention also contains information regarding whether the additional information is written to a portion or all of one or both of the lead-in and lead-out areas 10 and 15. In other words, information regarding whether or not a pit sequence is wobbled is separately recorded on the medium.

[0032] The information regarding the recording of the additional information may be recorded in the lead-in area 10, and preferably, though not necessarily, in a disk-related information region 10a. For example, the information about the recording of the additional information may be recorded in predetermined bytes on the disk-related information region 10a as follows:

[0033] 0000 0000b: additional information not record-

ed (non-wobbling)

[0034] 0000 0001b: additional information recorded (wobbling)

[0035] Separately recording the information about the recording of additional information in this way allows fast, reliable reproduction of the additional information.

[0036] Meanwhile, the reliability of recording and reproduction of the additional information can be enhanced by modulating and demodulating data recorded in the form of wobbling pits in a different way from the modulation and demodulation of user data. For example, data recorded in the entire lead-in area 10 or the disk-related information region 10a may be bi-phase modulated, while data in the remaining area may be modulated using RLL. RLL is a modulation technique that limits the number of consecutive 0's between the successive 1's. RLL(d,k) indicates that the sequence cf 0's ranges from d to k. For example, bi-phase modulation may be used to record data in the disk-related information region 10a, while RLL (1,7) may be used to record in the remaining region.

[0037] The information storage medium according to this embodiment of the present invention may have single or multiple information storage layers. As described above, the information storage medium according to this embodiment of the present invention enables fast reproduction of additional information by recording information regarding whether the additional information is recorded in one or both of the lead-in and lead-out areas.

[0038] FIG. 4 is a flowchart illustrating a method of recording and/or reproducing data according to an embodiment of the present invention. According to this method, information regarding whether additional information is recorded in an information storage medium is written to a predetermined region of the information storage medium, for example, a disk-related information region. The additional information is recorded in the form of wobbles containing wobbling pits. Once the information storage medium has been loaded, the information on the recording of the additional information is read. If the information indicates that the additional information is recorded, the additional information is read and then used to read user data from the information storage medium.

[0039] FIG. 5 is a block diagram of an apparatus to record and/or reproduce information regarding recording of additional information according to an embodiment of the present invention. The apparatus includes a writer/reader 51 and a controller 52. The writer/reader 51 records data on an information storage medium 60 according to this embodiment of the present invention and reads the recorded data therefrom. The controller 52 controls the writer/reader 51 so as to record the information about recording of the additional information on the information storage medium 60, and read the additional information according to the recorded information about recording of the additional information.

[0040] FIG. 6 is a block diagram showing an exemplary configuration of the data recording/reproducing apparatus of FIG. 5. Referring to FIG. 6, the writer/reader 51 includes a pickup 70 on which the information storage medium 60 is mounted. The controller 52 comprises a PC interface (I/F) 71, a digital signal processor (DSP) 72, an RF amplifier (AMP) 73, a servo 74, and a system controller 75.

[0041] During recording, the PC I/F 71 receives a recording command together with data to be recorded from a host (not shown). The system controller 75 performs initialization required for recording by reading information needed for the initialization, such as disk information stored in a lead-in area, and then preparing for recording based on the read information. The DSP 72 encodes data to be recorded, which is received from the host, using error correction code (ECC) by introducing additional data such as parity bits for error correction, and then modulates the ECC-encoded data using a predetermined modulation technique. The RF AMP 73 converts the data received from the DSP 72 into an RF signal. The pickup 70 records the RF signal received from the RF AMP 73 on the information storage medium 60. The servo 74 receives a command needed for servo control from the system controller 75 and performs servo control of the pickup 70. The system controller 75 allows the pickup 70 to record information regarding recording of the additional information in a predetermined region of the information storage medium 60.

[0042] During reproduction of the information stored on the information storage medium 60, the PC I/F 71 receives a reproduce command from a host (not shown). The system controller 75 performs an initialization process needed for data reproduction. Specifically, the system controller 75 reads information about the recording of additional information on the information storage medium 60 according to this embodiment of the present invention, and reads the additional information accordingly. The pickup 70 outputs an optical signal obtained by emitting a laser beam onto the information storage medium 60 and receiving the laser beam reflected from the information storage medium. The RF AMP 73 converts the optical signal output from the pickup 70 into an RF signal, sends modulated data obtained from the RF signal to the DSP 72, and provides a servo signal for control obtained from the RF signal to the servo 74. The DSP 72 demodulates the modulated data and outputs the data subjected to error correction using an ECC algorithm. The servo 74 receives the servo signal from the RF AMP 73 and the command needed for servo control from the system controller 75 and performs servo control of the pickup 70. The PC/IF 71 transmits the data received from the DSP 72 to the host.

[0043] Although a few embodiments of the present invention have been shown and described, it would be appreciated by those skilled in the art that changes may be made in these embodiments without departing from the principles of the invention, the scope of which is defined in the claims.

Claims

1. An information storage medium
characterised in that information regarding whether a pit sequence is wobbled is recorded separately from the wobbled pit sequence (8) on the information storage medium.

2. The information storage medium of claim 1, wherein the information is recorded in a lead-in area (10) of the information storage medium.

3. The information storage medium of claim 1 or 2, wherein the information is recorded in a disk-related information region of the lead-in area (10).

4. The information storage medium of claim 1 having a lead-in area (10), a user data area (13), and a lead-out area (15), wherein the information regarding whether additional information is recorded as wobbling pits (8) is recorded on at least a portion of at least one of the lead-in and the lead-out areas (10,15).

5. The information storage medium of claim 4, wherein the information regarding whether additional information is recorded as wobbling pits (8) is written to a region of the at least one of the lead-in and the lead-out areas (10,15) in which disk-related information is recorded.

6. The information storage medium of claim 4 or 5, wherein the information recorded as wobbling pits (8) is modulated in a different way than the information not recorded as wobbling pits (8).

7. The information storage medium of claim 4 or 5, wherein the additional information recorded as the wobbling pits (8) comprises at least one of identification (ID) of a type of the information storage medium, a serial number, a type of content recorded, a manufacturer of the medium, and copy protection data.

8. The information storage medium of claim 4 or 5, wherein the information storage medium is an optical disk.

9. A method of recording/reproducing data on/from an information storage medium having a lead-in area (10), a user data area (13), and a lead-out area (15), the method
characterised by comprising: recording information regarding whether additional information is recorded as wobbling pits (8) on at least a portion of at least one of the lead-in and the lead-out areas (10,15);
reading the information regarding the additional information in response to the information storage medium being loaded; and
reading the additional information according to the read information.

10. The method of claim 9, wherein the additional information recorded as the wobbling pits (8) is modulated in a different way than the information not recorded as wobbling pits (8).

11. The method of claim 9 or 10, wherein the additional information recorded as the wobbling pits (8) comprises at least one of identification (ID) of a type of the information storage medium, a serial number, a type of content recorded, a manufacturer of the medium, and copy protection data.

12. An apparatus to record/reproduce data on/from an information storage medium, the apparatus **characterised by** comprising:

    a reading unit (51) to read information regarding whether additional information is recorded as wobbling pits (8) on the information storage medium; and
    a controller (52) to control the reading unit to reproduce the additional information according to the information read by the reading unit (51).

13. The apparatus of claim 12, wherein the additional information recorded as wobbling pits (8) is modulated in a different way than the information not recorded as wobbling pits.

14. The apparatus of claim 12 or 13, wherein the additional information recorded as wobbling pits (8) comprises at least one of identification (ID) of a type of the information storage medium, a serial number, a type of content recorded, a manufacturer of the medium, and copy protection data.

Patentansprüche

1. Informationsspeichermedium, **dadurch gekennzeichnet, dass** Informationen darüber, ob eine Vertiefungssequenz gewobbelt ist, separat von der gewobbelten Vertiefungssequenz (8) auf dem Informationsspeichermedium aufgezeichnet werden.

2. Informationsspeichermedium nach Anspruch 1, wobei die Informationen in einem Einlaufbereich (10) des Informationsspeichermediums aufgezeichnet werden.

3. Informationsspeichermedium nach Anspruch 1 oder 2, wobei die Informationen in einer datenträgerbezogenen Informationsregion des Einlaufbereichs (10) aufgezeichnet werden.

4. Informationsspeichermedium nach Anspruch 1 mit einem Einlaufbereich (10), einem Benutzerdatenbereich (13) und einem Auslaufbereich (15), wobei die Informationen darüber, ob zusätzliche Informationen als wobbelnde Vertiefungen (8) aufgezeichnet werden, auf mindestens einem Teil des Einlauf- und/oder des Auslaufbereichs (10, 15) aufgezeichnet werden.

5. Informationsspeichermedium nach Anspruch 4, wobei die Informationen darüber, ob zusätzliche Informationen als wobbelnde Vertiefungen (8) aufgezeichnet werden, in eine Region des Einlauf- und/oder des Auslaufbereichs (10, 15) geschrieben werden, in der datenträgerbezogene Informationen aufgezeichnet werden.

6. Informationsspeichermedium nach Anspruch 4 oder 5, wobei die als wobbelnde Vertiefungen (8) aufgezeichneten Informationen auf eine andere Weise als die nicht als wobbelnde Vertiefungen (8) aufgezeichneten Informationen moduliert werden.

7. Informationsspeichermedium nach Anspruch 4 oder 5, wobei die als die wobbelnden Vertiefungen (8) aufgezeichneten zusätzlichen Informationen mindestens eines der Folgenden umfassen: eine Identifikation (ID) einer Art des Informationsspeichermediums, eine Seriennummer, eine Art von aufgezeichnetem Inhalt, einen Hersteller des Mediums und Kopierschutzdaten.

8. Informationsspeichermedium nach Anspruch 4 oder 5, wobei das Informationsspeichermedium ein optischer Datenträger ist.

9. Verfahren zum Aufzeichnen/Wiedergeben von Daten auf/von einem Informationsspeichermedium mit einem Einlaufbereich (10), einem Benutzerdatenbereich (13) und einem Auslaufbereich (15), wobei das Verfahren **dadurch gekennzeichnet ist, dass** es Folgendes umfasst:

   Aufzeichnen von Informationen darüber, ob zusätzliche Informationen als wobbelnde Vertiefungen (8) aufgezeichnet werden, auf mindestens einem Teil des Einlauf- und/oder des Auslaufbereichs (10, 15);
   Lesen der Informationen bezüglich der zusätzlichen Informationen als Reaktion darauf, dass das Informationsspeichermedium geladen wird; und
   Lesen der zusätzlichen Informationen gemäß den gelesenen Informationen.

10. Verfahren nach Anspruch 9, wobei die als die wobbelnden Vertiefungen (8) aufgezeichneten zusätzlichen Informationen auf eine andere Weise als die nicht als wobbelnde Vertiefungen (8) aufgezeichneten Informationen moduliert werden.

11. Verfahren nach Anspruch 9 oder 10, wobei die als die wobbelnden Vertiefungen (8) aufgezeichneten zusätzlichen Informationen mindestens eines der Folgenden umfassen: eine Identifikation (ID) einer Art des Informationsspeichermediums, eine Seriennummer, eine Art von aufgezeichnetem Inhalt, einen Hersteller des Mediums und Kopierschutzdaten.

12. Vorrichtung zum Aufzeichnen/Wiedergeben von Daten auf/von einem Informationsspeichermedium, wobei die Vorrichtung **dadurch gekennzeichnet ist, dass** sie Folgendes umfasst:

   eine Leseeinheit (51) zum Lesen von Informationen darüber, ob zusätzliche Informationen als wobbelnde Vertiefungen (8) auf dem Informationsspeichermedium aufgezeichnet werden; und
   eine Steuerung (52) zum Steuern der Leseeinheit, um die zusätzlichen Informationen gemäß den durch die Leseeinheit (51) gelesenen Informationen wiederzugeben.

13. Vorrichtung nach Anspruch 12, wobei die als wobbelnde Vertiefungen (8) aufgezeichneten zusätzlichen Informationen auf eine andere Weise als die nicht als wobbelnde Vertiefungen aufgezeichneten Informationen moduliert sind.

14. Vorrichtung nach Anspruch 12 oder 13, wobei die als wobbelnde Vertiefung (8) aufgezeichneten zusätzlichen Informationen mindestens eines der Folgenden umfassen: eine Identifikation (ID) einer Art des Informationsspeichermediums, eine Seriennummer, eine Art von aufgezeichnetem Inhalt, einen Hersteller des Mediums und Kopierschutzdaten.

Revendications

1. Support de stockage d'informations **caractérisé en ce que** des informations indiquant si une séquence de microcuvettes est vobulée sont enregistrées séparément de la séquence de microcuvettes vobulée (8) sur le support de stockage d'informations.

2. Support de stockage d'informations selon la revendication 1, dans lequel les informations sont enregistrées dans une zone d'entrée (10) du support de stockage d'informations.

3. Support de stockage d'informations selon la revendication 1 ou 2, dans lequel les informations sont enregistrées dans une région d'informations de la zone d'entrée (10) liées au disque.

4. Support de stockage d'informations selon la revendication 1, comportant une zone d'entrée (10), une zone de données d'utilisateur (13) et une zone de sortie (15), dans lequel les informations indiquant si des informations supplémentaires sont enregistrées sous la forme de microcuvettes vobulées (8) sont enregistrées sur au moins une partie d'au moins l'une des zones d'entrée et de sortie (10, 15).

5. Support de stockage d'informations selon la revendication 4, dans lequel les informations indiquant si des informations supplémentaires sont enregistrées sous la forme de microcuvettes vobulées (8) sont écrites dans une région de l'au moins une des zones d'entrée et de sortie (10, 15) dans lesquelles sont enregistrées des informations liées au disque.

6. Support de stockage d'informations selon la revendication 4 ou 5, dans lequel les informations enregistrées sous la forme de microcuvettes vobulées (8) sont modulées d'une manière différente des informations non enregistrées sous la forme de microcuvettes vobulées (8).

7. Support de stockage d'informations selon la revendication 4 ou 5, dans lequel les informations supplémentaires enregistrées sous la forme de microcuvettes vobulées (8) comprennent au moins l'un d'une identification (ID) d'un type du support de stockage d'informations, d'un numéro de série, d'un type de contenu enregistré, d'un fabricant du support et de données de protection contre la copie.

8. Support de stockage d'informations selon la revendication 4 ou 5, dans lequel le support de stockage d'informations est un disque optique.

9. Procédé d'enregistrement/reproduction de données sur/depuis un support de stockage d'informations ayant une zone d'entrée (10), une zone de données d'utilisateur (13) et une zone de sortie (15), le procédé
étant **caractérisé en ce qu'**il consiste à : enregistrer des informations indiquant si des informations supplémentaires sont enregistrées sous la forme de microcuvettes vobulées (8) sur au moins une partie d'au moins l'une des zones d'entrée et de sortie (10, 15) ; lire les informations concernant les informations supplémentaires en réponse au chargement du support de stockage d'informations ; et lire les informations supplémentaires conformément aux informations lues.

10. Procédé selon la revendication 9, dans lequel les informations supplémentaires enregistrées sous la forme de microcuvettes vobulées (8) sont modulées d'une manière différente des informations non enregistrées sous la forme de microcuvettes vobulées (8).

11. Procédé selon la revendication 9 ou 10, dans lequel les informations supplémentaires enregistrées sous la forme de microcuvettes vobulées (8) comprennent au moins l'un d'une identification (ID) d'un type du support de stockage d'informations, d'un numéro de série, d'un type de contenu enregistré, d'un fabricant du support et de données de protection contre la copie.

12. Appareil pour enregistrer/reproduire des données sur/depuis un support de stockage d'informations, l'appareil étant **caractérisé en ce qu'**il comprend :

une unité de lecture (51) pour lire des informations indiquant si des informations supplémentaires sont enregistrées sous la forme de microcuvettes vobulées (8) sur le support de stockage d'informations ; et
une unité de commande (52) pour commander l'unité de lecture afin de reproduire les informations supplémentaires conformément aux informations lues par l'unité de lecture (51).

13. Appareil selon la revendication 12, dans lequel les informations supplémentaires enregistrées sous la forme de microcuvettes vobulées (8) sont modulées d'une manière différente des informations non enregistrées sous la forme de microcuvettes vobulées.

14. Appareil selon la revendication 12 ou 13, dans lequel les informations supplémentaires enregistrées sous la forme de microcuvettes vobulées (8) comprennent au moins l'un d'une identification (ID) d'un type du support de stockage d'informations, d'un numéro de série, d'un type de contenu enregistré, d'un fabricant du support et de données de protection contre la copie.

FIG. 1

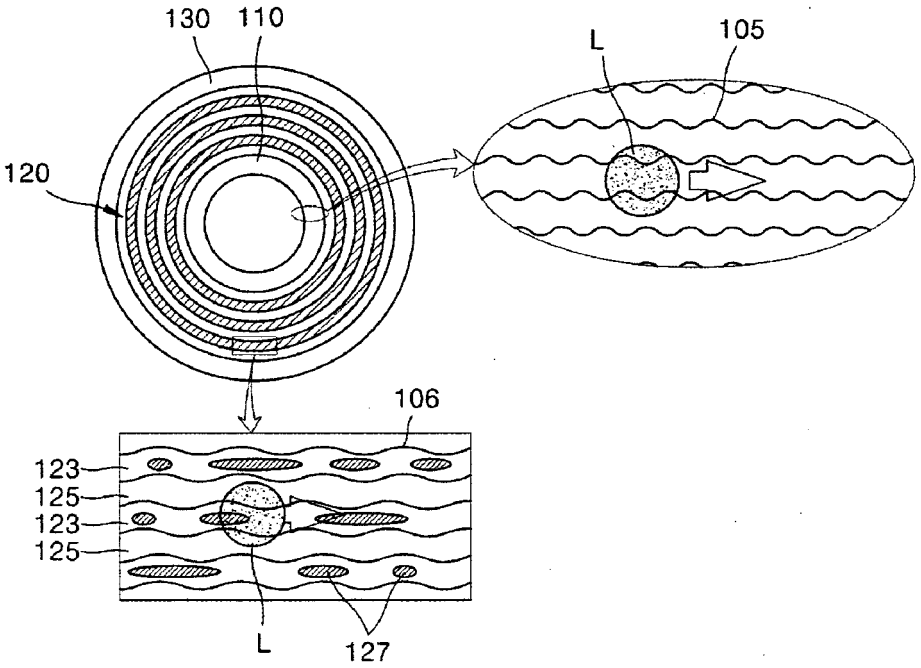

130
110
105
L
120
106
123
125
123
125
L
127

FIG. 2

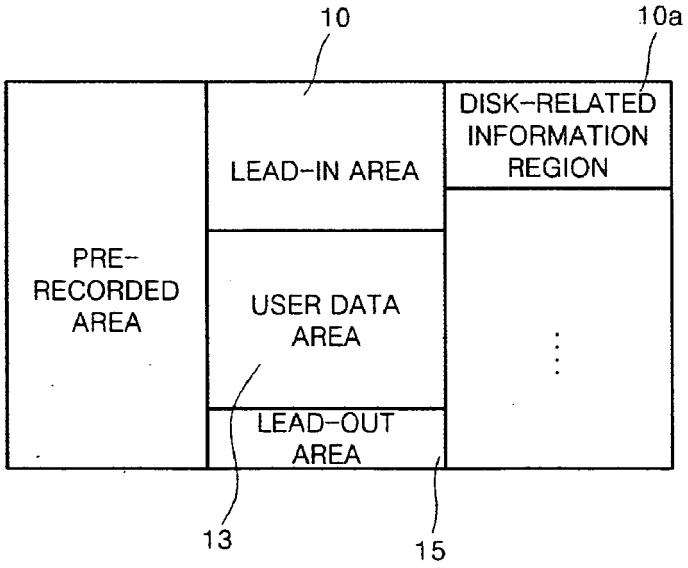

10
10a
PRE-RECORDED AREA
LEAD-IN AREA
DISK-RELATED INFORMATION REGION
USER DATA AREA
LEAD-OUT AREA
13
15

FIG. 3A

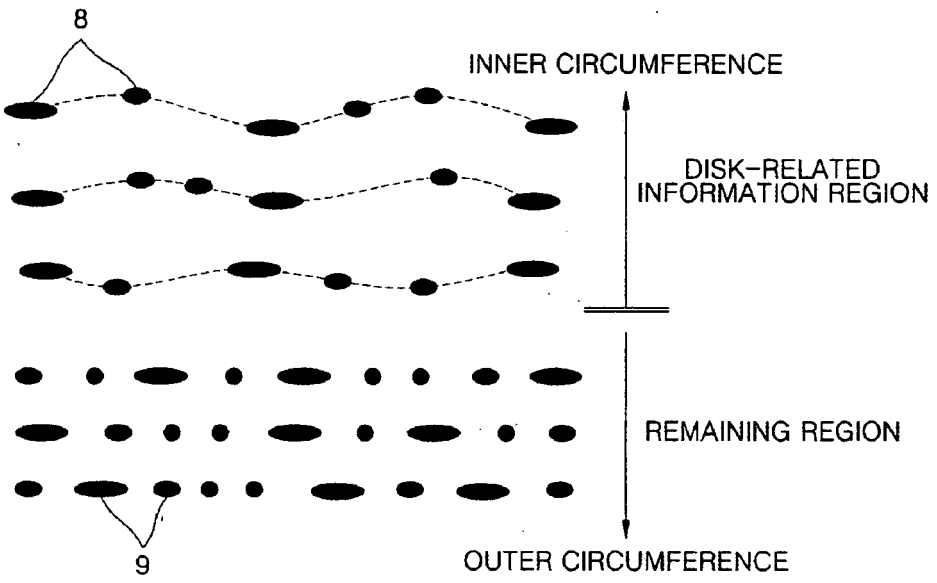

8
INNER CIRCUMFERENCE
DISK-RELATED INFORMATION REGION
REMAINING REGION
9
OUTER CIRCUMFERENCE

FIG. 3B

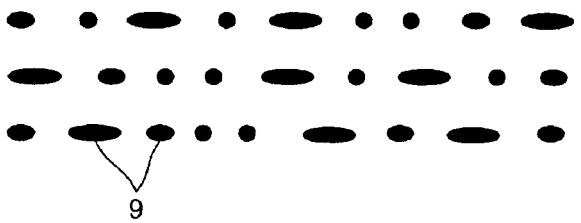

9

FIG. 4

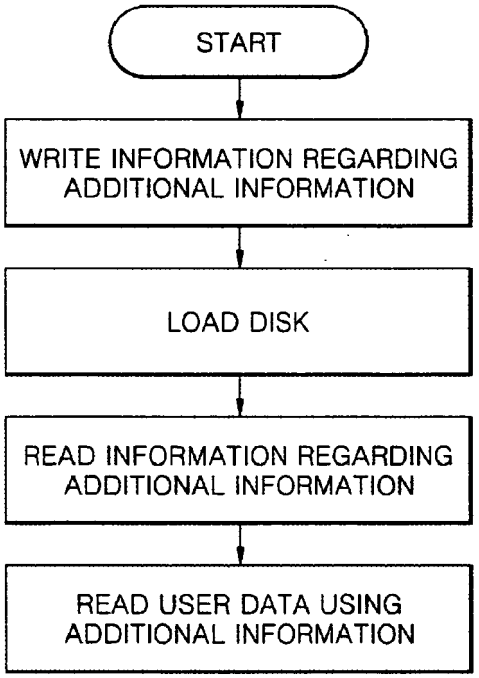

START
WRITE INFORMATION REGARDING ADDITIONAL INFORMATION
LOAD DISK
READ INFORMATION REGARDING ADDITIONAL INFORMATION
READ USER DATA USING ADDITIONAL INFORMATION

FIG. 5

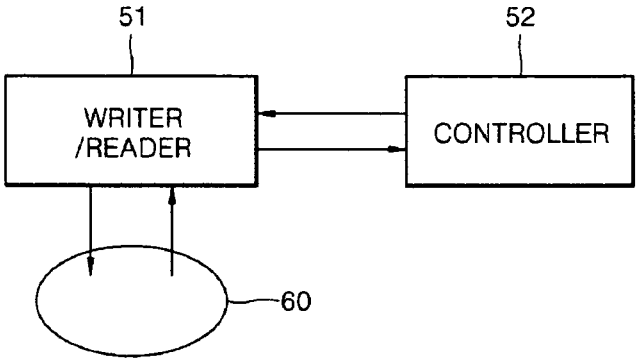
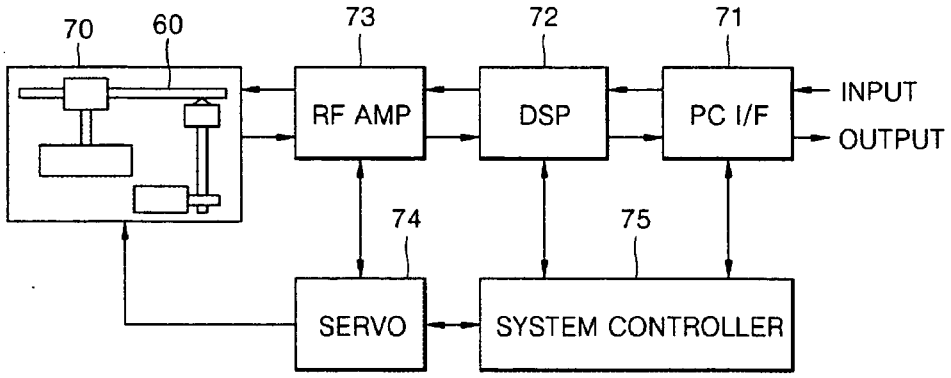

51
52
WRITER
/READER
CONTROLLER
60

FIG. 6


70
60
73
72
71
RF AMP
DSP
PC I/F
INPUT
OUTPUT
74
75
SERVO
SYSTEM CONTROLLER

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 1280141 A **[0005]**
- US 20020181376 A **[0005]**