

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 642 956 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

05.04.2006 Bulletin 2006/14

(51) Int Cl.:

C10M 163/00 (2006.01) C10M 165/00 (2006.01)(21) Application number: **05111664.8**(22) Date of filing: **23.05.2005**

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR**

Designated Extension States:


AL BA HR MK YU• **Chung, Simon****OX28 5JQ, Witney (GB)**• **Dodd, James****OX11 8JS, Didcot (GB)**• **Fellows, Raymond****OX18 2NR, Bampton (GB)**(30) Priority: **11.06.2004 EP 04253487**(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:**05104350.3 / 1 605 034**(71) Applicant: **Infineum International Limited****Abingdon****Oxfordshire OX13 6BB (GB)**(74) Representative: **Goddard, Frances Anna et al****Infineum UK Ltd.****Milton Hill Business &****Technology Centre****Abingdon, Oxfordshire OX13 6BB (GB)**Remarks:

This application was filed on 02 - 12 - 2005 as a
divisional application to the application mentioned
under INID code 62.

(72) Inventors:

• **Shaw, Robert****OX14 1YL, Abingdon (GB)**(54) **Detergent additive combination for lubricating compositions**

(57) A lubricating oil composition comprising a major amount of an oil of lubricating viscosity and a detergent composition comprising (A) an overbased metal salt of an organic acid and (B) an oil-soluble hydrocarbyl phenol aldehyde condensate having the following structure:

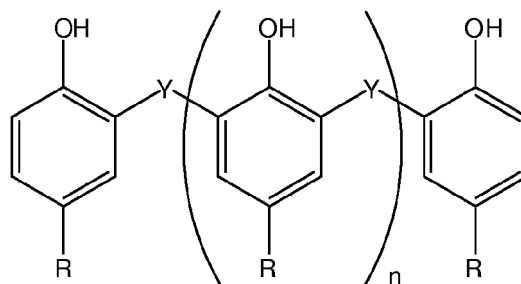

wherein n is 0 to 10, preferably 1 to 8, more preferably 2 to 6, and most preferably 3 to 5; Y is a divalent bridging group, and is preferably a hydrocarbyl group, preferably having from 1 to 4 carbon atoms; and R is a hydrocarbyl group having from 4 to 30, preferably 8 to 18, and most preferably 9 to 15 carbon atoms. The oil-soluble hydrocarbyl phenol aldehyde condensate has a weight average molecular weight (Mw) of 1250 to 1680, as measured by MALDI-TOF (Matrix Assisted Laser Desorption Ionization- Time of Flight) mass spectrometry.

EP 1 642 956 A1


Description

[0001] The present invention relates to detergent additives for lubricating oil compositions.

[0002] Detergent additives are used in a wide variety of automotive, marine, railroad and industrial lubricants to minimize high temperature engine varnish and lacquer deposits. They are usually metal salts of sulphonates, phenates and salicylates, such as, for examples, calcium sulphurized phenates. However, the use of sulphur-containing detergents will soon be restricted due to imposed chemical limits on sulphur.

[0003] The aim of the present invention is to provide a detergent that is free of sulphur and metal (i.e. ash).

[0004] In accordance with the present invention there is provided use as a detergent in a lubricating oil composition of an oil-soluble hydrocarbyl phenol aldehyde condensate having the following structure:

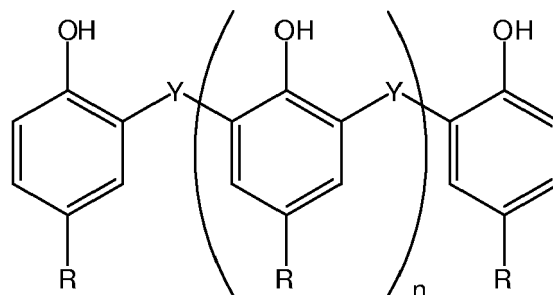

wherein n is 0 to 10, preferably 1 to 8, more preferably 2 to 6, and most preferably 3 to 5; Y is a divalent bridging group, and is preferably a hydrocarbyl group, preferably having from 1 to 4 carbon atoms; and R is a hydrocarbyl group having from 4 to 30, preferably 8 to 18, and most preferably 9 to 15 carbon atoms; the oil-soluble hydrocarbyl phenol aldehyde condensate having a weight average molecular weight (M_w) of 1250 to 1680, as measured by MALDI-TOF (Matrix Assisted Laser Desorption Ionization- Time of Flight) mass spectrometry.

[0005] The hydrocarbyl phenol aldehyde condensate has the advantage of being free of metals (such as, for example, calcium and magnesium) and sulphur. Furthermore, unlike salicylate detergents, the hydrocarbyl phenol aldehyde condensate does not exhibit negative interactions with dispersants.

[0006] The hydrocarbyl phenol aldehyde condensate is preferably a hydrocarbyl phenol formaldehyde condensate.

[0007] The term "hydrocarbyl" as used herein means that the group concerned is primarily composed of hydrogen and carbon atoms and is bonded to the remainder of the molecule via a carbon atom, but does not exclude the presence of other atoms or groups in a proportion insufficient to detract from the substantially hydrocarbon characteristics of the group. The hydrocarbyl group is preferably composed of only hydrogen and carbon atoms. Advantageously, the hydrocarbyl group is an aliphatic group, preferably alkyl or alkylene group, especially alkyl groups, which may be linear or branched. R is preferably an alkyl or alkylene group. R is preferably branched.

[0008] In accordance with the present invention there is also provided a method of improving the detergency of a lubricating oil composition, the method including the step of adding the hydrocarbyl phenol aldehyde condensate defined above to the lubricating oil composition.

[0009] The hydrocarbyl phenol aldehyde condensate preferably has a weight average molecular weight (M_w) in the range of 1280 to 1650, preferably 1300 to 1650, more preferably 1350 to 1600, as measured by MALDI-TOF (Matrix Assisted Laser Desorption Ionization- Time of Flight) Mass Spectrometry.

[0010] The hydrocarbyl phenol aldehyde condensate is preferably obtainable by the condensation reaction between at least one aldehyde or ketone or reactive equivalent thereof and at least one hydrocarbyl phenol, in the presence of an acid catalyst such as, for example, an alkyl benzene sulphonic acid. The product is preferably subjected to stripping to remove any unreacted hydrocarbyl phenol, preferably to less than 5.0% mass, more preferably to less than 3.0% mass, even more preferably to less than 1.0% mass, of unreacted hydrocarbyl phenol. Most preferably, the product includes less than 0.5%, such as, for example, less than 0.1 %, mass of unreacted hydrocarbyl phenol.

[0011] Although a basic catalyst can be used, an acid catalyst is preferred. The acid catalyst may be selected from a wide variety of acidic compounds such as, for example, phosphoric acid, sulphuric acid, sulphonic acid, oxalic acid and hydrochloric acid. The acid may also be present as a component of a solid material such as an acid treated clay. The amount of catalyst used may vary from 0.05 to 10% or more, such as for example 0.1 to 1 %, by mass of the total reaction mixture.

[0012] In particular, the hydrocarbyl phenol aldehyde condensate is preferably branched dodecyl phenol formaldehyde condensate, such as, for example, a tetrapropenyl tetramer phenol formaldehyde condensate.

[0013] The hydrocarbyl phenol aldehyde condensate is preferably used in the lubricating oil composition in an amount ranging from 0.1 to 20 mass%, more preferably from 0.2 to 15 mass%, and most preferably from 0.3 to 10 mass%, based on the mass of the lubricating oil composition.

5 Oil of Lubricating Viscosity

[0014] The lubricating oil composition will include an oil of lubricating viscosity. The oil of lubricating viscosity (also referred to as lubricating oil) may be any oil suitable for the lubrication of automotive, marine, railroad and industrial engines. The lubricating oil may suitably be an animal, a vegetable or a mineral oil. Suitably the lubricating oil is a petroleum-derived lubricating oil, such as a naphthenic base, paraffinic base or mixed base oil. Alternatively, the lubricating oil may be a synthetic lubricating oil. Suitable synthetic lubricating oils include synthetic ester lubricating oils, which oils include diesters such as di-octyl adipate, di-octyl sebacate and tridecyl adipate, or polymeric hydrocarbon lubricating oils such as, for example, liquid polyisobutene and poly-alpha olefins. Commonly, a mineral oil is employed. The lubricating oil generally comprises greater than 60, typically greater than 70, mass% of the lubricant. The lubricating oil typically has a kinematic viscosity at 100°C of from 2 to 40, for example from 3 to 15, mm²s⁻¹ and a viscosity index of from 80 to 100, for example, from 90 to 95.

[0015] Another class of lubricating oils is hydrocracked oils, where the refining process further breaks down the middle and heavy distillate fractions in the presence of hydrogen at high temperatures and moderate pressures. Hydrocracked oils typically have a kinematic viscosity at 100°C of from 2 to 40, for example from 3 to 15, mm²s⁻¹ and a viscosity index typically in the range of from 100 to 110, for example from 105 to 108.

[0016] The oil may include 'brightstock' which refers to base oils that are solvent-extracted, de-asphalted products from vacuum residuum generally having a kinematic viscosity at 100°C of from 28 to 36 mm²s⁻¹ and are typically used in a proportion of less than 30, preferably less than 20, more preferably less than 15, most preferably less than 10, such as less than 5, mass%, based on the mass of the composition.

[0017] Most preferably, the oil of lubricating viscosity is present in the lubricating oil composition in an amount greater than 50 mass%, more preferably greater than 60 mass%, and most preferably greater than 65 mass%, based on the mass of the lubricating oil composition.

30 Detergent Additives

[0018] The lubricating oil composition may also include one or more detergent additives based on metal "soaps", that is metal salts of acidic organic compounds, sometimes referred to as surfactants.

[0019] The metal may be an alkali or alkaline earth metal such as, for example, sodium, potassium, lithium, calcium, barium and magnesium. Calcium is preferred.

[0020] The surfactant may be a salicylate, a sulphonate, a carboxylate, a phenate, a thiophosphate or a naphthenate.

[0021] The detergent may also be a complex/hybrid detergent prepared from a mixture of more than one metal surfactant, such as a calcium alkyl phenate and a calcium alkyl salicylate. Such a complex detergent is a hybrid material in which the surfactant groups, for example phenate and salicylate, are incorporated during the overbasing process. Examples of complex detergents are described in the art, such as, for example, in EP 902 827B.

[0022] Surfactants for the surfactant system of the metal detergents contain at least one hydrocarbyl group, for example, as a substituent on an aromatic ring.

[0023] The detergents may be non-sulphurized or sulphurized, and may be chemically modified and/or contain additional substituents. Suitable sulphurizing processes are well known to those skilled in the art.

[0024] The detergent may have a low TBN of from 10 to 50, a medium TBN of 50 to 150, or a high TBN of greater than 150, such as, for example, 150 to 400.

[0025] The detergents may be used in a proportion in the range of 0.5 to 30, preferably 2 to 20, or more preferably 2 to 15, mass% based on the mass of the lubricating oil composition.

50 Dispersant

[0026] The lubricant composition may include at least one dispersant. A dispersant is an additive for a lubricating composition whose primary function in lubricants is to accelerate neutralization of acids by the detergent system.

[0027] A noteworthy class of dispersants are "ashless", meaning a non-metallic organic material that forms substantially no ash on combustion, in contrast to metal-containing, hence ash-forming, materials. Ashless dispersants comprise a long chain hydrocarbon with a polar head, the polarity being derived from inclusion of, e.g., an O, P or N atom. The hydrocarbon is an oleophilic group that confers oil-solubility, having for example 40 to 500 carbon atoms. Thus, ashless dispersants may comprise an oil-soluble polymeric hydrocarbon backbone having functional groups that are capable of associating with particles to be dispersed.

[0028] Examples of ashless dispersants are succinimides, e.g. polyisobutene succinic anhydride; and polyamine condensation products that may be borated or unborated.


[0029] The dispersants may be used in a proportion in the range of 0 to 10.0, preferably 0.5 to 6.0, or more preferably 1.0 to 4.0, mass% based on the mass of the lubricating oil composition.

Antiwear Additives

[0030] Antiwear additives may be present in the lubricating oil composition. The antiwear additives may be metallic or non-metallic, preferably the former.

[0031] Dihydrocarbyl dithiophosphate metal salts are examples of anti-wear additives that may be used in the present invention. The metal in the dihydrocarbyl dithiophosphate metal salts may be an alkali or alkaline earth metal, or aluminium, lead, tin, molybdenum, manganese, nickel or copper. Zinc salts are preferred, preferably in the range of 0.1 to 1.5, preferably 0.5 to 1.3, mass%, based upon the total mass of the lubricating oil composition. They may be prepared in accordance with known techniques by firstly forming a dihydrocarbyl dithiophosphoric acid (DDPA), usually by reaction of one or more alcohols or a phenol with P_2S_5 and then neutralizing the formed DDPA with a zinc compound. For example, a dithiophosphoric acid may be made by reacting mixtures of primary and secondary alcohols. Alternatively, multiple dithiophosphoric acids can be prepared comprising both hydrocarbyl groups that are entirely secondary and hydrocarbyl groups that are entirely primary. To make the zinc salt, any basic or neutral zinc compound may be used but the oxides, hydroxides and carbonates are most generally employed. Commercial additives frequently contain an excess of zinc due to use of an excess of the basic zinc compound in the neutralization reaction.

[0032] The preferred zinc dihydrocarbyl dithiophosphates are oil-soluble salts of dihydrocarbyl dithiophosphoric acids and may be represented by the following formula:



where R and R^1 may be the same or different hydrocarbyl radicals containing from 1 to 18, preferably 2 to 12, carbon atoms and including radicals such as alkyl, alkenyl, aryl, arylalkyl, alkaryl and cycloaliphatic radicals. Particularly preferred as R and R^1 groups are alkyl groups of 2 to 8 carbon atoms. Thus, the radicals may, for example, be ethyl, n-propyl, i-propyl, n-butyl, i-butyl, sec-butyl, amyl, n-hexyl, i-hexyl, n-octyl, decyl, dodecyl, octadecyl, 2-ethylhexyl, phenyl, butyl-phenyl, cyclohexyl, methylcyclopentyl, propenyl, butenyl. In order to obtain oil-solubility, the total number of carbon atoms (i.e. in R and R^1) in the dithiophosphoric acid will generally be 5 or greater. The zinc dihydrocarbyl dithiophosphate can therefore comprise zinc dialkyl dithiophosphates.

[0033] The antiwear additive may be used in a proportion in the range of 0.1 to 1.5, preferably 0.2 to 1.3, or more preferably 0.5 to 0.9, mass% based on the mass of the lubricating oil composition.

Antioxidants

[0034] Antioxidants may also be added to the lubricating oil composition. These may be aminic or phenolic. Examples of aminic include secondary aromatic amines such as diarylamines, for example diphenylamines wherein each phenyl group is alkylsubstituted with an alkyl group having 4 to 15 carbon atoms. Examples of phenolics include hindered phenols, including mono-phenols and bis-phenols. The anti-oxidant may be present in an amount of up to 3 mass%.

[0035] One or more of the following additives may also be present in the lubricating oil composition: pour point depressants such as poly(meth)acrylates or alkyl aromatic polymers; anti-foaming agents such as silicone anti-foaming agents; viscosity index improvers such as olefin copolymers; dyes; metal deactivators such as aryl thiazines, triazoles or alkyl substituted dimercapto thiadiazoles; and demulsifiers.

[0036] It may be desirable to prepare an additive package or concentrate of the lubricating oil composition. The additive package may be added simultaneously to the base oil to form the lubricating oil composition. Dissolution of the additive package into the lubricating oil may be facilitated by solvents and by mixing accompanied with mild heating. The additive package will typically be formulated to contain the detergent in proper amounts to provide the desired concentration, and/or to carry out the intended function in the final formulation when the additive package is combined with a predetermined amount of base lubricant. The additive package may contain active ingredients in an amount, based on the additive package, of, for example, from 2.5 to 90, preferably from 5 to 75, most preferably from 8 to 60, mass% of additives in the appropriate proportions, the remainder being base oil.

[0037] The final formulations may typically contain about 5 to 40 mass% of the additive package, the remainder being base oil.

[0038] The terms 'oil-soluble' or 'oil-dispersable' as used herein do not necessarily indicate that the compounds or additives are soluble, dissolvable, miscible or capable of being suspended in the oil in all proportions. These do mean, however, that they are, for instance, soluble or stably dispersible in oil to an extent sufficient to exert their intended effect

EP 1 642 956 A1

in the environment in which the oil is employed. Moreover, the additional incorporation of other additives may also permit incorporation of higher levels of a particular additive, if desired.

[0039] The invention will be further described, by way of example only, with reference to the following examples:

Preparation of Hydrocarbyl Phenol Aldehyde Condensates

Reaction Components

[0040]

	Hydrocarbyl Phenol Aldehyde Condensates				
	1100 Mw	1300 Mw	1500 Mw	1585 Mw	1700 Mw
Dodecylphenol	2200	2200	2200	2200	2200
Sulphonic Acid Catalyst	22	22	22	22	22
Paraformaldehyde	165	182	197	204	213
Water	550	550	550	550	550
Heptane	831	831	831	831	831

[0041] In the Table above, the amounts are given in grams for the reaction components for preparing hydrocarbyl phenol aldehyde condensates having weight average molecular weights (Mw) ranging from 1100 to 1700.

Method

[0042] The dodecylphenol, sulphonic acid catalyst, paraformaldehyde, water and heptane were added to a 5L baffled reactor with stirrer (200 rpm), nitrogen blanket (600ml/min), condenser, Dean and Stark trap, a temperature controlling system, and Cardice/Acetone trap vacuum system. The reaction components were heated from ambient to 80°C over 30 minutes, then heated further from 80 to 100°C over 2 hours, during which time water was removed by azeotropic distillation. The residual heptane and dodecyl phenol were removed from the reaction mixture under reduced pressure at 200°C. Finally, the temperature was decreased to 120°C at which point ESN 150 was added to produce the desired level of active ingredient (A.I.).

Example 1 and Comparative Example 1

[0043] Lubricating oil compositions were prepared and tested in the Caterpillar 1 N engine test. Both compositions have the same ash and soap levels (i.e. 1% ash and 0.9% soap).

	Example 1	Comparative Example 1
300 TBN Calcium sulphonate	1.81	1.26
400 TBN Magnesium Sulphonate	0.26	0.26
147 TBN Calcium Sulphurized Phenate		1.13
Dodecylphenol Formaldehyde Condensate- 1585 mw	0.45	0
Succinimide Dispersant	6.10	6.10
ZDDP Antioxidant	1.31	1.31
Antioxidant	0.26	0.26
Seals Moderator	0.17	0.17
SN150 Diluent	1.84	1.70
Group I Base Oil, 600N	18.5	19.8
Group I Base Oil, 150N	61.3	60

EP 1 642 956 A1

Table continued

	Example 1	Comparative Example 1
Viscosity Modifier	7.8	7.8
Pour Point Depressant	0.2	0.2
Ash (%mass)	1.00	1.00
TBN (D2896)	8.61	8.65
Soap (%mass)	0.91	0.91
Sulphur (%mass)	0.257	0.284
Phosphorus (%mass)	0.105	0.105

[0044] The Caterpillar 1 N engine test is designed to measure detergency. The test is made up of three detergency measurements: the amount of carbon in the top piston groove (top groove fill); the amount of heavy carbon on the top land of the piston (top land heavy carbon); and the overall piston cleanliness, measured as weighted demerits (weighted demerits, or WDN). The engine is sensitive to ash levels so both formulations were formulated to have the same ash levels.

Caterpillar 1 N Engine Test Results

[0045]

	Caterpillar 1N Test Results	
	Example 1	Comparative Example 1
Weighted Piston Demerits (WDN)	178.5	272.1
Top Groove Fill (TGF)	8	38
Top Land Heavy Carbon (TLHC)	0	4
Oil Consumption 0-252 hours (g/KW-h)	0.11	0.13
Ring Sticking	none	none

[0046] Only example 1, which includes the dodecylphenol formaldehyde condensate, passes all of the tests in the Caterpillar 1 N Test.

Example 2 and Comparative Example 2

[0047] Lubricating oil compositions were also prepared and tested in the Komatsu Hot Tube Test.

	Example 2	Comparative Example 2
300 TBN Calcium Sulphonate	1.45	1.45
400 TBN Magnesium Sulphonate	0.30	0.30
147 TBN Calcium Sulphurized Phenate	-	1.30
Succinimide Dispersant	7.00	7.00
ZDDP Antiwear	1.60	1.60
Antioxidant	0.40	0.40
Antifoam	0.003	0.003
PIBSA	0.20	0.20

EP 1 642 956 A1

Table continued

	Example 2	Comparative Example 2
Dodecylphenol Formaldehyde Condensate (stripped to <1% alkyl phenol) Mw 1500	1.08	-
SN 150 Diluent	2.37	2.15
Gp I Base Oil	Balance	Balance

[0048] The results are shown below:

	Example 2	Comparative Example 2
Visual Rating: 0 to 9 (0 = black and 9= clear) @ 280°C over 16 hours	7	4

Effect of Weight Average Molecular Weight (Mw) on Performance of Hydrocarbyl Phenol Aldehyde Condensate


[0049] The following formulations were tested to show the effect of weight average molecular weight (Mw) of the hydrocarbyl phenol aldehyde condensates ('HPAC's) on performance in the Caterpillar 1 N Test:

	Comparative 1100 Mw	1300 Mw	1500 Mw	1585 Mw	Comparative 1700 Mw
300 TBN Calcium sulphonate	1.81	1.81	1.81	1.81	1.81
400 TBN Magnesium Sulphonate	0.26	0.26	0.26	0.26	0.26
HPAC Mw 1100	0.45				
HPAC Mw 1300		0.45			
HPAC Mw 1500			0.45		
HPAC Mw 1585				0.45	
HPAC Mw 1700					0.45
Succinimide Dispersant	6.10	6.10	6.10	6.10	6.10
ZDDP	1.31	1.31	1.31	1.31	1.31
Antioxidant	0.26	0.26	0.26	0.26	0.26
PIBSA	0.17	0.17	0.17	0.17	0.17
SN150 diluent	1.70	1.70	1.70	1.70	1.70
Gp I base oil	Balance	Balance	Balance	Balance	Balance
Ash (%)	1.00	1.00	1.00	1.00	1.00
TBN (ASTM D2896)	8.61	8.61	8.61	8.61	8.61
% Ca	0.209	0.209	0.209	0.209	0.209
% P	0.105	0.105	0.105	0.105	0.105
% S	0.257	0.257	0.257	0.257	0.257
Weighted Piston Demerits (WDN)	229	218	170	179	266
Top Groove Fill (TGF)	62	15	12	8	25

[0050] As shown above, the hydrocarbyl phenol aldehyde condensates having weight average molecular weights of 1300, 1500 and 1585 show surprisingly better performance in the Caterpillar 1 N test than the hydrocarbyl phenol aldehyde condensates having weight average molecular weights of 1100 and 1700.


Claims

1. A lubricating oil composition, comprising a major amount of an oil of lubricating viscosity and a detergent composition comprising (A) an overbased metal salt of an organic acid and (B) an oil-soluble hydrocarbyl phenol aldehyde condensate having the following structure:

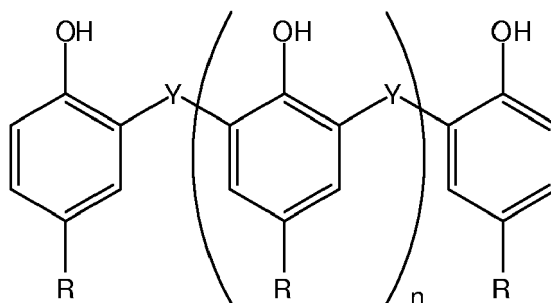

wherein n is 0 to 10, preferably 1 to 8, more preferably 2 to 6, and most preferably 3 to 5; Y is a divalent bridging group, and is preferably a hydrocarbyl group, preferably having from 1 to 4 carbon atoms; and R is a hydrocarbyl group having from 4 to 30, preferably 8 to 18, and most preferably 9 to 15 carbon atoms; the oil-soluble hydrocarbyl phenol aldehyde condensate having a weight average molecular weight (M_w) of 1250 to 1680, as measured by MALDI-TOF (Matrix Assisted Laser Desorption Ionization- Time of Flight) mass spectrometry.

2. A lubricating oil composition according to claim 1, wherein the hydrocarbyl phenol aldehyde condensate has a number average molecular weight (M_w) in the range of 1280 to 1650, preferably 1300 to 1650, more preferably 1350 to 1600, as measured by MALDI-TOF (Matrix Assisted Laser Desorption Ionization-Time of Flight) Mass Spectrometry.
3. A lubricating oil composition according to claim 1 or 2, wherein the condensate includes less than 5.0% mass, more preferably less than 3.0% mass, even more preferably to less than 1.0% by mass, of unreacted hydrocarbyl phenol.
4. A lubricating oil composition according to claim 1, 2 or 3, wherein hydrocarbyl phenol aldehyde condensate is obtainable by the condensation reaction between at least one aldehyde or ketone or reactive equivalent thereof and a hydrocarbyl phenol, in the presence of an acid catalyst.
5. A lubricating oil composition according to any one of the preceding claims, wherein the hydrocarbyl group in the hydrocarbyl phenol aldehyde condensate is branched.
6. A lubricating oil composition according to any one of the preceding claims, wherein the hydrocarbyl phenol aldehyde condensate is a hydrocarbyl phenol formaldehyde condensate.
7. A lubricating oil composition according to any one of the preceding claims, wherein the hydrocarbyl phenol aldehyde condensate is tetrapropenyl phenol formaldehyde condensate.
8. A lubricating oil composition according to any one of the preceding claims, wherein the composition is a crankcase lubricating oil composition.
9. An additive concentrate for a lubricating oil composition comprising (A) an overbased metal salt of an organic acid and (B) an oil-soluble hydrocarbyl phenol aldehyde condensate having the following structure:

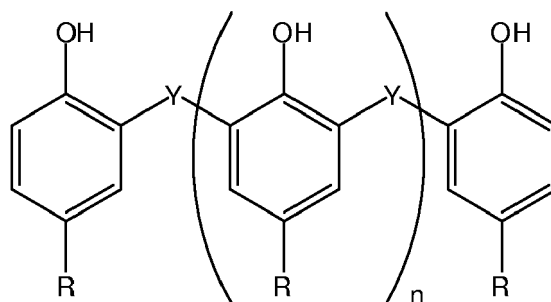

wherein n is 0 to 10, preferably 1 to 8, more preferably 2 to 6, and most preferably 3 to 5; Y is a divalent bridging group, and is preferably a hydrocarbyl group, preferably having from 1 to 4 carbon atoms; and R is a hydrocarbyl group having from 4 to 30, preferably 8 to 18, and most preferably 9 to 15 carbon atoms; the oil-soluble hydrocarbyl phenol aldehyde condensate having a weight average molecular weight (Mw) of 1250 to 1680, as measured by MALDI-TOF (Matrix Assisted Laser Desorption Ionization- Time of Flight) mass spectrometry.



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 05 11 1664

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	ANONYMOUS: "Methylene-bridged alkyl phenols" RESEARCH DISCLOSURE, MASON PUBLICATIONS, HAMPSHIRE, GB, vol. 422, no. 73, June 1999 (1999-06), XP007124476 ISSN: 0374-4353 * the whole document *	1-9	C10M163/00 C10M165/00
A	EP 0 575 154 A (THE LUBRIZOL CORPORATION) 22 December 1993 (1993-12-22) * page 2, line 44 - page 3, line 5 * * page 4, line 49 - page 5, line 27 * * page 5, lines 48-59 * * examples 1-3 * * claims 1,6-9 *	1-9	
A	US 5 707 946 A (HIEBERT ET AL) 13 January 1998 (1998-01-13) * column 8, line 54 - column 9, line 52 * * column 10, lines 1-40 * * column 11, lines 8-27,57-66 * * column 12, lines 8-19 *	1-9	TECHNICAL FIELDS SEARCHED (IPC) C10M
A	US 3 256 183 A (GREENWALD RUDOLPH) 14 June 1966 (1966-06-14) * column 2, lines 30-34,56-65 * * column 5, lines 4-26 *	1-9	
A	EP 0 719 851 A (ASAHI DENKA KOGYO KABUSHIKI KAISHA) 3 July 1996 (1996-07-03) * page 5, line 40 - page 7, line 48 * * page 13, samples 4, 5 * * page 14, samples 12-14, 31 * * page 20, tests 35, 36, 39-41 * * claims 1-3 *	1-9	
----- -/--			
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 23 January 2006	Examiner Perakis, N
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1

EPO FORM 1503 03.92 (P04C01)



DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	EP 0 725 129 A (THE LUBRIZOL CORPORATION) 7 August 1996 (1996-08-07) * abstract * * page 3, lines 11-29,50-57 * * page 6, line 45 - page 7, line 24 * * page 12, example 1 - page 13, example 4 * * claim 1 * -----	1-9	
			TECHNICAL FIELDS SEARCHED (IPC)
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 23 January 2006	Examiner Perakis, N
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 05 11 1664

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-01-2006

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0575154	A	22-12-1993	AT 175992 T	15-02-1999
			AU 4124493 A	23-12-1993
			CA 2098355 A1	18-12-1993
			DE 69323118 D1	04-03-1999
			DE 69323118 T2	24-06-1999
			ES 2127788 T3	01-05-1999
			JP 6049476 A	22-02-1994
			US 5259967 A	09-11-1993

US 5707946	A	13-01-1998	NONE	

US 3256183	A	14-06-1966	GB 1032994 A	15-06-1966

EP 0719851	A	03-07-1996	CA 2165997 A1	28-06-1996
			DE 69515166 D1	30-03-2000
			DE 69515166 T2	17-08-2000
			JP 3454593 B2	06-10-2003
			JP 8176579 A	09-07-1996
			US 5627146 A	06-05-1997

EP 0725129	A	07-08-1996	DE 69617761 D1	24-01-2002
			DE 69617761 T2	08-08-2002
			ES 2169785 T3	16-07-2002
