



(11) **EP 1 647 485 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
13.06.2007 Bulletin 2007/24

(51) Int Cl.:
B65B 5/08 (2006.01) **B65B 5/10** (2006.01)
B65B 43/56 (2006.01) **B65B 35/24** (2006.01)

(21) Application number: **05077133.6**

(22) Date of filing: **20.09.2005**

(54) **Machine for boxing objects in groups**

Maschine zum gruppenweisen Kartonieren von Gegenständen

Machine de mise en boîte d'un groupe d'articles

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**

(30) Priority: **15.10.2004 IT RE20040130**

(43) Date of publication of application:
19.04.2006 Bulletin 2006/16

(73) Proprietor: **Bema - S.r.l.
42030 Viano (RE) (IT)**

(72) Inventor: **Murarotto, Emilio
c/o Bema - S.r.l.
42030 Viano (Reggio Emilia) (IT)**

(74) Representative: **Corradini, Corrado et al
Ing. C. Corradini & C. S.R.L.
Via Dante Alighieri 4
I-42100 Reggio Emilia (IT)**

(56) References cited:
**DE-A1- 3 906 635 FR-A- 2 303 715
GB-A- 1 375 703 US-A- 5 239 807**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 647 485 B1

Description

[0001] The present invention concerns a machine and a method for arranging groups of objects in boxes comprising a support means for at least one box suitable for receiving the group of objects and a feeding means of the objects that one wishes to insert into the box, according to the preamble of claim 1 and claim 7, respectively (GB-A-1375703).

[0002] A purpose of the invention is, generally speaking, to make a machine having a relatively high operative rhythm. A typical and advantageous application of the invention is to box packets containing fluid material and having a yielding consistency, having an upper sealing edge, which is more or less flat. Indeed, machines for boxing packets filled with fluid, having yielding consistency and unreliable stability, are not known; this operation is currently carried out manually.

[0003] Therefore, with reference to this particular application, a purpose of the present invention is to make a machine capable of manipulating such types of objects.

[0004] This and other purposes are accomplished by the invention in object as characterised in the claims.

[0005] According to the invention, the manipulating devices operate to carry out transfer cycles that are staggered one with respect to the other so that while a manipulating device operates a cycle step, the other device operates a different cycle step.

[0006] In particular, said manipulating devices each comprise at least one gripping member suitable for taking at least one object at a time and means suitable for moving said gripping member from the feeding means to the box to carry out said transfer cycle, the gripping member of each manipulating device being mobile in a respective space separated from the space of the gripping member of the other manipulating device by an axial vertical plane. The support means is suitable for transferring the box alternatively from the space in which a gripping member operates to the space in which the other gripping member operates.

[0007] Thanks to such characteristics, the gripping member of each manipulating device can operate at the same time as that of the other manipulating device, without interfering with the movements thereof, but rather working in coordination with it.

[0008] Generally speaking, the result is that the machine is capable of operating with much higher speeds compared to conventional machines.

[0009] Also, in the case in which one operates on yielding packets filled with fluid, the result is, indeed, that it becomes possible to box such objects with a machine.

[0010] The operating speed is in any case very high; to box yielding packets filled with fluid, of a weight of 1 kg, it is possible to reach 14-15 boxing cycles per minute.

[0011] The invention is outlined in detail hereafter with the help of the attached figures that illustrate an embodiment thereof, as an example and not for limiting purposes.

FIG. 1 is a front vertical elevation view of the machine.

FIG. 1A is an enlarged detail of Fig. 1.

FIG. 2 is a side vertical elevation view of Fig. 1.

FIG. 2A is an enlarged detail of Fig. 2.

FIG. 3 is a plan view from above of Fig. 1.

FIG. 3A is an enlarged detail of Fig. 3.

FIG. 4 shows an example of a packet that is treated with the machine of Fig. 1.

FIG. 4a shows an example of an arrangement of a group of packets boxed with the machine of Fig. 1.

[0012] An example of an object that is treated with the machine according to the invention is illustrated in Fig. 4. This object is a soft packet 9, in particular formed with a film of polymeric material, filled with a fluid substance, typically food; the object has a general yielding consistency to the point that it is not sufficiently self-supporting, and its ability to keep stable and upright is clearly insufficient. Its general shape is roughly a prism with a rectangular base and tapered towards the top, where it ends with a flat sealing upper edge 91.

[0013] Such packets 9 advantageously lend themselves to being boxed in the way illustrated in Fig. 4A: a lower layer of packets is placed, laid down flat, with the upper edge 91 facing in one direction (towards the left in the figure) and above it a second layer is arranged, laid down flat, with the upper edge 91 facing in the opposite direction (towards the right); in such a way one proceeds by depositing a desired number of layers until the box 8 (shown as transparent in Fig. 4A) is filled. A particularly rational pile of packets is obtained that completely exploits the volume of the box 8.

[0014] The machine comprises a support means 10 suitable for supporting at least one box 8 (in particular two boxes 8 in the figures) suitable for receiving the group of packets 9 and a feeding means 20 that carries the packets 9 near to the box to be filled.

[0015] According to the invention a pair of manipulating devices 30A and 30B is foreseen, each suitable for operating according to transfer cycles with which it picks up at least one packet 9 at a time from the feeding means 20 and arranges it in the box 8 placed on the support means 10.

[0016] Each manipulating device comprises at least one gripping member 31 suitable for taking at least one packet 31 from the feeding means 20 to the box 8 to carry out said transfer cycle.

[0017] The gripping member 31 of each manipulating device 30A, 30B is mobile in a respective space separated from the space of the gripping member 31 of the other manipulating device by an axial vertical plane P. More specifically, the gripping member 31 of the manipulating device 30A moves within a space Sa whereas the gripping member 31 of the manipulating device 30B moves within a space Sb that is separated from the space Sb through the vertical (ideal) plane P, in particular passing through the axis of the feeding device 20.

[0018] In greater detail, each gripping member 31 comprises at least one group of suction cups 32 connected with a suction means (not illustrated in the figures) suitable for gripping, by suction action, at least one packet at a time, in particular being rested against its side wall 92. The gripping member 31 is fixed to the end of an arm 33 supported by a frame 34, to which it is firmly attached with the possibility of oscillation through a pin 35 with horizontal and longitudinal axis. A jack 36, firmly attached to the frame 34, acts upon the arm 33 producing the desired oscillation of the gripping member 31.

[0019] For its part, the frame 34 is supported by a trolley 37 that is able to slide along a vertical column 38 arranged at the side of the space Sa, Sb. The frame 34 is firmly attached to the trolley 37 with the possibility of oscillation, through a pin 39 with horizontal and longitudinal axis arranged at the end of an arm 41 fixed cantilevered to the trolley 37. A jack 42, firmly attached to the trolley 37, acts upon the frame 34 producing the desired oscillation thereof about the axis of the pin 39.

[0020] The trolley 37 can slide with translation movement in the vertical direction, actuated by a chain in turn actuated by a motor 44.

[0021] The gripping member 31 therefore has three degrees of freedom with which it is able to carry out a transfer cycle of the packet where:

a) initially, through the suction cups 32, it grips at least one packet 9 held arranged vertically by the feeding means 20 at the plane P (this position is indicated with A in Fig. 1A, where the gripping member is indicated with 31a and the packet with 9a),

b) it detaches the packet from the feeding means 20 (which for its part lets go, as specified below) and takes it away sideways from the plane P after rotation of the frame 34 about the pin 39,

c) it rotates (more or less simultaneously) the packet 9 to arrange it lying substantially horizontally, after rotation of the arm 33 about the axis of the pin 35 (this position is indicated with C in Fig. 1A, where the gripping member is indicated with 31c and the packet with 9c),

d) it transfers the packet downwards until it is deposited in the box 8 placed on the support means 10, after vertical translation of the trolley 37 along the column (this position is indicated with D in Fig. 1A, where the gripping member is indicated with 31d and the packet with 9d),

e) it roughly repeats the described movements in reverse so as to go back into the initial position of the cycle.

[0022] In the embodiment illustrated in the figures, each manipulating device 30A, 30B comprises two grip-

ping members 31 arranged side-by-side and aligned and acting simultaneously and each member 31 is suitable for taking and moving three packets 9. Therefore, two axially aligned boxes 8 are loaded, in each of which three columns of packets 9 are formed.

[0023] According to the invention, the manipulating device 30A and 30B are actuated in a substantially uninterrupted manner, and each of them operates so as to carry out the described transfer cycles that are staggered with respect to the other device.

[0024] For example, whereas the device 30A is in a gripping step of the packet 9 carried by the means 20 (step a)), the device 30B transfers the packet downwards and places it in the box below (step d)), and vice-versa.

[0025] According to the invention, said support means 10 is suitable for transferring the box alternatively from the space Sa in which the gripping member 31 of a manipulating device 30A operates to the space Sb in which the gripping member 31 of the other manipulating device 30B operates, and vice-versa.

[0026] In particular, the support means 10 comprises a conveyor belt 11, arranged in the lower part of the spaces Sa and

[0027] Sb, having a sufficient length to contain the desired number of boxes resting there that are filled simultaneously, arranged with its longitudinal axis horizontal and parallel to the axis of the feeding means 20. The conveyor belt 11 is slidably supported by two fixed rails 12, horizontal and transversal, through which it can translate in the transversal direction. Suitable moving members take care of alternatively moving the conveyor belt 11 and with it the box 8 (two boxes in the figures) from the space Sa to the space Sb and vice-versa, in two extreme positions arranged symmetrically with respect to the vertical plane P.

[0028] The alternative transfer in a transversal and horizontal direction of the box 8, arranged on the conveyor belt 11, is carried out in synchrony with the transfer cycles operated by the gripping members 31 so that the box 8 is, in every cycle, below the member that at that moment is setting down the packet 9 so as to be able to receive that packet.

[0029] The described manipulating device 30A and 30B have components arranged symmetrically with respect to the vertical plane P; thanks to this the rotation of the packet operated by a gripping member 31 to make it lie down horizontally (step c)) takes place in two opposite directions in the two manipulating devices, with the result that the packets operated upon by the manipulating device 30A, arranged to the left, are arranged in the box 8, with the upper edge 91 facing to the right, and vice-versa in the packets operated upon by the manipulating device 30B, arranged to the right; the result is that the packets are arranged in the box 8 with the arrangement illustrated in Fig. 4A, just as desired.

[0030] In the case in which, as illustrated in the figures, the object to be boxed is a soft packet filled with fluid material (as described above and illustrated in Fig. 4),

the feeding means 20 comprises a final conveyor belt 21c having two motorised belts 22, opposite and mobile in harmony, which clasp the packets 9 close to the upper edge 91.

[0031] The extreme portion upstream of the conveyor 21a has two symmetrically oscillating branches 24, suitable for moving away to receive the packets 9 that are taken into that position by the dispensing machine of the packets themselves (indicated with 50 and schematically illustrated in the figures) and suitable for then moving closer to squeeze and hold such packets 9. The movement of such branches 24 is actuated through a linkage 241, actuated by a jack (not illustrated in the figures), which moves the two front end pulleys 243 of the conveyor 21a. In Fig. 3A, the separated position of the two pulleys 243 is indicated with a solid line and the close together position is indicated with a broken line.

[0032] Downstream of the conveyor 21a and upstream of the conveyor 21c an intermediate conveyor 21b is arranged, also formed from two motorised belts 25, opposite and mobile in harmony, which clasp the packets 9 close to the upper edge 91.

[0033] In operation, the first conveyor belt 21a takes care of picking up the packets 9 from a dispensing machine (for example the filling machine).

[0034] The next conveyor belt 21b takes care of arranging the packets that it receives from the conveyor 21a at the correct distance (pitch), in particular adjacent to each other.

[0035] The final conveyor belt 21c takes care of taking the packets to the action zones Sa and Sb of the manipulating device 30A and 30B.

[0036] Here, as soon as the packets have been gripped by the gripping members 31, the two branches of the belts 21c are moved apart (through a compound lever actuated by a pneumatic jack, not illustrated in the figures) and the packets themselves are released by the gripping members 31 and, with a succession of transfer cycles produced alternatively by one device 30A and by the other 30B whilst the box 8 moves alternatively and in synchrony between one space Sa and the other Sb, they are dropped down according to predetermined groups, inside the box 8. When a box 8 is completed (or a group of two boxes as illustrated in the figures, or a group of more boxes) it is taken away by the line and other empty boxes are placed on the support means 10.

[0037] Of course, numerous practical-application modifications can be made to the invention in object, without for this reason departing from the scope of the inventive idea as claimed below.

Claims

1. Machine for boxing objects in groups, comprising a support means (10) for at least one box suitable for receiving the group of objects and a feeding means (20) of the objects, comprising a pair of manipulating

devices (30A, 30B) each suitable for operating according to transfer cycles with which it picks up at least one object at a time from the feeding means (20) and arranges it in the box, said manipulating devices (30A, 30B) being actuated in a substantially uninterrupted manner, **characterised in that** the manipulating devices (30A, 30B) operate to carry out transfer cycles that are staggered one with respect to the other so that while a manipulating device (30A, 30B) operates a cycle step, the other device (30B, 30A) operates a different cycle step.

2. Machine according to claim 1, **characterised in that** said manipulating devices (30A, 30B) each comprise at least one gripping member (31) suitable for taking at least one object at a time and means suitable for moving said gripping member (31) from the feeding means (20) up to the box to carry out said transfer cycle, the gripping member (31) of each manipulating device (30A, 30B) being mobile in a respective space separated from the space of the gripping member of the other manipulating device (30A, 30B) by an axial vertical plane (P).

3. Machine according to claim 2, **characterised in that** said support means (10) is suitable for transferring the box alternatively from the space (Sa) in which the gripping member (31) of one manipulating device (30A) operates to the space (Sb) in which the gripping member (31) of the other manipulating device (30B) operates, and vice-versa.

4. Machine according to claim 3, **characterised in that** the alternative transfer in the transversal and horizontal direction of the box (8), operated by the support means (10), is carried out in synchrony with the transfer cycles operated by the gripping members (31) so that the box (8) is, at every cycle, under the member (31) that at that moment is setting down the packet (9) so as to be able to receive such a packet.

5. Machine according to claim 2, **characterised in that** the manipulating devices (30A, 30B) have components arranged symmetrically with respect to the vertical plane (P).

6. Machine according to claim 1, **characterised in that** the feeding means (20) comprises a conveyor belt having two belts, opposite and mobile in harmony, which clasp the upper edge of the object.

7. Method for boxing objects in groups, using a machine comprising: a support means (10) for at least one box suitable for receiving the group of objects; a feeding means (20) of the objects, and a pair of manipulating devices (30A, 30B), each manipulating device (30A, 30B) operating according to transfer cycles with which it picks up at

least one object at a time from the feeding means (20) and arranges it in the box, said manipulating devices (30A, 30B) being actuated in a substantially uninterrupted manner, **characterised in that** said manipulating devices operate to carry out transfer cycles that are staggered one with respect to the other so that while a manipulating device (30A, 30B) operates a cycle step, the other device (30B, 30A) operates a different cycle step.

Patentansprüche

1. Maschine zur gruppenförmigen Anordnung von Gegenständen in Boxen, die eine Trägereinrichtung (10) für mindestens eine Box, die zur Aufnahme der Gruppe von Gegenständen geeignet ist, und eine Zufuhreinrichtung (20) der Gegenstände umfasst, die ein Paar von Handhabungsvorrichtungen (30A, 30B) umfasst, die jeweils zum Betrieb gemäß Übertragungszyklen geeignet sind, womit sie mindestens einen Gegenstand auf einmal von der Zufuhreinrichtung (20) aufnimmt und ihn in der Box anordnet, wobei die Handhabungsvorrichtungen (30A, 30B) auf im Wesentlichen ununterbrochene Art und Weise betätigt werden,

dadurch gekennzeichnet, dass

die Handhabungsvorrichtungen (30A, 30B) arbeiten um Übertragungszyklen auszuführen, die im Verhältnis zueinander versetzt sind, so dass, während die Handhabungsvorrichtung (30A, 30B) einen Zyklusschritt ausführt, die andere Vorrichtung (30B, 30A) einen anderen Zyklusschritt ausführt.

2. Maschine nach Anspruch 1, **dadurch gekennzeichnet, dass** die Handhabungsvorrichtungen (30A, 30B) jeweils mindestens ein Greifelement (31), welches zum Aufnehmen mindestens eines Gegenstandes auf einmal in der Lage ist, und Einrichtungen umfassen, die in der Lage sind, das Greifelement (31) von der Zufuhreinrichtung (20) nach oben zu der Box zu bewegen, um den Übertragungszyklus auszuführen, wobei das Greifelement (31) einer jeden Handhabungsvorrichtung (30A, 30B) in einem jeweiligen Raum bewegbar ist, der von dem Raum des Greifelementes der anderen Handhabungsvorrichtung (30A, 30B) durch eine axiale Vertikalebene (P) getrennt ist.

3. Maschine nach Anspruch 2, **dadurch gekennzeichnet, dass** die Trägereinrichtung (10) zur Übertragung der Box alternativ von dem Raum (Sa) in der Lage ist, indem das Greifelement (31) einer Handhabungsvorrichtung (30A) zu dem Raum (Sb) hinarbeitet, in dem das Greifelement (31) der anderen Handhabungsvorrichtung (30B) arbeitet, und umgekehrt.

4. Maschine nach Anspruch 3, **dadurch gekennzeichnet, dass** die alternative Übertragung in der transversalen und horizontalen Richtung der Box (8), die durch die Trägereinrichtung (10) ausgeführt wird, in Synchronisation mit den durch die Greifelemente (31) ausgeführten Übertragungszyklen ausgeführt wird, so dass sich die Box bei jedem Zyklus unter dem Element (31) befindet, welches in dem Moment das Paket (9) absetzt, um zum Empfangen eines solchen Paketes in der Lage zu sein.

5. Maschine nach Anspruch 2, **dadurch gekennzeichnet, dass** die Handhabungsvorrichtungen (30A, 30B) symmetrisch im Verhältnis zu der Vertikalebene (P) angeordnete Komponenten umfassen.

6. Maschine nach Anspruch 1, **dadurch gekennzeichnet, dass** die Zufuhreinrichtung (20) ein Förderband mit zwei Riemen umfasst, die einander gegenüberliegend und harmonisiert bewegbar sind, welche die Oberkante des Gegenstandes umklammern.


7. Verfahren zur gruppenförmigen Anordnung von Gegenständen in Boxen unter Verwendung einer Maschine, die Folgendes umfasst: eine Trägereinrichtung (10) für mindestens eine Box, die zur Aufnahme der Gruppe von Gegenständen geeignet ist; eine Zufuhreinrichtung (20) der Gegenstände und ein Paar von Handhabungsvorrichtungen (30A, 30B), wobei jede Handhabungsvorrichtung (30A, 30B) gemäß Übertragungszyklen arbeitet, womit sie mindestens einen Gegenstand auf einmal von der Zufuhreinrichtung (20) aufnimmt und ihn in der Box anordnet, wobei die Handhabungsvorrichtungen (30A, 30B) auf im Wesentlichen ununterbrochene Art und Weise betätigt werden, **dadurch gekennzeichnet, dass** die Handhabungsvorrichtungen (30A, 30B) arbeiten, um Übertragungszyklen auszuführen, die im Verhältnis zueinander versetzt sind, so dass, während die Handhabungsvorrichtung (30A, 30B) einen Zyklusschritt ausführt, die andere Vorrichtung (30B, 30A) einen anderen Zyklusschritt ausführt.


Revendications

1. Machine de rangement d'objets par groupe dans des boîtes, comprenant un dispositif de support (10) d'au moins une boîte convenant au logement du groupe d'objets et un dispositif (20) d'alimentation en objets, comportant une paire de dispositifs de manipulation (30A, 30B) pouvant chacun fonctionner dans des cycles de transfert au cours desquels il prélève au moins un objet à la fois depuis le dispositif d'alimen-

- tation (20) et le range dans la boîte, les dispositifs de manipulation (30A, 30B) étant manoeuvrés de manière pratiquement ininterrompue, **caractérisée en ce que** les dispositifs de manipulation (30A, 30B) fonctionnent pour l'exécution de cycles de transfert qui sont décalés l'un par rapport à l'autre afin que, lorsqu'un dispositif de manipulation (30A, 30B) exécute une étape d'un cycle, l'autre dispositif (30B, 30A) effectue une étape différente du cycle.
2. Machine selon la revendication 1, **caractérisée en ce que** les dispositifs de manipulation (30A, 30B) comprennent chacun au moins un organe de saisie (31) convenant à la prise d'au moins un objet à la fois et un dispositif qui convient au déplacement de l'organe de saisie (31) du dispositif d'alimentation (20) jusqu'à la boîte pour l'exécution du cycle de transfert, l'organe de saisie (31) de chaque dispositif de manipulation (30A, 30B) étant mobile dans un espace respectif séparé de l'espace de l'organe de saisie de l'autre dispositif de manipulation (30A, 30B) par un plan vertical axial (P).
3. Machine selon la revendication 2, **caractérisée en ce que** le dispositif de support (10) convient au transfert de la boîte alternativement depuis l'espace (Sa) dans lequel l'organe de saisie (31) d'un premier dispositif de manipulation (30A) fonctionne vers l'espace (Sb) dans lequel l'organe de saisie (31) de l'autre dispositif de manipulation (30B) fonctionne, et inversement.
4. Machine selon la revendication 3, **caractérisée en ce que** le transfert alternatif en directions transversale et horizontale de la boîte (8), effectué par le dispositif de support (10), est exécuté en synchronisme avec les cycles de transfert exécutés par les organes de saisie (31) afin que la boîte (8) se trouve, à chaque cycle, au-dessous de l'organe (31) qui, à ce moment, met en place le paquet (9) en le descendant, afin qu'il puisse loger ce paquet.
5. Machine selon la revendication 2, **caractérisée en ce que** les dispositifs de manipulation (30A, 30B) comportent des éléments constitutants disposés symétriquement par rapport au plan vertical (P).
6. Machine selon la revendication 1, **caractérisée en ce que** le dispositif d'alimentation (20) comporte une courroie transporteuse ayant deux courroies opposées et mobiles en harmonie, qui serrent le bord supérieur de l'objet.
7. Procédé de mise en boîte d'objets par groupe, à l'aide d'une machine qui comprend un dispositif de support (10) d'au moins une boîte convenant au logement du groupe d'objets, un dispositif de manipulation (20) des objets, et une paire de dispositifs de manipulation (30A, 30B), chaque dispositif de manipulation (30A, 30B) fonctionnant suivant des cycles de transfert dans lesquels il prélève au moins un objet à la fois du dispositif d'alimentation (20) et le place dans la boîte, les dispositifs de manipulation (30A, 30B) étant manoeuvrés de manière pratiquement ininterrompue, **caractérisé en ce que** les dispositifs de manipulation fonctionnent pour exécuter des cycles de transfert qui sont décalés l'un par rapport à l'autre si bien que, pendant qu'un dispositif de manipulation (30A, 30B) exécute une étape d'un cycle, l'autre dispositif (30B, 30A) exécute une étape différente du cycle.

FIG. 1

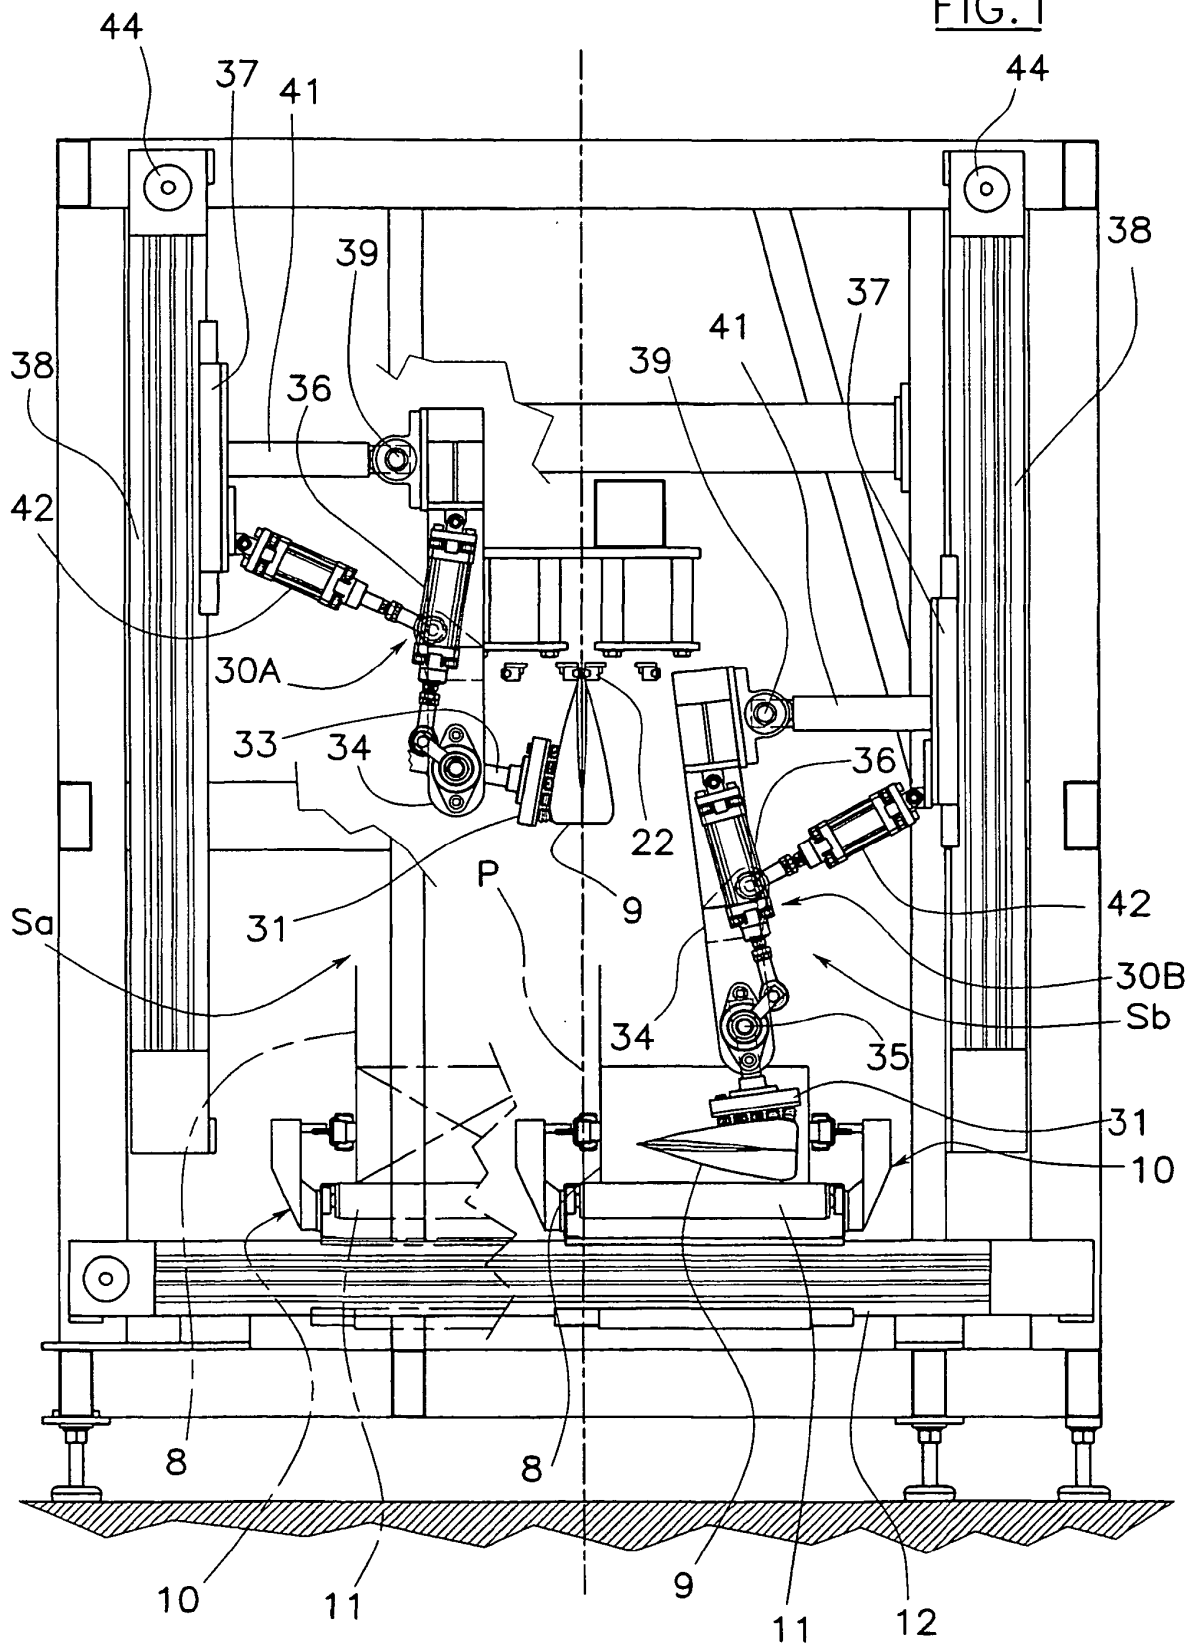

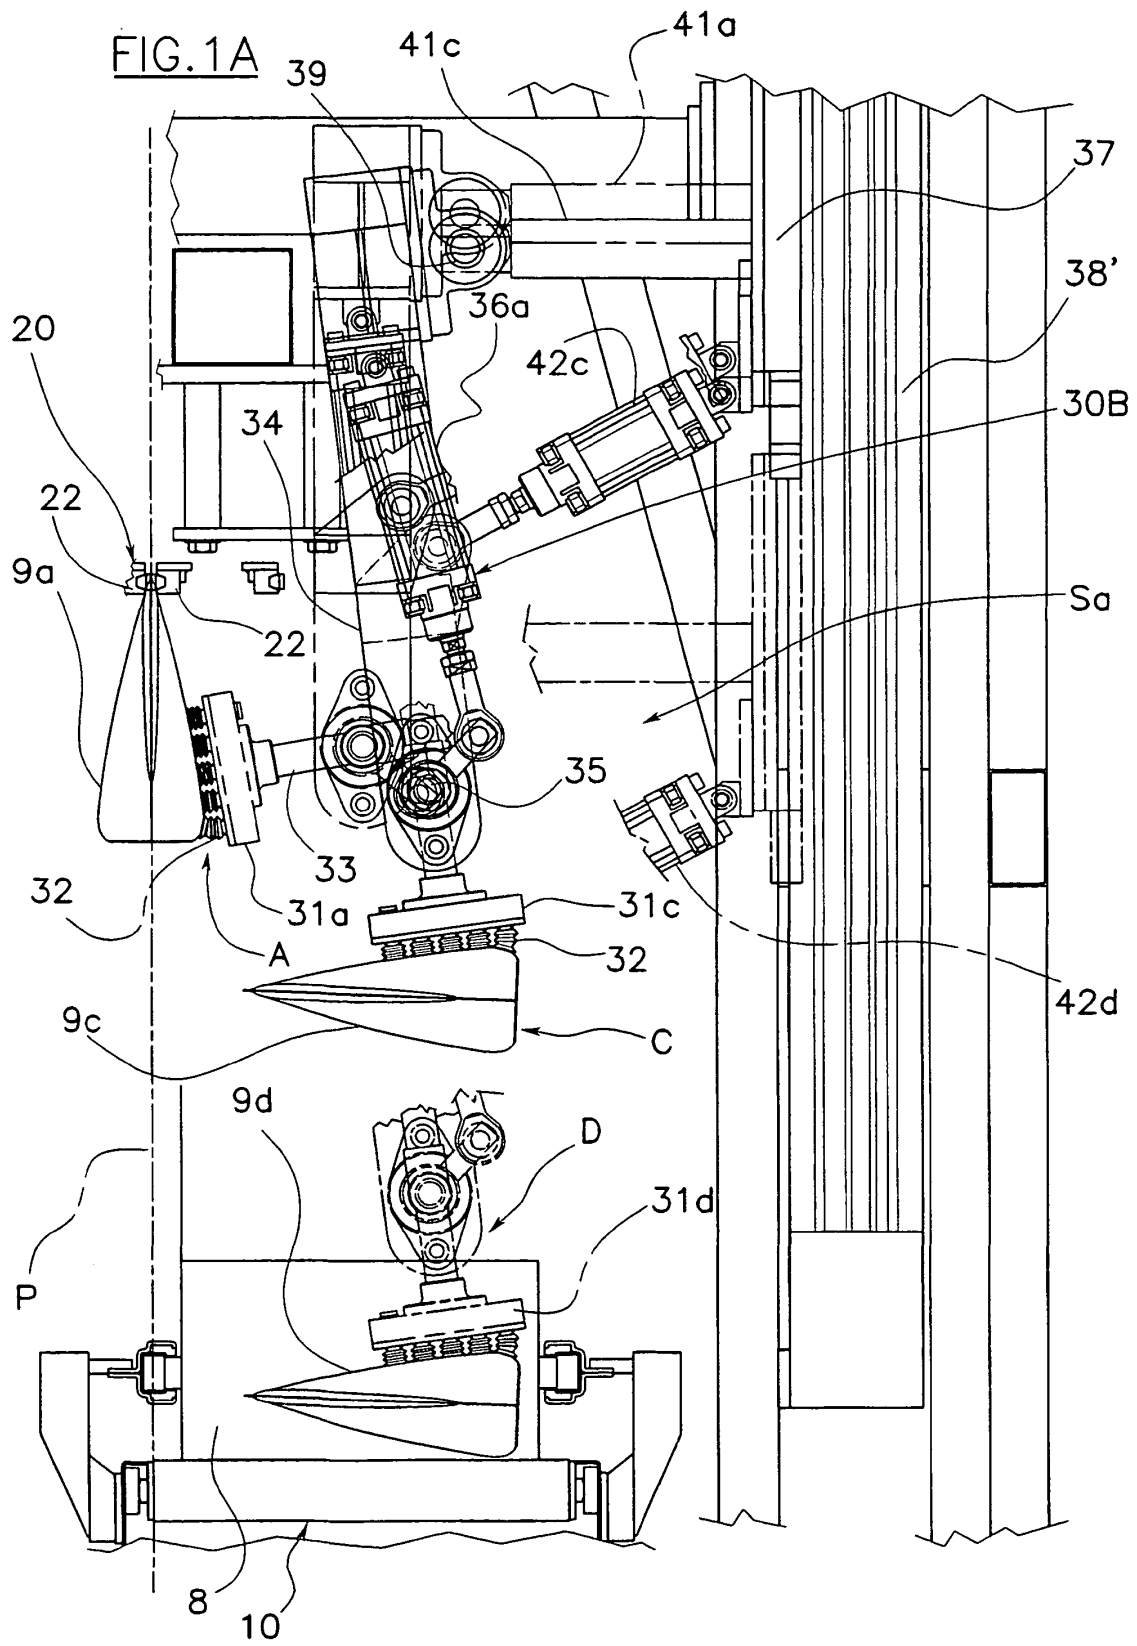

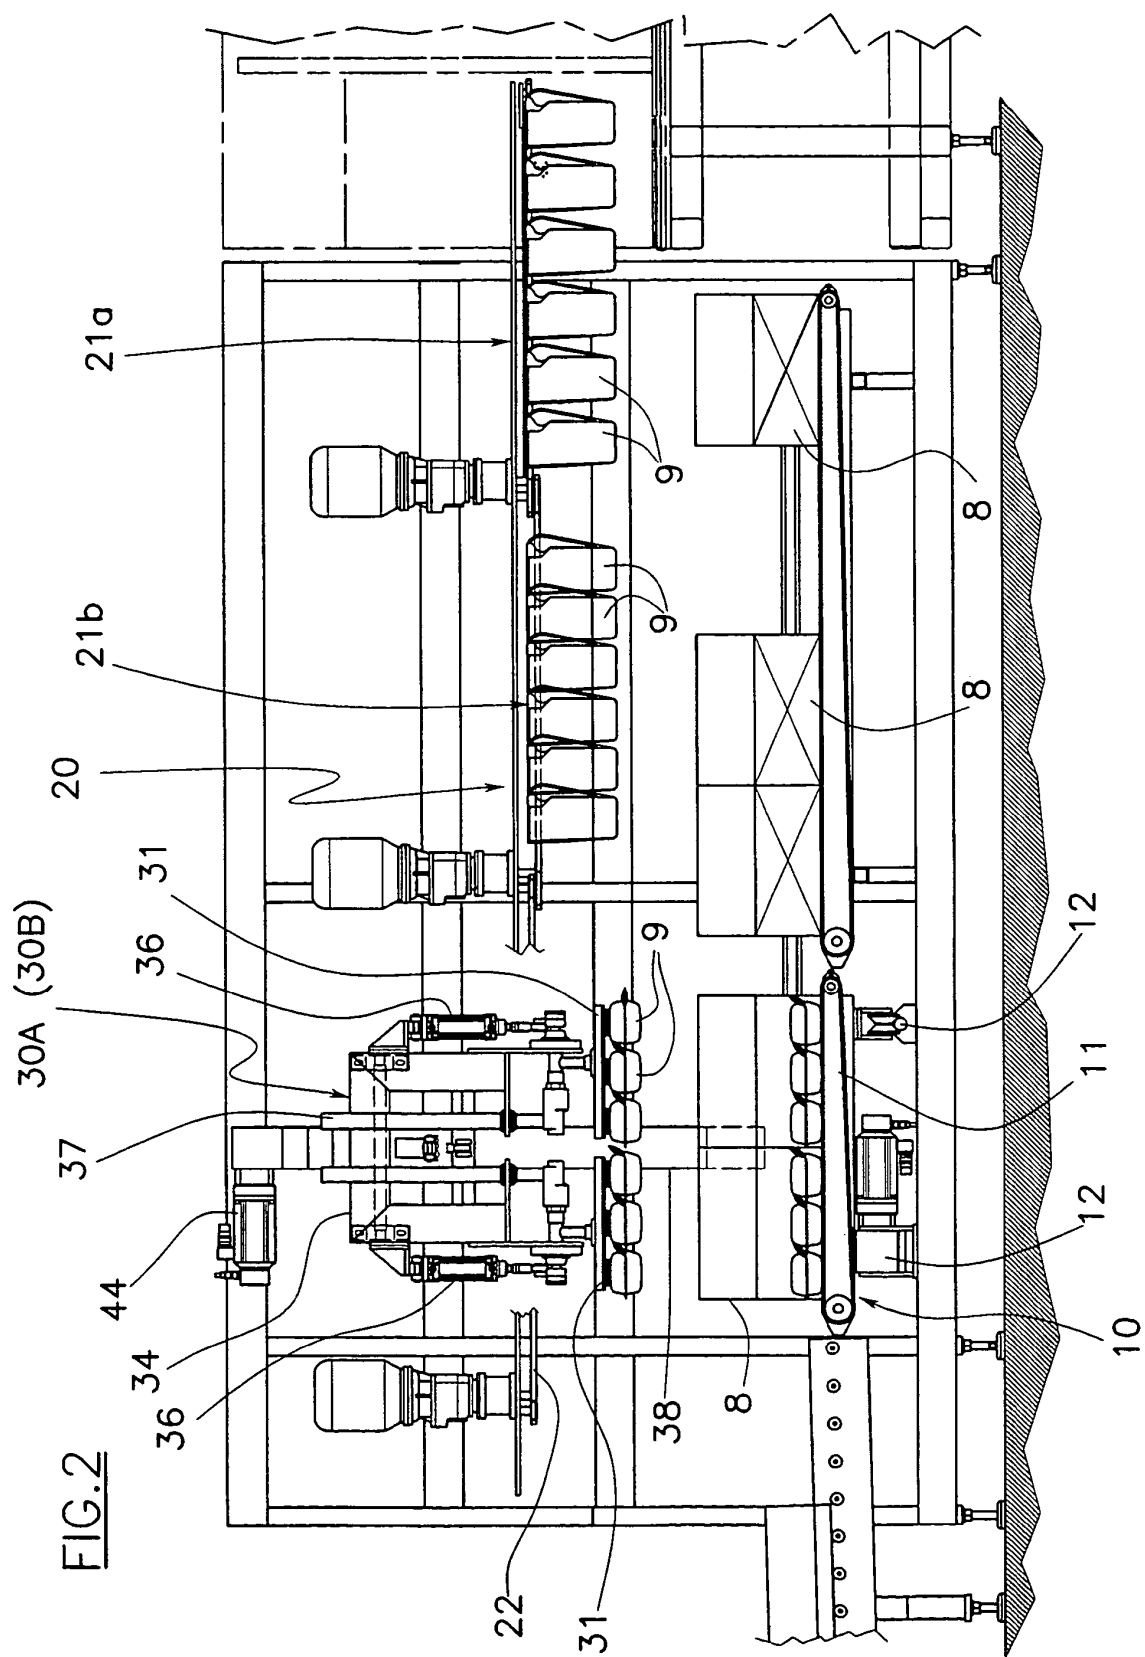
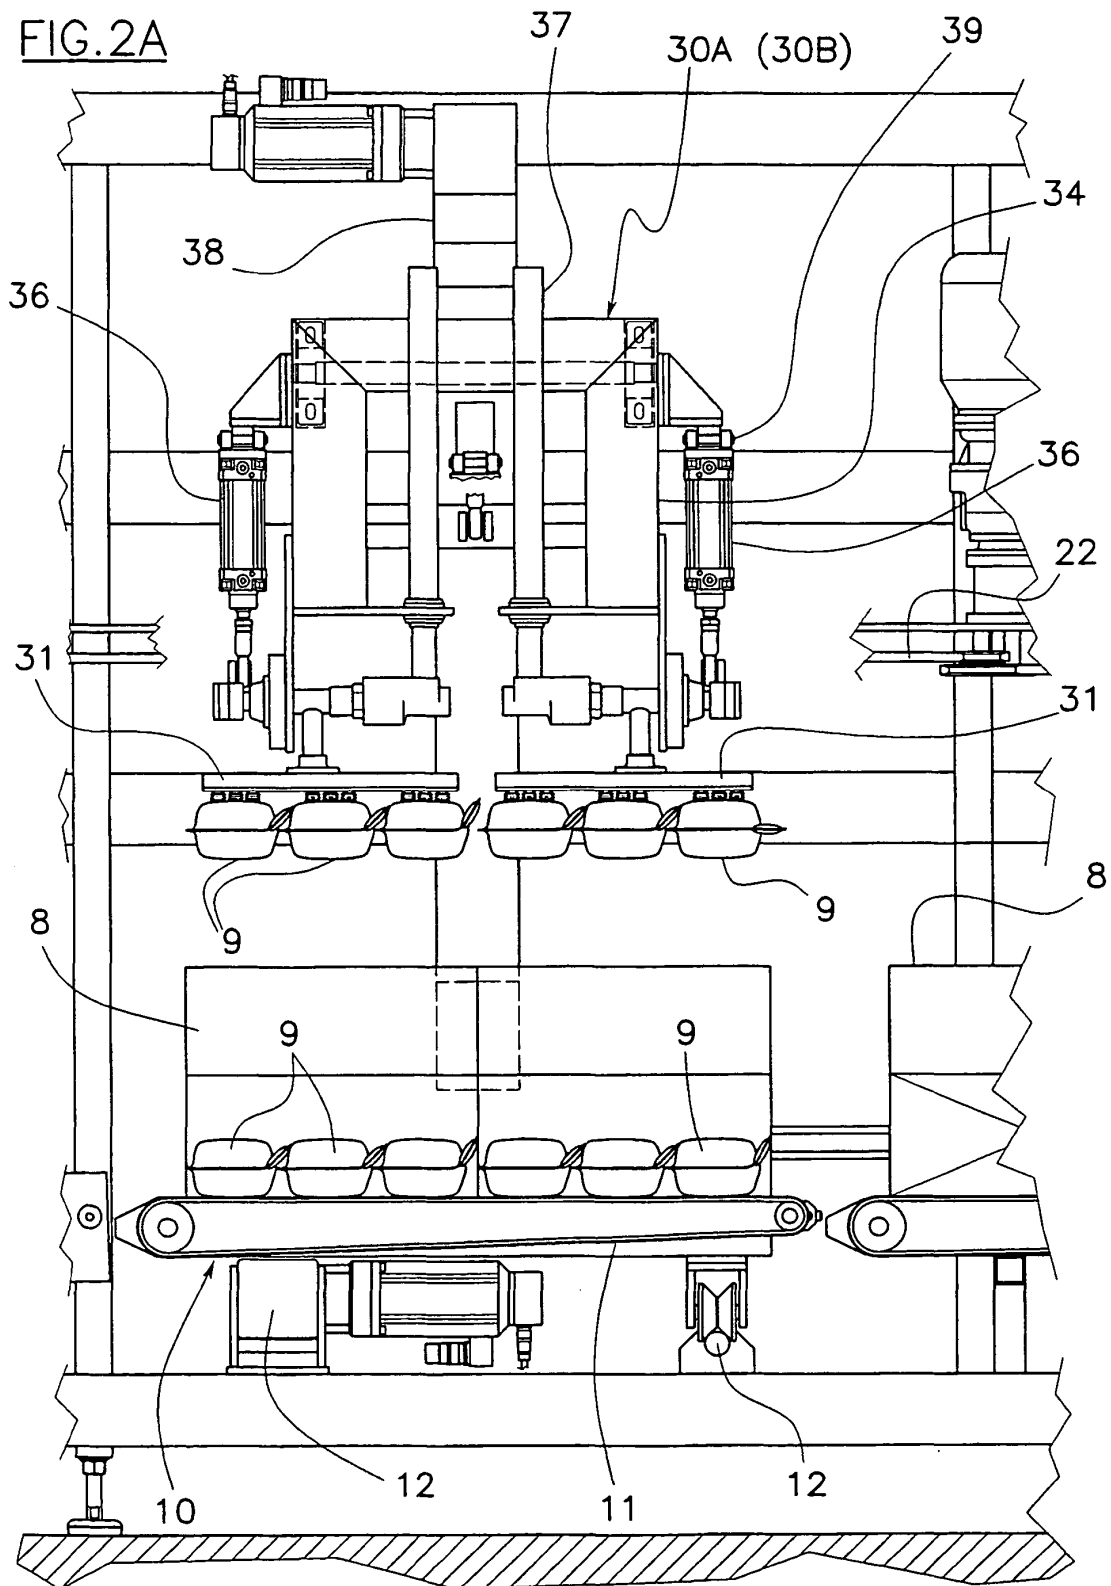


FIG. 2A



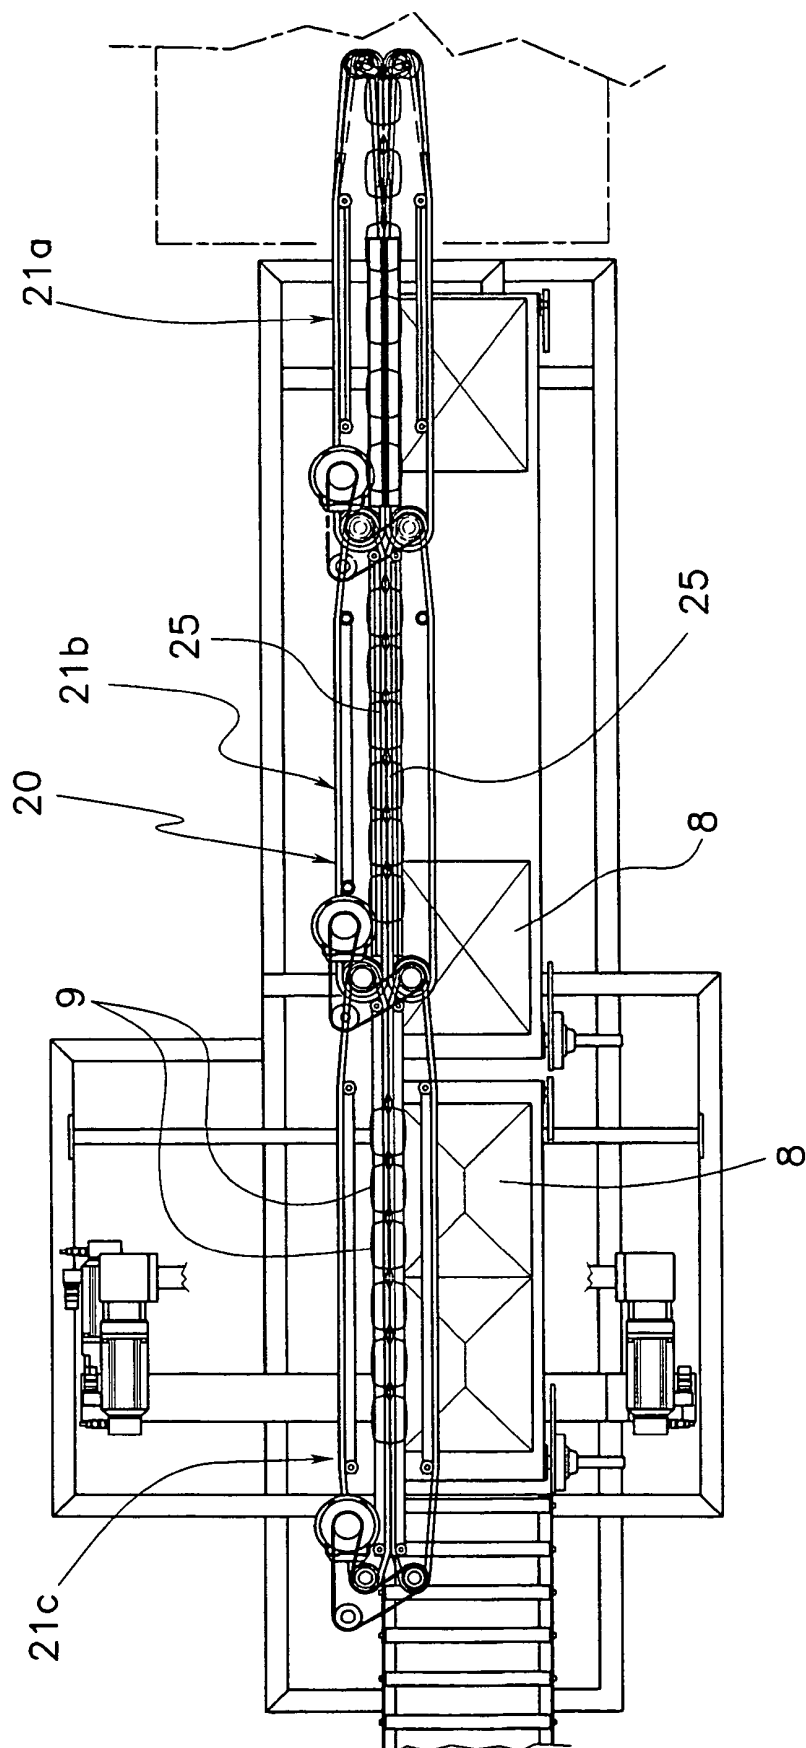


FIG. 3

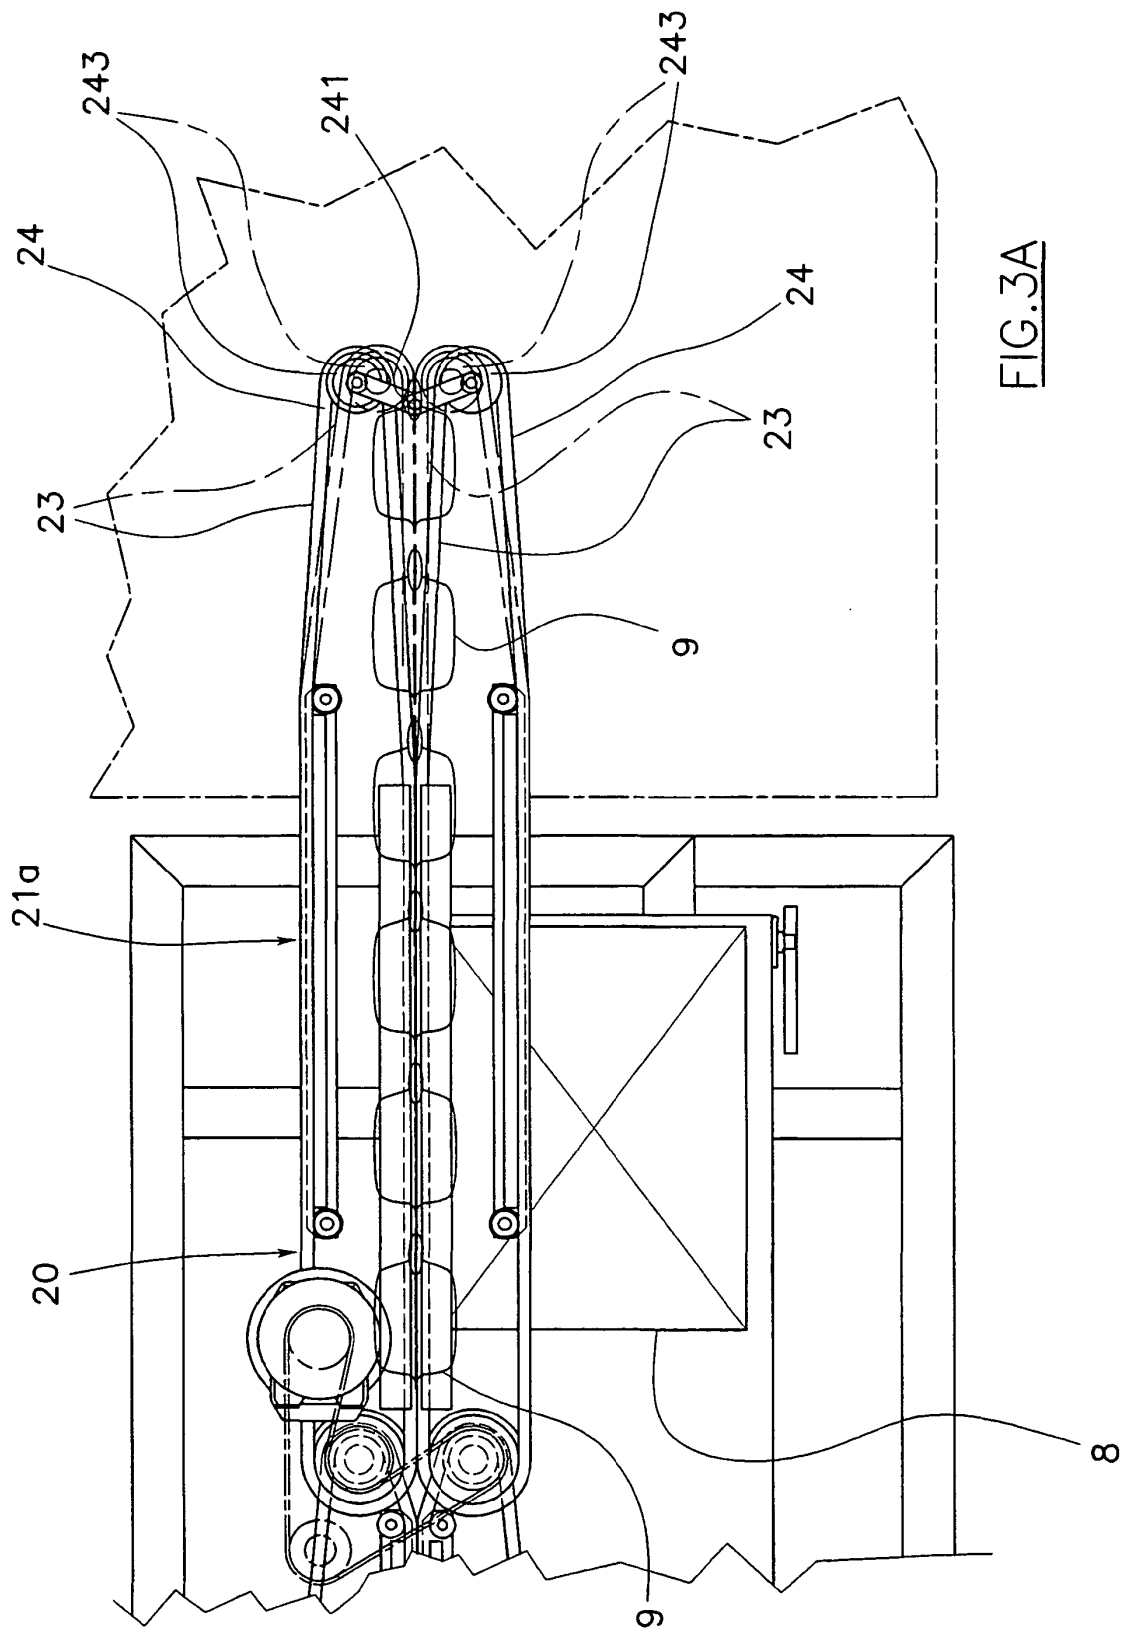


FIG. 3A

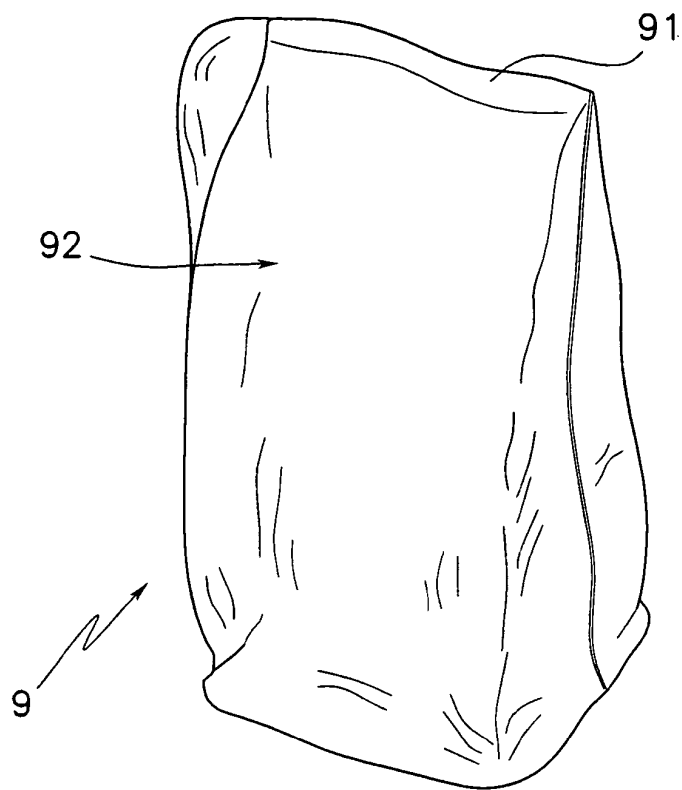


FIG. 4

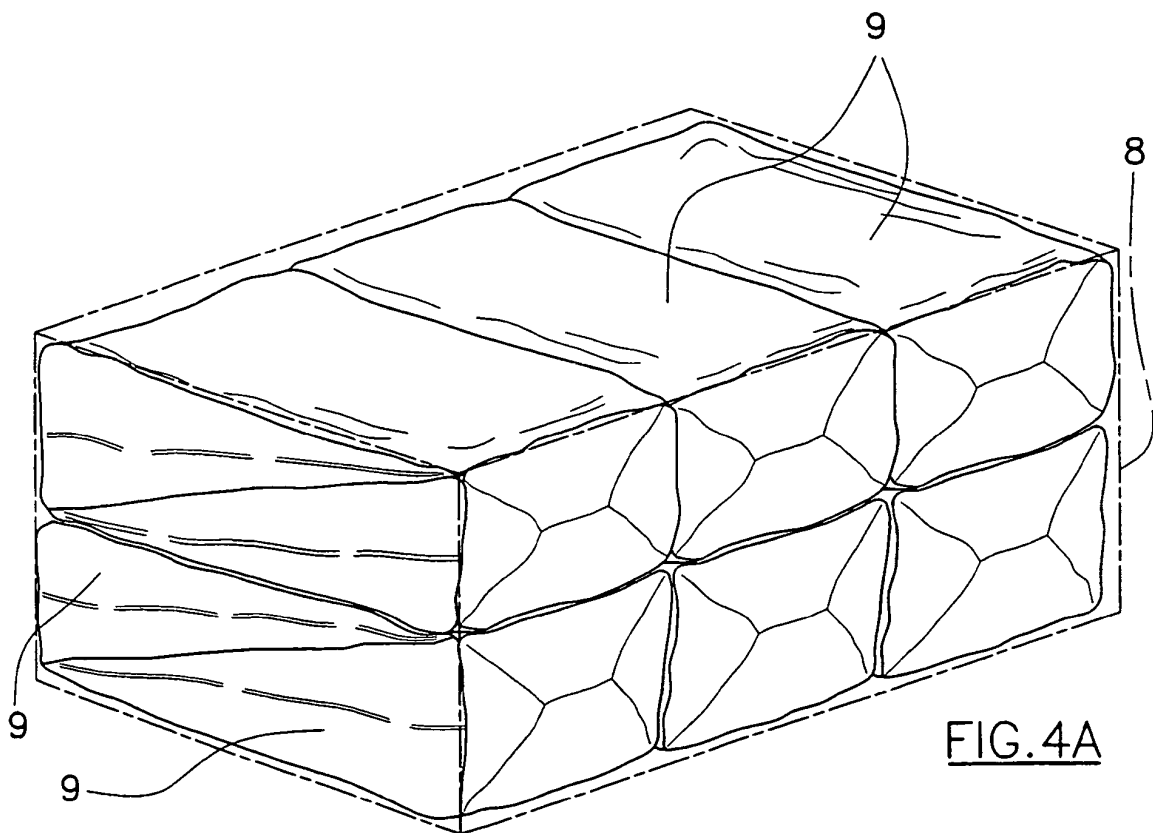


FIG. 4A

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- GB 1375703 A [0001]