



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**31.05.2006 Bulletin 2006/22**

(51) Int Cl.:  
**A01K 5/02 (2006.01) A01K 11/00 (2006.01)**

(21) Application number: **05077406.6**

(22) Date of filing: **20.10.2005**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI  
SK TR**  
Designated Extension States:  
**AL BA HR MK YU**

(30) Priority: **29.11.2004 NL 1027615**

(71) Applicant: **Lely Enterprises AG**  
**6300 ZUG (CH)**

(72) Inventors:  
• **Voogd, Lucien Eliza Niels**  
**4143 HG Leerdam (NL)**  
• **Van den Berg, Karel**  
**2971 BR Bleskensgraaf (NL)**  
• **Sie, Howard**  
**3037 VC Rotterdam (NL)**

(74) Representative: **Corten, Maurice Jean F.M. et al**  
**Octrooibureau Van der Lely N.V.**  
**Weverskade 110**  
**3147 PA Maassluis (NL)**

(54) **A device for and a method of automatically supplying feed and/or drink to animal**

(57) The invention relates to a device for automatically supplying feed and/or drink to an animal, comprising at any rate at least one trough (2), a flap (3), a control unit (4) for controlling the flap (3), so that the flap (3) is capable of being put in an open position and in a closed position for giving the animal access to the trough, respectively preventing the animal from having access to the trough (2), and an identification device (5) for identifying the animal and for emitting an identification signal that is indicative of the identified animal. The control unit (4) is provided with a memory, which memory is suitable for storing a first set of identification data in relation to animals that are allowed to have access to the trough (2)

and a second set of identification data in relation to animals that are not allowed to have access to the trough (2), with a comparing device for comparing the identification signal with the first and the second set of identification data in the memory, the control unit always keeping the flap (3) in the open position or releasing the flap (3) from the closed position if the identification signal belongs to the first set, and the control unit keeping the flap (3) in the closed position or releasing the flap (3) from the open position for enabling it to assume the closed position if the identification signal belongs to the second set.

## Description

**[0001]** The invention relates to a device for automatically supplying feed and/or drink to an animal according to the preamble of claim 1.

**[0002]** Such a device for automatically supplying feed to an animal is known from DE 8716831 U1.

**[0003]** The device disclosed in this document comprises a flap controlled by a control unit, which flap is capable of being put in an open position and in a closed position for giving the animal access to the trough, respectively preventing the animal from having access to the trough. In a standard situation the flap is in its closed position. Continuous energizing of an air cylinder connected to the flap realises a transition to the open position for an animal having access to the feed trough. After a certain period of time the flap is put again in the closed position by continuous energizing of the air cylinder. In this case, the flap can be used for actively driving the head of an animal out of the feed trough. Consequently, an animal having access to the feed trough is confronted in the first instance with a flap in the closed position, which is not a logical signal for the animal that is eligible to eat. This may have an adverse effect on the feed consumption of the animal.

**[0004]** It is an object of the invention to provide a device for and a method of automatically supplying feed and/or drink, comprising a way of access to the feed trough which is logical for an animal.

**[0005]** To this end, the device mentioned in the preamble comprises the features of the characterizing part of claim 1. The invention is based on the insight that, when the trough is immediately accessible during at least most of the time for an animal having access to the trough, the feed consumption is improved.

**[0006]** Moreover, the device can be designed in a less complicated and cheaper way.

**[0007]** In an embodiment of a device according to the invention, the device comprises locking devices for locking the flap at least in an open or a closed position. During at least most of the time the flap is in the locked open position. This is a logical inviting signal for an animal that is eligible to eat. The locked position of the flap in the closed position certainly prevents an animal that is not eligible to eat from having access to the trough.

**[0008]** In an embodiment of a device according to the invention, the locking devices are suitable for locking or blocking the movement of the flap at least in one intermediate position between the open and the closed position. This prevents an animal that is not (no longer) eligible to eat from being able to push the flap from the closed position back into the fully open position.

**[0009]** In an embodiment of a device according to the invention, the control unit is suitable for controlling the locking devices for unlocking the flap. After unlocking, the flap is capable of being pushed by the animal from the closed position into the open position. In reverse order, for enabling the flap to assume the closed position,

it is required that the locking devices are unlocked in the open position.

**[0010]** In an embodiment of a device according to the invention, the flap is rotatable about an at least substantially horizontal axis, the flap being upwardly pivotable from the closed position to the open position. There is made an efficient use of the gravitational force acting on the flap for enabling the flap to switch quickly from the open position into the closed position.

**[0011]** In an embodiment of a device according to the invention, the device comprises at least one indication means for the animal with regard to preventing access or giving access to the trough. Thus it is indicated to the animal whether or not the trough is accessible.

**[0012]** The invention also relates to a method of automatically supplying feed and/or drink to an animal in a trough, the method comprising the step of controlling a flap for giving access to the trough in the open position, respectively for preventing access to the trough in the closed position, the step of identifying the animal and of emitting an identification signal that is indicative of the identified animal. The method is characterized in that it comprises the step of comparing the identification signal with a first and a second set of identification data, the first set of identification data relating to animals that are allowed to have access to the trough and the second set of identification data relating to animals that are not allowed to have access to the trough, the step of always keeping the flap in the open position or releasing the flap from the closed position if the identification signal belongs to the first set, and the step of keeping the flap in the closed position or releasing the flap from the open position for enabling it to assume the closed position if the identification signal belongs to the second set.

**[0013]** Favourable embodiments of a method according to the invention are described in the relevant claims 7 to 10.

**[0014]** The invention will now be explained in further detail by way of example with reference to the accompanying drawings, in which:

Figure 1 shows a cross-sectional view of a system for automatically supplying feed and/or drink to an animal, comprising an embodiment of a device according to the invention;

Figure 2 shows in more detail an embodiment of a device according to the invention in a system according to Figure 1;

Figure 3 shows an embodiment of the flap that is capable of being pushed away with a locking device to be used in an embodiment of a device according to the invention;

Figure 4 shows in more detail the locking device of Figure 3;

Figure 5 shows schematically in side view a device according to the invention for elucidating its functioning.

**[0015]** Figure 1 shows a cross-sectional view of a feeding column 10 for automatically supplying feed and/or drink to an animal 27 with several feed troughs disposed around a central axis, each comprising a flap 3 that is capable of being pushed away. In the figure, on the left, the flap 3 of a feed trough is depicted in the closed position; on the right the flap 3 of another feed trough is shown in the opened position. In the opened position the flap 3 constitutes the rear and upper wall of the device 1. The dimensions of the feed trough 2 are so large that the animal 27 is able to root up the feed freely without feed falling over the edges beside the feed trough 2. The feed trough 2 is provided with a weighing sensor 12. The feed trough 2 is filled at its rear side via the central feed distribution tube 13 of the feeding column 10. The aperture 14 between the rear wall of the feed trough 2 and the rear side of the flap 3 that is capable of being pushed away is sufficiently large for the supply of feed or drink. The rear wall of the feed trough 2 and the rear side of the flap 3 that is capable of being pushed away form together a funnel-shaped guide means for the feed and/or the drink. In the unlikely event of feed getting stuck between the rear side of the flap 3 and the feed trough 2, upon rotation of the flap 3 from the opened position into the closed position, the blocked feed will still get into the feed trough 2. Because of the large set-up of the entire device in the zone of the feed trough 2 there is a good ventilation. Air freshening in the vicinity of the head of, for example, a cow is important. The risk of condensation and consequently fungoid growth and caking of feed in the feed trough 2 is now minimized. The animal 27 is stimulated to eat by the now always freshly smelling feed. In this embodiment, the feeding column 10 comprises several feed troughs 2 that are arranged circularly. The device 1 comprises a light unit 11 serving as an indication means for the animal 27 in relation to preventing access or giving access to the trough 2. Other indication means, such as, for example, a sound source, are possible as well.

**[0016]** Figure 2 shows in more detail the device 1 according to the invention for automatically supplying feed and/or drink to an animal 27. As shown in Figure 2, the device comprises a control unit 4 for controlling the flap 3, so that the flap 3 is capable of being put in an open position and in a closed position for giving the animal 27 access to the trough 2, respectively preventing the animal 27 from having access to the trough 2, and an identification device 5 for identifying the animal 27 and for emitting an identification signal that is indicative of the identified animal 27. The animal 27 wears an animal identification device 28 that is capable of communicating with the identification device 5 of the device 1. The control unit 4 is provided with a memory 6, which memory is suitable for storing a first set of identification data in relation to animals 27 that are allowed to have access to the trough 2 and a second set of identification data in relation to animals 27 that are not allowed to have access to the trough 2. A comparing device 7, constituting part of the control

unit 4, compares the identification signal of the animal 27 with the first and the second set of identification data in the memory 6, the situation being such that, if the identification signal belongs to the first set, the control unit 4 always keeps the flap 3 in the open position or releases it from the closed position, and, if the identification signal belongs to the second set, the control unit keeps the flap 3 in the closed position or releases it from the open position for enabling it to assume the closed position. Based on the identification signal of the relevant animal 27, in case of an animal 27 that is eligible to eat, feed and/or drink are/is brought into the feed trough 2 by means of a central feed distribution tube 13 of the feeding column 10. By means of calming light and/or sound signals in the immediate vicinity of the feed trough 2 during the time the animal 27 is eating, it is possible further to minimize stress in the animal's eating environment. The feed trough 2 and/or the feeding column 10 may further be provided with a spraying installation for (automatically) rinsing the feed trough 2 (not shown).

**[0017]** Figure 3 shows a perspective view of the flap 3 that is capable of being pushed away and the locking device 8. In this embodiment, the flap 3 consists of a metal strip which is folded at the edges for obtaining a sufficient constructive strength. At the upper and rear side of the flap 3 there is a coupling point 26 for the locking device 8. The various components are interconnected by means of bolt connections (not explicitly shown). The flap 3 may be included in the feeding column 10 in such a way that in the closed position the lower edge of the flap 3 and the feeding column 10 do not entirely fit up, a gap remaining between the two elements. This makes it possible for the animal 27 to observe, when the flap 3 is in its closed position, whether it will be possible to consume feed and/or drink. The flap 3 may also be designed in a transparent or partially open structure (for example a grid structure). Besides, there is, of course, neither a limitation as regards the flap materials to be applied: synthetic materials, composite materials are only a few examples of the many other possibilities.

**[0018]** Figure 4 shows a possible locking device 8 in more detail. With the aid of said locking device 8 and a pin 19 (Figure 5) as a partner locking device, the flap 3 is capable of being locked at least in an open or a closed position and suitable for blocking an upwardly pivotable movement of the flap 3 in at least one intermediate position between the open and the closed position. The control unit 4 is suitable for controlling the locking device 8 for unlocking the flap 3. Said flap 3 is rotatable about an at least substantially horizontal axis 9, and is upwardly pivotable from the closed position to the open position. The connection between the feeding column 10 and the flap 3 may be realised by means of a flexible element.

**[0019]** The functioning of the device 1 is now explained with reference to Figure 5.

Figure 5A

**[0020]** Figure 5A shows schematically the position of the flap 3 in the open position. In this position, a spring 16 between an actuator 15 and a locking device 8 is in a condition of relatively low tension. Because of the situation of the centre of gravity of the locking device 8, the flap 3 is locked in this position under the influence of gravitational force: a notch 17 at one end of a slot 18 in the locking device 8 surrounds a pin 19.

Figure 5B

**[0021]** If an animal 27 approaching the feed trough 2 is not eligible to eat or when an eating animal 27 has to leave its eating place, the actuator 15 is activated by the control unit 4. The actuator 15, in this example an electric motor, switches from a first position to a second position. In this case, the spring 16 is brought into a condition of high tension. This results in that the notch 17 comes loose from the pin 19 that was surrounded until that moment, so that the locking device 8 comes free. The flap 3 now falls downwards under the influence of gravitational force. The spring 16 put under tension ensures that the lower slot line 20 is kept in contact with the pin 19. A damping device 21, for example a rubber ring, is disposed around the pin 19, so that at the end of the free fall the locking device 8 can engage the pin 19 in a damped manner. This system is a fast functioning system. This makes it possible quickly to close the flap 3, so that an animal can no longer consume feed and/or drink, which is in particular advantageous in view of the jostling behaviour of dominant animals 27. Besides, due to the described method of closing, the aforementioned device 1 is very reliable. A continuous wireless signal connection between an animal identification device 28 worn by the animal 27 and the identification device 5 of the device 1 is not necessary. An animal identification signal received once and, consequently, activating once the actuator 15 will suffice for closing the flap 3. A notch 22 in the slot 18 of the locking device 8, between notches (17, 23) present at the ends of the locking slot 18, prevents an animal 27 that is not eligible to eat from succeeding in pushing the flap 3 into its completely open position. The upward movement of the flap is blocked at the moment when the notch 22 is able to surround the pin 19 halfway the locking slot 18. The arrangement is such that the animal 27 cannot get at the feed and/or the drink in this position of the flap 3. Of course, more or other ways of blocking the locking device 8 may be taken into consideration. As an actuator 15, besides the already mentioned electric motor, many other possibilities may be taken into consideration: an electromagnet, for example, may be chosen as well. Actuator 15, memory 6, comparing device 7 and control unit 4 may be separate, interconnected components. Also the positions of the aforementioned components may differ from the situation shown in Figures 2 and 5.

Figure 5C

**[0022]** Figure 5C shows schematically the position of the flap 3 in the closed position. In this position, a spring 16 between an actuator 15 and a locking device 8 is in a condition of high tension. By spring force a notch 23 at one end of a slot 18 in the locking device 8 is drawn to a pin 19 so as to surround said pin. Under the influence of spring force the flap 3 is now locked in this position.

Figuur 5D

**[0023]** In case an animal 27 that is eligible to eat approaches the feed trough 2 and the flap 3 is in its closed position, the actuator 15 is activated by the control unit 4. The actuator 15 switches from a second position back to a first position. This means that the spring 16 is brought from a condition of high tension into a condition of low tension. The animal 27 pushing its nose against the flap 3 now results in that the notch 23 comes loose from the pin 19 that was surrounded until that moment, so that the locking device 8 comes free. Now the flap 3 is capable of being pushed away in upward direction by the animal 27. The upper slot line 24 keeps contact with the pin 19. Eventually the notch 17 will come into a position in which it surrounds the pin 19. The flap 3 is then in a locked open position.

**[0024]** In respect of the foregoing extra attention is drawn to the fact that the actuator 15 which operates the flap 3 is not capable of being loaded directly by an animal, this in contrast with the air cylinder applied in the device of DE 8716831 U1. Consequently, the actuator 15 and the supporting frame 25 are loaded to a lesser extent. Furthermore, the device does not require complicated and/or expensive device-supporting provisions, which would be the case with an air cylinder being applied as an actuator for operating the flap. In a device 1 according to the invention, the locking device 8 is capable of being loaded by an animal. This relatively cheap component can easily be replaced.

## Claims

1. A device for automatically supplying feed and/or drink to an animal, comprising at any rate at least one trough, a flap, a control unit for controlling the flap, so that the flap is capable of being put in an open position and in a closed position for giving the animal access to the trough, respectively preventing the animal from having access to the trough, and an identification device for identifying the animal and for emitting an identification signal that is indicative of the identified animal, **characterized in that** the control unit is provided with a memory, which memory is suitable for storing a first set of identification data in relation to animals that are allowed to have access to the trough and a second set of identification data

in relation to animals that are not allowed to have access to the trough, with a comparing device for comparing the identification signal with the first and the second set of identification data in the memory, the control unit always keeping the flap in the open position or releasing the flap from the closed position if the identification signal belongs to the first set, and the control unit keeping the flap in the closed position or releasing the flap from the open position for enabling it to assume the closed position if the identification signal belongs to the second set.

2. A device as claimed in claim 1, **characterized in that** the device comprises locking devices for locking the flap at least in an open or a closed position.

3. A device as claimed in claim 2, **characterized in that** the control unit is suitable for controlling the locking devices for unlocking the flap.

4. A device as claimed in any one of the preceding claims, **characterized in that** the flap is rotatable about an at least substantially horizontal axis, the flap being upwardly pivotable from the closed position to the open position.

5. A device as claimed in any one of the preceding claims, **characterized in that** the device comprises at least one indication means for the animal with regard to preventing access or giving access to the trough.

6. A method of automatically supplying feed and/or drink to an animal in a trough, the method comprising the step of controlling a flap for giving access to the trough in the open position, respectively for preventing access to the trough in the closed position, the step of identifying the animal and of emitting an identification signal that is indicative of the identified animal, **characterized in that** the method comprises the step of comparing the identification signal with a first and a second set of identification data, the first set of identification data relating to animals that are allowed to have access to the trough and the second set of identification data relating to animals that are not allowed to have access to the trough, the step of always keeping the flap in the open position or releasing the flap from the closed position if the identification signal belongs to the first set, and the step of keeping the flap in the closed position or releasing the flap from the open position for enabling it to assume the closed position if the identification signal belongs to the second set.

7. A method as claimed in claim 6, **characterized in that** the method comprises the step of locking the flap at least in an open or a closed position.

8. A method as claimed in claim 7, **characterized in that** the method comprises the step of controlling the locking devices for unlocking the flap.

9. A method as claimed in any one of claims 6 to 8, **characterized in that** the method comprises the step of rotating the flap about an at least substantially horizontal axis, and the step of pivoting the flap upwards from the closed position to the open position.

10. A method as claimed in any one of claims 6 to 9, **characterized in that** the method comprises the step of giving the animal at least one indication with regard to preventing access or giving access to the trough.

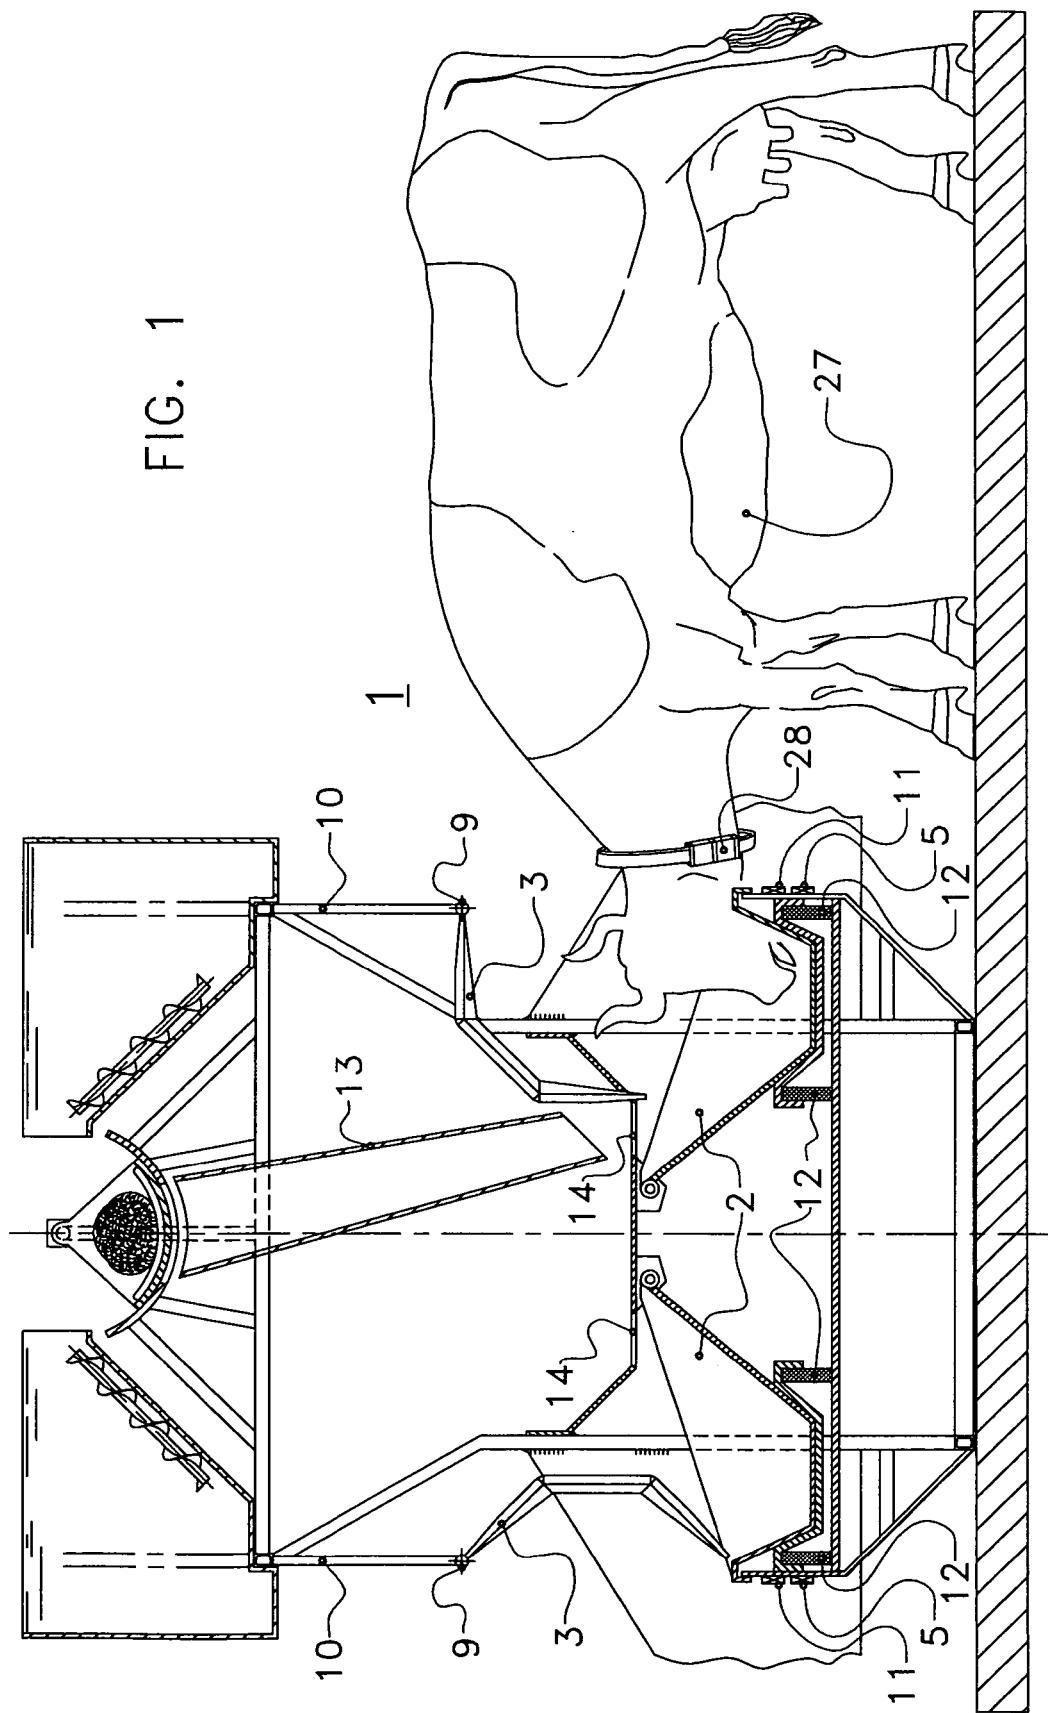
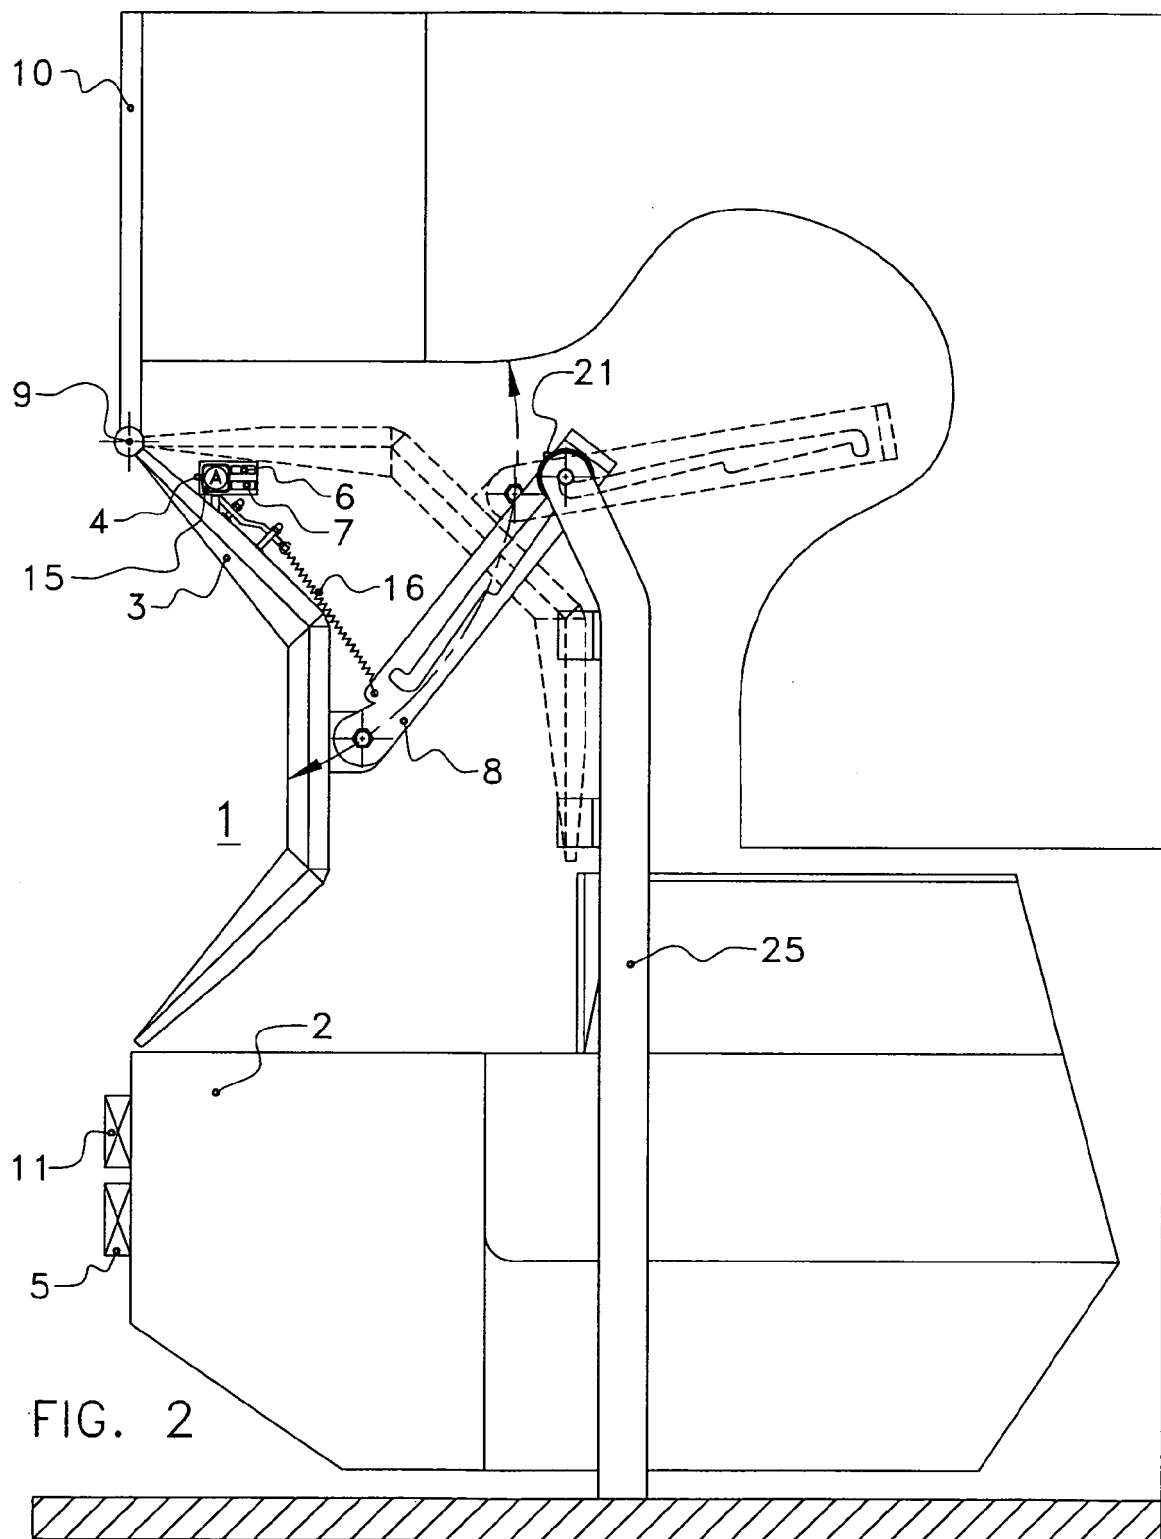


FIG. 1



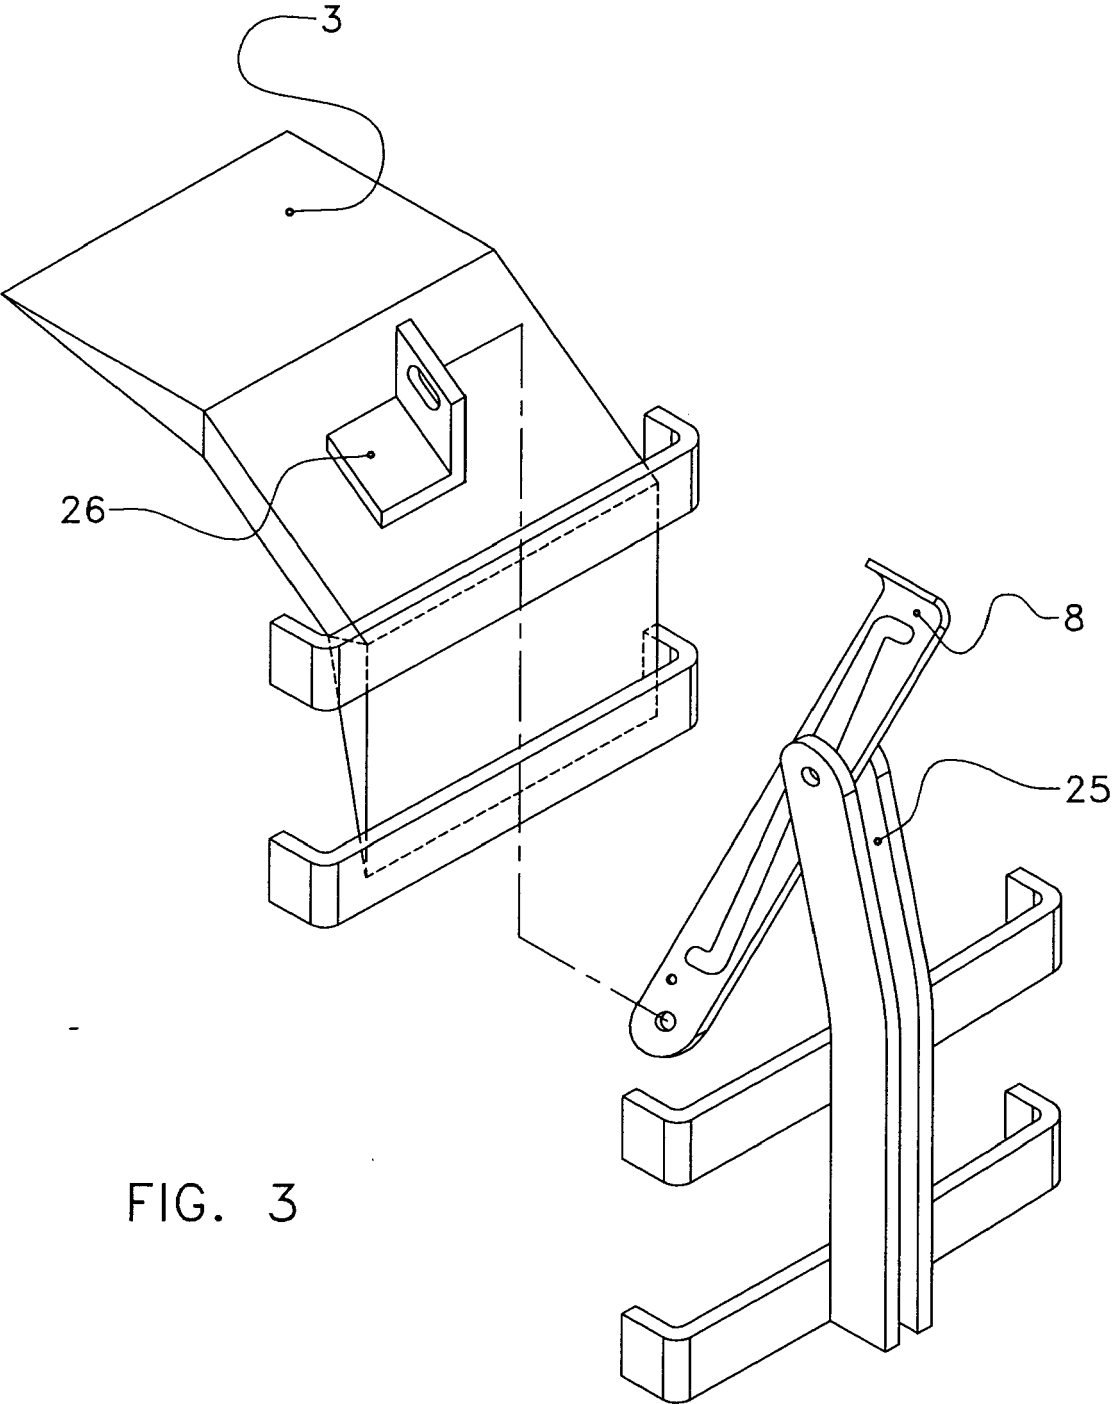


FIG. 3



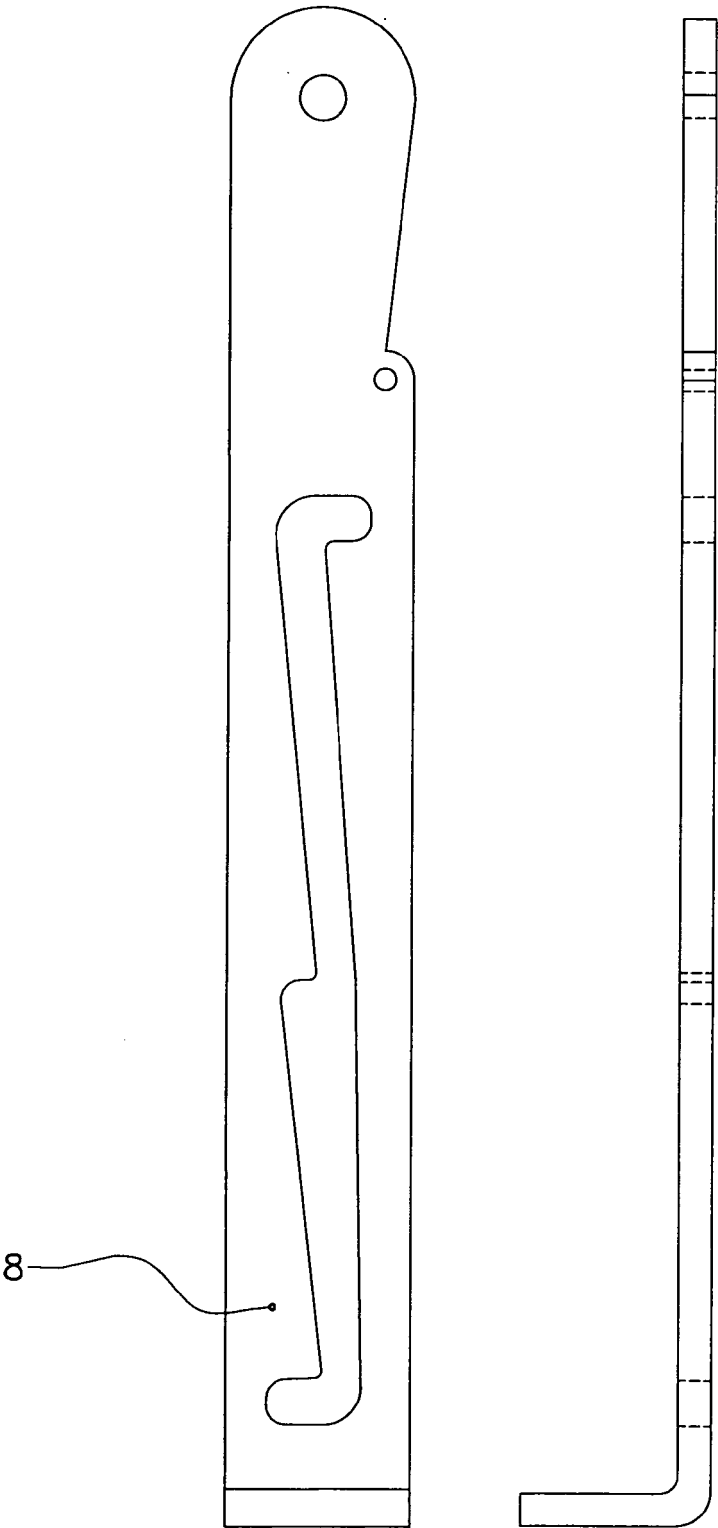


FIG. 4

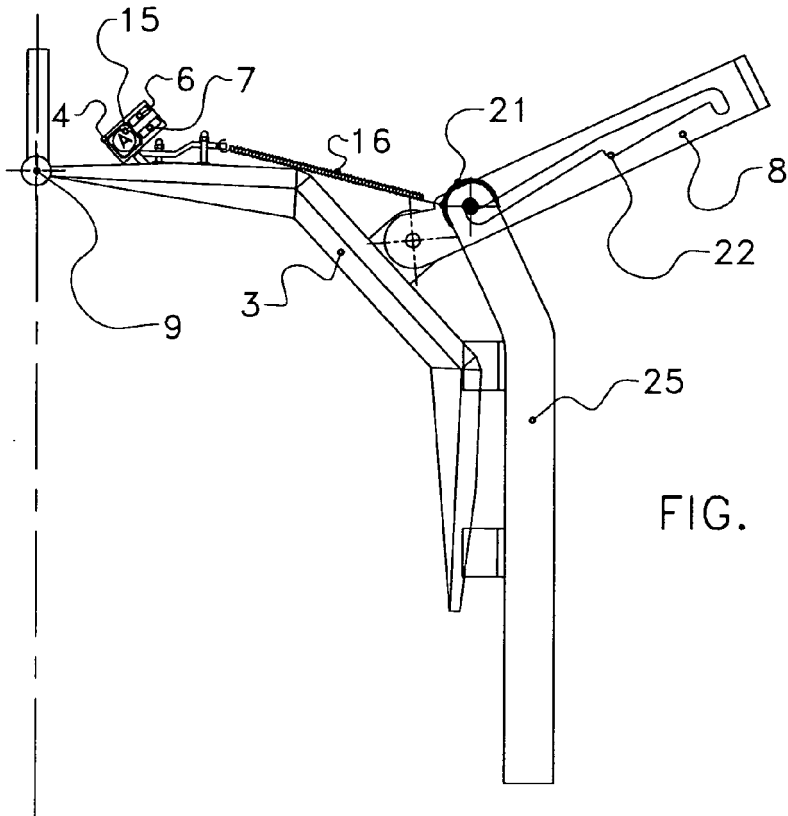


FIG. 5A

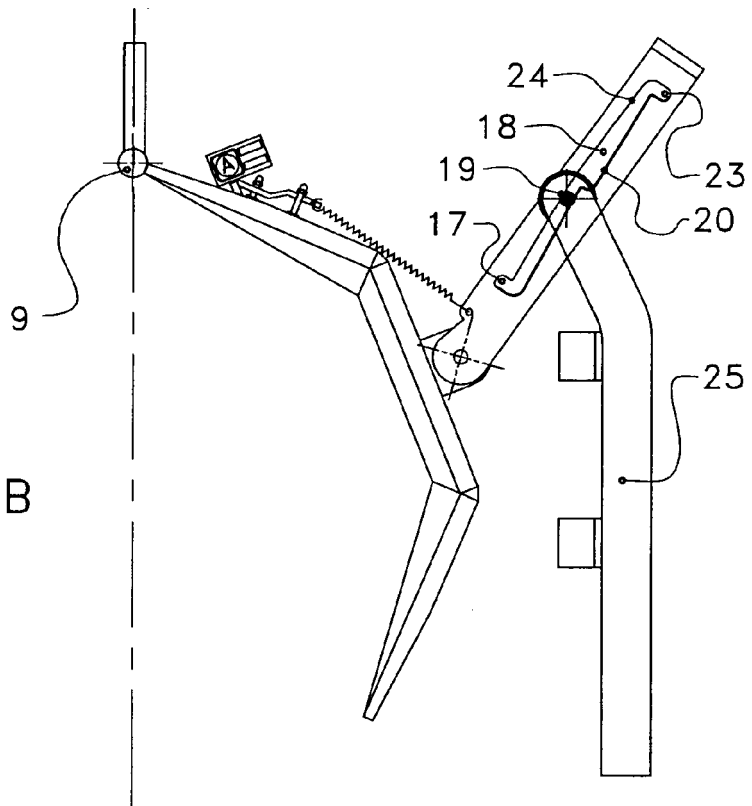


FIG. 5B

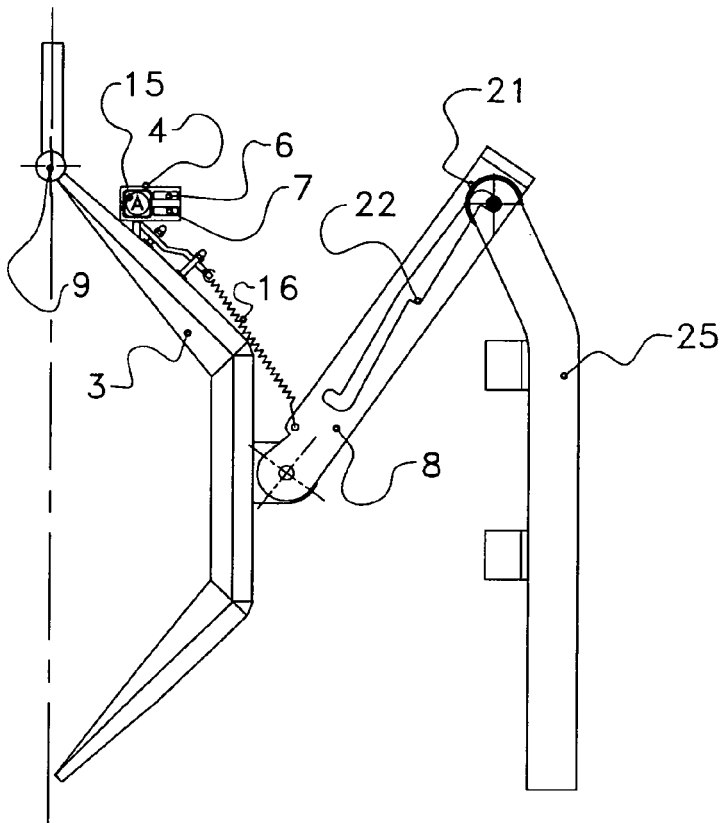


FIG. 5C

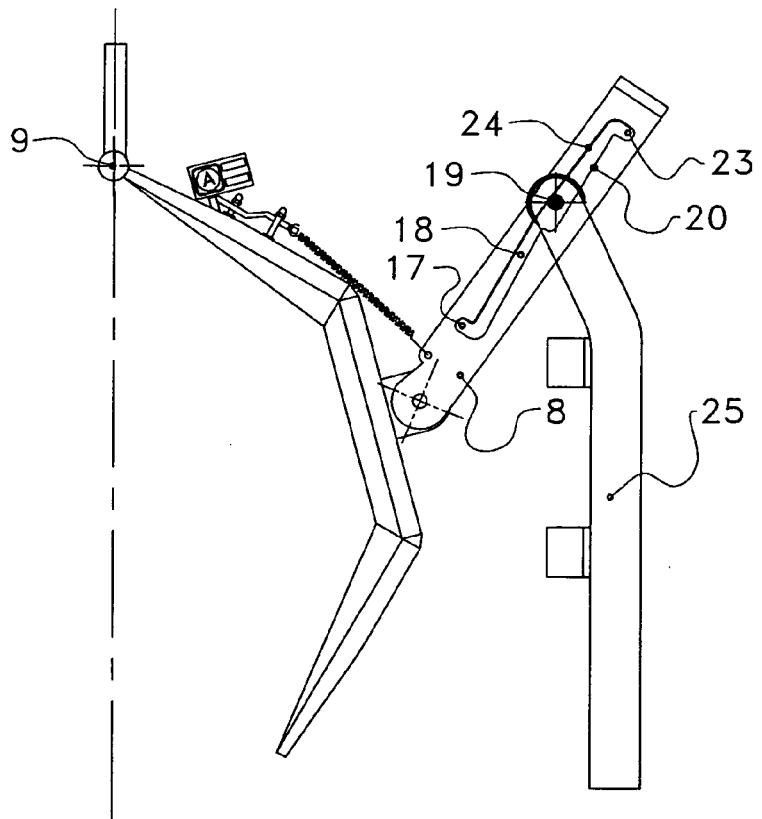


FIG. 5D



DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X,D	DE 87 16 831 U1 (KIMMEYER, ANTONIUS, 4722 ENNIGERLOH, DE) 31 March 1988 (1988-03-31)	1,4-6,9,10	INV. A01K5/02
Y	* page 3, line 10 - page 5, line 22; figure 1 *	2,3,7,8	A01K11/00
Y	----- DE 33 11 050 A1 (HUETTL, GERHARD, DIPL.-ING., 8261 ASCHAU, DE) 27 September 1984 (1984-09-27)	2,3,7,8	
A	* page 6, paragraph 4; figures *	1,4-6,9,10	
A	----- US 5 315 958 A (FOERSTER ET AL) 31 May 1994 (1994-05-31) * column 4, line 46 - column 6, line 20; figures *	1-10	
	-----		
			TECHNICAL FIELDS SEARCHED (IPC)
			A01K
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 14 March 2006	Examiner A. Forjaz
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 05 07 7406

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

14-03-2006

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 8716831	U1	31-03-1988	NONE
DE 3311050	A1	27-09-1984	NONE
US 5315958	A	31-05-1994	AT 122203 T 15-05-1995
		CA 2085307 A1 16-06-1993	
		DE 4141347 A1 17-06-1993	
		DK 547304 T3 18-09-1995	
		EP 0547304 A1 23-06-1993	