



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 661 969 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

31.05.2006 Bulletin 2006/22

(51) Int Cl.:

C10M 163/00 (2006.01)

C10M 167/00 (2006.01)

C10N 10/04 (2006.01)

C10N 10/12 (2006.01)

C10N 30/04 (2006.01)

C10N 40/25 (2006.01)

(21) Application number: **05110046.9**

(22) Date of filing: **26.10.2005**

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**

Designated Extension States:

AL BA HR MK YU

(30) Priority: **30.11.2004 EP 04257400**

(71) Applicant: **Infineum International Limited**

Abingdon

Oxfordshire OX13 6BB (GB)

(72) Inventors:

- **Irving, Matthew**
Fairford,
Gloucestershire GL7 4DU (GB)
- **Arrowsmith, Stephen**
Didcot,
Oxfordshire OX11 9RA (GB)

(74) Representative: **Goddard, Frances Anna et al**

Infineum UK Ltd.

Milton Hill Business &

Technology Centre

Abingdon, Oxfordshire OX13 6BB (GB)

(54) **Lubricating oil compositions**

(57) Lubricating oil compositions having a sulfated ash content of no more than 1.0 mass %, which contain a major amount of oil of lubricating viscosity, a minor amount of calcium salicylate detergent, an amount of a magnesium-based detergent providing at least 200 ppm

of magnesium, and a basic, low molecular weight, nitrogen-containing dispersant, which compositions provide improved top ring wear protection in internal combustion engines.

EP 1 661 969 A1

Description

[0001] The present invention relates to lubricating oil compositions. More specifically, the present invention is directed to lubricating oil compositions that provide improved lubricant performance in diesel engines provided with exhaust gas recirculation (EGR) systems that have reduced levels of sulfated ash, phosphorus and sulfur (low "SAPS").

BACKGROUND OF THE INVENTION

[0002] Environmental concerns have led to continued efforts to reduce the NO_x emissions of compression ignited (diesel) internal combustion engines. The latest technology being used to reduce the NO_x emissions of diesel engines is known as exhaust gas recirculation or EGR. EGR reduces NO_x emissions by introducing non-combustible components (exhaust gas) into the incoming air-fuel charge introduced into the engine combustion chamber. This reduces peak flame temperature and NO_x generation. In addition to the simple dilution effect of the EGR, an even greater reduction in NO_x emission is achieved by cooling the exhaust gas before it is returned to the engine. The cooler intake charge allows better filling of the cylinder, and thus, improved power generation. In addition, because the EGR components have higher specific heat values than the incoming air and fuel mixture, the EGR gas further cools the combustion mixture leading to greater power generation and better fuel economy at a fixed NO_x generation level.

[0003] Diesel fuel contains sulfur. Even "low-sulfur" diesel fuel contains 300 to 400 ppm of sulfur. When the fuel is burned in the engine, this sulfur is converted to SO_x. In addition, one of the major by-products of the combustion of a hydrocarbon fuel is water vapor. Therefore, the exhaust stream contains some level of NO_x, SO_x and water vapor. In the past, the presence of these substances has not been problematic because the exhaust gases remained extremely hot, and these components were exhausted in a disassociated, gaseous state. However, when the engine is equipped with an EGR system and the exhaust gas is mixed with cooler intake air and recirculated through the engine, the water vapor can condense and react with the NO_x and SO_x components to form a mist of nitric and sulfuric acids in the EGR stream. This phenomenon is further exacerbated when the EGR stream is cooled before it is returned to the engine.

[0004] Concurrent with the development of the condensed EGR engine, there has been a continued effort to reduce the content of sulfated ash, phosphorus and sulfur in the crankcase lubricant due to both environmental concerns and to insure compatibility with pollution control devices used in combination with modern engines (e.g., three-way catalytic converters and particulate traps). In Europe, a lubricant meeting the ACEA E6 low SAPS specification must pass, *inter alia*, the "Mack T10" engine test, which measures performance in an engine having a high degree of cooled exhaust gas recirculation, and the resulting presence of an increased level of inorganic mineral acids.

[0005] Salicylate detergents are known to provide detergency that is superior to that of phenate and sulfonate-based detergents. Because of this improved detergency, the use of a salicylate detergent allows for a reduction in treat rate, and corresponding reduction in the metal content of the lubricant contributed by detergent. Thus, salicylate detergents have been favored in the formulation of low SAPS lubricating oil compositions. It has been known to use a combination of a low base number (neutral) salicylate detergent and a high base number salicylate detergent (overbased) to allow the formulators to precisely balance detergency and acid neutralization capacity, at minimum ash levels. Calcium salicylate detergents are used most commonly due to a perception that magnesium-based detergents may be the cause of certain performance debits, particularly increased bore polishing, in various industry standard tests to which lubricants are subjected.

[0006] In formulating low SAPS lubricants for the ACEA E6 category, the amount of ash contributed by detergent(s), combined with the ash contributed by the ash-containing antiwear agents in the formulation, must remain below the 1.0 mass % ash content limitation of the specification. The need to meet this stringent limitation on ash level, and provide adequate detergency performance led formulators to reduce the level of detergent overbasing. However, this reduction in the amount of overbasing reduces the acid neutralization capacity of the lubricating oil contribution. Lubricants containing reduced levels of detergent overbasing were found to provide unacceptable top-ring weight loss in the Mack T10 test. While not wishing to be bound to any specific theory, it is believed that these performance problems are due to acid corrosion in the top-groove area of the engine piston.

[0007] Therefore, it would be advantageous to identify low SAPS lubricating oil compositions that better perform in diesel engines, particularly diesel engines equipped with EGR systems. Surprisingly, it has been found that by using, in combination with calcium salicylate detergent, a relatively small amount of a magnesium-based detergent and a low molecular weight ashless nitrogen-containing dispersant, low SAPS lubricating oil compositions demonstrating excellent performance in diesel engines, particularly diesel engines provided with EGR systems, can be provided.

SUMMARY OF THE INVENTION

[0008] In accordance with a first aspect of the invention, there is provided a lubricating oil composition having a sulfated ash content of no more than 1.0 mass %, which comprises a major amount of oil of lubricating viscosity, a minor amount of calcium salicylate detergent, an amount of a magnesium-based detergent providing the lubricating oil composition

with at least 200 ppm of magnesium, and a basic low molecular weight nitrogen-containing dispersant.

[0009] In accordance with a second aspect of the invention, there is provided a lubricating oil composition, as described in the first aspect, wherein the calcium salicylate detergent is one or more overbased calcium salicylate detergents, or a combination of one or more overbased calcium salicylate detergents and one or more neutral calcium salicylate detergents.

[0010] In accordance with a third aspect of the invention, there is provided a lubricating oil composition, as described in the first or second aspect, wherein the low molecular weight dispersant is derived from an unsaturated hydrocarbon, for example, an olefinic polymer, such as polyisobutylene, having a number average molecular weight of from about 300 to about 1100, which low molecular weight dispersant has a TBN of from about 25 to about 100.

[0011] In accordance with a fourth aspect of the invention, there is provided a lubricating oil composition, as described in the first, second or third aspect, further comprising an ashless high molecular weight nitrogen-containing dispersant derived from an unsaturated hydrocarbon, for example, an olefinic polymer, such as polyisobutylene, having a number average molecular weight of from greater than 1100 to about 3000.

[0012] In accordance with a fifth aspect of the invention, there is provided a lubricating oil composition, as in any of the previously described aspects, wherein the low molecular weight dispersant provides from about 0.025 to about 0.25 mass % of nitrogen to the lubricating oil composition.

[0013] In accordance with a sixth aspect of the invention, there is provided a lubricating oil composition, as in any of the previously described aspects, wherein the dispersant contributes, in total, from about 0.10 to about 0.35 mass %, such as from about 0.125 to about 0.25 mass %, most preferably from about 0.15 to about 0.20 mass % of nitrogen to the lubricating oil composition.

[0014] In accordance with a seventh aspect of the invention, there is provided a lubricating oil composition, as described in the first, second or third aspect, wherein the lubricating oil composition has a sulfur content of no more than 0.4 mass %, preferably no more than 0.3 mass %.

[0015] In accordance with an eighth aspect of the invention, there is provided a method of operating a diesel engine provided with an exhaust gas recirculation system, which method comprises lubricating said engine with a lubricating oil composition of the first, through ninth aspects.

[0016] Other and further objects, advantages and features of the present invention will be understood by reference to the following specification.

DETAILED DESCRIPTION OF THE INVENTION

[0017] The oil of lubricating viscosity useful in the practice of the invention may range in viscosity from light distillate mineral oils to heavy lubricating oils such as gasoline engine oils, mineral lubricating oils and heavy duty diesel oils. Generally, the viscosity of the oil ranges from about 2 mm²/sec (centistokes) to about 40 mm²/sec, especially from about 3 mm²/sec to about 20 mm²/sec, most preferably from about 4 mm²/sec to about 10 mm²/sec, as measured at 100°C.

[0018] Natural oils include animal oils and vegetable oils (e.g., castor oil, lard oil); liquid petroleum oils and hydrorefined, solvent-treated or acid-treated mineral oils of the paraffinic, naphthenic and mixed paraffinic-naphthenic types. Oils of lubricating viscosity derived from coal or shale also serve as useful base oils.

[0019] Synthetic lubricating oils include hydrocarbon oils and halo-substituted hydrocarbon oils such as polymerized and interpolymers of olefins (e.g., polybutylenes, polypropylenes, propylene-isobutylene copolymers, chlorinated polybutylenes, poly(1-hexenes), poly(1-octenes), poly(1-decenes)); alkylbenzenes (e.g., dodecylbenzenes, tetradecylbenzenes, dinonylbenzenes, di(2-ethylhexyl)benzenes); polyphenyls (e.g., biphenyls, terphenyls, alkylated polyphenols); and alkylated diphenyl ethers and alkylated diphenyl sulfides and derivative, analogs and homologs thereof.

[0020] Alkylene oxide polymers and interpolymers and derivatives thereof where the terminal hydroxyl groups have been modified by esterification, etherification, etc., constitute another class of known synthetic lubricating oils. These are exemplified by polyoxyalkylene polymers prepared by polymerization of ethylene oxide or propylene oxide, and the alkyl and aryl ethers of polyoxyalkylene polymers (e.g., methyl-polyiso-propylene glycol ether having a molecular weight of 1000 or diphenyl ether of poly-ethylene glycol having a molecular weight of 1000 to 1500); and mono- and polycarboxylic esters thereof, for example, the acetic acid esters, mixed C₃-C₈ fatty acid esters and C₁₃ Oxo acid diester of tetraethylene glycol.

[0021] Another suitable class of synthetic lubricating oils comprises the esters of dicarboxylic acids (e.g., phthalic acid, succinic acid, alkyl succinic acids and alkenyl succinic acids, maleic acid, azelaic acid, suberic acid, sebacic acid, fumaric acid, adipic acid, linoleic acid dimer, malonic acid, alkylmalonic acids, alkenyl malonic acids) with a variety of alcohols (e.g., butyl alcohol, hexyl alcohol, dodecyl alcohol, 2-ethylhexyl alcohol, ethylene glycol, diethylene glycol monoether, propylene glycol). Specific examples of such esters includes dibutyl adipate, di(2-ethylhexyl) sebacate, di-n-hexyl fumarate, dioctyl sebacate, diisooctyl azelate, diisodecyl azelate, dioctyl phthalate, didecyl phthalate, dieicosyl sebacate, the 2-ethylhexyl diester of linoleic acid dimer, and the complex ester formed by reacting one mole of sebacic acid with two moles of tetraethylene glycol and two moles of 2-ethylhexanoic acid.

[0022] Esters useful as synthetic oils also include those made from C₅ to C₁₂ monocarboxylic acids and polyols and polyol esters such as neopentyl glycol, trimethylolpropane, pentaerythritol, dipentaerythritol and tripentaerythritol.

[0023] Silicon-based oils such as the polyalkyl-, polyaryl-, polyalkoxy- or polyaryloxysilicone oils and silicate oils comprise another useful class of synthetic lubricants; such oils include tetraethyl silicate, tetraisopropyl silicate, tetra-(2-ethylhexyl)silicate, tetra-(4-methyl-2-ethylhexyl)silicate, tetra-(p-tert-butyl-phenyl) silicate, hexa-(4-methyl-2-ethylhexyl)disiloxane, poly(methyl)siloxanes and poly(methylphenyl)siloxanes. Other synthetic lubricating oils include liquid esters of phosphorous-containing acids (e.g., tricresyl phosphate, trioctyl phosphate, diethyl ester of decylphosphonic acid) and polymeric tetrahydrofurans.

[0024] The oil of lubricating viscosity may comprise a Group I, Group II, Group III, Group IV or Group V base stocks or base oil blends of the aforementioned base stocks. Preferably, the oil of lubricating viscosity is a Group II, Group III, Group IV or Group V base stock, or a mixture thereof, or a mixture of a Group I base stock and one or more a Group II, Group III, Group IV or Group V base stock. The base stock, or base stock blend preferably has a saturate content of at least 65%, more preferably at least 75%, such as at least 85%. Preferably, the basestock or basestock blend is a Group III or higher basestock or mixture thereof, or a mixture of a Group II basestock and a Group III or higher basestock or mixture thereof. Most preferably, the base stock, or base stock blend, has a saturate content of greater than 90%. Preferably, the oil or oil blend will have a sulfur content of less than 1 mass %, preferably less than 0.6 mass %, most preferably less than 0.4 mass %, such as less than 0.3 mass %.

[0025] Preferably the volatility of the oil or oil blend, as measured by the Noack test (ASTM D5880), is less than or equal to 30 mass %, preferably less than or equal to 25 mass %, more preferably less than or equal to 20 mass %, most preferably less than or equal 16 mass %. Preferably, the viscosity index (VI) of the oil or oil blend is at least 85, preferably at least 100, most preferably from about 105 to 140.

[0026] Definitions for the base stocks and base oils in this invention are the same as those found in the American Petroleum Institute (API) publication "Engine Oil Licensing and Certification System", Industry Services Department, Fourteenth Edition, December 1996, Addendum 1, December 1998. Said publication categorizes base stocks as follows:

- a) Group I base stocks contain less than 90 percent saturates and/or greater than 0.03 percent sulfur and have a viscosity index greater than or equal to 80 and less than 120 using the test methods specified in Table 1.
- b) Group II base stocks contain greater than or equal to 90 percent saturates and less than or equal to 0.03 percent sulfur and have a viscosity index greater than or equal to 80 and less than 120 using the test methods specified in Table 1.
- c) Group III base stocks contain greater than or equal to 90 percent saturates and less than or equal to 0.03 percent sulfur and have a viscosity index greater than or equal to 120 using the test methods specified in Table 1.
- d) Group IV base stocks are polyalphaolefins (PAO).
- e) Group V base stocks include all other base stocks not included in Group I, II, III, or IV.

Table 1 - Analytical Methods for Base Stock

Property	Test Method
Saturates	ASTM D 2007
Viscosity Index	ASTM D 2270
Sulfur	ASTM D 2622
	ASTM D 4294
	ASTM D 4927
	ASTM D 3120

[0027] Metal-containing or ash-forming detergents function as both detergents to reduce or remove deposits and as acid neutralizers or rust inhibitors, thereby reducing wear and corrosion and extending engine life. Detergents generally comprise a polar head with a long hydrophobic tail. The polar head comprises a metal salt of an acidic organic compound. The salts may contain a substantially stoichiometric amount of the metal in which case they are usually described as normal or neutral salts, and would typically have a total base number or TBN (as can be measured by ASTM D2896) of from 0 to 80. A large amount of a metal base may be incorporated by reacting excess metal compound (e.g., an oxide or hydroxide) with an acidic gas (e.g., carbon dioxide). The resulting overbased detergent comprises neutralized detergent as the outer layer of a metal base (e.g. carbonate) micelle. Such overbased detergents may have a TBN of 150 or greater, and typically will have a TBN of from 250 to 450 or more.

[0028] Detergents that may be used include oil-soluble neutral and overbased sulfonates, phenates, sulfurized phenates, thiophosphonates, salicylates, and naphthenates and other oil-soluble carboxylates of a metal, particularly the alkali or alkaline earth metals, e.g., barium, sodium, potassium, lithium, calcium, and magnesium. The most commonly used metals are calcium and magnesium, which may both be present in detergents used in a lubricant, and mixtures of calcium and/or magnesium with sodium. Particularly convenient metal detergents are neutral and overbased calcium sulfonates having TBN of from 20 to 450, neutral and overbased calcium phenates and sulfurized phenates having TBN of from 50 to 450 and neutral and overbased magnesium or calcium salicylates having a TBN of from 20 to 450. Combinations of detergents, whether overbased or neutral or both, may be used.

[0029] Sulfonates may be prepared from sulfonic acids which are typically obtained by the sulfonation of alkyl substituted aromatic hydrocarbons such as those obtained from the fractionation of petroleum or by the alkylation of aromatic hydrocarbons. Examples included those obtained by alkylating benzene, toluene, xylene, naphthalene, diphenyl or their halogen derivatives such as chlorobenzene, chlorotoluene and chloronaphthalene. The alkylation may be carried out in the presence of a catalyst with alkylating agents having from about 3 to more than 70 carbon atoms. The alkaryl sulfonates usually contain from about 9 to about 80 or more carbon atoms, preferably from about 16 to about 60 carbon atoms per alkyl substituted aromatic moiety.

[0030] The oil soluble sulfonates or alkaryl sulfonic acids may be neutralized with oxides, hydroxides, alkoxides, carbonates, carboxylate, sulfides, hydrosulfides, nitrates, borates and ethers of the metal. The amount of metal compound is chosen having regard to the desired TBN of the final product but typically ranges from about 100 to 220 mass % (preferably at least 125 mass %) of that stoichiometrically required.

[0031] Metal salts of phenols and sulfurized phenols are prepared by reaction with an appropriate metal compound such as an oxide or hydroxide and neutral or overbased products may be obtained by methods well known in the art. Sulfurized phenols may be prepared by reacting a phenol with sulfur or a sulfur containing compound such as hydrogen sulfide, sulfur monohalide or sulfur dihalide, to form products which are generally mixtures of compounds in which 2 or more phenols are bridged by sulfur containing bridges.

[0032] Carboxylate detergents, e.g., salicylates, can be prepared by reacting an aromatic carboxylic acid with an appropriate metal compound such as an oxide or hydroxide and neutral or overbased products may be obtained by methods well known in the art. The aromatic moiety of the aromatic carboxylic acid can contain heteroatoms, such as nitrogen and oxygen. Preferably, the moiety contains only carbon atoms; more preferably the moiety contains six or more carbon atoms; for example benzene is a preferred moiety. The aromatic carboxylic acid may contain one or more aromatic moieties, such as one or more benzene rings, either fused or connected via alkylene bridges. The carboxylic moiety may be attached directly or indirectly to the aromatic moiety. Preferably the carboxylic acid group is attached directly to a carbon atom on the aromatic moiety, such as a carbon atom on the benzene ring. More preferably, the aromatic moiety also contains a second functional group, such as a hydroxy group or a sulfonate group, which can be attached directly or indirectly to a carbon atom on the aromatic moiety.

[0033] Preferred examples of aromatic carboxylic acids are salicylic acids and sulfurized derivatives thereof, such as hydrocarbyl substituted salicylic acid and derivatives thereof. Processes for sulfurizing, for example a hydrocarbyl - substituted salicylic acid, are known to those skilled in the art. Salicylic acids are typically prepared by carboxylation, for example, by the Kolbe - Schmitt process, of phenoxides, and in that case, will generally be obtained, normally in a diluent, in admixture with uncarboxylated phenol.

[0034] Preferred substituents in oil - soluble salicylic acids are alkyl substituents. In alkyl - substituted salicylic acids, the alkyl groups advantageously contain 5 to 100, preferably 9 to 30, especially 14 to 20, carbon atoms. Where there is more than one alkyl group, the average number of carbon atoms in all of the alkyl groups is preferably at least 9 to ensure adequate oil solubility.

[0035] Detergents generally useful in the formulation of lubricating oil compositions also include "hybrid" detergents formed with mixed surfactant systems, e.g., phenate/salicylates, sulfonate/phenates, sulfonate/salicylates, sulfonates/phenates/salicylates, as described, for example, in pending U.S. Patent Application Nos. 09/180,435 and 09/180,436 and U.S. Patent Nos. 6,153,565 and 6,281,179.

[0036] Lubricating oil compositions of the present invention comprise calcium salicylate detergent including at least one overbased calcium salicylate detergent or a combination of at least one calcium salicylate detergent and at least one neutral (TBN below 100) calcium salicylate detergent. Preferably, calcium salicylate detergent is used in an amount providing the lubricating oil composition with from about 0.10 to about 0.30 mass %, such as from about 0.15 to about 0.25 mass %, more preferably from about 0.18 to about 0.22 mass % of calcium, measured as sulfated ash (SASH) content. Preferably, calcium salicylate detergent contributes from about 5 to about 90 %, such as from about 45 to about 90 % of the total TBN from detergent, more preferably from about 60 to about 85 such as from about 70 to about 80 % of the total TBN of the lubricating oil composition from detergent. Preferably, calcium salicylate detergent contributes from about 25 to about 55 % of the total TBN, such as from about 30 to about 50 % of the total TBN, more preferably from about 30 to about 45 % of the total TBN of the lubricating oil composition.

[0037] Lubricating oil compositions of the present invention further comprise at least one magnesium-based detergent,

which may be a salicylate detergent, a sulfonate detergent, a phenate detergent, a hybrid mixed surfactant detergent, or a combination thereof. Preferably, the magnesium detergent is not a saligenin or salixarate detergent. Preferably, magnesium detergent is present in an amount providing the lubricating oil composition with greater than 0.02 mass % (200 ppm), such as greater than 0.03 mass % (400 ppm), of magnesium, measured as sulfated ash (SASH) content. Preferably, magnesium detergent is present in an amount providing the lubricating oil composition with no more than 0.125 mass % (1250 ppm) of magnesium, such as from about 300 to about 1000, more preferably from about 400 to 700 ppm of magnesium, measured as sulfated ash (SASH) content. Preferably, the magnesium detergent has, or magnesium detergents have on average, a TBN of at least 100, preferably at least 300, such as from about 300 to 550, more preferably at least 400, such as from about 400 to about 550. Preferably, magnesium detergent contributes from about 10 to about 55 %, such as from about 15 to about 40 % of the total TBN from detergent, more preferably from about 18 to about 25 % of the total TBN of the lubricating oil composition from detergent. Preferably, magnesium detergent contributes from about 5 to about 40 %, such as from about 7.5 to about 30 % of the total TBN, more preferably from about 10 to about 20 % of the total TBN of the lubricating oil composition.

[0038] Preferably, detergent in total is used in an amount providing the lubricating oil composition with from about 0.35 to about 1.0 mass %, such as from about 0.5 to about 0.9 mass %, more preferably from about 0.6 to about 0.85 mass % of sulfated ash (SASH). Preferably, the lubricating oil composition has an overall TBN contribution of from about 6 to about 10, such as from about 6.5 to about 9, more preferably from about 7 to about 8, from detergent.

[0039] Traditionally, in lubricating oil compositions developed for this category, detergents comprise from about 0.5 to about 10 mass %, preferably from about 2.5 to about 7.5 mass %, most preferably from about 4 to about 6.5 mass % of a lubricating oil composition formulated for use in a heavy duty diesel engine.

[0040] Dispersants, generally, are used to maintain in suspension materials resulting from oxidation during use that are insoluble in oil, thus preventing sludge flocculation and precipitation, or deposition on metal parts. Nitrogen-containing ashless (metal-free) dispersants are basic, and contribute to the TBN of a lubricating oil composition to which they are added, without introduction of additional sulfated ash. When used as an ashless source of TBN, low molecular weight nitrogen-containing detergents (derived from a polymeric backbone having a number average molecular weight (M_n) of less than or equal to 1100) are preferred. The molecular weight of a dispersant is generally expressed in terms of the molecular weight of the polyalkenyl moiety as the precise molecular weight range of the dispersant depends on numerous parameters including the type of polymer used to derive the dispersant, the number of functional groups, and the type of nucleophilic group employed. Low molecular weight ashless dispersants provide maximum TBN per unit mass and thus, provide the desired TBN contribution at a minimum additive treat rate.

[0041] Low molecular weight dispersants useful in the context of the present invention include the range of nitrogen-containing, ashless (metal-free) dispersants known to be effective to reduce formation of deposits upon use in gasoline and diesel engines, when added to lubricating oils and comprise an oil soluble polymeric long chain backbone having functional groups capable of associating with particles to be dispersed. Typically, such dispersants have amine, amine-alcohol or amide polar moieties attached to the polymer backbone, often via a bridging group. The ashless dispersant may be, for example, selected from oil soluble salts, esters, amino-esters, amides, imides and oxazolines of long chain hydrocarbon-substituted mono- and polycarboxylic acids or anhydrides thereof; thiocarboxylate derivatives of long chain hydrocarbons; long chain aliphatic hydrocarbons having polyamine moieties attached directly thereto; and Mannich condensation products formed by condensing a long chain substituted phenol with formaldehyde and polyalkylene polyamine.

[0042] Generally, each mono- or dicarboxylic acid-producing moiety will react with a nucleophilic group (amine or amide) and the number of functional groups in the polyalkenyl-substituted carboxylic acylating agent will determine the number of nucleophilic groups in the finished dispersant.

[0043] The polyalkenyl moiety of the low molecular weight dispersant of the present invention has a number average molecular weight of from about 300 to about 1100, preferably between 400 and 1000, such as between 400 and 950. Preferably, the low molecular weight dispersant will have a TBN of from about 20 to about 100, such as from about 25 to about 95, more preferably from about 40 to about 90. Preferably, the low molecular weight dispersant will contribute from about 5 to about 25 %, such as from about 8 to about 20%, more preferably from about 10 to about 15 of the total TBN of the lubricating oil composition. Preferably, the low molecular weight dispersant will be present in an amount providing the lubricating oil composition with from about 0.025 to about 0.25 mass %, such as from about 0.04 to about 0.15 mass %, more preferably from about 0.06 to about 0.10 mass % of nitrogen. Preferably, the basic nitrogen-containing low molecular weight dispersant is present in an amount providing the lubricating oil composition with from about 20 to about 60%, such as from about 35 to about 55%, more preferably from about 40 to about 50 % of the total amount of dispersant nitrogen.

[0044] Suitable hydrocarbons or polymers employed in the formation of the dispersants of the present invention include homopolymers, interpolymers or lower molecular weight hydrocarbons. One family of such polymers comprise polymers of ethylene and/or at least one C_3 to C_{28} alpha-olefin having the formula $H_2C=CHR^1$ wherein R^1 is straight or branched chain alkyl radical comprising 1 to 26 carbon atoms and wherein the polymer contains carbon-to-carbon unsaturation, preferably a high degree of terminal ethenylidene unsaturation. Preferably, such polymers comprise interpolymers of

ethylene and at least one alpha-olefin of the above formula, wherein R¹ is alkyl of from 1 to 18 carbon atoms, and more preferably is alkyl of from 1 to 8 carbon atoms, and more preferably still of from 1 to 2 carbon atoms. Therefore, useful alpha-olefin monomers and comonomers include, for example, propylene, butene-1, hexene-1, octene-1, 4-methylpentene-1, decene-1, dodecene-1, tridecene-1, tetradecene-1, pentadecene-1, hexadecene-1, heptadecene-1, octadecene-1, nonadecene-1, and mixtures thereof (e.g., mixtures of propylene and butene-1, and the like). Exemplary of such polymers are propylene homopolymers, butene-1 homopolymers, ethylene-propylene copolymers, ethylene-butene-1 copolymers, propylene-butene copolymers and the like, wherein the polymer contains at least some terminal and/or internal unsaturation. Preferred polymers are unsaturated copolymers of ethylene and propylene and ethylene and butene-1. The interpolymers of this invention may contain a minor amount, e.g. 0.5 to 5 mole % of a C₄ to C₁₈ non-conjugated diolefin comonomer. However, it is preferred that the polymers of this invention comprise only alpha-olefin homopolymers, interpolymers of alpha-olefin comonomers and interpolymers of ethylene and alpha-olefin comonomers. The molar ethylene content of the polymers employed in this invention is preferably in the range of 0 to 80 %, and more preferably 0 to 60 %. When propylene and/or butene-1 are employed as comonomer(s) with ethylene, the ethylene content of such copolymers is most preferably between 15 and 50 %, although higher or lower ethylene contents may be present.

[0045] These polymers may be prepared by polymerizing alpha-olefin monomer, or mixtures of alpha-olefin monomers, or mixtures comprising ethylene and at least one C₃ to C₂₈ alpha-olefin monomer, in the presence of a catalyst system comprising at least one metallocene (e.g., a cyclopentadienyl-transition metal compound) and an alumoxane compound. Using this process, a polymer in which 95 % or more of the polymer chains possess terminal ethenylidene-type unsaturation can be provided. The percentage of polymer chains exhibiting terminal ethenylidene unsaturation may be determined by FTIR spectroscopic analysis, titration, or C¹³ NMR. Interpolymers of this latter type may be characterized by the formula POLY-C(R¹)=CH₂ wherein R¹ is C₁ to C₂₆ alkyl, preferably C₁ to C₁₈ alkyl, more preferably C₁ to C₈ alkyl, and most preferably C₁ to C₂ alkyl, (e.g., methyl or ethyl) and wherein POLY represents the polymer chain. The chain length of the R¹ alkyl group will vary depending on the comonomer(s) selected for use in the polymerization. A minor amount of the polymer chains can contain terminal ethenyl, i.e., vinyl, unsaturation, i.e. POLY-CH=CH₂, and a portion of the polymers can contain internal monounsaturations, e.g. POLY-CH=CH(R¹), wherein R¹ is as defined above. These terminally unsaturated interpolymers may be prepared by known metallocene chemistry and may also be prepared as described in U.S. Patent Nos. 5,498,809; 5,663,130; 5,705,577; 5,814,715; 6,022,929 and 6,030,930.

[0046] Another useful class of polymers is polymers prepared by cationic polymerization of isobutene, styrene, and the like. Common polymers from this class include polyisobutenes obtained by polymerization of a C₄ refinery stream having a butene content of about 35 to about 75 mass %, and an isobutene content of about 30 to about 60 mass %, in the presence of a Lewis acid catalyst, such as aluminum trichloride or boron trifluoride. A preferred source of monomer for making poly-n-butenes is petroleum feedstreams such as Raffinate II. These feedstocks are disclosed in the art such as in U.S. Patent No. 4,952,739. Polyisobutylene is a most preferred backbone of the present invention because it is readily available by cationic polymerization from butene streams (e.g., using AlCl₃ or BF₃ catalysts). Such polyisobutylenes generally contain residual unsaturation in amounts of about one ethylenic double bond per polymer chain, positioned along the chain. A preferred embodiment utilizes polyisobutylene prepared from a pure isobutylene stream or a Raffinate I stream to prepare reactive isobutylene polymers with terminal vinylidene olefins. Preferably, these polymers, referred to as highly reactive polyisobutylene (HR-PIB), have a terminal vinylidene content of at least 65%, e.g., 70%, more preferably at least 80%, most preferably, at least 85%. The preparation of such polymers is described, for example, in U.S. Patent No. 4,152,499. HR-PIB is known and HR-PIB is commercially available under the tradenames Glissopal™ (from BASF) and Ultravis™ (from BP-Amoco).

[0047] The polyalkenyl moiety from which the dispersants are derived preferably have a narrow molecular weight distribution (MWD), also referred to as polydispersity, as determined by the ratio of weight average molecular weight (M_w) to number average molecular weight (M_n). Specifically, polymers from which the dispersants of the present invention are derived have a M_w/M_n of from about 1.5 to about 2.0, preferably from about 1.5 to about 1.9, most preferably from about 1.6 to about 1.8.

[0048] Polyisobutylene polymers that may be employed are generally based on a hydrocarbon chain of from about 700 to 3000. Methods for making polyisobutylene are known. Polyisobutylene can be functionalized by halogenation (e.g. chlorination), the thermal "ene" reaction, or by free radical grafting using a catalyst (e.g. peroxide), as described below.

[0049] The hydrocarbon or polymer backbone can be functionalized, e.g., with carboxylic acid producing moieties (preferably acid or anhydride moieties) selectively at sites of carbon-to-carbon unsaturation on the polymer or hydrocarbon chains, or randomly along chains using any of the three processes mentioned above or combinations thereof, in any sequence.

[0050] Processes for reacting polymeric hydrocarbons with unsaturated carboxylic acids, anhydrides or esters and the preparation of derivatives from such compounds are disclosed in U.S. Patent Nos. 3,087,936; 3,172,892; 3,215,707; 3,231,587; 3,272,746; 3,275,554; 3,381,022; 3,442,808; 3,565,804; 3,912,764; 4,110,349; 4,234,435; 5,777,025; 5,891,953; as well as EP 0 382 450 B1; CA-1,335,895 and GB-A-1,440,219. The polymer or hydrocarbon may be func-

tionalized, for example, with carboxylic acid producing moieties (preferably acid or anhydride) by reacting the polymer or hydrocarbon under conditions that result in the addition of functional moieties or agents, i.e., acid, anhydride, ester moieties, etc., onto the polymer or hydrocarbon chains primarily at sites of carbon-to-carbon unsaturation (also referred to as ethylenic or olefinic unsaturation) using the halogen assisted functionalization (e.g. chlorination) process or the thermal "ene" reaction.

[0051] Selective functionalization can be accomplished by halogenating, e.g., chlorinating or brominating the unsaturated α -olefin polymer to about 1 to 8 mass %, preferably 3 to 7 mass % chlorine, or bromine, based on the weight of polymer or hydrocarbon, by passing the chlorine or bromine through the polymer at a temperature of 60 to 250°C, preferably 110 to 160°C, e.g., 120 to 140°C, for about 0.5 to 10, preferably 1 to 7 hours. The halogenated polymer or hydrocarbon (hereinafter backbone) is then reacted with sufficient monounsaturated reactant capable of adding the required number of functional moieties to the backbone, e.g., monounsaturated carboxylic reactant, at 100 to 250°C, usually about 180°C to 235°C, for about 0.5 to 10, e.g., 3 to 8 hours, such that the product obtained will contain the desired number of moles of the monounsaturated carboxylic reactant per mole of the halogenated backbones. Alternatively, the backbone and the monounsaturated carboxylic reactant are mixed and heated while adding chlorine to the hot material.

[0052] While chlorination normally helps increase the reactivity of starting olefin polymers with monounsaturated functionalizing reactant, it is not necessary with some of the polymers or hydrocarbons contemplated for use in the present invention, particularly those preferred polymers or hydrocarbons which possess a high terminal bond content and reactivity. Preferably, therefore, the backbone and the monounsaturated functionality reactant, e.g., carboxylic reactant, are contacted at elevated temperature to cause an initial thermal "ene" reaction to take place. Ene reactions are known.

[0053] The hydrocarbon or polymer backbone can be functionalized by random attachment of functional moieties along the polymer chains by a variety of methods. For example, the polymer, in solution or in solid form, may be grafted with the monounsaturated carboxylic reactant, as described above, in the presence of a free-radical initiator. When performed in solution, the grafting takes place at an elevated temperature in the range of about 100 to 260°C, preferably 120 to 240°C. Preferably, free-radical initiated grafting would be accomplished in a mineral lubricating oil solution containing, e.g., 1 to 50 mass %, preferably 5 to 30 mass % polymer based on the initial total oil solution.

[0054] The free-radical initiators that may be used are peroxides, hydroperoxides, and azo compounds, preferably those that have a boiling point greater than about 100°C and decompose thermally within the grafting temperature range to provide free-radicals. Representative of these free-radical initiators are azobutyronitrile, 2,5-dimethylhex-3-ene-2, 5-bis-tertiary-butyl peroxide and dicumene peroxide. The initiator, when used, typically is used in an amount of between 0.005 mass % and 1 mass %, based on the weight of the reaction mixture solution. Typically, the aforesaid monounsaturated carboxylic reactant material and free-radical initiator are used in a weight ratio range of from about 1.0:1 to 30:1, preferably 3:1 to 6:1. The grafting is preferably carried out in an inert atmosphere, such as under nitrogen blanketing. The resulting grafted polymer is characterized by having carboxylic acid (or ester or anhydride) moieties randomly attached along the polymer chains: it being understood, of course, that some of the polymer chains remain ungrafted. The free radical grafting described above can be used for the other polymers and hydrocarbons of the present invention.

[0055] The preferred monounsaturated reactants that are used to functionalize the backbone comprise mono- and dicarboxylic acid material, i.e., acid, anhydride, or acid ester material, including (i) monounsaturated C_4 to C_{10} dicarboxylic acid wherein (a) the carboxyl groups are vicinyl, (i.e., located on adjacent carbon atoms) and (b) at least one, preferably both, of said adjacent carbon atoms are part of said mono unsaturation; (ii) derivatives of (i) such as anhydrides or C_1 to C_5 alcohol derived mono- or diesters of (i); (iii) monounsaturated C_3 to C_{10} monocarboxylic acid wherein the carbon-carbon double bond is conjugated with the carboxy group, i.e., of the structure $-C=C-CO-$; and (iv) derivatives of (iii) such as C_1 to C_5 alcohol derived mono- or diesters of (iii). Mixtures of monounsaturated carboxylic materials (i) - (iv) also may be used. Upon reaction with the backbone, the monounsaturated of the monounsaturated carboxylic reactant becomes saturated. Thus, for example, maleic anhydride becomes backbone-substituted succinic anhydride, and acrylic acid becomes backbone-substituted propionic acid. Exemplary of such monounsaturated carboxylic reactants are fumaric acid, itaconic acid, maleic acid, maleic anhydride, chloromaleic acid, chloromaleic anhydride, acrylic acid, methacrylic acid, crotonic acid, cinnamic acid, and lower alkyl (e.g., C_1 to C_4 alkyl) acid esters of the foregoing, e.g., methyl maleate, ethyl fumarate, and methyl fumarate.

[0056] To provide the required functionality, the monounsaturated carboxylic reactant, preferably maleic anhydride, typically will be used in an amount ranging from about equimolar amount to about 100 mass % excess, preferably 5 to 50 mass % excess, based on the moles of polymer or hydrocarbon. Unreacted excess monounsaturated carboxylic reactant can be removed from the final dispersant product by, for example, stripping, usually under vacuum, if required.

[0057] The functionalized oil-soluble polymeric hydrocarbon backbone is then derivatized with a nitrogen-containing nucleophilic reactant, such as an amine, aminoalcohol, amide, or mixture thereof, to form a corresponding derivative. Amine compounds are preferred. Useful amine compounds for derivatizing functionalized polymers comprise at least one amine and can comprise one or more additional amine or other reactive or polar groups. These amines may be hydrocarbyl amines or may be predominantly hydrocarbyl amines in which the hydrocarbyl group includes other groups, e.g., hydroxy groups, alkoxy groups, amide groups, nitriles, imidazoline groups, and the like. Particularly useful amine compounds include mono- and polyamines, e.g., polyalkene and polyoxyalkylene polyamines of about 2 to 60, such as 2 to 40 (e.g., 3 to 20) total carbon

atoms having about 1 to 12, such as 3 to 12, preferably 3 to 9, most preferably from about 6 to about 7 nitrogen atoms per molecule. Mixtures of amine compounds may advantageously be used, such as those prepared by reaction of alkylene dihalide with ammonia. Preferred amines are aliphatic saturated amines, including, for example, 1,2-diaminoethane; 1,3-diaminopropane; 1,4-diaminobutane; 1,6-diaminohexane; polyethylene amines such as diethylene triamine; triethylene tetraamine; tetraethylene pentamine; and polypropyleneamines such as 1,2-propylene diamine; and di-(1,2-propylene)triamine. Such polyamine mixtures, known as PAM, are commercially available. Particularly preferred polyamine mixtures are mixtures derived by distilling the light ends from PAM products. The resulting mixtures, known as "heavy" PAM, or HPAM, are also commercially available. The properties and attributes of both PAM and/or HPAM are described, for example, in U.S. Patent Nos. 4,938,881; 4,927,551; 5,230,714; 5,241,003; 5,565,128; 5,756,431; 5,792,730; and 5,854,186.

[0058] Other useful amine compounds include: alicyclic diamines such as 1,4-di(aminomethyl) cyclohexane and heterocyclic nitrogen compounds such as imidazolines. Another useful class of amines is the polyamido and related amidoamines as disclosed in U.S. Patent Nos. 4,857,217; 4,956,107; 4,963,275; and 5,229,022. Also usable is tris(hydroxymethyl) amino methane (TAM) as described in U.S. Patent Nos. 4,102,798; 4,113,639; 4,116,876; and UK 989,409. Dendrimers, star-like amines, and comb-structured amines may also be used. Similarly, one may use condensed amines, as described in U.S. Patent No. 5,053,152. The functionalized polymer is reacted with the amine compound using conventional techniques as described, for example, in U.S. Patent Nos. 4,234,435 and 5,229,022, as well as in EP-A-208,560.

[0059] A preferred dispersant composition is one comprising at least one polyalkenyl succinimide, which is the reaction product of a polyalkenyl substituted succinic anhydride (e.g., PIBSA) and a polyamine (PAM) that has a coupling ratio of from about 0.65 to about 1.25, preferably from about 0.8 to about 1.1, most preferably from about 0.9 to about 1. In the context of this disclosure, "coupling ratio" may be defined as a ratio of the number of succinyl groups in the PIBSA to the number of primary amine groups in the polyamine reactant.

[0060] Another class of high molecular weight ashless dispersants comprises Mannich base condensation products. Generally, these products are prepared by condensing about one mole of a long chain alkyl-substituted mono- or polyhydroxy benzene with about 1 to 2.5 moles of carbonyl compound(s) (e.g., formaldehyde and paraformaldehyde) and about 0.5 to 2 moles of polyalkylene polyamine, as disclosed, for example, in U.S. Patent No. 3,442,808. Such Mannich base condensation products may include a polymer product of a metallocene catalyzed polymerization as a substituent on the benzene group, or may be reacted with a compound containing such a polymer substituted on a succinic anhydride in a manner similar to that described in U.S. Patent No. 3,442,808. Examples of functionalized and/or derivatized olefin polymers synthesized using metallocene catalyst systems are described in the publications identified *supra*.

[0061] The dispersant(s) of the present invention are preferably non-polymeric (e.g., are mono- or bis-succinimides).

[0062] To provide adequate suspension insoluble oxidation products, sludge flocculation and precipitation, and deposits on metal parts, it is preferable to use the low molecular weight dispersant in combination with an amount of a high molecular weight nitrogen-containing dispersant. Suitable high molecular weight nitrogen-containing dispersants are dispersants as described above derived from an unsaturated hydrocarbon, preferably an olefinic polymer, more preferably a polyisobutylene. Suitable high molecular weight dispersants have a number average molecular weight of at least 1100, such as 1150 to about 3000, preferably between 1300 and 3000, preferably at least 1800, such as between 1800 and 2800, more preferably at least 2100, such as from about 2000 to 2500, and most preferably from about 2100 to about 2400.

[0063] Preferably, the lubricating oil composition comprises from about 0.10 to about 0.35 mass %, preferably from about 0.125 to about 0.25 mass %, most preferably from about 0.15 to about 0.20 mass % of total nitrogen from dispersant. Preferably, from about 0.05 to about 0.20 mass %, such as from about 0.07% to about 0.15 mass %, more preferably, from about 0.08 to about 0.12 mass% of nitrogen is contributed by the high molecular weight dispersant. Preferably, the high molecular weight nitrogen-containing dispersant provides the lubricating oil composition with from about 35 to about 80%, such as from about 45 to about 65 %, more preferably from about 50 to about 60% of the total amount of dispersant nitrogen.

[0064] In one embodiment of the invention, greater than about 50 wt. %, preferably greater than about 60%, more preferably greater than about 65%, most preferably greater than about 70% of the total amount of dispersant nitrogen contributed by high molecular weight dispersant is non-basic. The normally basic nitrogen of nitrogen-containing dispersants can be rendered non-basic by reacting the nitrogen-containing dispersant with a suitable, so-called "capping agent". Conventionally, nitrogen-containing dispersants have been "capped" to reduce the adverse effect such dispersants have on the fluoroelastomer engine seals. Numerous capping agents and methods are known. Of the known "capping agents", those that convert basic dispersant amino groups to non-basic moieties (e.g., amido or imido groups) are most suitable. The reaction of a nitrogen-containing dispersant and alkyl acetoacetate (e.g., ethyl acetoacetate (EAA)) is described, for example, in U.S. Patent Nos. 4,839,071; 4,839,072 and 4,579,675. The reaction of a nitrogen-containing dispersant and formic acid is described, for example, in U.S. Patent No. 3,185,704. The reaction product of a nitrogen-containing dispersant and other suitable capping agents are described in U.S. Patent Nos. 4,663,064 (glycolic acid); 4,612,132; 5,334,321; 5,356,552; 5,716,912; 5,849,676; 5,861,363 alkyl and alkylene carbonates, e.g., ethylene

carbonate); and 4,686,054 (maleic anhydride or succinic anhydride). The foregoing list is not exhaustive and other methods of capping nitrogen-containing dispersants to convert basic amino groups to non-basic nitrogen moieties are known to those skilled in the art. In another preferred embodiment, greater than 50 % (by mass) of the total amount of dispersant nitrogen contributed by the high molecular weight dispersant is non-basic, and high molecular weight dispersant contributes no more than about 3.5 mmols of nitrogen per 100 grams of finished oil.

[0065] In another preferred embodiment, high molecular weight dispersant provides the lubricating oil composition with from about 1 to about 7 mmols of hydroxyl (from the capping agent) per 100 grams of finished oil. The hydroxyl moieties may come from the use of a nitrogen-containing dispersant capped by reaction with certain capping agents as described above, from a non-nitrogen-containing dispersant having hydroxyl functional groups, or from a combination thereof. Of the capping agents described above, reaction of a nitrogen-containing dispersant with alkyl acetoacetates, glycolic acid and alkylene carbonates will provide the capped dispersant with hydroxyl moieties. In the case of alkyl acetoacetate, tautomeric hydroxyl groups will be provided in equilibrium with keto groups. Non-nitrogen-containing dispersants providing hydroxyl moieties include the reaction products of long chain hydrocarbon-substituted mono- and polycarboxylic acids or anhydrides and mono-, bis- and/or tris-carbonyl compounds. Such materials are described, for example, in U.S. Patent Nos. 5,057,564; 5,274,051; 5,288,811 and 6,077,915; and copending U.S. Patent Application Serial Nos. 09/476,924 and 09/781,004. Preferred are dispersant reaction products of bis-carbonyls, such as glyoxylic acid (see U.S. Patent Nos. 5,696,060; 5,696,067; 5,777,142; 5,786,490; 5,851,966 and 5,912,213); and dialkyl malonates.

[0066] The dispersant(s) of the present invention, may optionally be borated. Such dispersants can be borated by conventional means, as generally taught in U. S. Patent Nos. 3,087,936, 3,254,025 and 5,430,105. Boration of the dispersant is readily accomplished by treating an acyl nitrogen-containing dispersant with a boron compound such as boron oxide, boron halide boron acids, and esters of boron acids, in an amount sufficient to provide from about 0.1 to about 20 atomic proportions of boron for each mole of acylated nitrogen composition. Preferably, lubricating oil compositions of the present invention contain less than 400 ppm of boron, such as less than 300 ppm of boron, more preferably, less than 100 ppm, such as less than 70 ppm of boron.

[0067] In another embodiment, lubricating oil compositions of the present invention further comprise a sulfur-containing molybdenum compound. Certain, sulfur-containing, organo-molybdenum compounds are known to function as friction modifiers in lubricating oil compositions, and further provide antioxidant and antiwear credits to a lubricating oil composition. Such sulfur-containing organo-molybdenum compounds are particularly well suited for use as the sulfur-containing molybdenum compounds of the present invention. As an example of such oil soluble organo-molybdenum compounds, there may be mentioned the dithiocarbamates, dithiophosphates, dithiophosphinates, xanthates, thioxanthates, sulfides, and the like, and mixtures thereof. Particularly preferred are molybdenum dithiocarbamates, dialkyldithiophosphates, alkyl xanthates and alkylthioxanthates.

[0068] Among the molybdenum compounds useful in the compositions of this invention are organo-molybdenum compounds of the formula



and






wherein R is an organo group selected from the group consisting of alkyl, aryl, aralkyl and alkoxyalkyl, generally of from 1 to 30 carbon atoms, and preferably 2 to 12 carbon atoms and most preferably alkyl of 2 to 12 carbon atoms. Especially preferred are the dialkyldithiocarbamates of molybdenum.


[0069] Another group of organo-molybdenum compounds useful in the lubricating compositions of this invention are trinuclear molybdenum compounds, especially those of the formula $\text{Mo}_3\text{S}_k\text{L}_n\text{Q}_z$ and mixtures thereof wherein the L are independently selected ligands having organo groups with a sufficient number of carbon atoms to render the compound soluble or dispersible in the oil, n is from 1 to 4, k varies from 4 through 7, Q is selected from the group of neutral electron donating compounds such as water, amines, alcohols, phosphines, and ethers, and z ranges from 0 to 5 and includes non-stoichiometric values. At least 21 total carbon atoms should be present among all the ligands' organo groups, such as at least 25, at least 30, or at least 35 carbon atoms.

[0070] The ligands are independently selected from the group of



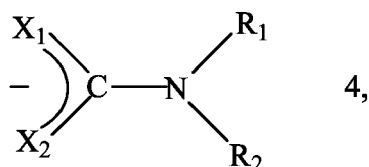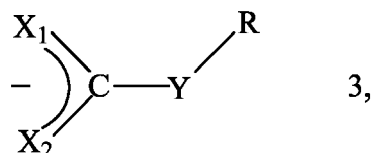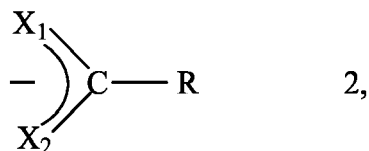

and

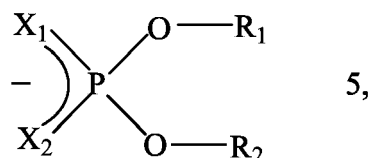

and mixtures thereof, wherein X, X₁, X₂, and Y are independently selected from the group of oxygen and sulfur, and wherein R₁, R₂, and R are independently selected from hydrogen and organo groups that may be the same or different. Preferably, the organo groups are hydrocarbyl groups such as alkyl (e.g., in which the carbon atom attached to the remainder of the ligand is primary or secondary), aryl, substituted aryl and ether groups. More preferably, each ligand has the same hydrocarbyl group.

[0071] The term "hydrocarbyl" denotes a substituent having carbon atoms directly attached to the remainder of the ligand and is predominantly hydrocarbyl in character within the context of this invention. Such substituents include the following:

1. Hydrocarbon substituents, that is, aliphatic (for example alkyl or alkenyl), alicyclic (for example cycloalkyl or cycloalkenyl) substituents, aromatic-, aliphatic- and alicyclic-substituted aromatic nuclei and the like, as well as cyclic substituents wherein the ring is completed through another portion of the ligand (that is, any two indicated substituents may together form an alicyclic group).


2. Substituted hydrocarbon substituents, that is, those containing non-hydrocarbon groups which, in the context of this invention, do not alter the predominantly hydrocarbyl character of the substituent. Those skilled in the art will be aware of suitable groups (e.g., halo, especially chloro and fluoro, amino, alkoxy, mercapto, alkylmercapto, nitro, nitroso, sulfoxy, etc.).

3. Hetero substituents, that is, substituents which, while predominantly hydrocarbon in character within the context of this invention, contain atoms other than carbon present in a chain or ring otherwise composed of carbon atoms.


[0072] Importantly, the organo groups of the ligands have a sufficient number of carbon atoms to render the compound

soluble or dispersible in the oil. For example, the number of carbon atoms in each group will generally range between about 1 to about 100, preferably from about 1 to about 30, and more preferably between about 4 to about 20. Preferred ligands include dialkyldithiophosphate, alkylxanthate, and dialkyldithiocarbamate, and of these dialkyldithiocarbamate is more preferred. Organic ligands containing two or more of the above functionalities are also capable of serving as ligands and binding to one or more of the cores. Those skilled in the art will realize that formation of the compounds of the present invention requires selection of ligands having the appropriate charge to balance the core's charge.

[0073] Compounds having the formula $\text{Mo}_3\text{S}_k\text{L}_n\text{Q}_z$ have cationic cores surrounded by anionic ligands and are represented by structures such as



and



and have net charges of +4. Consequently, in order to solubilize these cores the total charge among all the ligands must be -4. Four monoanionic ligands are preferred. Without wishing to be bound by any theory, it is believed that two or more trinuclear cores may be bound or interconnected by means of one or more ligands and the ligands may be multidentate. Such structures fall within the scope of this invention. This includes the case of a multidentate ligand having multiple connections to a single core. It is believed that oxygen and/or selenium may be substituted for sulfur in the core(s).

[0074] Oil-soluble or dispersible trinuclear molybdenum compounds can be prepared by reacting in the appropriate liquid(s)/solvent(s) a molybdenum source such as $(\text{NH}_4)_2\text{Mo}_3\text{S}_{13} \cdot n(\text{H}_2\text{O})$, where n varies between 0 and 2 and includes non-stoichiometric values, with a suitable ligand source such as a tetraalkylthiuram disulfide. Other oil-soluble or dispersible trinuclear molybdenum compounds can be formed during a reaction in the appropriate solvent(s) of a molybdenum source such as of $(\text{NH}_4)_2\text{Mo}_3\text{S}_{13} \cdot n(\text{H}_2\text{O})$, a ligand source such as tetraalkylthiuram disulfide, dialkyldithiocarbamate, or dialkyldithiophosphate, and a sulfur abstracting agent such cyanide ions, sulfite ions, or substituted phosphines. Alternatively, a trinuclear molybdenum-sulfur halide salt such as $[\text{M}']_2[\text{Mo}_3\text{S}_7\text{A}_6]$, where M' is a counter ion, and A is a halogen such as Cl, Br, or I, may be reacted with a ligand source such as a dialkyldithiocarbamate or dialkyldithiophosphate in the appropriate liquid(s)/solvent(s) to form an oil-soluble or dispersible trinuclear molybdenum compound. The appropriate liquid/solvent may be, for example, aqueous or organic.

[0075] A compound's oil solubility or dispersibility may be influenced by the number of carbon atoms in the ligand's organo groups. In the compounds of the present invention, at least 21 total carbon atoms should be present among all the ligand's organo groups. Preferably, the ligand source chosen has a sufficient number of carbon atoms in its organo groups to render the compound soluble or dispersible in the lubricating composition.


[0076] The terms "oil-soluble" or "dispersible" used herein do not necessarily indicate that the compounds or additives are soluble, dissolvable, miscible, or capable of being suspended in the oil in all proportions. These do mean, however,

that they are, for instance, soluble or stably dispersible in oil to an extent sufficient to exert their intended effect in the environment in which the oil is employed. Moreover, the additional incorporation of other additives may also permit incorporation of higher levels of a particular additive, if desired.

[0077] The sulfur-containing molybdenum compound is preferably an organo-molybdenum compound. Moreover, the molybdenum compound is preferably selected from the group consisting of a molybdenum dithiocarbamate (MoDTC), molybdenum dithiophosphate, molybdenum dithiophosphinate, molybdenum xanthate, molybdenum thioxanthate, molybdenum sulfide and mixtures thereof. Most preferably, the molybdenum compound is present as molybdenum dithiocarbamate. The molybdenum compound may also be a trinuclear molybdenum compound.

[0078] Dihydrocarbyl dithiophosphate metal salts are frequently used as antiwear and antioxidant agents. The metal may be an alkali or alkaline earth metal, or aluminum, lead, tin, molybdenum, manganese, nickel or copper. The zinc salts are most commonly used in lubricating oil in amounts of 0.1 to 10, preferably 0.2 to 2 mass %, based upon the total weight of the lubricating oil composition. They may be prepared in accordance with known techniques by first forming a dihydrocarbyl dithiophosphoric acid (DDPA), usually by reaction of one or more alcohol or a phenol with P_2S_5 and then neutralizing the formed DDPA with a zinc compound. For example, a dithiophosphoric acid may be made by reacting mixtures of primary and secondary alcohols. Alternatively, multiple dithiophosphoric acids can be prepared where the hydrocarbyl groups on one are entirely secondary in character and the hydrocarbyl groups on the others are entirely primary in character. To make the zinc salt, any basic or neutral zinc compound could be used but the oxides, hydroxides and carbonates are most generally employed. Commercial additives frequently contain an excess of zinc due to the use of an excess of the basic zinc compound in the neutralization reaction.

[0079] The preferred zinc dihydrocarbyl dithiophosphates are oil soluble salts of dihydrocarbyl dithiophosphoric acids and may be represented by the following formula:

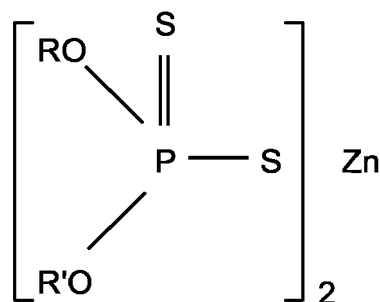

wherein R and R' may be the same or different hydrocarbyl radicals containing from 1 to 18, preferably 2 to 12, carbon atoms and including radicals such as alkyl, alkenyl, aryl, arylalkyl, alkaryl and cycloaliphatic radicals. Particularly preferred as R and R' groups are alkyl groups of 2 to 8 carbon atoms. Thus, the radicals may, for example, be ethyl, n-propyl, i-propyl, n-butyl, i-butyl, sec-butyl, amyl, n-hexyl, i-hexyl, n-octyl, decyl, dodecyl, octadecyl, 2-ethylhexyl, phenyl, butylphenyl, cyclohexyl, methylcyclopentyl, propenyl, butenyl. In order to obtain oil solubility, the total number of carbon atoms (i.e. R and R') in the dithiophosphoric acid will generally be about 5 or greater. The zinc dihydrocarbyl dithiophosphate (ZDDP) can therefore comprise zinc dialkyl dithiophosphates. Although the lubricating oil compositions of the present invention are capable of providing excellent performance in the presence of amounts of ZDDP providing greater amounts of phosphorus, the improved performance of the inventive lubricating oil compositions are particularly apparent in low SAPS formulations which, by definition, have phosphorous levels of no greater than about 0.08 mass % (800 ppm). Therefore, preferably, lubricating oil compositions of the present invention contain less than 800 ppm of phosphorus, such as from about 100 to 800 ppm of phosphorus, more preferably from about 300 to about 750 ppm of phosphorus, such as from about 500 to 700 ppm of phosphorus.

[0080] The viscosity index of the base stock is increased, or improved, by incorporating therein certain polymeric materials that function as viscosity modifiers (VM) or viscosity index improvers (VII). Generally, polymeric materials useful as viscosity modifiers are those having number average molecular weights (M_n) of from about 5,000 to about 250,000, preferably from about 15,000 to about 200,000, more preferably from about 20,000 to about 150,000. These viscosity modifiers can be grafted with grafting materials such as, for example, maleic anhydride, and the grafted material can be reacted with, for example, amines, amides, nitrogen-containing heterocyclic compounds or alcohol, to form multifunctional viscosity modifiers (dispersant-viscosity modifiers).

[0081] Pour point depressants (PPD), otherwise known as lube oil flow improvers (LOFIs) lower the temperature. Compared to VM, LOFIs generally have a lower number average molecular weight. Like VM, LOFIs can be grafted with grafting materials such as, for example, maleic anhydride, and the grafted material can be reacted with, for example, amines, amides, nitrogen-containing heterocyclic compounds or alcohol, to form multifunctional additives.

[0082] Polymer molecular weight, specifically $\bar{M}_n$, can be determined by various known techniques. One convenient method is gel permeation chromatography (GPC), which additionally provides molecular weight distribution information (see W. W. Yau, J. J. Kirkland and D. D. Bly, "Modern Size Exclusion Liquid Chromatography", John Wiley and Sons, New York, 1979). Another useful method for determining molecular weight, particularly for lower molecular weight

polymers, is vapor pressure osmometry (see, e.g., ASTM D3592).

[0083] In another embodiment, the lubricating oil compositions of the present invention further comprise a minor amount of one or more high molecular weight polymers comprising (i) copolymers of hydrogenated poly(monovinyl aromatic hydrocarbon) and poly (conjugated diene), wherein the hydrogenated poly(monovinyl aromatic hydrocarbon) segment comprises at least about 20 mass % of the copolymer; (ii) olefin copolymers containing alkyl or aryl amine, or amide groups, nitrogen-containing heterocyclic groups or ester linkages and/or (iii) acrylate or alkylacrylate copolymer derivatives having dispersing groups.

[0084] One class of polymers that can be used as the "high molecular polymer" is copolymers of hydrogenated poly (monovinyl aromatic hydrocarbon) and poly (conjugated diene), wherein the hydrogenated poly(monovinyl aromatic hydrocarbon) segment comprises at least about 20 mass% of the copolymer (hereinafter "Polymer (i)"). Such polymers can be used in lubricating oil compositions as viscosity modifiers and are commercially available as, for example, SV151 (Infineum USA L.P.). Preferred monovinyl aromatic hydrocarbon monomers useful in the formation of such materials include styrene, alkyl-substituted styrene, alkoxy-substituted styrene, vinyl naphthalene and alkyl-substituted vinyl naphthalene. The alkyl and alkoxy substituents may typically comprise from 1 to 6 carbon atoms, preferably from 1 to 4 carbon atoms. The number of alkyl or alkoxy substituents per molecule, if present, may range from 1 to 3, and is preferably one.

[0085] Preferred conjugated diene monomers useful in the formation of such materials include those conjugated dienes containing from 4 to 24 carbon atoms, such as 1, 3-butadiene, isoprene, piperylene, methylpentadiene, 2-phenyl-1,3-butadiene, 3,4-dimethyl-1,3-hexadiene and 4,5-diethyl-1,3-octadiene.

[0086] Preferred are block copolymers comprising at least one poly(monovinyl aromatic hydrocarbon) block and at least one poly (conjugated diene) block. Preferred block copolymers are selected from those of the formula AB, wherein A represents a block polymer of predominantly poly(monovinyl aromatic hydrocarbon), B represents a block of predominantly poly (conjugated diene).

[0087] Preferably, the poly(conjugated diene) block is partially or fully hydrogenated. More preferably, the monovinyl aromatic hydrocarbons are styrene and/or alkyl-substituted styrene, particularly styrene. Preferred conjugated dienes are those containing from 4 to 12 carbon atoms, more preferably from 4 to 6 carbon atoms. Isoprene and butadiene are the most preferred conjugated diene monomers. Preferably, the poly(isoprene) is hydrogenated.

[0088] Block copolymers and selectively hydrogenated block copolymers are known in the art and are commercially available. Such block copolymers can be made by anionic polymerization with an alkali metal initiator such as sec-butyllithium, as described, for example, in U.S. Pat. Nos. 4,764,572; 3,231,635; 3,700,633 and 5,194,530.

[0089] The poly(conjugated diene) block(s) of the block copolymer may be selectively hydrogenated, typically to a degree such that the residual ethylenic unsaturation of the block is reduced to at most 20%, more preferably at most 5%, most preferably at most 2% of the unsaturation level before hydrogenation. The hydrogenation of these copolymers may be carried out using a variety of well established processes including hydrogenation in the presence of such catalysts as Raney Nickel, noble metals such as platinum and the like, soluble transition metal catalysts and titanium catalysts as described in U.S. Patent No. 5,299,464.

[0090] Sequential polymerization or reaction with divalent coupling agents can be used to form linear polymers. It is also known that a coupling agent can be formed in-situ by the polymerization of a monomer having two separately polymerizable vinyl groups such as divinylbenzene to provide star polymers having from about 6 to about 50 arms. Di- and multivalent coupling agents containing 2 to 8 functional groups, and methods of forming star polymers are well known and such materials are available commercially.

[0091] A second class of "high molecular weight polymers" are olefin copolymers (OCP) containing dispersing groups such as alkyl or aryl amine, or amide groups, nitrogen-containing heterocyclic groups or ester linkages (hereinafter "Polymer (ii)"). The olefin copolymers can comprise any combination of olefin monomers, but are most commonly ethylene and at least one other α -olefin. The at least one other α -olefin monomer is conventionally an α -olefin having 3 to 18 carbon atoms, and is most preferably propylene. As is well known, copolymers of ethylene and higher α -olefins, such as propylene, often include other polymerizable monomers. Typical of these other monomers are non-conjugated dienes such as the following, non-limiting examples:

- a. straight chain dienes such as 1,4-hexadiene and 1,6-octadiene;
- b. branched chain acyclic dienes such as 5-methyl-1,4-hexadiene; 3,7-dimethyl-1,6-octadiene; 3,7-dimethyl-1,7-octadiene and mixed isomers of dihydro-myrcene and dihydroocinene;
- c. single ring alicyclic dienes such as 1,4-cyclohexadiene; 1,5-cyclooctadiene; and 1,5-cyclododecadiene;
- d. multi-ring alicyclic fused and bridged ring dienes such as tetrahydroindene; methyltetrahydroindene; dicyclopentadiene; bicyclo-(2,2,1)-hepta-2,5-diene; alkenyl, alkylidene, cycloalkenyl and cycloalkylidene norbornenes such as

5-methylene-2-norbornene (MNB), 5-ethylidene-2-norbornene (ENB), 5-propylene-2-norbornene, 5-isopropylidene-2-norbornene, 5-(4-cyclopentyl)-2-norbornene; 5-cyclohexylidene-2-norbornene.

[0092] Of the non-conjugated dienes typically used, dienes containing at least one of the double bonds in a strained ring are preferred. The most preferred diene is 5-ethylidene-2-norbornene (ENB). The amount of diene (wt. basis) in the copolymer can be from 0% to about 20%, with 0% to about 15% being preferred, and 0% to about 10% being most preferred. As already noted, the most preferred olefin copolymer is ethylene-propylene. The average ethylene content of the copolymer can be as low as 20% on a weight basis. The preferred minimum ethylene content is about 25%. A more preferred minimum is 30%. The maximum ethylene content can be as high as 90% on a weight basis, preferably the maximum ethylene content is 85%, most preferably about 80%. Preferably, the olefin copolymers contain from about 35 to 75 mass % ethylene, more preferably from about 50 to about 70 mass % ethylene.

[0093] The molecular weight (number average) of the olefin copolymer can be as low as 2000, but the preferred minimum is 10,000. The more preferred minimum is 15,000, with the most preferred minimum number average molecular weight being 20,000. It is believed that the maximum number average molecular weight can be as high as 12,000,000. The preferred maximum is about 1,000,000, with the most preferred maximum being about 750,000. An especially preferred range of number average molecular weight for the olefin copolymers of the present invention is from about 20,000 to about 100,000.

[0094] Olefin copolymers can be rendered multifunctional by attaching a nitrogen-containing polar moiety (e.g., amine, amine-alcohol or amide) to the polymer backbone. The nitrogen-containing moieties are conventionally of the formula R-N-R', wherein R, R' and R'' are independently alkyl, aryl or H. Also suitable are aromatic amines of the formula R'-NH-R'', wherein R' and R'' are aromatic groups and each are is alkyl. The most common method for forming a multifunctional OCP viscosity modifier involves the free radical addition of the nitrogen-containing polar moiety to the polymer backbone. The nitrogen-containing polar moiety can be attached to the polymer using a double bond within the polymer (i.e., the double bond of the diene portion of an EPDM polymer, or by reacting the polymer with a compound providing a bridging group containing a double bond (e.g., maleic anhydride as described, for example, in U.S. Patent Nos. 3,316,177; 3,326,804; and carboxylic acids and ketones as described, for example, in U.S. Patent No. 4,068,056), and subsequently derivatizing the functionalized polymer with the nitrogen-containing polar moiety. A more complete list of nitrogen-containing compounds that can be reacted with the functionalized OCP is described *infra*, in the discussion of dispersants. Multifunctionalized OCPs and methods for forming such materials are known in the art and are available commercially (e.g., HITEC 5777 available from Ethyl Corporation and PA1160, a product of Dutch Staaten Minen).

[0095] Preferred are low ethylene olefin copolymers containing about 50 mass % ethylene and having a number average molecular weight between 10,000 and 20,000 grafted with maleic anhydride and aminated with aminophenyl-diamine and other dispersant amines.

[0096] The third class of polymers useful in the practice of the present invention are acrylate or alkylacrylate copolymer derivatives having dispersing groups (hereinafter "Polymer (iii)"). These polymers have been used as multifunctional dispersant viscosity modifiers in lubricating oil compositions, and lower molecular weight polymers of this type have been used as multifunctional dispersant/LOFIs. Such polymers are commercially available as, for example, ACRYLOID 954, (a product of RohMax USA Inc.) The acrylate or methacrylate monomers and alkyl acrylate or methacrylate monomers useful in the formation of Polymer (iii) can be prepared from the corresponding acrylic or methacrylic acids or their derivatives. Such acids can be derived using well known and conventional techniques. For example, acrylic acid can be prepared by acidic hydrolysis and dehydration of ethylene cyanohydrin or by the polymerization of β -propiolactone and the destructive distillation of the polymer to form acrylic acid. Methacrylic acid can be prepared by, for example, oxidizing a methyl α -alkyl vinyl ketone with metal hypochlorites; dehydrating hydroxyisobutyric acid with phosphorus pentoxide; or hydrolyzing acetone cyanohydrin.

[0097] Alkyl acrylates or methacrylate monomers can be prepared by reacting the desired primary alcohol with the acrylic acid or methacrylic acid in a conventional esterification catalyzed by acid, preferably p-toluene sulfonic acid and inhibited from polymerization by MEHQ or hydroquinone. Suitable alkyl acrylates or alkyl methacrylates contain from about 1 to about 30 carbon atoms in the alkyl carbon chain. Typical examples of starting alcohols include methyl alcohol, ethyl alcohol, ethyl alcohol, butyl alcohol, octyl alcohol, iso-octyl alcohol, isodecyl alcohol, undecyl alcohol, dodecyl alcohol, tridecyl alcohol, capryl alcohol, lauryl alcohol, myristyl alcohol, pentadecyl alcohol, palmityl alcohol and stearyl alcohol. The starting alcohol can be reacted with acrylic acid or methacrylic acid to form the desired acrylates and methacrylates, respectively. These acrylate polymers may have number average molecular weights (Mn) of 10,000 - 1,000,000 and preferably the molecular weight range is from about 200,000 - 600,000.

[0098] To provide an acrylate or methacrylate with a dispersing group, the acrylate or methacrylate monomer is copolymerized with an amine-containing monomer or the acrylate or methacrylate main chain polymer is provided so as to contain sites suitable for grafting and then amine-containing branches are grafted onto the main chain by polymerizing amine-containing monomers.

[0099] Examples of amine-containing monomers include the basic amino substituted olefins such as p-(2-diethylami-

noethyl) styrene; basic nitrogen-containing heterocycles having a polymerizable ethylenically unsaturated substituent such as the vinyl pyridines or the vinyl pyrrolidones; esters of amino alcohols with unsaturated carboxylic acids such as dimethylaminoethyl methacrylate and polymerizable unsaturated basic amines such as allyl amine.

[0100] Preferred Polymer (iii) materials include polymethacrylate copolymers made from a blend of alcohols with the average carbon number of the ester between 8 and 12 containing between 0.1-0.4 mass % nitrogen.

[0101] Most preferred are polymethacrylate copolymers made from a blend of alcohols with the average carbon number of the ester between 9 and 10 containing between 0.2-0.25% nitrogen by weight provided in the form of N-N Dimethyl-aminoalkyl-methacrylate.

[0102] Lubricating oil compositions of the present invention may contain Polymer (i), (ii), (iii), or a mixture thereof, in an amount of from about 0.10 to about 2 mass %, based on polymer weight; more preferably from about 0.2 to about 1 mass %, most preferably from about 0.3 to about 0.8 mass %. Alternatively in discussing the multifunctional components; specifically Polymers (ii) and (iii); said components are present providing nitrogen content to the lubricating oil composition from about 0.0001 to about 0.02 mass %, preferably from about 0.0002 to about 0.01 mass %, most preferably from about 0.0003 to about 0.008 mass % of nitrogen. Polymers (i), (ii) (iii) and mixtures thereof, need not comprise the sole VM and/or LOFI in the lubricating oil composition, and other VM, such as non-functionalized olefin copolymer VM and, for example, alkylfumarate/vinyl acetate copolymer LOFIs may be used in combination therewith. For example, a heavy duty diesel engine of the present invention may be lubricated with a lubricating oil composition wherein the high molecular weight polymer is a mixture comprising from about 10 to about 90 mass % of a hydrogenated styrene-isoprene block copolymer, and from about 10 to about 90 mass % non-functionalized OCP.

[0103] Additional additives may be incorporated into the compositions of the invention to enable particular performance requirements to be met. Examples of additives which may be included in the lubricating oil compositions of the present invention are metal rust inhibitors, viscosity index improvers (other than polymer i, iii and/or iii), corrosion inhibitors, oxidation inhibitors, friction modifiers (other than the sulfur-containing molybdenum compounds), anti-foaming agents, anti-wear agents and pour point depressants (other than polymer iii). Some are discussed in further detail below.

[0104] Oxidation inhibitors or antioxidants reduce the tendency of mineral oils to deteriorate in service. Oxidative deterioration can be evidenced by sludge in the lubricant, varnish-like deposits on the metal surfaces, and by viscosity growth. Such oxidation inhibitors include hindered phenols, alkaline earth metal salts of alkylphenolthioesters having preferably C₅ to C₁₂ alkyl side chains, calcium nonylphenol sulfide, oil soluble phenates and sulfurized phenates, phosphosulfurized or sulfurized hydrocarbons or esters, phosphorous esters, metal thiocarbamates, oil soluble copper compounds as described in U.S. Patent No. 4,867,890, and molybdenum-containing compounds.

[0105] Aromatic amines having at least two aromatic groups attached directly to the nitrogen constitute another class of compounds that is frequently used for antioxidancy. Typical oil soluble aromatic amines having at least two aromatic groups attached directly to one amine nitrogen contain from 6 to 16 carbon atoms. The amines may contain more than two aromatic groups. Compounds having a total of at least three aromatic groups in which two aromatic groups are linked by a covalent bond or by an atom or group (e.g., an oxygen or sulfur atom, or a -CO-, -SO₂- or alkylene group) and two are directly attached to one amine nitrogen also considered aromatic amines having at least two aromatic groups attached directly to the nitrogen. The aromatic rings are typically substituted by one or more substituents selected from alkyl, cycloalkyl, alkoxy, aryloxy, acyl, acylamino, hydroxy, and nitro groups. The amount of any such oil soluble aromatic amines having at least two aromatic groups attached directly to one amine nitrogen should preferably not exceed 0.4 wt. % active ingredient.

[0106] Preferably, lubricating oil compositions in accordance with the present invention contain from about 0.05 to about 5 mass %, preferably from about 0.10 to about 3 mass %, most preferably from about 0.20 to about 2.5 mass % of phenolic antioxidant, aminic antioxidant, or a combination thereof, based on the total weight of the lubricating oil composition.

[0107] Friction modifiers and fuel economy agents that are compatible with the other ingredients of the final oil may also be included. Examples of such materials include glyceryl monoesters of higher fatty acids, for example, glyceryl mono-oleate; esters of long chain polycarboxylic acids with diols, for example, the butane diol ester of a dimerized unsaturated fatty acid; oxazoline compounds; and alkoxyated alkyl-substituted mono-amines, diamines and alkyl ether amines, for example, ethoxylated tallow amine and ethoxylated tallow ether amine. A preferred lubricating oil composition contains a dispersant composition of the present invention, base oil, and a nitrogen-containing friction modifier.

[0108] A viscosity index improver dispersant functions both as a viscosity index improver and as a dispersant. Examples of viscosity index improver dispersants include reaction products of amines, for example polyamines, with a hydrocarbyl-substituted mono- or dicarboxylic acid in which the hydrocarbyl substituent comprises a chain of sufficient length to impart viscosity index improving properties to the compounds. In general, the viscosity index improver dispersant may be, for example, a polymer of a C₄ to C₂₄ unsaturated ester of vinyl alcohol or a C₃ to C₁₀ unsaturated mono-carboxylic acid or a C₄ to C₁₀ di-carboxylic acid with an unsaturated nitrogen-containing monomer having 4 to 20 carbon atoms; a polymer of a C₂ to C₂₀ olefin with an unsaturated C₃ to C₁₀ mono- or di-carboxylic acid neutralised with an amine, hydroxylamine or an alcohol; or a polymer of ethylene with a C₃ to C₂₀ olefin further reacted either by grafting a C₄ to C₂₀ unsaturated nitrogen-containing monomer thereon or by grafting an unsaturated acid onto the polymer backbone

and then reacting carboxylic acid groups of the grafted acid with an amine, hydroxy amine or alcohol. A preferred lubricating oil composition contains a dispersant composition of the present invention, base oil, and a viscosity index improver dispersant.

[0109] Pour point depressants, otherwise known as lube oil flow improvers (LOFI), lower the minimum temperature at which the fluid will flow or can be poured. Such additives are well known. Other than the compounds described above as Polymer (iii), typical additives that improve the low temperature fluidity of the fluid are C₈ to C₁₈ dialkyl fumarate/vinyl acetate copolymers, and polymethacrylates. Foam control can be provided by an antifoamant of the polysiloxane type, for example, silicone oil or polydimethyl siloxane.

[0110] Some of the above-mentioned additives can provide a multiplicity of effects; thus for example, a single additive may act as a dispersant-oxidation inhibitor. This approach is well known and need not be further elaborated herein.

[0111] In the present invention it may be necessary to include an additive which maintains the stability of the viscosity of the blend. Thus, although polar group-containing additives achieve a suitably low viscosity in the pre-blending stage it has been observed that some compositions increase in viscosity when stored for prolonged periods. Additives which are effective in controlling this viscosity increase include the long chain hydrocarbons functionalized by reaction with mono- or dicarboxylic acids or anhydrides which are used in the preparation of the ashless dispersants as hereinbefore disclosed. In another preferred embodiment, the lubricating oil compositions of the present invention contain an effective amount of a long chain hydrocarbons functionalized by reaction with mono- or dicarboxylic acids or anhydrides (e.g., polyisobutenyl succinic anhydride (PIBSA)).

[0112] When lubricating compositions contain one or more of the above-mentioned additives, each additive is typically blended into the base oil in an amount that enables the additive to provide its desired function.. Representative effective amounts of such additives, when used in crankcase lubricants, are listed below.

ADDITIVE	MASS % (Broad)	MASS % (Preferred)
Dispersant	0.1 - 20	1 - 8
Metal Detergents	0.1 - 15	0.2 - 9
Corrosion Inhibitor	0 - 5	0 - 1.5
Metal Dihydrocarbyl Dithiophosphate	0.1 - 6	0.1 - 4
Antioxidant	0 - 5	0.01 - 2.5
Pour Point Depressant	0.01 - 5	0.01 - 1.5
Antifoaming Agent	0 - 5	0.001 - 0.15
Supplemental Antiwear Agents	0 - 1.0	0 - 0.5
Friction Modifier	0 - 5	0 - 1.5
Viscosity Modifier	0.01 - 10	0.25 - 3
Basestock	Balance	Balance

[0113] Fully formulated low SAPS lubricating oil compositions of the present invention preferably have a sulfur content of no greater than about 0.3 mass %, such as less than about 0.25 mass % (e.g., less than 0.24 mass %), more preferably less than about 0.20 mass %, most preferably less than about 0.15 mass % of sulfur; a phosphorus content of less than 800 ppm; such as 300 to 700 ppm, more preferably 500 to 750 ppm, and a sulfated ash content of less than 1.0 mass %, preferably less than 0.8 mass %. Preferably, the Noack volatility of the fully formulated lubricating oil composition (oil of lubricating viscosity plus all additives) will be no greater than 12 mass %, such as no greater than 10 mass %, preferably no greater than 8 mass %. Fully formulated low SAPS lubricating oil compositions of the present invention preferably have a base number (BN) of from about 10 to about 18, preferably from about 12 to about 16, more preferably from about 13 to about 15.

[0114] It may be desirable, although not essential to prepare one or more additive concentrates comprising additives (concentrates sometimes being referred to as additive packages) whereby several additives can be added simultaneously to the oil to form the lubricating oil composition.

[0115] The final composition may employ from 5 to 30 mass %, preferably 5 to 25 mass %, typically 10 to 20 mass % of the concentrate, the remainder being oil of lubricating viscosity.

[0116] This invention will be further understood by reference to the following examples, wherein all parts are parts by weight, unless otherwise noted and which include preferred embodiments of the invention.

EXAMPLES

[0117] Formulated lubricants were prepared, containing the components shown in Table 2. Example 1 (comparative) represents a standard "conventional SAPS", lubricating oil composition containing an all calcium salicylate detergent system and a low molecular weight borated dispersant. Example 2 (comparative) represents a corresponding low SAPS formulations, again containing an all calcium salicylate detergent system, but with reduced overbasing and a low molecular weight borated dispersant, but no magnesium-based detergent. Examples 4 and 5 (invention) substitute a minor amount of magnesium sulfonate detergent for a portion of the calcium salicylate detergent and incorporate an additional amount of high BN, low molecular weight dispersant (non-borated). The detergents and dispersants used in the comparative tests are described below:

"Det. A" overbased 168 BN calcium salicylate detergent;
 "Det. B" neutral 64 BN calcium salicylate detergent;
 "Det. C" highly overbased 400 BN magnesium sulfonate detergent;
 "Disp. 1" PIBSA/PAM dispersant; 950 Mn PIB; 1.3 mass % boron; 1.2 mass % nitrogen; 25 BN;
 "Disp. 2" PIBSA/PAM dispersant; 950 Mn PIB; 2.1 mass % nitrogen 46 BN;
 "Disp. 3" PIBSA/PAM dispersant; 1000 Mn PIB; 1.9 mass % nitrogen; 44 BN;
 "Disp. 4" PIBSA/PAM dispersant; 450 Mn PIB; 3.6 mass % nitrogen; 90 BN.

[0118] Each of the exemplified lubricants was formulated in a Group III basestock and contained, as "other additives", a high molecular weight dispersant, antioxidant, viscosity modifier and lubricating oil flow improver (LOFI). Each of the exemplified lubricants represents a multigrade 10 W 40 heavy duty diesel (HDD) crankcase lubricant. Amounts listed below are in terms of mass % of the total additive (active ingredient + diluent oil) and are not presented on an active ingredient (A.I.) basis.

Table 2

Component	1 (Comp.)	2 (Comp.)	3 (Inv.)	4 (Inv.)
Det(s).	A, B	A, B	A, B, C	A, B, C
Tot. Det.	8.62	7.15	7.57	7.57
Disp(s).	1	1	1, 2, 3	1,3,4
Tot. LMW Disp.	1.96	0.80	4.30	7.43
ZDDP	1.47	0.88	1.00	1.00
Other Add.	18.75	20.70	21.20	17.20
Basestock	69.20	70.47	65.93	66.80
Total	100.00	100.00	100.00	100.00

Analyses of Examples 1 through 4 are provided in Table 3:

Table 3

Test	Property	Ex. 1	Ex. 2	Ex. 3	Ex. 4
D4739	TBN	15.84	10.10	13.85	13.22
D874	SASH (mass %)	1.9	1.0	1.0	1.0
D5185	Ca (mass %)	0.48	0.26	0.21	0.21
D5185	Mg (mass %)	----	----	0.04	0.04
D5185	P (mass %)	0.12	0.07	0.08	0.08

Table continued

Test	Property	Ex. 1	Ex. 2	Ex. 3	Ex. 4
D5185	S (mass %)	0.35	0.20	0.23	0.25
D4629	N (mass %)	0.08	0.11	0.23	0.24

[0119] The performance of each of the exemplified lubricants was evaluated in a Mack T10 screener test. The results are provided in Table 4.

Table 4

Test	Units	Ex. 1	Ex. 2	Ex. 3	Ex. 4	Pass/Fail Limit*
Av. Top Ring Wear	μM	93	196	126	136	158
Av. Cylinder Wear	μM	21.3	17.0	18.8	23.3	32
*for API CI-4/ACEA E6 specification						

[0120] The above results demonstrate that the low SAPS lubricants containing calcium salicylate as the sole detergent (Ex. 2) fails the top ring wear portion of the Mack T10 screener test. In contrast, low SAPS lubricants of the present invention (Ex. 3 and Ex. 4), in which the detergent system combines calcium salicylate and a magnesium-based detergent, and which lubricants further include an ashless TBN source in the form of a low molecular weight dispersant, provide a strong pass. As is further shown by the data, the introduction of a low level of magnesium does not significantly affect cylinder wear performance.

[0121] The disclosures of all patents, articles and other materials described herein are hereby incorporated, in their entirety, into this specification by reference. Compositions described as "comprising" a plurality of defined components are to be construed as including compositions formed by admixing the defined plurality of defined components. The principles, preferred embodiments and modes of operation of the present invention have been described in the foregoing specification. What applicants submit is their invention, however, is not to be construed as limited to the particular embodiments disclosed, since the disclosed embodiments are regarded as illustrative rather than limiting. Changes may be made by those skilled in the art without departing from the spirit of the invention.

Claims

1. A lubricating oil composition having a maximum sulfated ash content of 1.0 mass %, said lubricating oil composition comprising:
 - (a) a major amount of oil of lubricating viscosity;
 - (b) a minor amount of calcium salicylate detergent;
 - (c) an amount of an overbased magnesium detergent providing the lubricating oil composition with at least 200 ppm of magnesium; and
 - (d) a minor amount of a basic, low molecular weight, nitrogen-containing dispersant having a number average molecular weight (M_n) of no greater than 1100.
2. A lubricating oil composition according to claim 1, wherein said calcium salicylate detergent is a combination of at least one overbased calcium salicylate detergent having a TBN of at least 100, and at least one neutral calcium salicylate detergent having a TBN of less than 100.
3. A lubricating oil composition according to either claim 1 or claim 2, wherein said minor amount of calcium salicylate detergent provides said lubricating oil composition with from 0.10 to 0.30 mass %, preferably from 0.15 to 0.25 mass %, more preferably from 0.18 to 0.22 mass % of calcium.
4. A lubricating oil composition according to any one of the preceding claims, wherein said minor amount of calcium salicylate detergent provides said lubricating oil composition with from 5 to 90%, preferably 25 to 55%, such as from 30 to 50%, more preferably from 35 to 45 % of the total TBN.
5. A lubricating oil composition according to any one of the preceding claims, wherein said amount of overbased

magnesium detergent provides said lubricating oil composition with at least 200 ppm, and no more than 1250 ppm, preferably from 300 to 1000 ppm, more preferably from 400 to 700 ppm of magnesium.

6. A lubricating oil composition according to any one of the preceding claims, wherein said amount of overbased magnesium detergent provides said lubricating oil composition with from 5 to 40 %, preferably from 7.5 to 30%, more preferably from about 10 to 20 % of the total TBN.
7. A lubricating oil composition according to any one of the preceding claims, wherein said magnesium detergent has, or has on average, a TBN of at least 100, preferably at least 300, more preferably from 350 to 550, most preferably at least 400, such as from 400 to 550.
8. A lubricating oil composition according to any one of the preceding claims, wherein the total amount of detergent introduces into the lubricating oil composition from 0.35 to 1.0 mass %, preferably from 0.5 to 0.9 mass %, more preferably from a 0.6 to 0.85 mass % of sulfated ash.
9. A lubricating oil composition according to any one of the preceding claims, said basic nitrogen-containing low molecular weight dispersant is derived from an unsaturated hydrocarbon, preferably an olefinic polymer, more preferably polyisobutylene.
10. A lubricating oil composition according to any one of the preceding claims, wherein said basic nitrogen-containing low molecular weight dispersant has a number average molecular weight of from 300 to 1000, preferably from 400 to 950.
11. A lubricating oil composition according to any one of the preceding claims, wherein said basic nitrogen-containing low molecular weight dispersant has a TBN of from 20 to 100, preferably from 25 to 95, more preferably from 40 to 90.
12. A lubricating oil composition according to any one of the preceding claims, wherein said basic nitrogen-containing low molecular weight dispersant provides said lubricating oil composition with from 5 to 25%, preferably from 8 to 20%, more preferably from 10 to 15% of the total TBN.
13. A lubricating oil composition according to any one of the preceding claims, wherein said basic nitrogen-containing low molecular weight dispersant is present in an amount providing said lubricating oil composition with from 0.025 to 0.25 mass %, preferably from 0.04 to 0.15 mass %, more preferably from 0.06 to 0.10 mass % of nitrogen.
14. A lubricating oil composition according to any one of the preceding claims, wherein said basic nitrogen-containing low molecular weight dispersant is present in an amount providing said lubricating oil composition with from 20 to 60%, preferably from 35 to 55%, more preferably from 40 to 50 % of the total amount of dispersant nitrogen.
15. A lubricating oil composition according to any one of the preceding claims, further comprising a high molecular weight nitrogen-containing dispersant derived from an unsaturated hydrocarbon, preferably an olefinic polymer, more preferably polyisobutylene, having a number average molecular weight (Mn) of at least 1100, such as from 1150 to 3000, preferably at least 1800, such as from 1800 to 2800, more preferably at least 2100, such as from 2000 to 2500.
16. A lubricating oil composition according to claim 15, wherein said a high molecular weight nitrogen-containing dispersant is present in an amount providing the lubricating oil composition with from 0.05 to 0.20 mass %, preferably from 0.07 to 0.15 mass %, more preferably from 0.08 to 0.12 mass % of nitrogen.
17. A lubricating oil composition according to claim 15 or 16, wherein said high molecular weight nitrogen-containing dispersant is present in an amount providing said lubricating oil composition with from 35 to 80%, preferably from 45 to 65 %, more preferably from 50 to 60% of the total amount of dispersant nitrogen.
18. A lubricating oil composition according to any one of claims 15 to 17, wherein at least one of said high molecular weight nitrogen-containing dispersant is derived from highly reactive polyisobutylene, having a terminal vinylidene content of at least 65%.
19. A lubricating oil composition according to any one of the preceding claims, wherein at least one of said low molecular weight, nitrogen-containing dispersant is derived from highly reactive polyisobutylene, having a terminal vinylidene

content of at least 65%.

- 5 **20.** A lubricating oil composition according to any one of the preceding claims, further comprising a minor amount of one or more high molecular weight polymers comprising (i) copolymers of hydrogenated poly(monovinyl aromatic hydrocarbon) and poly (conjugated diene), wherein the hydrogenated poly(monovinyl aromatic hydrocarbon) segment comprises at least 20 wt.% of the copolymer; (ii) olefin copolymers containing alkyl or aryl amine, or amide groups, nitrogen-containing heterocyclic groups or ester linkages and/or (iii) acrylate or alkylacrylate copolymer derivatives having dispersing groups.
- 10 **21.** A lubricating oil composition according to any one of the preceding claims, further comprising a long chain hydrocarbon functionalized by reaction with mono- or dicarboxylic acid or anhydride.
- 15 **22.** A lubricating oil composition according to any one of the preceding claims, further comprising an amount of an oil soluble sulfur-containing molybdenum compound.
- 20 **23.** A lubricating oil composition according to claim 22, wherein said sulfur-containing molybdenum compound is selected from the group consisting of oil soluble molybdenum dithiocarbamates, dithiophosphates, dithiophosphinates, xanthates, thioxanthates, sulfides, and mixtures thereof, preferably molybdenum dithiocarbamates, dialkyldithiophosphates, alkyl xanthates and alkylthioxanthates and mixtures thereof, most preferably dimeric and trimeric molybdenum dithiocarbamates and mixtures thereof.
- 25 **24.** A lubricating oil composition according to any one of the preceding claims, wherein said oil of lubricating viscosity has a saturates content of at least 90.
- 30 **25.** A lubricating oil composition according to any one of the preceding claims, having a Noack volatility of less than 12 mass %, preferably less than 10 mass %, more preferably less than 8 mass %.
- 35 **26.** A lubricating oil composition according to any one of the preceding claims, having a phosphorus content of less than 800 ppm, preferably from 100 ppm to 800 ppm.
- 40 **27.** A lubricating oil composition according to any one preceding claims, further comprising at least one aminic antioxidant, phenolic antioxidant, or a combination thereof.
- 45 **28.** A lubricating oil composition according to any one of the preceding claims, having a sulfur content of no greater than 0.3 mass %.
- 50 **29.** A lubricating oil composition according to any one of the preceding claims, having a base number (BN) of from 10 to 18, preferably from 12 to 16, more preferably from 13 to 15.
- 55 **30.** A method of operating a compression ignited engine provided with an exhaust gas recirculation system which method comprises lubricating said engine with a lubricating oil composition according to any one of the preceding claims.
- 31.** A method according to claim 30, wherein said engine is a heavy duty diesel engine provided with an exhaust gas recirculation system.
- 32.** Use of lubricating oil composition according to any one of the claims 1 to 29, in an internal combustion engine to provide a pass in the Mack T10 engine test for Top-ring wear.



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 05 11 0046

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2004/102335 A1 (CARRICK VIRGINIA A ET AL) 27 May 2004 (2004-05-27) * paragraphs [0001], [0037], [0088], [0089], [0100], [0101], [0103], [0107], [0111], [0112], [0128], [0130]; claims 1,15,20; examples 5,6,9 * -----	1-32	C10M163/00 C10M167/00 C10N10/04 C10N10/12 C10N30/04 C10N40/25
X	US 2003/134756 A1 (CARRICK VIRGINIA A ET AL) 17 July 2003 (2003-07-17) * paragraphs [0044], [0085]; claims 1,5,6,8; example 1 * -----	1,3-14, 19-23, 26,27,29	
X	EP 1 310 549 A (INFINEUM INTERNATIONAL LIMITED) 14 May 2003 (2003-05-14) * paragraphs [0001], [0022], [0025], [0034], [0036], [0048], [0052], [0060], [0069] - [0071], [0078], [0079], [0105], [0109]; tables 1,6 * -----	1-32	
X	EP 1 203 804 A (TONEN CORPORATION) 8 May 2002 (2002-05-08) * paragraphs [0001], [0042], [0044] - [0046], [0056], [0059]; claim 1 * -----	1-32	TECHNICAL FIELDS SEARCHED (IPC) C10M
X	US 2004/127371 A1 (ARROWSMITH STEPHEN ET AL) 1 July 2004 (2004-07-01) * paragraphs [0026], [0037], [0040], [0047], [0054], [0055], [0067], [0068], [0071], [0072], [0075], [0077], [0078], [0095]; claims 1,9,14 * -----	1-32	
X	EP 1 167 497 A (CHEVRON ORONITE JAPAN LIMITED) 2 January 2002 (2002-01-02) * paragraphs [0026], [0030], [0053], [0055]; claims 1,6,8,15,18,20 * -----	1-32	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 23 February 2006	Examiner Bertrand, S
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

2
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 05 11 0046

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-02-2006

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2004102335 A1	27-05-2004	AU 2003302425 A1	18-06-2004
		CA 2506632 A1	10-06-2004
		EP 1587902 A1	26-10-2005
		WO 2004048503 A1	10-06-2004

US 2003134756 A1	17-07-2003	NONE	

EP 1310549 A	14-05-2003	NONE	

EP 1203804 A	08-05-2002	CA 2314194 A1	21-01-2002
		JP 2000290677 A	17-10-2000
		SG 87142 A1	19-03-2002

US 2004127371 A1	01-07-2004	CA 2440797 A1	13-03-2004
		CN 1493671 A	05-05-2004
		JP 2004107664 A	08-04-2004
		SG 109531 A1	30-03-2005

EP 1167497 A	02-01-2002	CA 2349411 A1	02-12-2001
		DE 01304885 T1	15-07-2004
		SG 115379 A1	28-10-2005
		US 2002019320 A1	14-02-2002
