

(19)



(11)

EP 1 663 635 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
21.10.2009 Bulletin 2009/43

(21) Application number: **04764897.7**

(22) Date of filing: **07.09.2004**

(51) Int Cl.:
B31F 1/14 (2006.01)

(86) International application number:
PCT/EP2004/009954

(87) International publication number:
WO 2005/023533 (17.03.2005 Gazette 2005/11)

(54) **CREPING BLADE**

KREPPSCHABER

LAME DE CREPAGE

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR**

(30) Priority: **08.09.2003 SE 0302400**
24.03.2004 US 807397

(43) Date of publication of application:
07.06.2006 Bulletin 2006/23

(73) Proprietor: **BTG Eclépens S.A.**
1312 Eclépens (CH)

(72) Inventors:
• **FRETI, Silvano**
1162 St. Prex (CH)
• **LAITHIER, Jean, Francois**
2207 Coffrance (CH)

(74) Representative: **Pierrou, Mattias**
Awapatent AB
P.O. Box 45 086
104 30 Stockholm (SE)

(56) References cited:
WO-A1-99/64674 GB-A- 2 128 551
US-B1- 6 207 021

EP 1 663 635 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical field of the invention

[0001] The present invention relates to blades for creping. More particularly, the present invention relates to creping blades provided with a ceramic coating and a method of manufacturing such blades.

Technical background

[0002] Creping doctor blades are commonly used in the production of tissue. The blades have the function of detaching a paper web from a rigid, hot dryer cylinder (often called a Yankee dryer) and at the same time exert a compressive action on the web thereby creating the typical crepe structure of a tissue product.

[0003] Nowadays, the creping blade must fulfill many requirements:

- The blade must overcome the adhesive forces which stick the paper web on the dryer surface, the adhesion being promoted (for purposes of drying the web) by a chemical coating applied to the dryer by means of a spray-boom.
- The blade should create the desired crepe structure in the web and thereby provide the right bulk, softness and mechanical strength to the tissue. For this aspect, the geometry of the blade tip is important. A square edge blade (90 degrees) in a given creping situation will create a different tissue than a blade with a sharp edge of say 75 degrees in the same creping situation. The former situation gives a higher bulk and coarser crepe structure than do the latter.
- The blade should keep the tissue parameters as constant as possible for the longest possible period of time. In other words, the wear of the blade tip and its interaction with the layer of coating chemicals on the web are important factors.
- The blade should be as friendly as possible against the dryer surface. This means that any wear should predominantly or exclusively occur on the blade, rather than on the dryer surface. The surface of the dryer can be either cast iron (same material as the bulk of the cylinder, i.e. a cylinder without any surface deposit) or a metallisation obtained by, for example, thermal spraying. As an example, WO 97/22729 describes a method for coating Yankee dryers.

[0004] Creping blades are subjected to wear for different reasons. First there is sliding wear against the dryer, and second there is impact wear due to the web hitting the blade during creping. It has been found that the progressive wear of the creping blade is directly related to unwanted evolution of the tissue properties, such as changes in bulk and softness. Practical experience, after having reviewed many tissue mills, has shown that the best properties of the tissue are obtained only with a new

blade. For steel blades, this period of good properties could be as short as one reel only.

[0005] In order to accommodate for such behavior (i.e. blade wear), tissue makers are specifying ranges of properties which are said to be acceptable. Nevertheless, there would be a high industrial demand for the tissue quality reached in the very first part of the first reel after a blade change. When the targeted range of tissue properties is not reachable anymore, the creping blade is changed for a new one, obtaining again the desirable characteristics but which are rapidly decreasing. Generally, steel blades of grade type such as AISI 1074 in quenched and tempered states are used. Such blades generally show rapid wear and consequently rapid changes in tissue quality, as well as possible micro-welding issues with the dryer surface and a so-called hot waving behavior.

[0006] For the reasons mentioned above, there has been made several attempts to improve the behavior of such blades by adding hard, wear resistant materials at the blade tip.

[0007] US patent 3,688,336 explain the possibility to add a wear resistant material at the blade tip by a suitable method of the thermal spraying type. The desire to avoid chipping of the wear resistant material was recognized. The referenced US patent proposes the solution to use a groove at the blade tip and a break-in space between the wear resistant material in the groove and the leading edge of the blade.

[0008] GB 2,128,551 discloses a multipurpose scraper which may be used as a creping blade, having an edge coated by thermal spraying in many passes with a wear resistant material from the ceramic or metal carbide families. More specifically, alumina-titania is presented. Focus is further made on flexibility and again is the need for minimum brittleness emphasized.

[0009] Other documents, such as US-6,207,021 and US-6,074,526, teach the possibility to create a recess on the blade tip in order to obtain an essentially constant contact surface against the dryer, and by this feature a constant scraping efficiency. Apart from the fact that such solutions are very much increasing the manufacturing costs for the blade, by virtue of elaborate and accurate grinding, such solutions are in practice exposed to blade tip failure due to hot friction wear and possible plastic flow of the reduced portion of the blade remaining at disposal for sliding wear.

[0010] Today, thermally sprayed ceramic tipped blades are used in the tissue industry. Ceramic compositions including alumina, alumina-titania and alumina-zirconia are well known in the field. The 60%/40% alumina-zirconia fulfils the basic requirements of good sliding wear against cast iron, very high fracture toughness and at the same time a relatively low hardness. Although creping blades having the above-mentioned features may bring benefits in terms of lifetime, they still suffer from a number of drawbacks.

[0011] Firstly, there is a large variation in blade lifetime

due to chipping problems of the ceramic edge. The blade has to be removed and replaced after a lifetime which can be anywhere between 5 minutes to 12 hours. It has been observed in practice that most of the failures observed when using ceramic tipped blades occur during the very first period after a blade change. If relatively small, such chips are responsible for what is often called "tramlines" on the mother reel when winding. With increasing size of such chips in the blade, or decreasing grade of the tissue to lower grammages, the chips may cause web breaks and holes on the tissue. This impairs productivity and quality. In conjunction to this point, the clear trend to use more and more recycled fibers in tissue production leads to more and more high ash content and foreign particles being entrapped in the tissue-making process, thereby promoting even more chipping of the leading edge of the state of the art ceramic tipped creping blades.

[0012] Secondly, another limitation for thermally sprayed ceramic tipped blades according to the state of the art is that, for high quality tissue such as facial towels, the conventional ceramic blade is not able to keep the very demanding tissue characteristics for any prolonged time. The inspection of worn ceramic blades shows that the impact of the tissue is much closer to the leading edge in such case compared to the situation for less quality demanding tissue. This can be understood by considering the fact that the high softness is obtained by having a very high adhesion onto the dryer surface, the web detachment and its impact thereby being close to the leading edge of the creping blade. The consequence is that once again chipping, in this case minute microchips, develop at the tip of the ceramic blade, leading to a "rounded" edge. Consequently, the tissue properties decrease rapidly even when using a ceramic tipped blade. In this respect, the solution in line with US-3,688,336 referenced above will be useless because the impact will occur in the unprotected "breaking-in space".

[0013] The use of creping blades tipped with thermally sprayed metal carbides, such as for example WC-Co or WC-Co-Cr is known. Such materials are less brittle than sprayed ceramic and therefore less sensitive to edge chipping. Nevertheless, the use of such materials should be avoided due to other drawbacks, namely:

- There is a potentially higher wear rate of the dryer surface, and potentially high damage due to chatter-marks if vibrations develop within the tissue machine and are transferred to the creping blade.
- Metal carbides are constituted by a metal matrix with embedded carbides. Such situation may promote the micro-welding events between the blade and the dryer surface at the high temperatures present in the sliding contact. This may lead to transfer of material from the dryer to the blade, causing premature wear or damage to the surface of the high cost dryer cylinder or its costly metallization.
- Another limitation of metal carbides derives from

their high thermal conductivity. The friction wear is creating a large amount of heat, adding to the temperature of the already hot dryer surface. Steel creping blades or creping blades made of a steel substrate with an edge coating of metal or metal carbide may obtain a blue color at about 10 mm from the tip, which count for temperatures exceeding 300°C. On long blades (wide machines), the steel expands sufficiently to create waving of the blade, instabilities in the blade holder, difficulties to unload blades and possibly damages to the Yankee drum, in particular when unloading such a hot blade. This is the so-called hot waving behavior.

- [0014]** Consequently, there is a need in the tissue industry for a creping blade with improved behavior, including the advantageous features of ceramic materials from a friction standpoint, but lacking the chipping drawbacks resulting from material brittleness.

Summary of the invention

- [0015]** One object of the present invention is therefore to provide a creping blade having a thermally sprayed ceramic tip, which blade does not present the macrochips limitations explained above, thereby avoiding the large fluctuations in blade lifetime.

- [0016]** A second object of the invention is to provide a blade that is more resistant to microchips when used on high quality tissue, such as facial tissue, allowing for the tissue properties to be maintained within the desired range for a longer period of time, i.e. an extension of the blade lifetime.

- [0017]** Another object of the invention is to provide a blade which is compatible with various types of Yankee dryer surfaces, e.g. both cast iron and metallisations, without premature wear of the dryer surface or material transfer from the dryer surface to the sliding contact of the blade due to microwelding.

- [0018]** Yet another object is to provide a very low sliding wear rate of the creping blade in order to maintain the scraping efficiency of the blade as constant as possible for a prolonged period of time.

- [0019]** The surprising observation on which the present invention is founded is that the use of one sprayed ceramic compound which is more brittle than alumina-based products will enable the solution of the chipping problem in creping blade applications, and at the same time fulfill the other objects mentioned above.

- It has been found, to the surprise of the skilled person, that creping blades tipped with a ceramic of chromia-titania ($\text{Cr}_2\text{O}_3/\text{TiO}_2$), applied by thermal spraying, exhibit no chipping at the leading edge of the blade, neither small edge microchips nor any macrochips.

- [0020]** Typically, the ceramic material covers the blade substrate at least over the section thereof adapted for contact with the dryer cylinder (the working edge or leading edge), as well as the section thereof upon which the

web impacts during creping. In other words, the ceramic top layer forms both a working edge adapted for contact with the surface of a dryer cylinder, and a web impact area upon which the web impacts during creping. Hence, the ceramic composition of the present invention improves both the sliding wear of the blade against the dryer cylinder, and the impact wear in the area of the blade where it is hit by the web.

[0021] Blades tipped with thermally sprayed chromia-titania with a titania-content of up to 25% by weight have been found to be suited for all creping requirements described above, as will be elucidated in the summary and various examples that follow.

[0022] It is preferred that the ceramic coating on the blade tip is chromia-titania ($\text{Cr}_2\text{O}_3/\text{TiO}_2$) with 5% to 25% by weight titania (TiO_2), more preferably 5% to 15% by weight titania (TiO_2), and most preferably with 10% to 15% titania.

[0023] The addition of titania to the ceramic composition also provides improved toughness, thereby facilitating coiling of the blades during, or subsequent to, manufacture. It has been found that delamination could occur between the ceramic deposit and the blade substrate when coiling the blade if the toughness of the ceramic deposit is too low.

[0024] The chromia-titania ceramic deposit according to the present invention is preferably a single phase coating without any lamella of titania in the coating microstructure. It is believed that this fact adds to the wear resistance of the coating. In a multiphase material, each phase generally behaves differently to wear, leading to roughening of the creping surface and an increased risk of web breakage. This becomes particularly important for low grammage tissue. The use of a single phase ceramic top layer according to the present invention provides uniform wear, leading to a smooth surface over the entire lifetime of the creping blade. In particular, any wear taking place on the web impact area of the blade will behave uniformly, such that a smooth wear surface is produced, thus keeping the creping properties and thereby also the quality of the creped product substantially constant for a prolonged period of time. In order to make the ceramic coating single phase, the coating is applied by thermal spraying from a spraying powder comprised of substantially single phase particles. In other words, the raw material for the thermal spraying process is not a, simple mix of chromia particles and titania particles, but rather a powder in which each particle already has the desired content of chromia and titania. The use of a simple mechanical blend of chromia particles and titania particles would lead to a coating having typical double phase properties, thereby not achieving the advantageous, smooth wear behavior described above. The properties of the single phase coating composition will be shown in more detail in the description below.

Brief description of the drawings

[0025] In the following, a detailed description of the invention will be given by way of preferred embodiments and practical examples. The description is given in conjunction with the accompanying drawings, on which:

Figure 1 illustrates the region of engagement between the surface of a dryer cylinder and the working edge of a newly installed creping blade according to the prior art (steel blade);

Figure 2 illustrates the region of engagement between the surface of the dryer and the working edge of a worn creping blade according to the prior art (steel blade) after a certain working time;

Figure 3 illustrates the region of engagement between the surface of the dryer and the working edge of a newly installed creping blade according to the present invention;

Figure 4 illustrates the region of engagement between the surface of the dryer and the working edge of a creping blade according to the present invention after a similar working time as that of figure 2 for the prior art blade;

Figures 5 to 7 represent EDX spectra for blade sliding bevels and are referred to in Example 1 below;

Figure 8 is a SEM view of a macrochip event and is referred to in Example 1 below;

Figures 9 and 10 are SEM views of the working edges of creping blades and are referred to in Example 2 below;

Figure 11 is a graph representing softness obtained for three different types of blades and is referred to in Example 3 below;

Figures 12 and 13 are SEM views showing wear patterns after two different running times for a prior art blade; and

Figure 14 is a SEM view showing the wear pattern for a creping blade according to the present invention.

Detailed description of embodiments

[0026] An embodiment of the creping blade according to the present invention can comprise the following:

- a steel substrate having a thickness in the range from 0.635 to 1.250 mm; and a width in the range from 50 to 150 mm, preferably in the range from 75 to 120 mm;
- a prebevel on the steel substrate, with an angle in the range from 0 (no prebevel) to 10 degrees, preferably from 4 to 8 degrees;
- a bond coat, suitably applied by thermal spraying of Ni-Cr (80/20) for example by atmospheric plasma spraying (APS) to a thickness in the range from 10 to 50 microns;
- a ceramic top layer at the working edge of the blade,

the ceramic being a thermally sprayed composition of chromia-titania, suitably applied by for example APS, having a thickness at the front of the blade in the range from 150 to 300 microns, preferably from 200 to 300 microns;

- a final grinding of the blade to the desired front bevel, from about -15 degrees (75 degree blades) to about +15 degrees (105 degree blades) in accordance with the intended application;
- a chamfer bevel at the blade tip, on the surface facing the dryer, with a length in the range from, 0 mm (no chamfer) to 0.5 mm, and with a bevel lower than the sliding bevel in the range from 3 to 15 degrees, preferably from 6 to 12 degrees.

[0027] It is preferred to have a top coating of chromia-titania, where the titania content is in the range from 5% to 25%, most preferably from 10% to 15%.

[0028] By way of introduction, the performance of the creping blade according to the invention will be briefly outlined with reference to figures 1-4, where a prior art blade is compared to the inventive blade.

[0029] Figure 1 illustrates the use of a prior art creping blade and shows the situation for a newly installed steel blade. The creping blade 2 is shown in engagement with the surface of a dryer cylinder 1. The dryer moves according to the arrow a, transporting paper web 3 and a coating chemical layer 4 up to the working edge 5 of the blade 2. The paper web 3 hits the surface 11 of the blade at a point 6 near the edge 5 thereof, and the web 3 is thereby compressed and changes direction in the form of a creped tissue 7. As illustrated in the figure, the coating chemical layer 4 is partially scraped off by the working edge 5 of the creping blade, but some material of this chemical layer 8 remains on the surface of the dryer 1. If the degree of adhesion between the web and the cylinder surface is very high, then point 6 corresponding to the web impact area upon the creping blade can be very close to the working edge 5 or even superimposed.

[0030] Figure 2 again illustrates the use of the prior art creping blade, but now after a working time of t1. Hence, figure 2 shows the situation for a worn prior art creping blade 2 due to sliding against the dryer surface. The working edge 5 as shown in figure 1 is now replaced by a sliding surface 5'. The impact wear located in the area 6 has created a groove on the surface 11 of the blade. Due to the usual constant linear load applied to the blade tip, the development of the sliding surface 5' will, directly decrease the scraping efficiency of the blade 2, whereby the amount of residual chemical layer 8 will increase over time.

[0031] Figure 3 illustrates the use of a creping blade 2 according to the present invention and shows the situation for a newly installed blade. The blade is in contact with the dryer surface at the edge 5. The wear-resistant chromia-titania layer is represented by the darker area 9 in the figure. In this example, the prebevel given to the steel substrate causes the ceramic coating to have a

wedge shape as indicated by the darker area 9 in the figure.

[0032] Figure 4 again illustrates the use of a creping blade 2 according to the present invention, but now after a working time of t1 (similar working time as shown in figure 2 for the prior art steel blade). Hence, figure 4 shows the situation for a worn creping blade according to the present invention. The sliding wear rate is much lower compared to the situation for the prior art blade shown in figure 2, and the sliding bevel 5' is so small that it is practically similar to an edge. As a consequence, for a given linear load applied to the blade tip, the scraping efficiency of the inventive blade is only slightly lower compared to a newly installed blade, and the residual amount 8 of the coating chemical layer 4 has only increased by a small amount.

Examples

[0033] In order to determine the performance of the creping blades according to the present invention, a number of comparative trials were performed.

Example 1

[0034] In a tissue mill, trials were performed with three different types of creping blades. The first type, labeled A, was a blade according to the present invention, having a ceramic top coating of chromia-titania with 15% titania content. The second type, labeled B, was a prior art ceramic tipped blade with an alumina-based material for the ceramic coating. The third type, labeled C, was a prior art metal carbide blade.

[0035] The running conditions for the creping process were the following:

- paper web made from 100% recycled fibers;
- industrial towel type tissue;
- grammages of 19, 22 and 28 g/m², with wet strength;
- Yankee speed of 1050 m/min;
- Crepe ratio of 15%;
- Yankee surface comprised of Metso Curemate-78, a HVOF WC-Co-Cr coating;
- web moisture of 3.5-4%;
- creping blade dimensions of 1.2 x 100 x 2980 mm (thickness x width x length);
- a blade bevel of 85 degrees (-5 degrees from square edge);
- a blade load of 2.5 bars (280 kgf/m on the reading scale);
- a base adhesive composition comprised of Cyttac (Key Chemicals) 133 @ 37 ml/min or 2.3 mg/m²;
- a release composition comprised of Cylube (Key Chemicals) 112 @ 16 ml/min or 4.6 mg/m²;
- a modifier composition comprised of Cyttac 420 (Key Chemicals) (DiAmmoniumPhosphate) @ 17 ml/min or 1.8 mg/m².

[0036] Blade A (the blade according to the present invention) was run for 19 hrs and was not at the end of its lifetime. Blade B was run for 11 hrs and was removed due to 2 chips occurring. Blade C was run for 20 hrs and was at the end of its lifetime.

[0037] Figure 5 represents an EDX (Energy Dispersive X-ray) spectrum made on the sliding bevel of blade A after 19, hrs running time. No peaks are found related to the material of the Curemate-78 surface (W-Co-Cr). The peaks from Cr, Ti and O are related to the ceramic composition of the creping blade coating, and the peak from Au is due to gold sputtering of the sample.

[0038] Figure 6 represents an EDX spectrum made on the sliding bevel of blade B after 11 hrs running time. Again, no peaks are found related to the material of the Curemate-78 surface. The peaks from Al, Zr and O are related to the ceramic composition of the creping blade coating, and the peak from Au is due to gold sputtering of the sample.

[0039] Figure 7 represents an EDX spectrum made on the sliding bevel of blade C after 20 hrs running time. The blade material is WC-Co without any Cr content. A small but clearly visible Cr peak in this spectrum is related to the material of the Curemate-78 surface of the Yankee (W-Co-Cr). Although not quantitative, this is a sign of friction/microwelding interaction between the material of the blade and that of the Yankee dryer surface.

[0040] Moreover, figure 8 is a SEM view of a macrochip that occurred on blade B. The failure of the ceramic created a line defect on the tissue web, which is unacceptable and therefore lead to a blade change.

[0041] As a conclusion of this example, the state of the art ceramic tipped blade (blade B) is sensitive to macrochips. The state of the-art metal carbide tipped blade (blade C) is not particularly sensitive to macrochips but show signs of unwanted interaction with the dryer Curemate-78 surface. The blade according to the present invention (blade A) combines the benefits of the two state of the art blades.

Example 2

[0042] On another tissue machine, currently employing alumina-based creping blades, a trial of ten blades according to the invention was performed. ,

[0043] The running conditions for the creping process were the following:

- paper web made from 100% deinked fibers (recycled);
- toilet paper tissue type;
- grammage of 16 g/m²;
- Yankee speed of 770 m/min;
- Yankee surface comprised of cast iron;
- Reel speed of 560 m/min (crepe ratio 27%);
- web moisture of 3%;
- creping blade dimensions of 1.2 x 120 x 3420 mm (thickness x width x length);

- a blade bevel of 85 degrees (-5 degrees from square edge);
- a blade load of 2.5 kN/m;
- a stick-out of 60 mm.

[0044] The ceramic blades currently used on this machine exhibits a very large variation in blade lifetime, ranging from 1 hour up to over 100 hours. The lifetime of the currently used alumina-based ceramic tipped blades is limited mainly by chipping problems, and the average lifetime is about 50 hours.

[0045] The lifetime of the ten blades according to the present invention tested on this machine were (in hours) 77-116-60-142-76-50-65-109-44-124, with an average of 86 hours and a minimum lifetime of 44 hours. Change of blade was in this case dictated by a change in paper grade, and not by chipping problems.

[0046] An alumina-based ceramic tipped blade was run on the machine for 131 hours and then inspected in a scanning electron microscope (SEM). Figure 9 represents an SEM view of the edge of that blade. The sliding wear path, indicated by the arrow in the figure, was found to have a width of 550 μm.

[0047] Figure 10 represents a similar SEM view, but of the creping blade according to the present invention after a running time of 142 hours on this machine. The sliding wear path, indicated by the arrow in the figure, was found to have a width of 150 μm. This should be compared to the result evidenced by figure 9 for the state of the art blade for a similar running time on the same machine.

[0048] As a conclusion of this example, the resistance to chips on cast iron for a tissue grammage this low is greatly improved by the use of blades according to the invention. It should be pointed out that blade chips in connection with such very light tissue may be responsible for web breaks, and consequently loss in productivity.

[0049] In addition, the lower sliding wear path obtained for the inventive blade compared to the state of the art blades (150 μm compared to 550 μm) will ensure a more uniform scraping efficiency of the coating chemicals over time, and therefore also a more constant creping process.

Example 3

[0050] On yet another tissue machine, currently employing alumina-based ceramic tipped creping blades, a comparative trial was performed between state of the art blades and blades according to the present invention.

[0051] The running conditions for the creping process were the following:

- paper web made from 100% virgin fibers;
- soft toilet paper tissue type
- grammage of 21 g/m²;
- Yankee speed of 1100 m/min;
- Yankee surface comprised of cast iron;

- creping blade dimensions of 1.2 x 120 x 2790 mm (thickness x width x length);
- blade bevel of 75 degrees (-15 degrees from square edge).

[0052] State of the art ceramic tipped and metal carbide tipped blades were compared to a blade according to the present invention. The blade according to the invention had a 90% chromia - 10% titania composition. In this case, the softness attributed value is an important criteria for this tissue mill. The three blade types were run for about 8 hours during 3 consecutive days of production of the same grade. The desired softness value is 3.0, with a minimum acceptable value of 2.6. Figure 11 shows a graph representing the results obtained by the three types of blades.

[0053] Clearly, this trial shows that for high quality tissue grade, the state of the art ceramic blade is not able to reach the same results as the metal carbide blade, i.e. to keep the softness as constant and high as possible. The blade according to the invention, however, (in this case with a ceramic having 90% chromia and 10% titania) gives a softness comparable to that of the metal carbide tipped blade, but lacks the potential drawbacks with respect to friction compatibility.

Example 4

[0054] In the tissue machine of Example 2 above, tests were performed (under the same running conditions as outlined in Example 2 above) in order to inspect the wear pattern of the worn blades. A comparison was made between alumina-zirconia ceramic tipped blades of the prior art and chromia-titania ceramic tipped blades according to the present invention. Inspection of the worn blades was made by scanning electron microscopy (SEM).

[0055] Figure 12 shows a SEM view of the wear pattern created by running web on a state of the art alumina-zirconia ceramic tipped blade after a running time of 28 hrs.

[0056] Figure 13 shows a view similar to that shown in figure 12, but now after a running time of 131 hrs.

[0057] Figure 14 shows again a view similar to figures 12 and 13, but now for a blade according to the present invention. The blade shown in figure 14 has a ceramic coating of chromia with 15% by weight titania. The wear pattern shown in figure 14 was created after a running, time of 116 hrs.

[0058] Figures 12 to 14, which all have the same magnification, clearly show that the wear of a multiphase material such as alumina with 40% by weight zirconia leads to a quite rough wear pattern, while the use of a single phase material according to the invention (chromia with 15% by weight titania) gives a very smooth impact wear pattern on the blade. This difference in impact wear pattern can explain why the use of a ceramic tipped blade according to the present invention leads to a decrease in the frequency of web breaks compared to a prior art

multiphase ceramic material.

Conclusion

[0059] A blade for creping has been described. The blade according to the invention has a ceramic top layer covering the working edge of the blade, as well as the surface upon which the web impacts during creping. The ceramic top layer is a ceramic composition comprising chromia-titania. Preferably, the ceramic composition of the top layer comprises chromia-titania, with a titania content of 5% to 25% by weight, and most preferably from 10% to 15% titania.

[0060] The blade according to the present invention leads to lower sliding wear at the working edge of the blade, which in turn gives a more uniform scraping efficiency. Moreover, the ceramic top layer of the blade according to the present invention is comprised of a single phase composition, leading to a comparatively uniform impact wear at the areas where the web impacts the creping blade. This, in turn, has the advantage that the creping process is more constant over time and that the occurrence of web breaks is drastically reduced.

Claims

1. A blade for creping a paper web from a surface, comprising a steel substrate which is covered by a thermally sprayed ceramic top layer that forms both a working edge adapted for contact with said surface and a web impact area upon which the web impacts during creping, wherein the ceramic composition of said ceramic top layer comprises both chromia (Cr_2O_3) and titania (TiO_2), the content of titania being up to 25% by weight.
2. A blade according to claim 1, wherein the content of titania in the composition of the ceramic top layer is 5% to 25% by weight.
3. A blade according to claim 1 or 2, wherein the ceramic top layer has a titania content in the range from 5% to 15% by weight, preferably in the range from 10% to 15%.
4. A blade according to any one of the preceding claims, wherein the thickness of the ceramic top layer at the edge section of the blade is in the range from 150 to 300 microns, preferably from 200 to 300 microns.
5. A blade according to any one of the preceding claims, further comprising a bond coat between the steel substrate and the ceramic top layer.
6. A blade according to claim 5, wherein said bond coat comprises Ni-Cr.

7. A blade according to claim 5 or 6, wherein said bond coat has a thickness between 10 and 50 μm .
8. A blade according to any one of the preceding claims, wherein the steel substrate has a prebevel with an angle of up to 10 degrees, upon which the ceramic top layer is deposited.
9. A blade according to claim 8, wherein said prebevel has an angle of 4-8 degrees.
10. A blade according to any one of the preceding claims, wherein the steel substrate has a thickness in the range from 0.635 to 1.250 mm.
11. A blade according to any one of the preceding claims, wherein the steel substrate has a width in the range from 50 to 150 mm, preferably in the range from 75 to 120 mm.
12. A blade according to any one of the preceding claims, wherein the ceramic top layer is a single phase ceramic material.
13. A method of manufacturing a blade for creping a paper web from a surface, comprising the steps of:

applying a ceramic top layer on a steel substrate by thermal spraying, such that the ceramic top layer forms both a working edge adapted for contact with said surface and a web impact area upon which the web impacts during creping,

wherein the ceramic top layer is made to comprise chromia and titania, the content of titania being up to 25% by weight.
14. A method as claimed in claim 13, further comprising the step of applying a bond coat on the steel substrate before applying the ceramic top layer.
15. A method as claimed in claim 13 or 14, wherein the ceramic top layer is applied by thermal spraying from a spraying powder comprising single-phase particles, such that a single phase top coating is provided.

Patentansprüche

1. Kreppschaber zum Kreppen einer Papierbahn aus einer Oberfläche, enthaltend ein Stahlsubstrat, das von einer thermisch aufgespritzten keramischen Deckschicht bedeckt ist, die sowohl eine Arbeitskante, die für den Kontakt mit der Oberfläche eingerichtet ist, als auch einen Bahnauftreffbereich ausbildet, auf den die Bahn während des Kreppens auftrifft, wobei die keramische Zusammensetzung der keramischen Deckschicht sowohl Chromoxid (Cr_2O_3) als

auch Titanoxid (TiO_2) enthält und der Gehalt des Titanoxids bis zu 25 Gew.-% beträgt.

2. Schaber nach Anspruch 1, bei dem der Gehalt des Titanoxids in der Zusammensetzung der keramischen Deckschicht 5 bis 25 Gew.-% beträgt.
3. Schaber nach Anspruch 1 oder 2, bei dem die keramische Deckschicht einen Titanoxidgehalt im Bereich von 5 bis 15 Gew.-%, vorzugsweise im Bereich von 10 bis 15 Gew.-% hat.
4. Schaber nach einen der vorhergehenden Ansprüche, bei dem die Dicke der keramischen Deckschicht am Kantenabschnitt des Schabers im Bereich von 150 bis 300 μm , vorzugsweise von 200 bis 300 μm liegt.
5. Schaber nach einem der vorhergehenden Ansprüche, weiterhin enthaltend eine Klebebeschichtung zwischen dem Stahlsubstrat und der keramischen Deckschicht.
6. Schaber nach Anspruch 5, bei dem die Klebebeschichtung Ni-Cr enthält.
7. Schaber nach Anspruch 5 oder 6, bei dem die Klebebeschichtung eine Dicke zwischen 10 und 50 μm hat.
8. Schaber nach einem der vorhergehenden Ansprüche, bei dem das Stahlsubstrat eine Neigung in einem Winkel von bis zu 10 Grad hat, auf das die keramische Deckschicht abgeschieden ist.
9. Schaber nach Anspruch 8, bei dem die Neigung einen Winkel von 4 bis 8 Grad hat.
10. Schaber nach einem der vorhergehenden Ansprüche, bei dem das Stahlsubstrat eine Dicke im Bereich von 0,635 bis 1,250 mm hat.
11. Schaber nach einem der vorhergehenden Ansprüche, bei dem das Stahlsubstrat eine Breite im Bereich von 50 bis 150 mm, vorzugsweise im Bereich von 75 bis 120 mm hat.
12. Schaber nach einem der vorhergehenden Ansprüche, bei dem die keramische Deckschicht ein einphasiges keramisches Material ist.
13. Verfahren zum Herstellen eines Schabers zum Kreppen einer Papierbahn aus einer Oberfläche, enthaltend folgende Schritte:

Aufbringen einer keramischen Deckschicht auf ein Stahlsubstrat durch thermisches Spritzen, so dass die keramische Deckschicht sowohl ei-

ne Arbeitskante, die dazu eingerichtet ist, die Oberfläche zu berühren, als auch einen Bahn-auftreffbereich ausbildet, auf den die Bahn wäh- rend des Kreppens auftrifft,

wobei die keramische Deckschicht so beschaffen ist, dass sie Chromoxid und Titanoxid enthält und der Gehalt des Titanoxids bis zu 25 Gew.-% beträgt.

14. Verfahren nach Anspruch 13, weiterhin umfassend den Schritt des Aufbringens einer Klebebeschich- tung auf dem Stahlsubstrat vor dem Aufbringen der keramischen Deckschicht.

15. Verfahren nach Anspruch 13 oder 14, bei dem die keramische Deckschicht durch thermisches Sprit- zen aus einem Spritzpulver aufgebracht wird, das einphasige Partikel enthält, so dass eine einphasige Deckschicht ausgebildet wird.

Revendications

1. lame pour crêper une feuille continue de papier de- puis une surface, comprenant un substrat d'acier qui est couvert par une couche supérieure de céramique déposée par projection thermique qui forme à la fois un bord de travail adapté pour entrer en contact avec ladite surface et une zone d'impact de feuille sur la- quelle la feuille vient frapper pendant le crêpage, dans lequel la composition de la céramique de ladite couche supérieure de céramique comprend à la fois de l'oxyde de chrome (Cr_2O_3) et de l'oxyde de titane (TiO_2), le contenu de l'oxyde de titane étant de jus- qu'à 25% en poids.

2. lame selon la revendication 1, dans laquelle le con- tenu en oxyde de titane dans la composition de la couche supérieure de céramique est de 5% à 25% en poids.

3. lame selon la revendication 1 ou 2, dans laquelle la couche supérieure de céramique a un contenu en oxyde de titane dans une plage allant de 5% à 15% en poids, de préférence dans une plage allant de 10% à 15%.

4. lame selon l'une quelconque des revendications précédentes, dans laquelle l'épaisseur de la couche supérieure de céramique au niveau de la section de bord de la lame est dans une plage de 150 à 300 microns, de préférence de 200 à 300 microns.

5. lame selon l'une quelconque des revendications précédentes, comprenant en outre une couche d'ac- crochage entre le substrat d'acier et la couche su- périeure de céramique.

6. lame selon la revendication 5, dans laquelle ladite couche d'accrochage comprend du Ni-Cr ;

7. lame selon la revendication 5 ou 6, dans laquelle ladite couche d'accrochage a une épaisseur d'entre 10 et 50 μm .

8. lame selon l'une quelconque des revendications précédentes, dans laquelle le substrat d'acier a un pré-chanfrein avec un angle de jusqu'à 10 degrés, sur lequel la couche supérieure de céramique est déposée.

9. lame selon la revendication 8, dans laquelle ledit pré-chanfrein a un angle de 4-8 degrés.

10. lame selon l'une quelconque des revendications précédentes, dans laquelle le substrat d'acier a une épaisseur dans une plage allant de 0,635 à 1,250 mm.

11. lame selon l'une quelconque des revendications précédentes, dans laquelle le substrat d'acier a une largeur dans une plage allant de 50 à 150 mm, de préférence dans une plage allant de 75 à 120 mm.

12. lame selon l'une quelconque des revendications précédentes, dans laquelle la couche supérieure de céramique est un matériau céramique monphasé.

13. Procédé de fabrication d'une lame pour crêper une feuille continue de papier depuis une surface, com- prenant les étapes consistant à :

appliquer une couche supérieure de céramique sur un substrat d'acier par projection thermique, de telle manière que la couche supérieure de céramique forme à la fois un bord de travail adapté pour entrer en contact avec ladite surfa- ce et une zone d'impact de feuille sur laquelle la feuille frappe pendant le crêpage,

dans lequel la couche supérieure de céramique est faite pour comprendre de l'oxyde de chrome et de l'oxyde de titane, le contenu en oxyde de titane pou- vant atteindre jusqu'à 25% en poids.

14. Procédé selon la revendication 13, comprenant en outre l'étape consistant à appliquer une couche d'ac- crochage sur le substrat d'acier avant l'application de la couche supérieure de céramique.

15. Procédé selon la revendication 13 ou 14, dans lequel la couche supérieure de céramique est appliquée par projection thermique à partir d'une poudre de projection comprenant des particules monopha- sées, de telle manière qu'une couche supérieure de céramique monophasée est formée.

Fig. 1
(Prior Art)

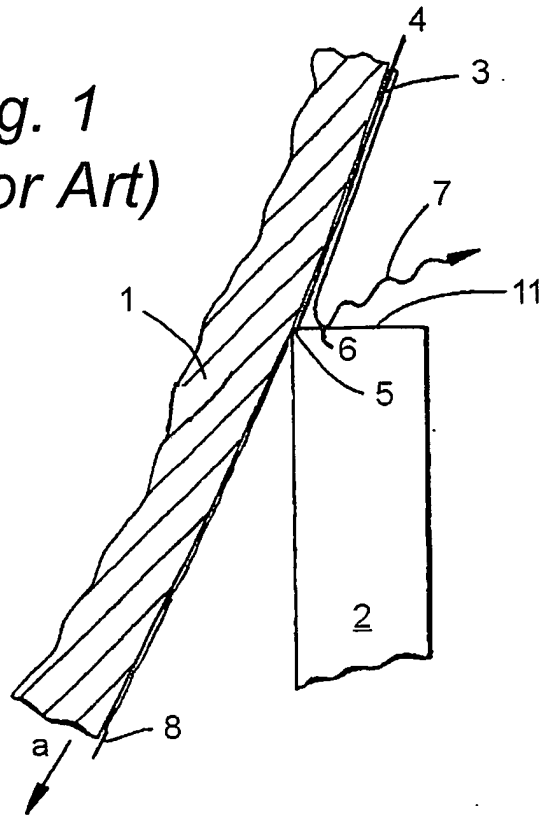


Fig. 2
(Prior Art)

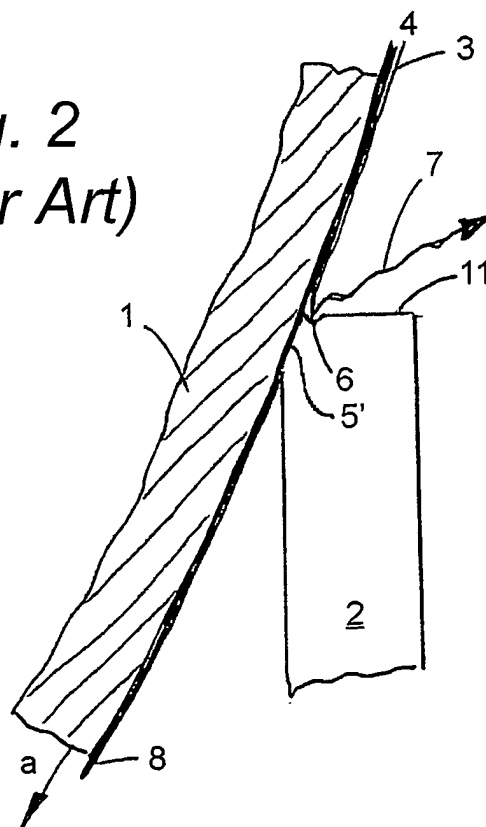


Fig. 3

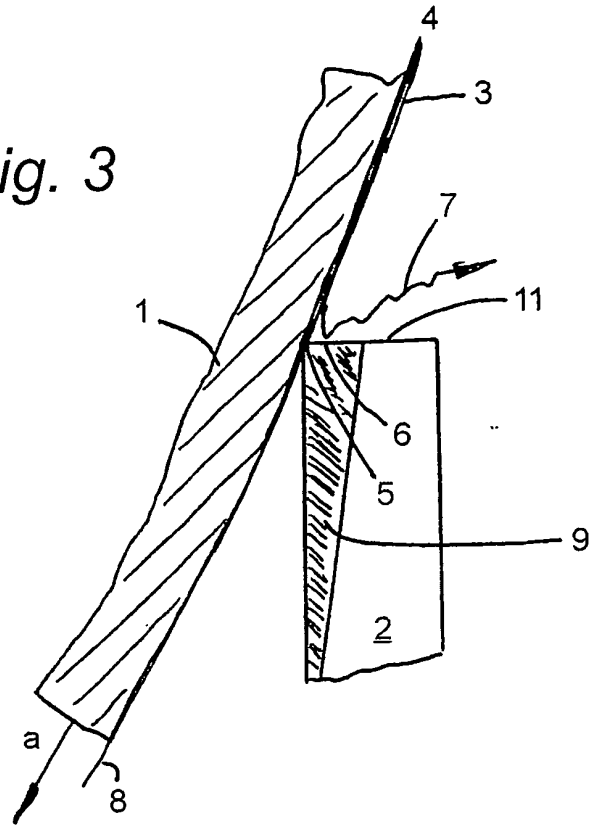
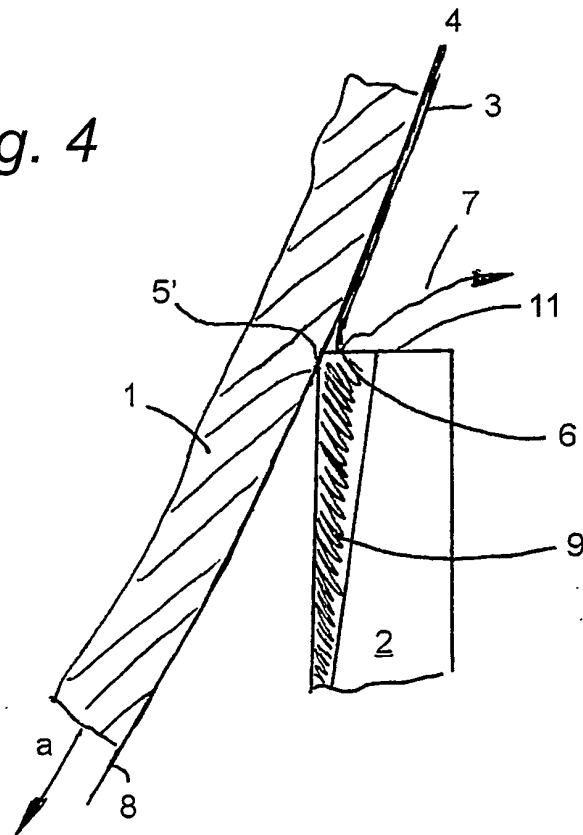
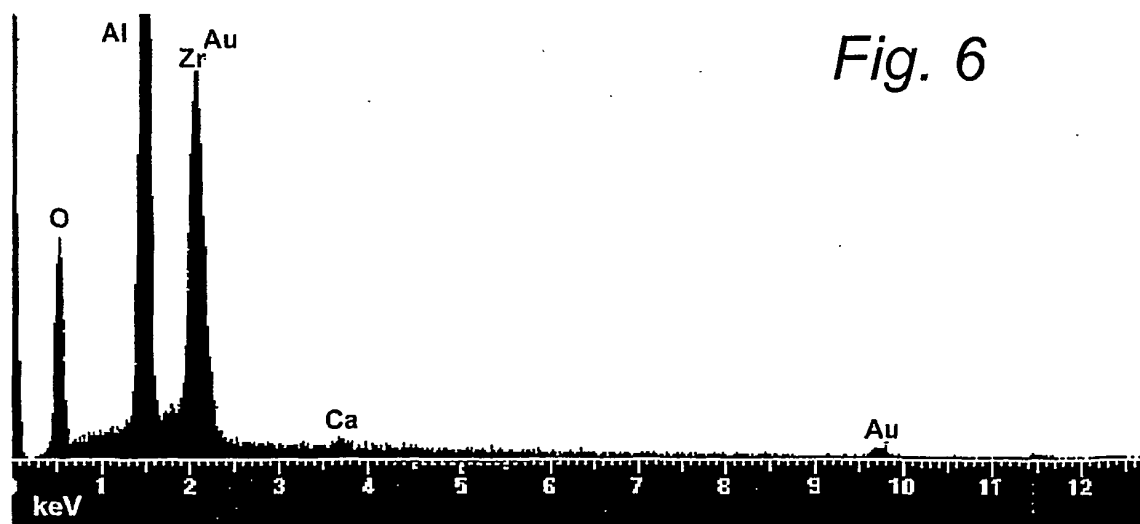
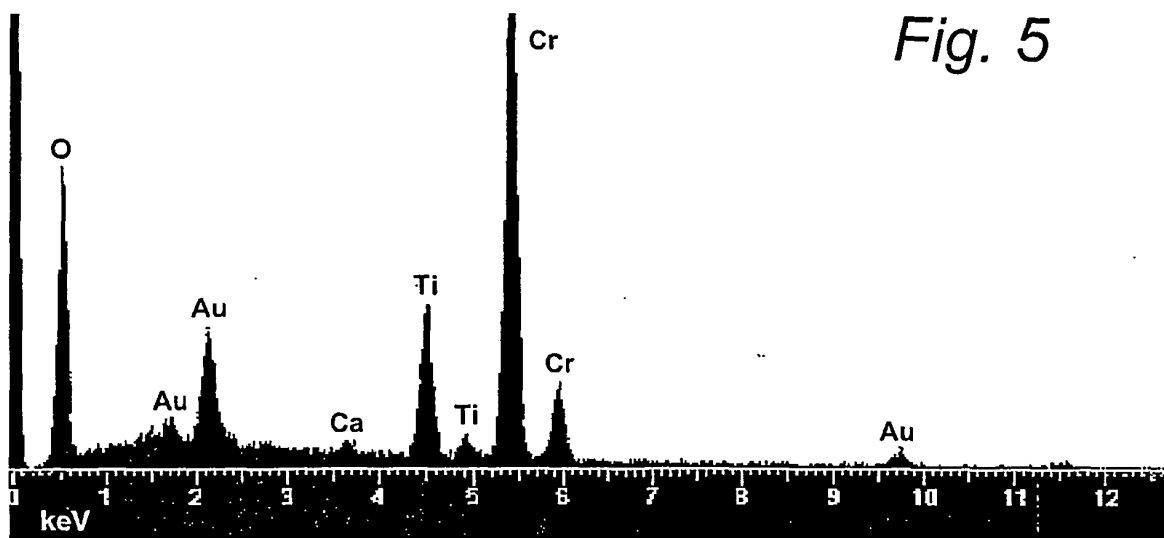
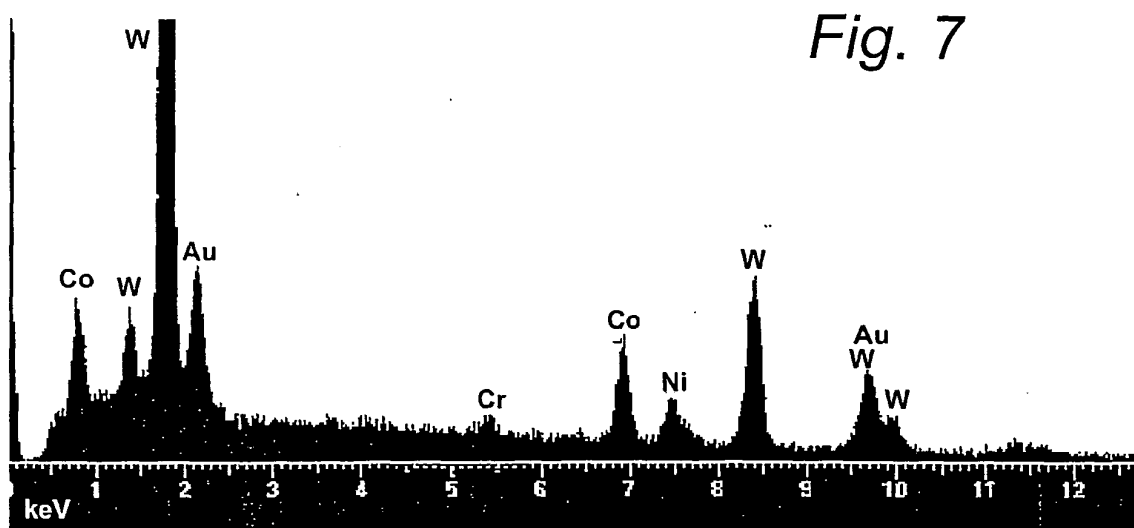


Fig. 4







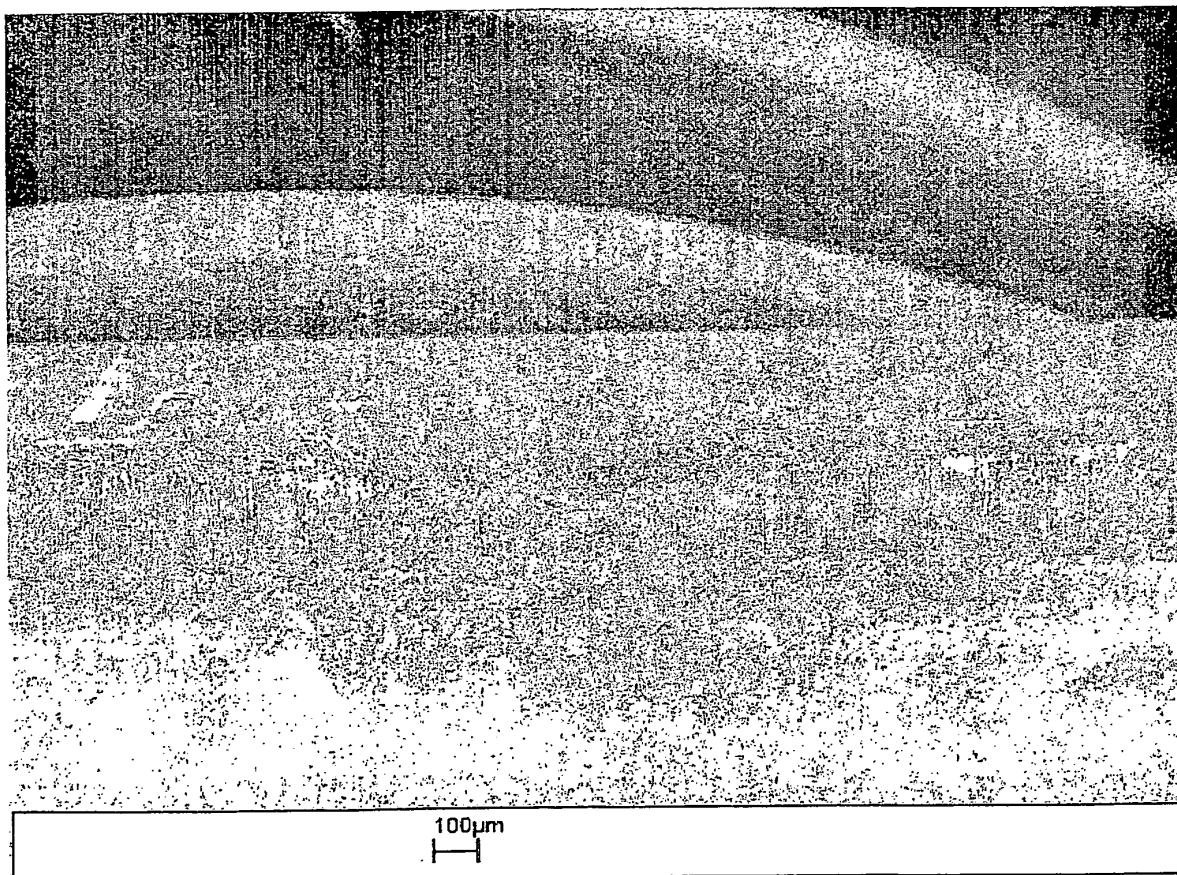


Fig. 8

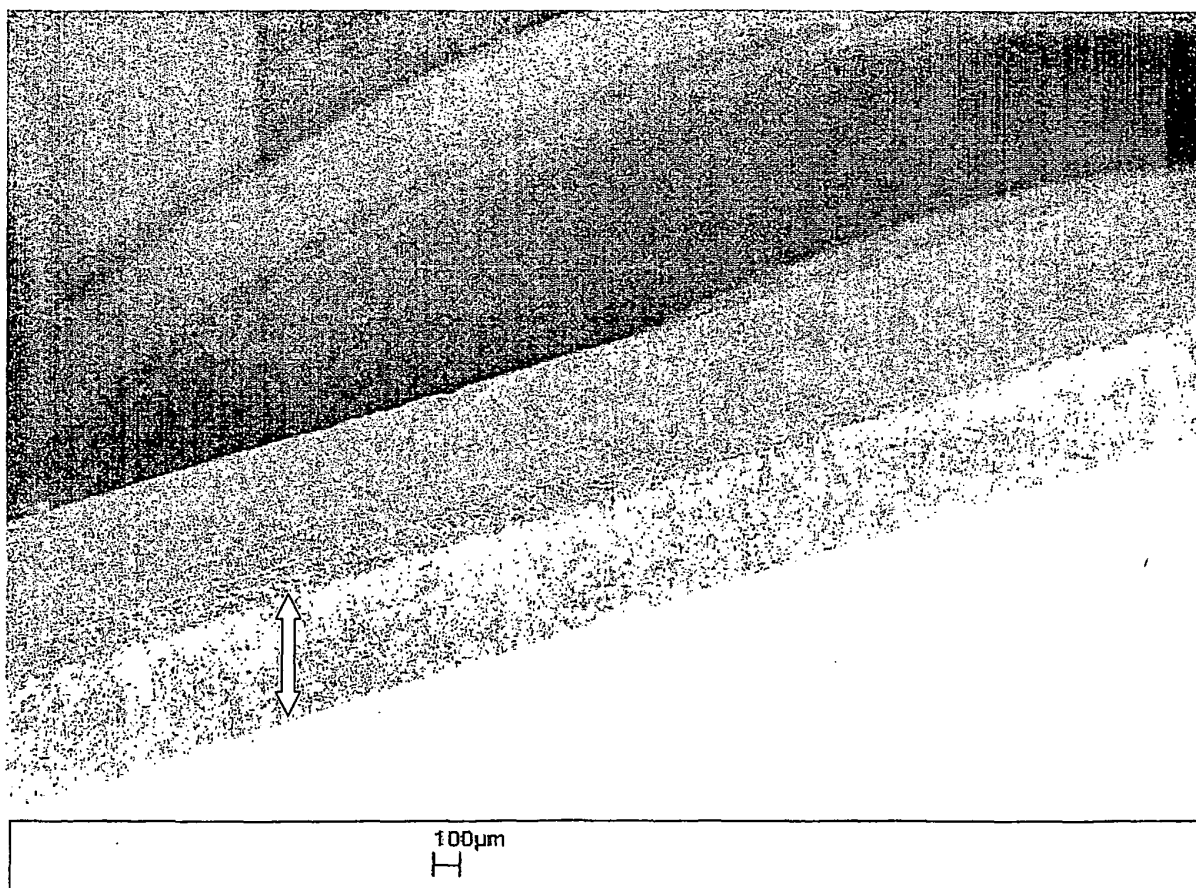


Fig. 9

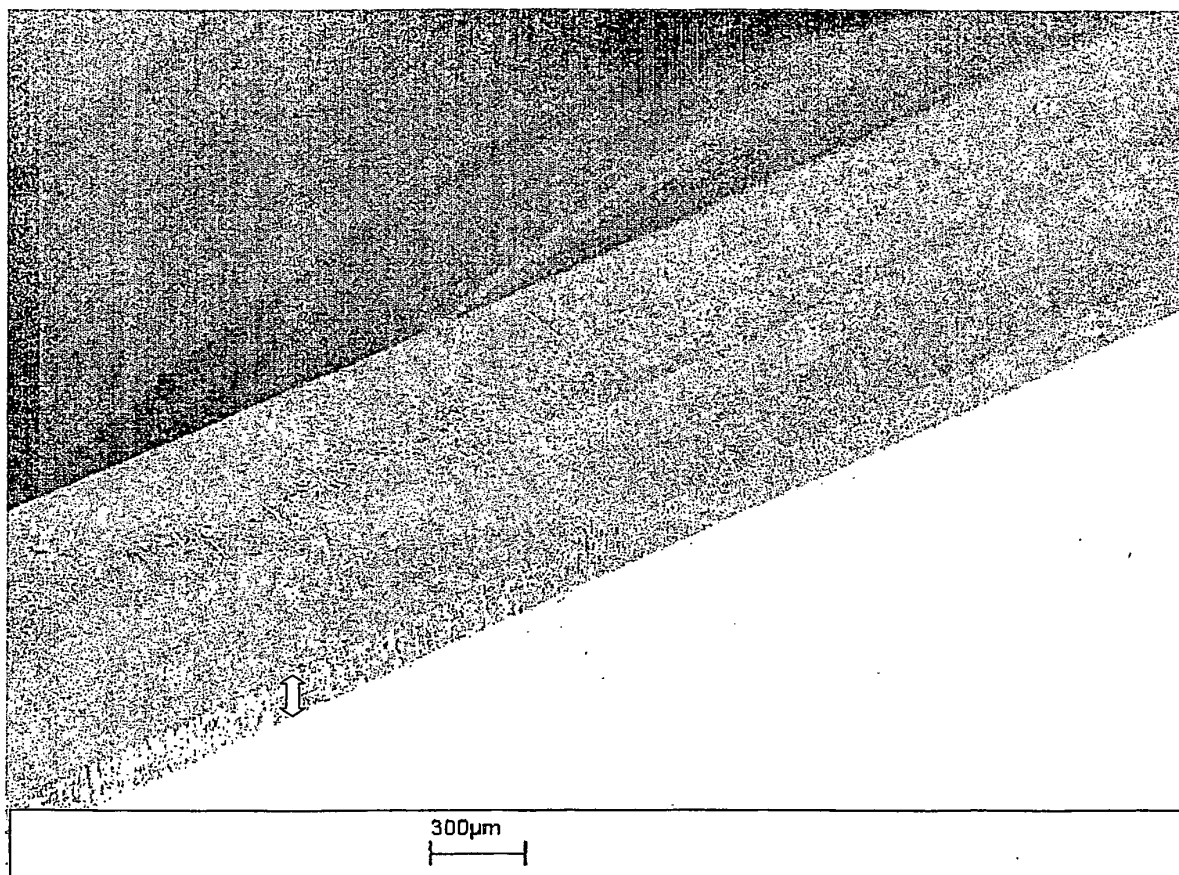


Fig. 10

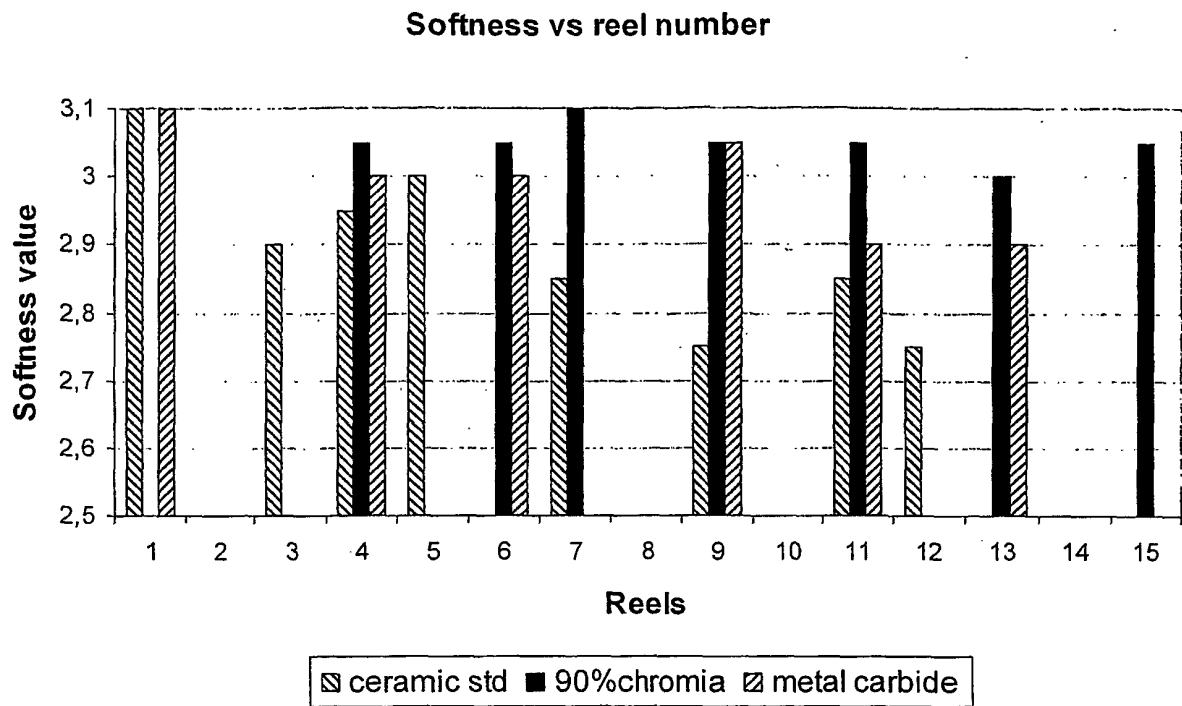


Fig. 11

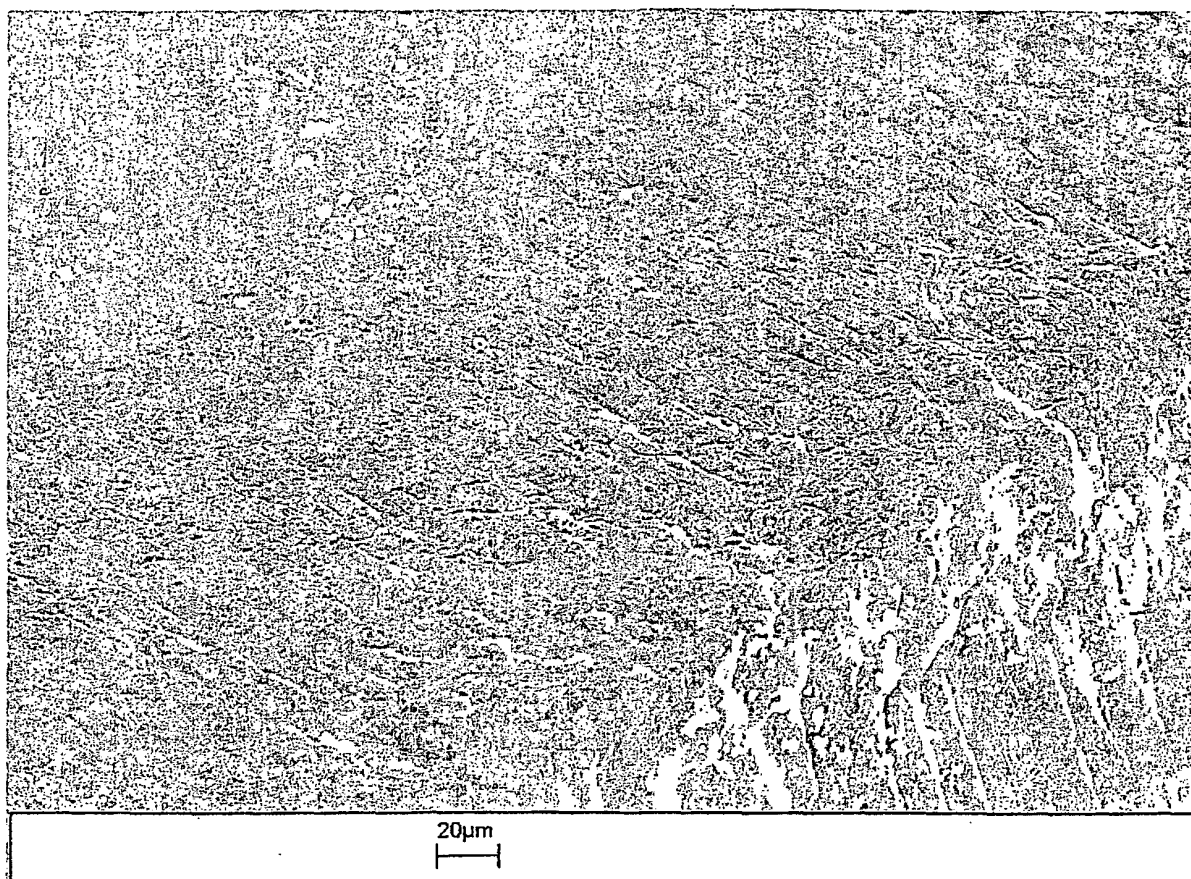


Fig. 12

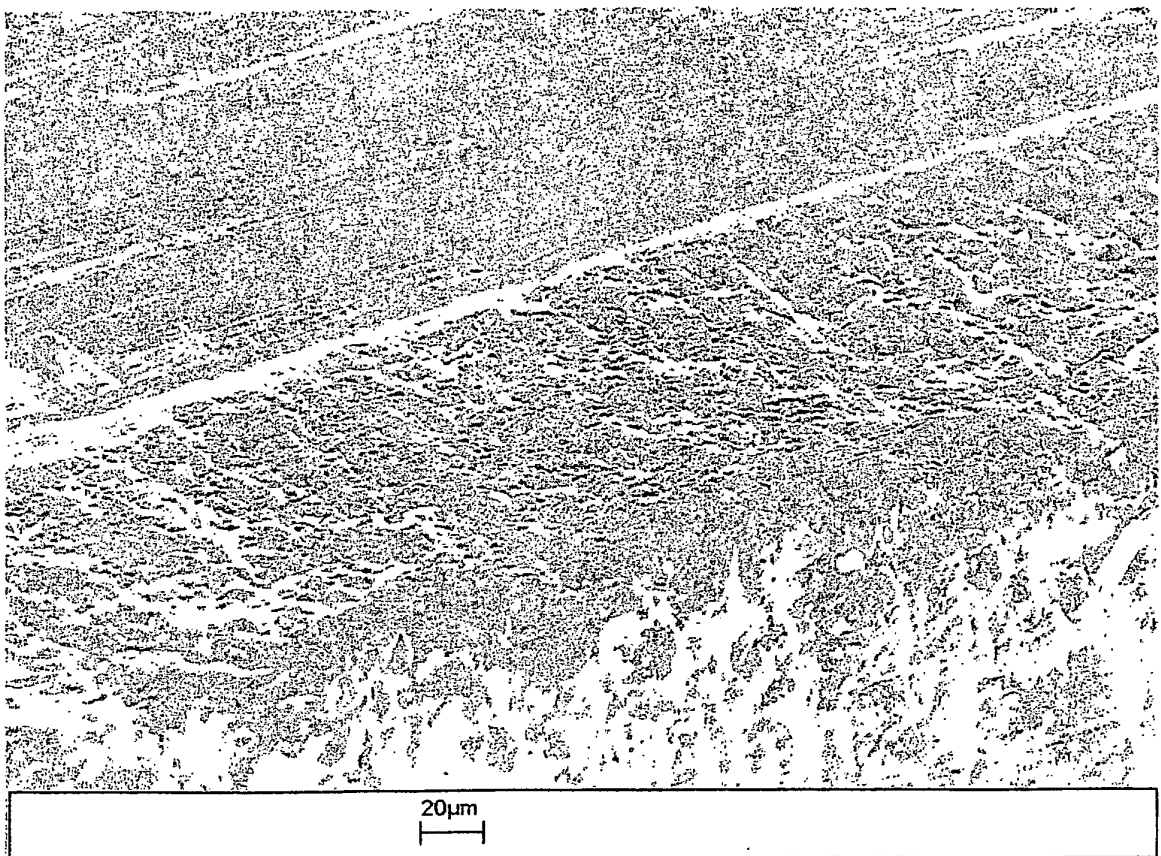


Fig. 13

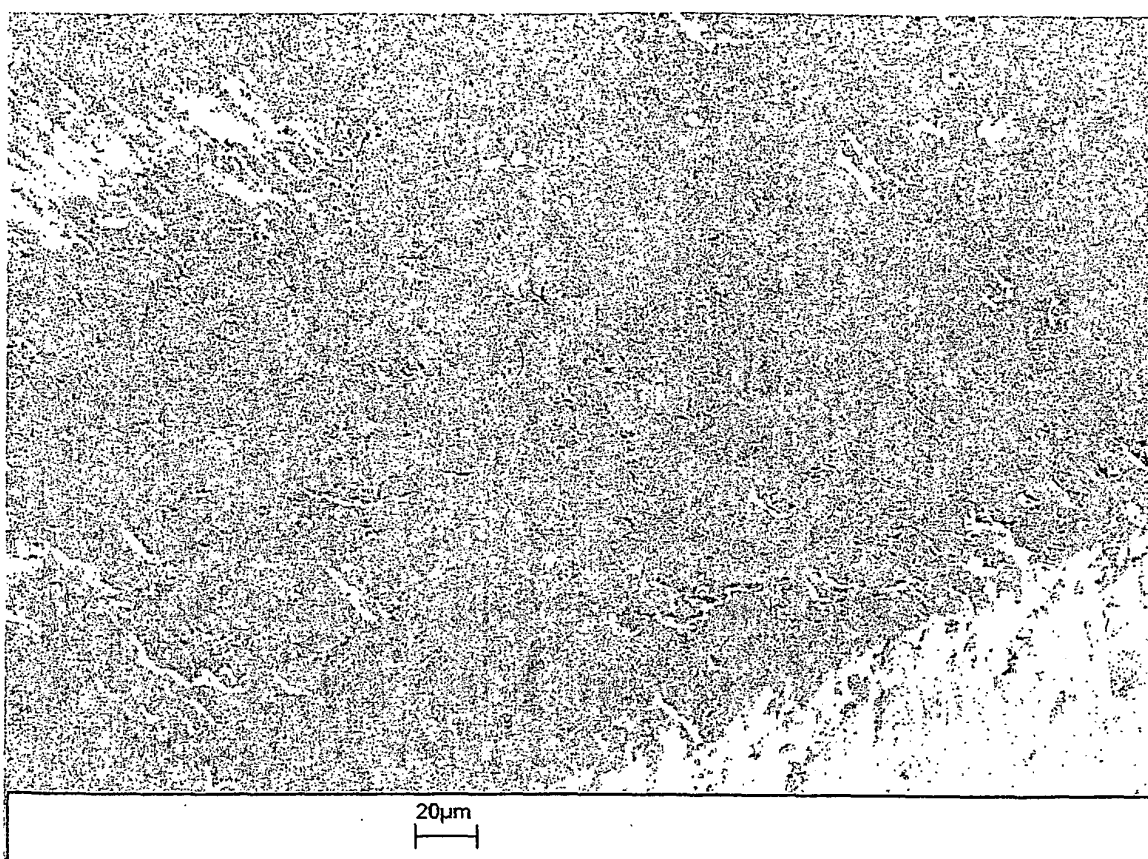


Fig. 14

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 9722729 A [0003]
- US 3688336 A [0007] [0012]
- GB 2128551 A [0008]
- US 6207021 B [0009]
- US 6074526 A [0009]