



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
07.06.2006 Bulletin 2006/23

(51) Int Cl.:
E01C 7/08 (2006.01) **E01C 7/18** (2006.01)
E01C 7/35 (2006.01) **E04F 15/12** (2006.01)

(21) Application number: **04078300.3**

(22) Date of filing: **06.12.2004**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR**
Designated Extension States:
AL BA HR LV MK YU

(72) Inventor: **Uhl, Frans Werner
2051 KA Overveen (NL)**

(71) Applicant: **Uhl, Frans Werner
2051 KA Overveen (NL)**


(74) Representative: **van Westenbrugge, Andries et al
Nederlandsch Octrooibureau,
J.W. Frisolaan 13,
P.O. Box 29720
2502 LS Den Haag (NL)**

(54) **Surfacing for a pavement and method for the production of such a surfacing**

(57) A method for the production of a hardened surfacing comprises the following steps:

- laying at least one layer consisting of granules of a rock-like material, which are at least bound by a fusible binder, obtained from oil refining, at a temperature of between 130 °C and 190 °C onto a substrate,
- compacting this layer immediately after laying by applying pressure, for example using a roller,
- allowing the layer to cool, and
- removing the top portion of the layer by mechanical

means, such as milling, grinding or polishing, as a result of which granules that have been cut through become visible, wherein, before the layer is laid, particles are added to the layer and mixed with the granules and the binder in the mixture and as a result are distributed through the mixture, after which the layer is laid, compacted and cooled and the top portion is removed, as a result of which a portion of said particles, which at least partially are located in the top portion of the layer, is likewise removed.

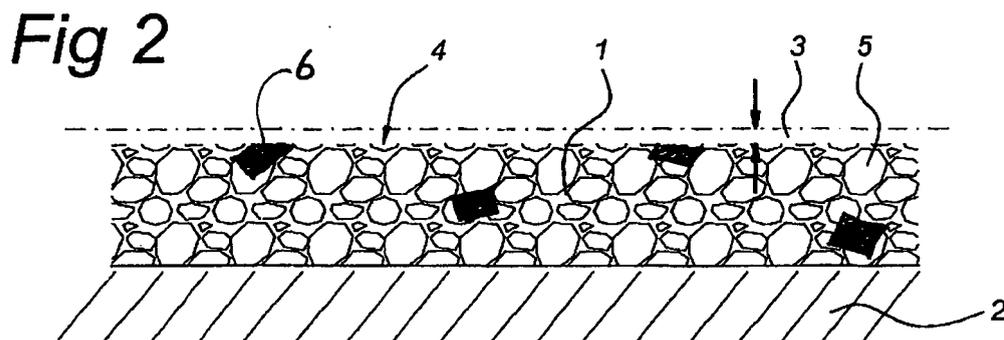

Description

[0001] The invention relates to a surfacing for a pavement, for example for a square, roads and paths, where, in addition to the functional requirements, aesthetic requirements can also be met. Rolled asphalt is easy and quick to lay for large surface areas. The appearance is uniform black to grey without the addition of colouring pigments. This type of surfacing is not found to be aesthetically pleasing. By changing the appearance a more decorative and aesthetic appearance is obtained.

[0002] The invention comprises the production of a hardened surfacing in accordance with the following steps:

- laying at least one layer consisting of granules of a rock-like material, which at least are bound by a fusible binder, obtained from oil refining, at a temperature of between 130 °C and 190 °C onto a substrate,
- compacting this layer immediately after laying by applying pressure, for example using a roller,
- allowing the layer to cool, and
- removing the top portion of the layer by mechanical means, such as milling, grinding or polishing, as a result of which granules that have been cut through become visible, wherein, before the layer is laid, particles are mixed with the granules and the binder in a mixture and distributed therein, after which the layer is laid, compacted and cooled and the top portion is removed, as a result of which a portion of said particles, which at least partially are located in the top portion of the layer, is likewise removed.

[0003] The result of this method can reveal a surfacing which displays cut granules and particles of different shape and colour embedded in, for example, a black matrix. This gives a special aesthetic appearance.

[0004] Before the direct laying of the surfacing, the substrate is a foundation of, for example, sand or crushed rock or a combination of the two. This substrate could also be a cement-based concrete.

[0005] If it is desired subsequently to make elements for such a surfacing and to use these elements as surfacing at another site, the substrate is then a non-sticky surface, such as an area comprising a layer of sand, horizontally levelled and compacted, which can be re-used. For example, these elements are made of compacted dense rolled asphalt or compacted open-textured rolled asphalt with a percentage voids of less than 20 % (V/V), which are laid as a continuous layer. A thin layer is then removed from the layer, as a result of which numerous cut surfaces of granules and particles are revealed. By sawing the layer vertically into pieces in such a way that elements with the desired dimensions are produced, these elements can be removed from the non-sticky sand layer and laid elsewhere on a foundation as covering.

[0006] Elements can also be made in another way. Moulds of identical dimensions are arranged on a non-

sticky layer, such as a compacted sand layer, a metal plate or wooden slab, which has been treated with a release agent. These moulds can, for example, consist merely of a future outer edge. At least one steel strip that extends all round is accommodated in this outer edge. These moulds are then filled with hot rolled asphalt (bitumen as binder) or "C-Fix®" asphalt (residue from oil refining as binder) to well above the top of the outer edge of the mould. The height of the overfill must correspond to the settlement after compaction of the layer plus the height of the top portion to be removed. In the hot state the layer is compacted using, for example, a roller. After cooling of the layer, a top portion of the layer, such as a thin layer, is removed down to the top of the outer edge of the moulds. Numerous cut surfaces of granules and particles will now have appeared at the surface. The outer edges of the moulds that are in contact with one another stick only to the asphalt and not to one another. Elements have then been produced that can be released from the non-sticky substrate. The elements can be transported, for example after storage, to another location for use as surfacing for a pavement, a floor or the like.

[0007] In order to obtain a desired appearance, for example a specific colour or effect, it is possible to use in the upper layer at least granules that, for example, have originated from old or existing river beds via extraction or have been obtained from igneous or sedimentary rocks via crushing. This usually refers to gravel, the particle size of which is between 2 and 63 mm.

[0008] In order to obtain an aesthetic effect from the cut granules visible at the surface it is preferred to use granules of rock-like material that have a particle size of between 1 and 80 mm.

[0009] An alternative is to make the particle size between 3 and 40 mm.

[0010] A binder that has been obtained from oil refining, such as modified bitumen or a residue material with the trade name C-Fix®, is preferably used for binding the granules. Known plastics can be added to this binder to improve the binding properties. Fillers or sand can also be added to the binder in order to obtain a sufficiently dense surfacing, the percentage voids in the compacted layer being less than 7 %. As far as the type of bitumen is concerned, it is possible to use either the most common "black" bitumen or white bitumen, which is termed colourless. It is also possible to add colourants to the binder to colour the matrix of the top layer.

[0011] To increase the aesthetic surface effect of the top layer, particles of a specific shape are distributed in the asphalt mixture before the top layer is laid. This can be done by adding the particles at the asphalt production facility or on site, where the rolled asphalt has to be laid, after which the particles are mixed into the mixture such that they are well distributed through the mixture. Distributed means that the particles are mainly separated from each other. The particles are decorative elements and to date have never been used in this application. When the layer is compacted these particles are also compact-

ed. The dimensions of the particles are preferably on the whole between 2 and 100 mm. As an alternative, said dimensions can be between 2 and 60 mm. These particles can be metal, ceramic, glass, wood, plastic or hard decorative stone particles. In this context decorative stones are that type of stones that have not been used in rolled asphalt to date. The metal particles used are preferably metals which do not have the propensity to acquire an oxide coating or acquire only a very thin oxide coating. One example is stainless steel. Using, for example, particles of high-grade stainless steel, black bitumen and the correct types of gravel it is possible to simulate the appearance of rare black marble.

[0012] The shape of these particles can, for example, approximate to a block, a cube, a pyramid or a sphere. These particles could also be somewhat plate-shaped. The particles could also be in the shape of a symbol or image or of a trade mark, such as a bicycle, telephone, coin, flower, municipal coat of arms or a company trade mark. Another possibility is that reflective and/or photoluminescent material is mixed into the particles of fusible, transparent substances, such as glass and plastic. In the presence of little or no light these particles can, for example, reflect light or light up in the dark. Squares and shopping streets that light up could, for example, in this way give a distinctive appearance in the dark.

[0013] The removal of a thin layer from the top layer, so that a smooth top with a structure of cut granules is produced, is preferably obtained by means of milling and/or grinding. Fine grinding, i.e. polishing, will have to be carried out as the final treatment in order to make the top shine or glisten.

[0014] The surface is preferably provided with a transparent coating for protection and/or to improve the slip-resistance of the top surface.

[0015] The invention also comprises a surfacing which can be used for a pavement or a floor, which has been produced in accordance with what has been described above. This surfacing can consist either of a continuous layer or of tiles. In the case of a continuous layer it is possible to give this the appearance of a covering made of tiles by making shallow saw cuts in the form of a tile pattern. In the case of separate tiles these can have the dimensions of block paving, pavement slabs or decorative tiles and also of slabs, which can have large to very large dimensions, for example 1 m x 2 m to 3 m x 8 m.

[0016] The invention will be explained in more detail below with reference to figures.

Figure 1 shows, diagrammatically, a surfacing containing particles on a foundation.

Figure 2 shows the surfacing with a top portion removed.

Figure 3 shows part of the top surface.

Figure 4 shows a top layer on a larger scale.

[0017] Figure 1 shows the layer 1, which is laid hot and compacted, on a substrate 2. This substrate can, for ex-

ample, be of sand, crushed rock or layers of rolled asphalt or "C-Fix®" asphalt or of cement-based concrete laid beforehand.

[0018] Figure 2 shows the top layer from Figure 1, where a thin layer or the top portion 3 has been removed from the top and a machined surface 4 has been produced. Top portion 3 has been removed, for example, by a mechanical treatment such as milling or grinding, optionally followed by polishing.

[0019] Figure 3 shows part of the surface 4 which is a consequence of the removal of the top portion 3. Many granules 4 show a cut surface, which granules are embedded in a matrix 7. Here the matrix can consist of a fusible binder, obtained from oil refining, which is optionally mixed with known plastics, fillers or sand. Colouring pigments can optionally have been added. A few particles 6 can be seen at the surface 4.

[0020] Figure 4 shows only a cross-section of the machined layer 1 with particles 6 therein distributed through the layer 1, in accordance with the invention. Depending on the resistance that is experienced by the granules 5, the particles 6 have, as a result of mixing into the asphalt mixture before laying layer 1, laying layer 1 and then compacting, acquired a position that cannot be determined in advance. After removal of the top portion 3, the cut surface of these particles can have various shapes. In the case of a particle 6 that is block-shaped, for example in the form of a parallelepiped, or cube-shaped, the cut surface can have a triangular or rectangular shape. Block-shaped or cube-shaped particles have been used in Figure 4 as an example.

Claims

1. Method for the production of a hardened surfacing comprising the following steps:

- laying at least one layer (1) consisting of granules (5) of a rock-like material, which are at least bound by a fusible binder, obtained from oil refining, at a temperature of between 130 °C and 190 °C onto a substrate (2),

- compacting this layer (1) immediately after laying by applying pressure, for example using a roller,

- allowing the layer (1) to cool, and

- removing the top portion of the layer (1) by mechanical means, such as milling, grinding or polishing, as a result of which granules (5) that have been cut through become visible, wherein, before the layer (1) is laid, particles (6) are mixed with the granules (5) and the binder in a mixture and distributed therein, after which the layer (1) is laid, compacted and cooled and the top portion is removed, as a result of which a portion of said particles (6), which at least partially are located in the top portion of the layer (1), is likewise

- removed.
2. Method according to Claim 1, wherein the substrate (2) is a foundation of sand or crushed rock or a combination thereof. 5
3. Method according to Claim 1, wherein the substrate (2) is a non-sticky surface.
4. Method according to Claims 1 - 3, wherein at least some of the granules (5) consist of granules extracted from river beds and/or produced from igneous rocks and/or sedimentary rocks via crushing. 10
5. Method according to Claims 1-4, wherein the particle size of the granules (5) is between 1 and 80 millimetres. 15
6. Method according to Claim 5, wherein the particle size of the granules (5) is between 3 and 40 millimetres. 20
7. Method according to Claims 1 - 6, wherein the binder is a modified bitumen. 25
8. Method according to Claims 1 - 6, wherein the binder is a residue material from oil refining.
9. Method according to Claims 1-8, wherein the dimensions of the particles (6) are on the whole between 2 and 100 mm. 30
10. Method according to Claim 9, wherein the dimensions of the particles (6) are on the whole between 2 and 60 mm. 35
11. Method according to Claims 9-10, wherein the particles (6) consist of metal, ceramic, glass, wood, plastic or hard decorative stones. 40
12. Method according to Claims 9 - 11, wherein the particles (6) have a shape approximating to that of a block, cube, pyramid or sphere.
13. Method according to Claims 9-11, wherein the particles (6) have a plate-shaped appearance. 45
14. Method according to one of the preceding claims, wherein the particles (6) are in the shape of a symbol, image or a trade mark. 50
15. Method according to Claims 9-14, wherein reflecting and/or photoluminescent material is mixed into the particles (6) of fusible transparent substances, such as glass and plastic. 55
16. Method according to one of the preceding claims, wherein the machined surface (4) of the layer (1) is provided with a transparent coating.
17. Method for the production of a hardened surfacing, comprising the following steps:
- laying at least one layer (1) consisting of granules (5) of a rock-like material, which are at least bound by a fusible binder, obtained from oil refining, at a temperature of between 130 °C and 190 °C onto a substrate (2),
 - compacting this layer (1) immediately after laying by applying pressure, for example using a roller,
 - allowing the layer (1) to cool, and
 - removing the top portion of the layer (1) by mechanical means, such as milling, grinding or polishing, as a result of which granules (5) that have been cut through become visible, wherein, before the layer (1) is laid, particles (6) are added to the layer (1) and mixed with the granules (5) and the binder in the mixture and as a result are distributed through the mixture, after which the layer (1) is laid, compacted and cooled and the top portion is removed, as a result of which a portion of said particles (6), which at least partially are located in the top portion of the layer (1), is likewise removed.
18. Surfacing to be used for a pavement or a floor, where this has been produced in accordance with preceding Claims 1-17.

Fig 1

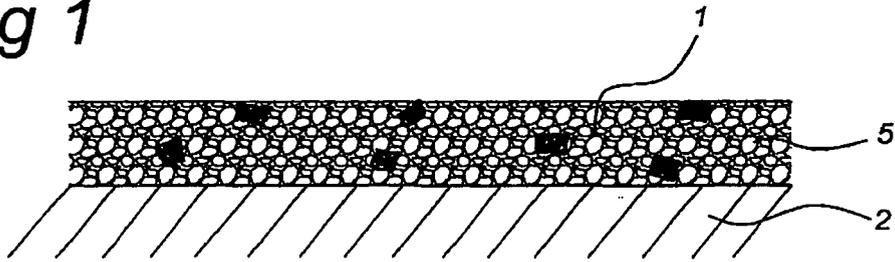


Fig 2

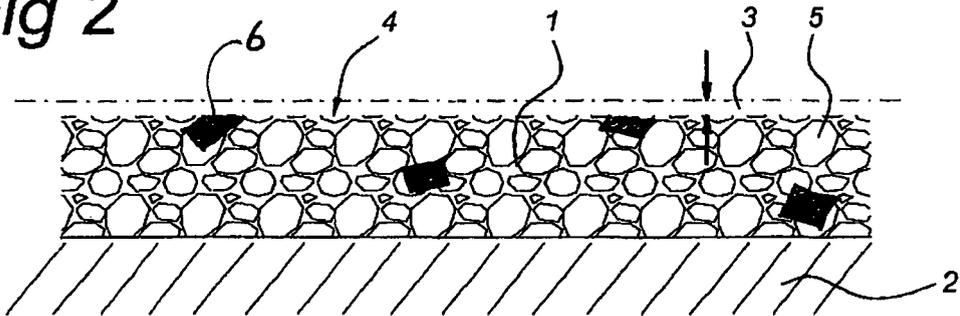


Fig 3


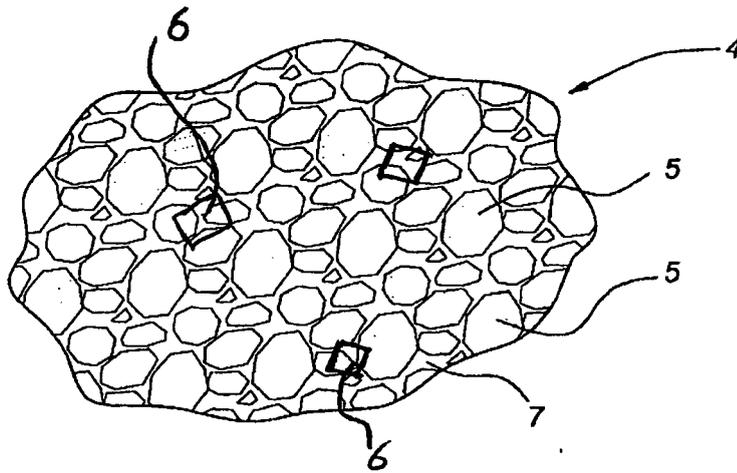


Fig 4



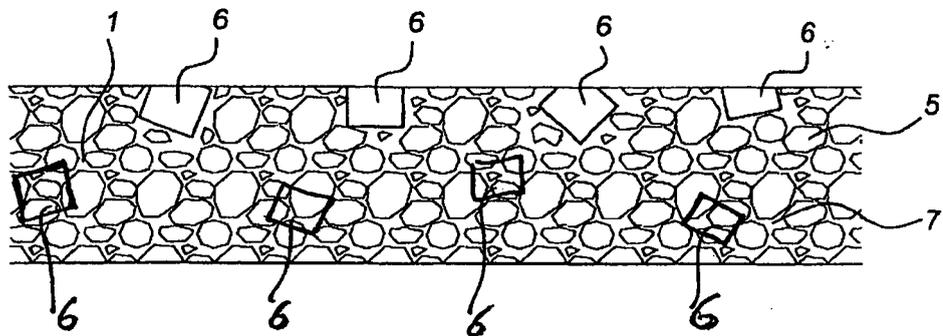

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	GB 1 351 005 A (JAPANESE GEON CO LTD) 24 April 1974 (1974-04-24)	1-13,17,18	E01C7/08 E01C7/18 E01C7/35 E04F15/12
Y	* page 1, line 9 - page 3, line 18 * -----	14-16	
Y	EP 0 995 858 A (CHRISTL, WILFRIED) 26 April 2000 (2000-04-26) * column 7, lines 5-9 * * column 4, lines 19-28 * -----	15,16	
Y	DE 93 19 406 U1 (TITTELBAACH, HANS, 89231 NEU-ULM, DE) 31 March 1994 (1994-03-31) * page 1, paragraph 1; figures 1-3 * -----	14	
A	EP 1 069 241 A (SOCIETE DE PAVAGE ET DES ASPHALTES DE PARIS; ASTEN) 17 January 2001 (2001-01-17) * the whole document * -----	1,17,18	
A	US 2 172 629 A (W.TREUHAFT) 12 September 1939 (1939-09-12) * the whole document * -----	1,17,18	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			E01C E04F
Place of search		Date of completion of the search	Examiner
Munich		27 April 2005	Kerouach, M
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

2
EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 07 8300

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

27-04-2005

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 1351005	A	24-04-1974	JP 49017008 B	26-04-1974
			JP 48041013 B	04-12-1973
			BE 771031 A1	16-12-1971
			CA 968895 A1	03-06-1975
			DE 2139277 A1	02-03-1972
			FR 2102089 A1	07-04-1972
			NL 7110879 A	08-02-1972
			SE 373595 B	10-02-1975
			US 3849355 A	19-11-1974
			ZA 7105225 A	26-07-1972

EP 0995858	A	26-04-2000	DE 19848927 A1	27-04-2000
			DE 29824241 U1	21-09-2000
			EP 0995858 A2	26-04-2000

DE 9319406	U1	31-03-1994	NONE	

EP 1069241	A	17-01-2001	FR 2796404 A1	19-01-2001
			AT 269445 T	15-07-2004
			DE 60011520 D1	22-07-2004
			EP 1069241 A1	17-01-2001

US 2172629	A	12-09-1939	NONE	
