

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 674 599 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
28.06.2006 Bulletin 2006/26

(51) Int Cl.:
D03D 25/00 (2006.01) B28B 19/00 (2006.01)
C04B 35/80 (2006.01)

(21) Application number: 05256362.4

(22) Date of filing: 13.10.2005

(84) Designated Contracting States:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR

Designated Extension States:

AL BA HR MK YU

(30) Priority: 21.12.2004 US 18221

(71) Applicant: GENERAL ELECTRIC COMPANY
Schenectady, NY 12345 (US)

(72) Inventors:

• Kostar, Timothy Daniel
Nashua, NH 03063 (US)

• Capper, Douglas Melton
Trenton
Ohio 45067 (US)
• Subramanian, Suresh
Mason
Ohio 45040 (US)

(74) Representative: Goode, Ian Roy et al
London Patent Operation
General Electric International, Inc.
15 John Adam Street
London WC2N 6LU (GB)

(54) Orthogonal weaving for fabricating complex shape preforms

(57) An orthogonal stitch-weave method and fiber architecture (48). The architecture (48) allows near-net-

shape composite preforms to be fabricated, thereby reducing costs associated with complex preform shapes and increasing desired strengths of the composite.

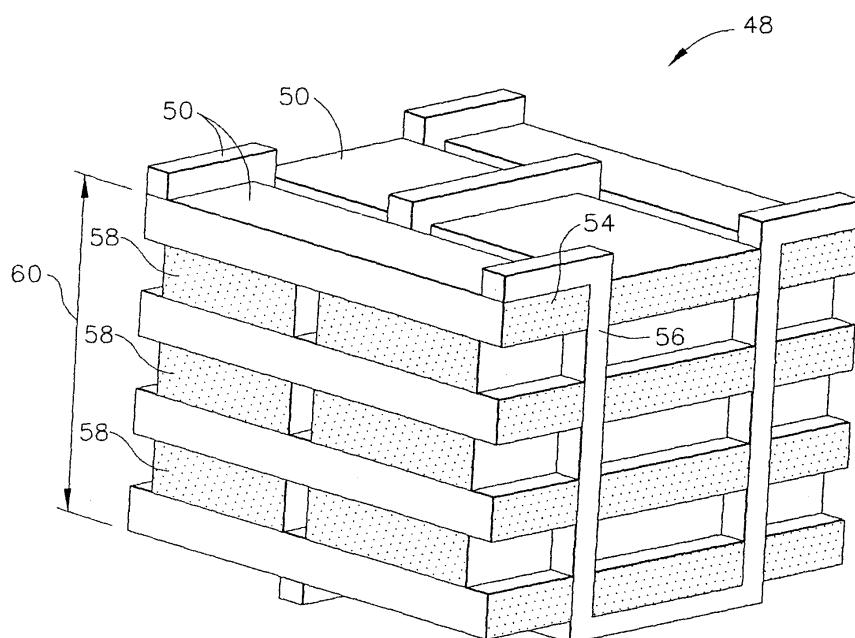


FIG. 2

Description

[0001] The present invention relates generally to composite preforms and methods for making composite preforms.

[0002] In a gas turbine engine, air is pressurized in a compressor and mixed with fuel in a combustor and ignited for generating hot combustion gasses which flow downstream through several turbine stages. A turbine stage includes stationary turbine vanes extending radially between inner and outer castings. The vanes are hollow with openings that mate to openings within the castings. The vanes have airfoil configurations for guiding the combustion gasses between corresponding turbine rotor blades disposed downstream of the vanes. The blades are mounted to the perimeter of a rotor disk that rotates during operation for providing power to turn the compressor or fan during operation. Since the turbine vanes are heated during operation by the hot combustion gasses, which flow thereover, cooling air bled from the compressor, is channeled inside the vanes for cooling thereof.

[0003] In order to increase the efficiency and the performance of gas turbine engines so as to provide increased thrust-to-weight ratios, lower emissions and improved specific fuel consumption, engine turbines are tasked to operate at higher temperatures. As the higher temperatures reach and surpass the limits of the material comprising the components in the hot section of the engine and in particular the turbine section of the engine, new materials must be developed.

[0004] As the engine operating temperatures have increased, new methods of cooling the high temperature alloys comprising the combustors and the turbine airfoils have been developed. For example, ceramic thermal barrier coatings (TBCs) have been applied to the surfaces of components in the stream of the hot effluent gases of combustion to reduce the heat transfer rate and to provide thermal protection to the underlying metal and allow the component to withstand higher temperatures. These improvements helped to reduce the peak temperatures and thermal gradients. Simultaneously, ceramic matrix composites were developed as substitutes for the high temperature alloys. The ceramic matrix composites (CMCs) in many cases provided an improved temperature and density advantage over the metals, making them the material of choice when higher operating temperatures were desired.

[0005] A number of techniques have been used to manufacture turbine engine components. One such technique includes manufacturing turbine blades from CMCs. One method of manufacturing CMC components, set forth in U.S. Pat. Nos. 5,015,540; 5,330,854; and 5,336,350; and all assigned to the assignee of the present invention, relates to the production of silicon carbide matrix composites containing fibrous material that is infiltrated with molten silicon, herein referred to as the Silcomp process. The fibers generally have diameters of about

140 micrometers or greater, which prevent intricate, complex shapes, such as turbine blade components, from being manufactured by the Silcomp process.

[0006] Another technique of manufacturing CMC turbine blades is the method known as the slurry cast melt infiltration (MI) process. A technical description of such a slurry cast MI method is described in detail in U.S. Patent No. 6,280,550 B1, which is assigned to the Assignee of the present invention. In one method of manufacturing using the slurry cast MI method, CMCs are produced by initially providing plies of balanced two-dimensional (2D) woven cloth comprising silicon carbide (SiC)-containing fibers, having two weave directions at substantially 90° angles to each other, with substantially the same number of fibers running in both directions of the weave. The use of two dimensional plies prevents intricate, complex shapes, such as turbine blade components, from being manufactured.

[0007] One disadvantage of existing methods for production of CMC preforms is that the fibers that provide advantageous structural properties to a composite are not positioned and interlocked or interwoven to provide an optimal fiber architecture. Conventional methods of three-dimensional composite performing typically involve fabricating woven, or braided shapes that do not provide the desired complex preform shapes. What is needed is a method of weaving a three-dimensional composite preform that provides a tailored fiber architecture, which may be, assembled "near-net-shape".

[0008] Improvements in manufacturing technology and materials are the keys to increased performance and reduced costs for many articles. As an example, continuing and often interrelated improvements in processes and materials have resulted in major increases in the performance of aircraft gas turbine engines, such as the improvements of the present invention. The present invention is a novel method for manufacturing a turbine engine component made from a ceramic matrix composite (CMC) by weaving a three-dimensional composite preform that provides a tailored fiber architecture that may be assembled near-net-shape. A near-net-shape is a shape for a composite preform that, after weaving, requires little or no trimming prior to final fabrication of the composite. The present invention produces a component tailored to an intricate, complex shape having the advantage of a fine unit cell size inside the weave, wherein the resultant composite has superior mechanical properties and erosion resistance.

[0009] The method of the present invention is particularly suitable for fabrication of turbine airfoil components for gas turbine engines. In particular, the method of the present invention is suitable for the fabrication of stationary turbine vanes for use in gas turbine engines. The method of the present invention is particularly suitable for composites having complex and/or intricate shapes, such as stationary turbine vanes, because the method allows fabrication of preforms of a complex and/or intricate shape that does not require trimming (i.e., near-net-

shape) prior to final fabrication into the composite.

[0010] The present invention provides a method of weaving a preform that includes positioning a predetermined number of warp pins on a base. The warp pins on the base are positioned to form a path substantially forming the outline of a desired preform shape. A predetermined number of dummy pins are positioned on the base, outlining the path formed by the warp pins. The dummy pin's help facilitate placement of the weft tow and stitcher tow by providing support for the tows along the path formed by the warp pins. The method further includes positioning a first predetermined number of weft tows adjacent the warp pins to form a general outline of the desired preform shape. A predetermined number of stitcher tows are positioned adjacent the warp and dummy pins. A predetermined number of stitcher tows are positioned adjacent and substantially perpendicular to the first predetermined number of weft tows. The warp pins and the dummy pins are advanced through the base to maintain a length of pin sufficient to place the weft and stitcher tows. A second predetermined number of weft tows are positioned adjacent the warp pins in the path formed by the warp pins, in a direction opposite the direction of the first predetermined number of weft tows. The second predetermined number of weft tows are laid upon the previously placed weft tows and stitcher tows. A second predetermined number of stitcher tows are positioned adjacent and substantially perpendicular to the second predetermined number of weft tows. The method is repeated in order to build a thickness of weft tows and stitcher tows. The plurality of weft tows and stitcher tows placed adjacent the warp pins and dummy pins form the general outline of the desired preform shape having a build dimension perpendicular to the weft tows and stitcher tows. When a predetermined thickness for the build dimension is reached, the warp and dummy pins are removed and the warp pins are replaced by warp tows. The resultant preform is near-net-shape having an interlocked and interwoven fiber architecture.

[0011] Other features and advantages of the present invention will be apparent from the following more detailed description of the preferred embodiment, taken in conjunction with the accompanying drawings which illustrate, by way of example, the principles of the invention, and in which:

FIG. 1 is a sectional view of a hollow turbine for a gas turbine engine vane, illustrating the geometry of the vane along a radial axis of the engine.

FIG. 2 is a perspective view of the orthogonal stitch-weave pattern of the present invention.

FIG. 3 is a flow chart illustrating an exemplary method in accordance with the present invention.

FIG. 4 is a sectional view illustrating an initial step of creating the stitch-weave of FIG. 2.

FIG. 5 is a sectional view illustrating the arrangement of FIG. 4, with a further step of creating the stitch-weave of FIG. 2.

FIG. 6 is a sectional view illustrating the arrangement of FIG. 5, with a further step of creating the stitch-weave of FIG. 2.

FIG. 7 is a sectional view illustrating the arrangement of FIG. 6, with a further step of creating the stitch-weave of FIG. 2.

FIG. 8 is a variation of the stitch-weave method shown in FIGS. 4 through 7.

FIG. 9 is a variation of the stitch-weave shown in FIG. 8, illustrating an exemplary pattern used to create joints in complex shapes, in accordance with the present invention.

FIG. 10 is a sectional view of the hollow vane of FIG. 1, illustrating the stitch-weave pattern of FIG. 2, in accordance with the present invention.

25 **[0012]** FIG. 1 illustrates a sectional view of vane 20. Vane 20 is a relatively complex three dimensional shape that includes a structural stiffener 40 and cooling air channels 42. During engine operation, cool, compressed air is bled from a compressor section of a gas turbine engine 30 (not shown) and directed through channels 42 to cool vane 20.

35 **[0013]** FIG. 2 is a perspective representation of the stitch-weave 48 of the present invention illustrating a plurality of fiber tows 50 arranged in a preferred architecture. As will be appreciated, FIG. 2 depicts the pattern created by the present invention. Fiber tows 50 are made up of one or a plurality of long, relatively thin smaller fibers. As shown in FIG. 2, fiber tows 50 include three types including: weft tows 54, a stitcher tows 56 and warp tows 58. 40 The smaller fibers making up the fiber tows 50 are any fiber suitable for the construction of preforms for ceramic matrix composites. The fibers may include, but are not limited to silicon carbide (SiC). Weft tows 54 and warp tows 58 and stitcher tows 56 are in a three dimensional 45 orthogonal geometry. In one embodiment of the invention, the weft tows 54, the warp tows 58 and the stitcher tows 56 are oriented at 90° angles to each other. The length of the weft tows 54 and the warp tows 58 define a first and second orthogonal directions, respectively. 50 The stitch-weave 48 is defined by a through-thickness 60 as measured along a third orthogonal direction.

55 **[0014]** FIG. 3 illustrates a preferred method in accordance with the present invention, illustrating discreet method steps. In Step 100, warp pins 72 and dummy pins 74 are placed along a base to define a desired preform shape. FIGS. 4 through 9 illustrate the positioning of the weft tows 54, and stitcher tows 56 as illustrated as steps 110 and 120 in FIG. 3. In Step 110, weft tows 54

are positioned, or laid, in a path adjacent to warp pins 72, thereby outlining the desired shape (see FIG. 4). In Step 120, stitcher tows 56 are positioned, or laid, adjacent to warp pins 72 and dummy pins 74 at an angle substantially perpendicular to the positioned weft tows 54 (see FIG. 5). In Step 130, a determination is made as to whether the desired build height, as measured along the axis perpendicular to both the weft tows and the stitcher tows 56, has been achieved. If the build height determination of Step 130 is negative, the process returns to step 110 and the steps are repeated with the positioning of the weft tows 54 and the laying of the stitcher tows 56. If the build height determination of Step 130 is positive, the process proceeds to step 140. In Step 140, the warp pins 72 and dummy pins 74 are removed and warp pins 72 are replaced by warp tows 58, thereby completing the fabrication of stitch-weave 48.

[0015] FIGs. 4 through 7 illustrate the positioning of the weft tows 54 and the stitcher tows 56 as the build height is created. FIGs. 8 and 9 illustrate alternate embodiment for the placement of the pins and the positioning of the weft tows 54 and stitcher tows 56. The pins shown in FIGs. 4 through 9 comprise warp pins 72 and dummy pins 74. Warp pins 72 are replaced by warp tows 58 when the predetermined build height is achieved. Dummy pins 74 facilitate weft tow 54 and stitcher tow 56 placement and are not replaced by the warp tows 58.

[0016] FIG. 4 illustrates the "Position Weft Tows in Desired Paths" Step 110 of FIG. 3, wherein warp pins 72 and dummy pins 74 are positioned and a weft tow 54 is positioned, or laid, adjacent to the warp pins 72 and dummy pins 74 in a desired path.

[0017] FIG. 5 illustrates the "Lay Individual Stitcher Tows in Desired Paths" Step 120 of FIG. 3, wherein the stitcher tows 56 are positioned, or laid, at an angle perpendicular to the weft tows 54 and warp pins 72 and dummy pins 74.

[0018] FIG. 6 illustrates the continuation of Step 110, immediately after Step 130, wherein additional weft tows 54 are positioned, or laid, adjacent to the warp pins 72 in the desired path. The weft tows 54 and stitcher tows 56 build on top of each other and form a build height in a third dimension perpendicular to both the weft tows 54 and stitcher tows 56.

[0019] FIG. 7 illustrates a continuation of Step 120, after a performance of a previous Step 120, wherein the stitcher tows 56 are positioned, or laid, adjacent to warp pins 72 and dummy pins 74 in about a 180° orientation (i.e. the opposite direction) from the previous Step 120. The orientations for the repeated step 120 are rotated 180° for each iteration of the method shown in FIG. 3. In this manner, the resultant stitch-weave 48 illustrated in FIG. 7 is built up in the direction perpendicular to the weft tows 54 and stitcher tows 56 and is fabricated for a three dimensional shape. In order to complete the weave-stitch process of the present invention, once the predetermined build-height is achieved, the dummy pins 74 and warp pins 72 are removed and warp pins 72 are replaced with

warp tows 58. The replacement of the warp pins 72 with the warp tows 58 reinforces of the stitch-weave 48 in the direction perpendicular to both the weft tows 54 and the stitcher tows 56.

[0020] FIG. 8 illustrates a variation of the stitch-weave 48 of FIGs. 4-7, wherein the dummy pins 74 and warp pins 72 are positioned in an alternate shape. Specifically, a plurality of pins 70 are positioned adjacent to one another in a portion of the preform shape. The stitch-weave 48 illustrated in FIG. 8 is performed in the same manner as described in FIG. 3 to fabricate a stitch-weave 48. In this manner, stitch weave 48 will have a greater number of warp tows 58, thereby increasing the strength of the resulting composite along the axis of the warp tows 58.

[0021] FIG. 9 illustrates a stitch weave 48 wherein a joint is created in accordance with the method of FIG. 4.

[0022] FIG. 10 illustrates the fabrication of a preform architecture of the vane of FIG. 2 in accordance with the method of FIG. 3. In FIG. 10, dummy pins 74 are omitted for clarity, and warp pins 72 have been replaced with warp tows 58. As will be appreciated, many differing complex shapes can be fabricated by the teachings of the present invention. It should be noted that the positioning of weft tows 54 may include multiple weft tows 54 at differing locations within stitch-weave 48 in a single step. Thus provided, vane 20 can be constructed of a ceramic matrix composite wherein the preform is initially stitched and woven into an optimized architecture that may be tailored to provide desired properties.

[0023] In another embodiment of the invention, the positioning of the stitcher tows 56 includes a step wherein the stitcher tows 56 are positioned, or laid, adjacent to warp pins 72 and dummy pins 74 at an angle substantially perpendicular to the positioned weft tows 54, at locations along the desired preform shape in order to provide the finished ceramic matrix composite with additional transverse fiber reinforcement.

[0024] In another embodiment of the invention, after the preform of near-net-shape has been woven, the preform may be processed according to any known ceramic matrix composite processing method known for ceramic cloths, including woven ceramic cloths. Examples of suitable processes for forming the final ceramic matrix composite include, but are not limited to chemical vapor infiltration, wherein a preform of woven ceramic preform is set inside a chemical vapor reactor, the preform is heated, and atoms or molecules in the form of vapor are deposited on and, preferably, within the woven ceramic preform; lanxide process, the ceramic preform is dipped into a liquid metal bath and the metal is converted to a ceramic

material via oxidation; melt infiltration, wherein the woven preform is infiltrated with a carbon containing slurry, which is converted to ceramic through infiltration with molten silicon; and polymer impregnation and pyrolysis, wherein the preform is impregnated with a polymeric precursor of the matrix which is converted to ceramic through pyrolysis of the polymer at elevated temperature. Each of these process methods generally includes the step of coating the preform with a thin layer of ceramic interface (BN, BN/Si₃N₄) prior to matrix processing. While the present invention has been described with respect to CMC processing, the weaving method of the present invention may also be used in preparation of any composite preform, including but not limited to, carbon-epoxy composites and carbon-carbon composites.

[0025] In a preferred embodiment of the invention, after the preform of near-net-shape has been woven, the preform may be processed into a CMC by slurry cast melt infiltration. Slurry cast melt infiltration includes slurry casting a matrix, such as SiC, into the porous preform. The slurry cast preform is then subject to densification through melt infiltration with a suitable infiltrate, such as silicon.

[0026] The fibers useful as tows in the present invention include, but are not limited to SiC. Alternate suitable fibers include carbon fibers; oxide fibers, such as alumina (i.e. \square -Al₂O₃) and alumina-silica fibers; coated fibers, such as boron nitride and carbon coated fibers; and combinations thereof.

[0027] A suitable matrix for the processed preform of near-net shape CMC includes, but is not limited to silicon carbide. Alternate matrices include alumina, silica, alumina-silicate, glass, mullite, carbon, oxides of such elements as Al, Si, Hf, Y and Zr, and their mixtures and combinations thereof.

Claims

1. A method of weaving a preform for forming a finished ceramic matrix composite comprising:

positioning a predetermined number of pins (70) in a base, wherein the pins (70) extend perpendicularly from the surface of the base and wherein the pins (70) are positioned laterally across the base to form a general outline of a desired preform shape;

positioning a first predetermined number of weft tows (54) adjacent the pins (70) in a first path forming a general outline of the desired preform shape;

positioning a predetermined number of stitcher tows (56) adjacent to the pins (70), wherein the stitcher tows (56) are positioned adjacent to the first predetermined number of weft tows (54) and perpendicular to the path forming the general outline of the desired preform shape; and

advancing the pins (70) perpendicularly through the base to provide sufficient pin length to allow positioning of additional weft tows (54) and stitcher tows (56);
wherein the positioning of the weft tows (54), the positioning of the stitcher tows (56) and the advancing of the pins (70) are repeated until the weft tows (54) and the stitcher tows (56) form a predetermined thickness; wherein upon achieving said predetermined thickness, the pins (70) are removed and replaced with a warp tow (58) to form the desired preform shape.

15 2. The method of Claim 1, wherein the desired preform shape is a shape requiring substantially no trimming prior to final fabrication into the finished ceramic matrix composite.

20 3. The method of Claim 1, further comprising the step of determining a predetermined ratio of stitcher tows to warp tows (58) to control the strength of the finished ceramic matrix composite.

25 4. The method of Claim 3, wherein the predetermined ratio includes a greater number of warp tows (58) than stitcher tows (56) to increase the strength of the ceramic matrix composite in a direction parallel to the warp tows (58).

30 5. The method of Claim 1, wherein the step of positioning a predetermined number of stitcher tows (56) includes positioning the stitcher tows (56) at locations along the desired preform shape in order to provide the finished ceramic matrix composite with transverse fiber reinforcement.

35 6. The method of Claim 1, wherein the weft tows (54), the stitcher tows (56) and the warp tows (58) include a plurality of individual fibers.

40 7. The method of Claim 1, further comprising infiltrating the desired preform shape to form a ceramic matrix composite.

45 8. The method of claim 7, wherein the infiltrating includes casting the preform with a slurry matrix to form a slurry cast preform and thereafter subjecting the slurry cast preform to melt infiltration to form the finished ceramic matrix composite.

50 9. The method of claim 7 further comprising:

55 processing the ceramic matrix composite preform into a ceramic matrix composite wherein the processing forms a finished ceramic matrix composite substantially without the trimming of the preform.

10. A woven ceramic matrix composite preform for making a finished ceramic matrix composite shape comprising:

a predetermined number of weft tows; 5
a predetermined number of stitcher tows; and
a predetermined number of warp tows;
wherein the weft tows, the stitcher tows and the
warp tows are arranged in an orthogonal weave;
and 10
wherein the orthogonal weave forms a preform
of a shape substantially the same as the shape
of the finished ceramic matrix composite shape.

15

20

25

30

35

40

45

50

55

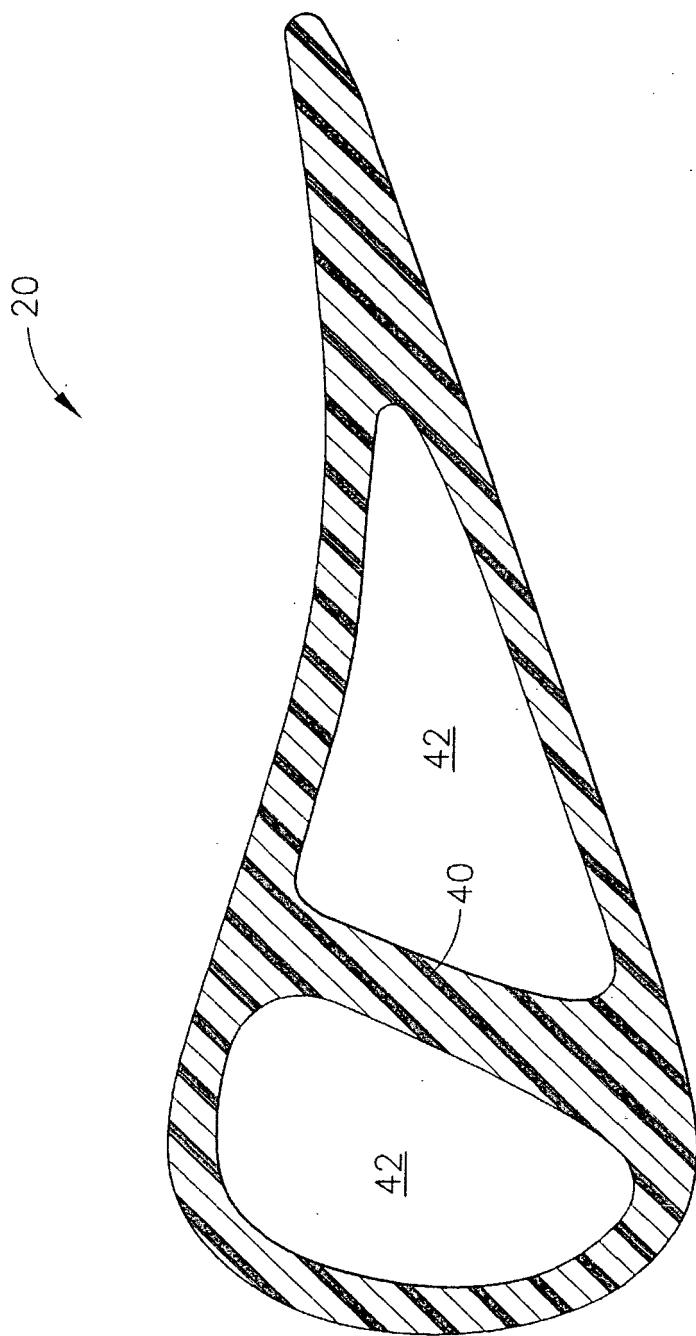


FIG. 1

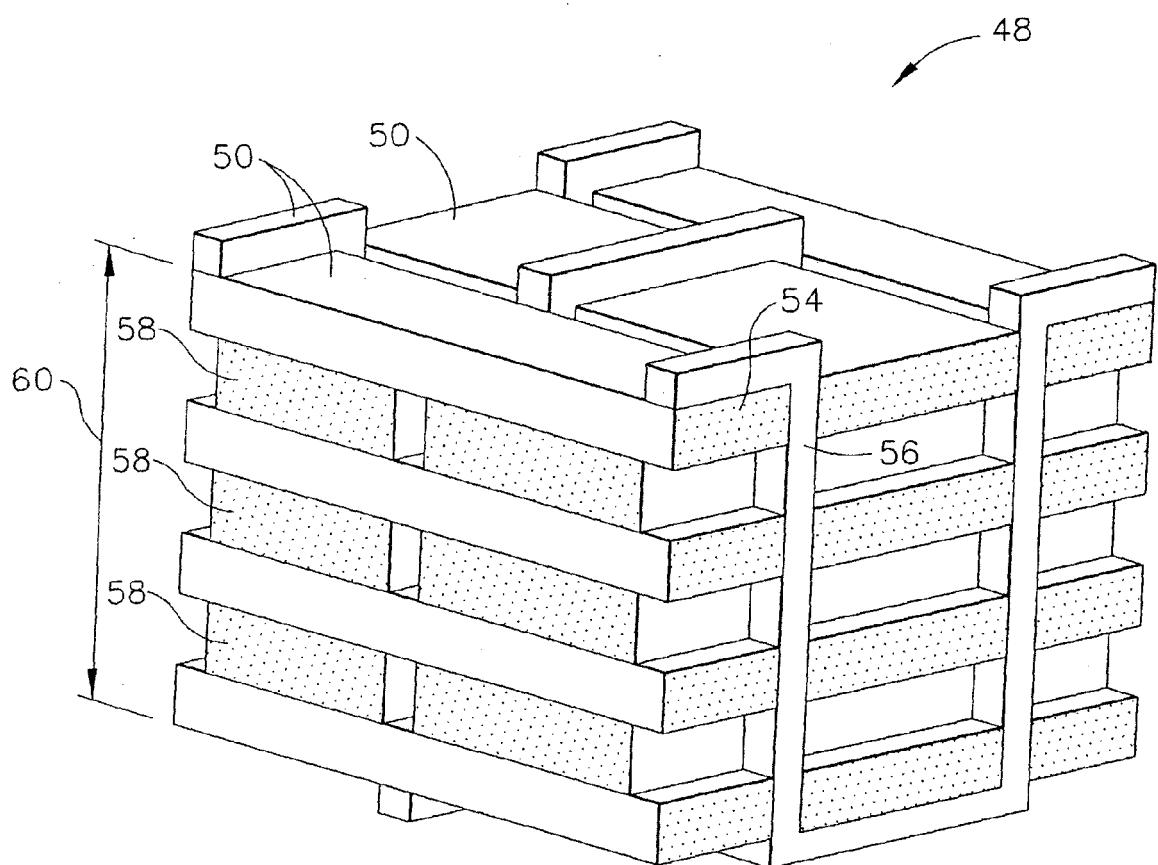


FIG. 2

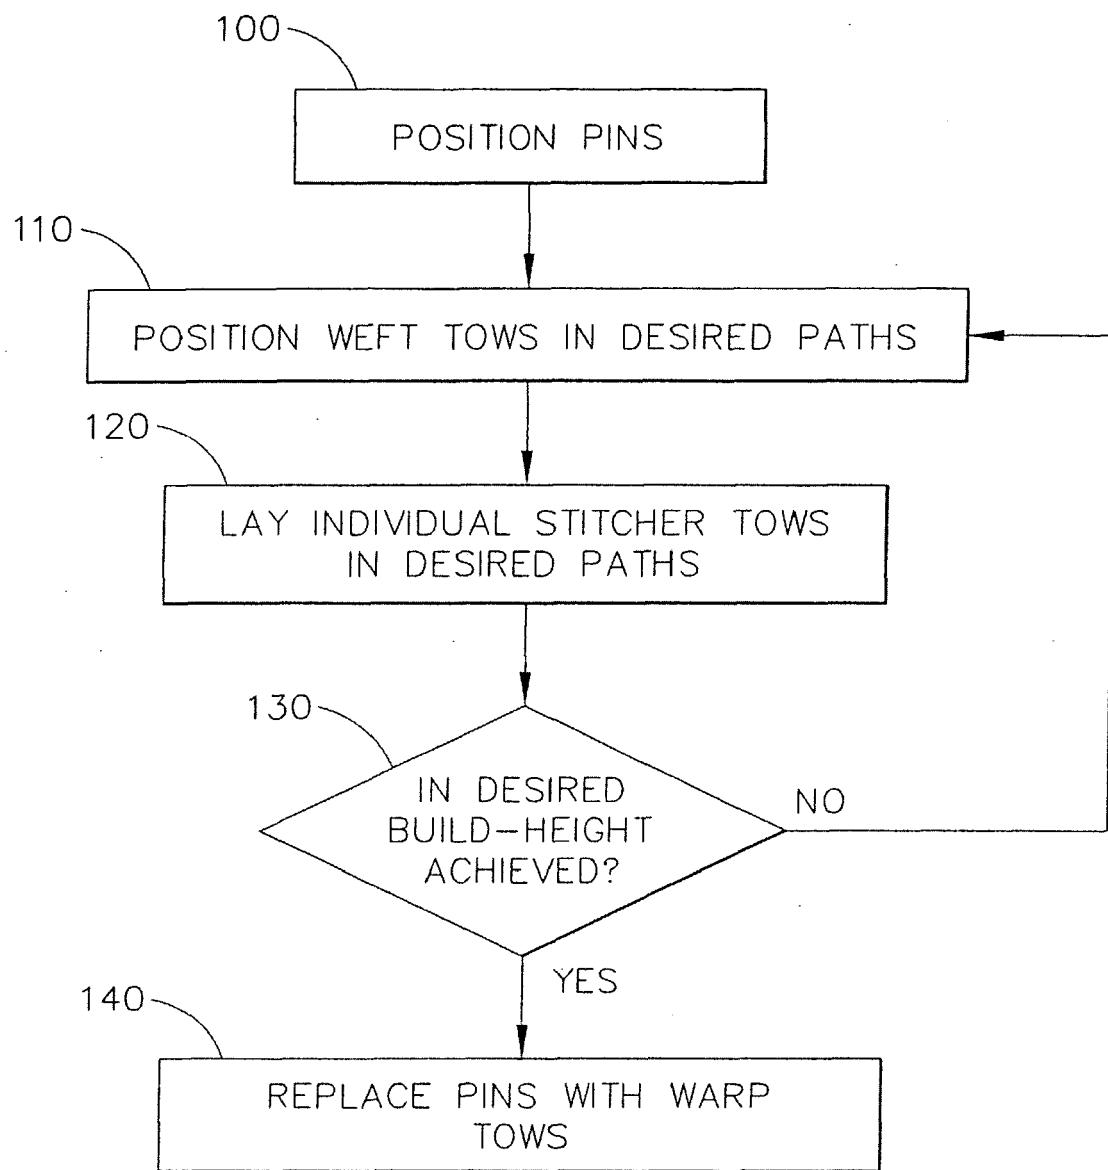


FIG. 3

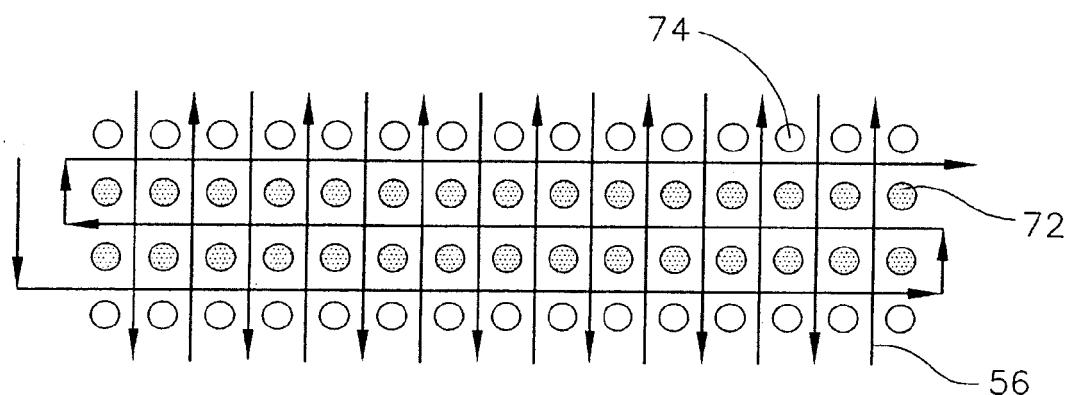
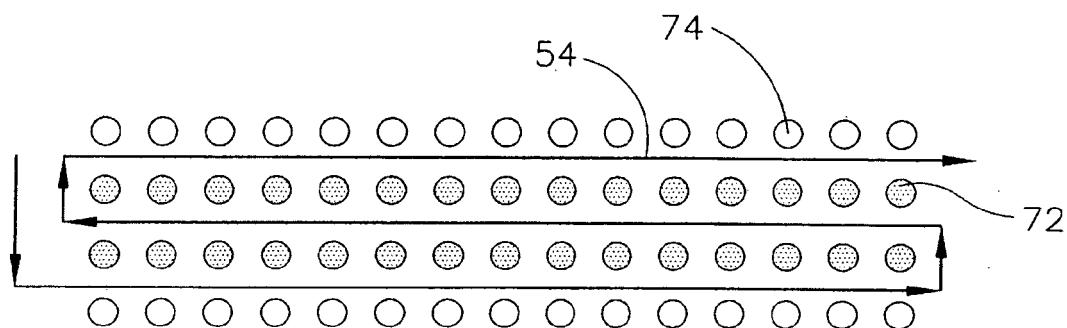


FIG. 5

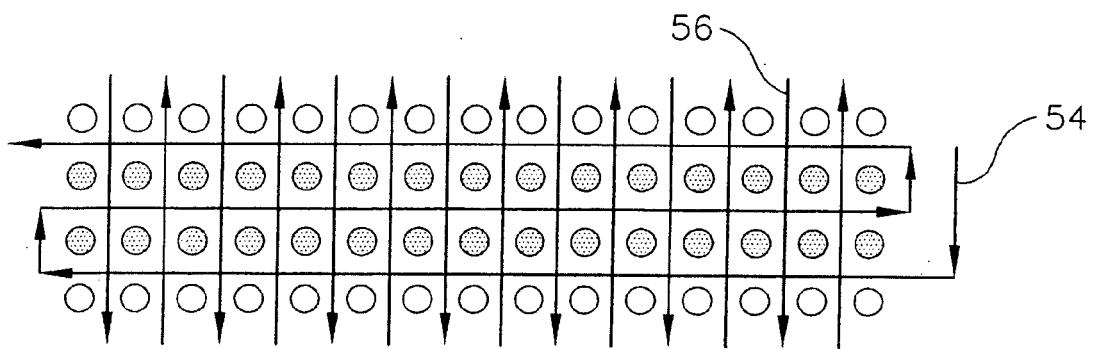


FIG. 6

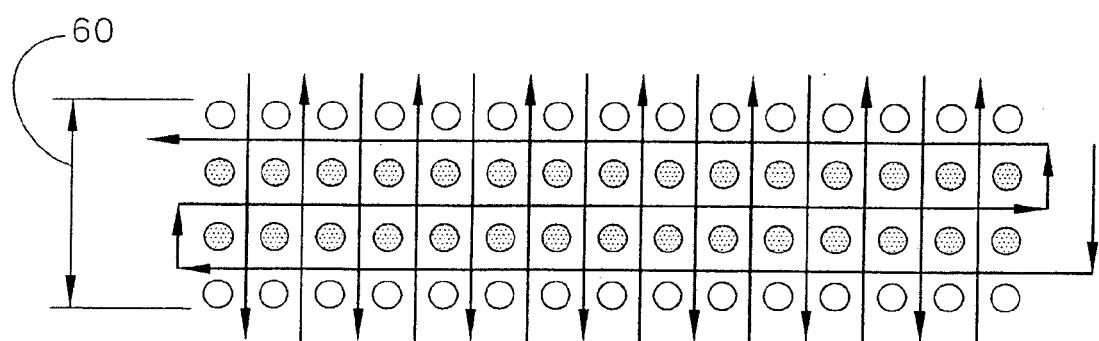


FIG. 7

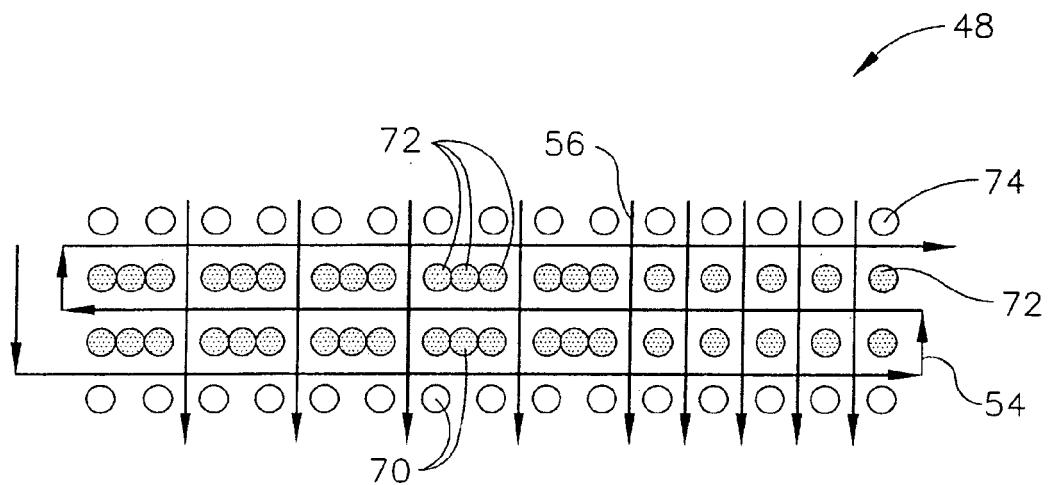


FIG. 8

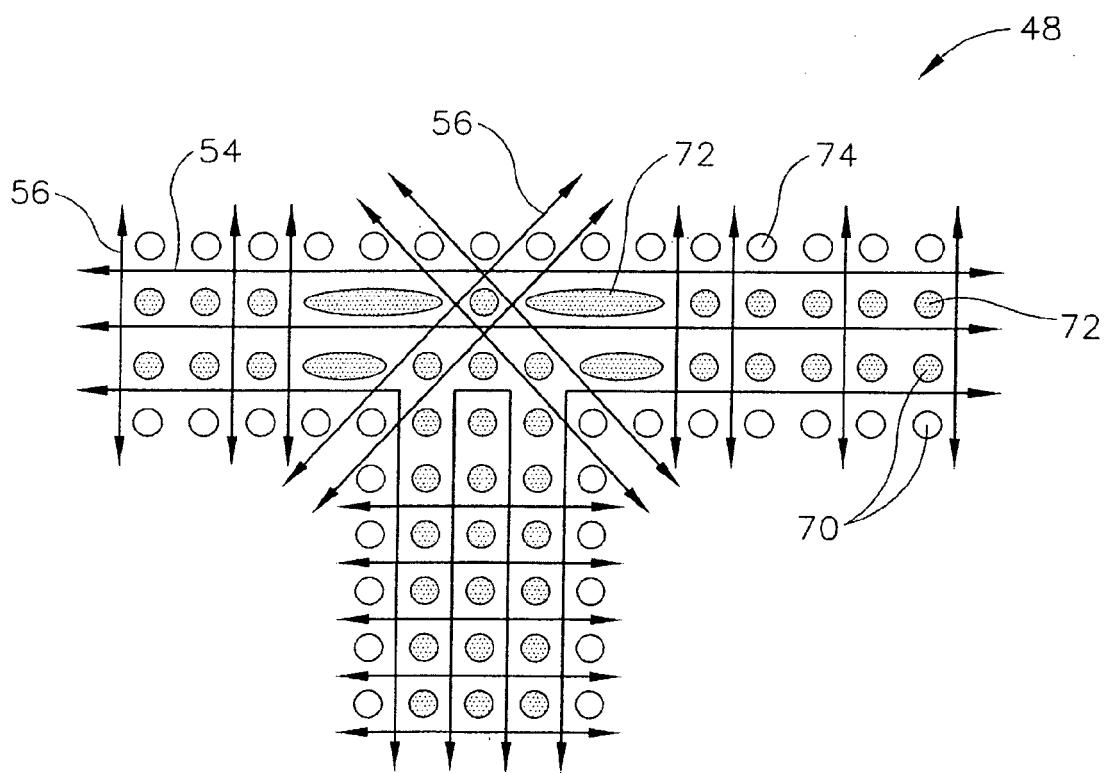


FIG. 9

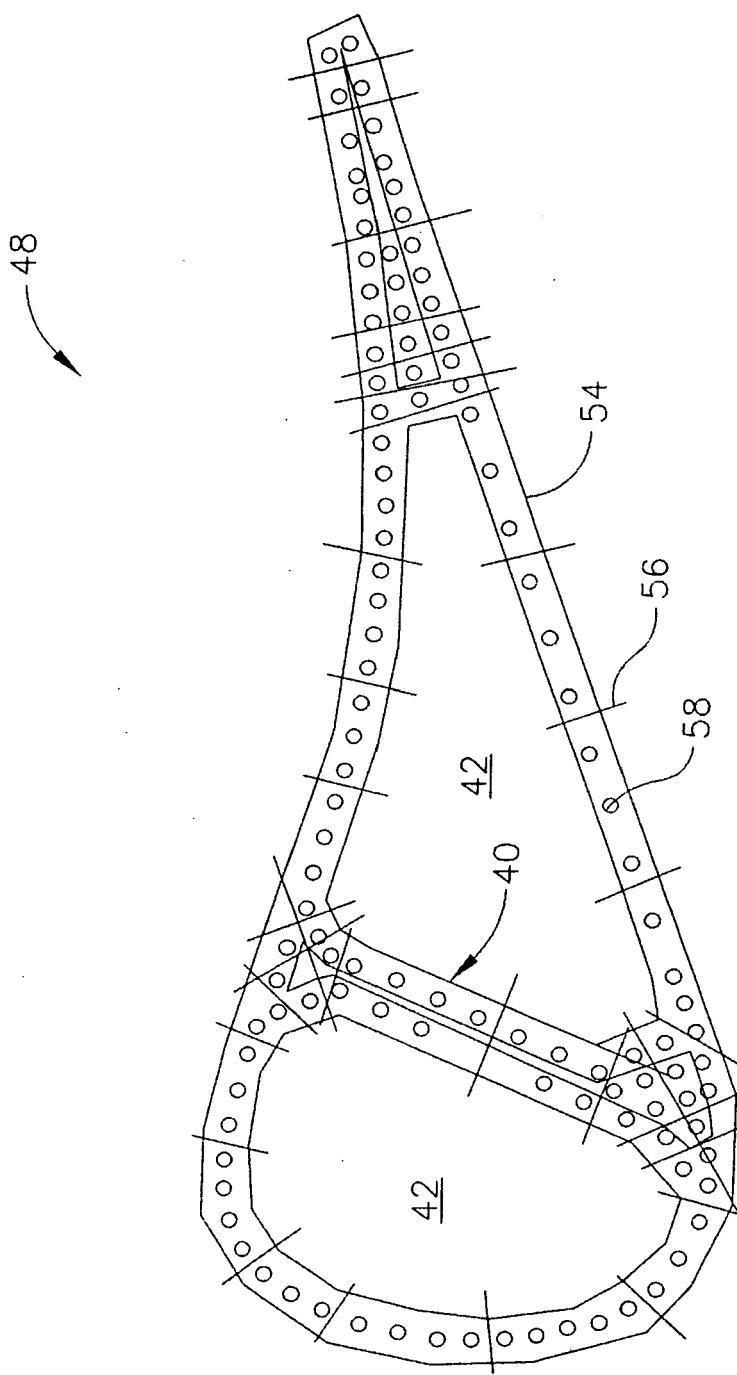


FIG. 10