

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 674 919 A8

(12)

CORRECTED EUROPEAN PATENT APPLICATION

published in accordance with Art. 158(3) EPC

Note: Bibliography reflects the latest situation

(15) Correction information:

Corrected version no 1 (W1 A1)
INID code(s) 72

(51) Int Cl.:

G02F 1/1339 ^(2006.01)

(48) Corrigendum issued on:

23.08.2006 Bulletin 2006/34

(86) International application number:

PCT/JP2004/015232

(43) Date of publication:

28.06.2006 Bulletin 2006/26

(87) International publication number:

WO 2005/038519 (28.04.2005 Gazette 2005/17)(21) Application number: **04792449.3**(22) Date of filing: **15.10.2004**

(84) Designated Contracting States:

DE FR GB(30) Priority: **17.10.2003 JP 2003357529****30.06.2004 JP 2004192772****25.08.2004 JP 2004244571**

(71) Applicants:

- **NIPPON KAYAKU KABUSHIKI KAISHA**
Tokyo 102-8172 (JP)
- **SHARP KABUSHIKI KAISHA**
Osaka-shi, Osaka 545-8522 (JP)

• **AKATUKA, Yasumasa**

Saitama-shi, Saitama 3360964 (JP)

• **HIRANO, Masahiro**

Ageo-shi, Saitama 3620001 (JP)

• **OKAZAKI, Tsuyoshi**

Nara-shi, Nara 6310016 (JP)

• **MATSUMOTO, Toshihiro**

Nara-shi, Nara 6308123 (JP)

• **WAKA, Nobuhiro**

Matsusaka-shi, Mie 5150046 (JP)

• **NISHIWAKI, Shogo**

Matsusaka-shi, Mie 5150016 (JP)


(72) Inventors:

- **SAKANO, Tsunetoshi**
Kawasaki-shi, Kanagawa 2160004 (JP)
- **HAYASIBARA, Syouichi**
Saitama-shi, Saitama 3380002 (JP)

(74) Representative: **Gille Hrabal Struck Neidlein Prop****Roos****Brucknerstrasse 20****40593 Düsseldorf (DE)**(54) **SEALANT FOR LIQUID CRYSTAL, LIQUID-CRYSTAL DISPLAY MADE WITH THE SAME, AND PROCESS FOR PRODUCING THE DISPLAY**

(57) A liquid crystal sealant comprising an epoxy resin represented by the following formula (1):

[Formula 1]

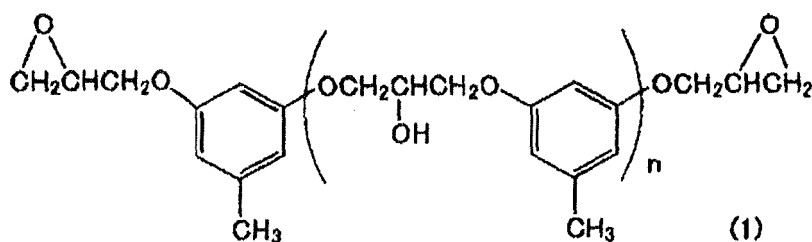

EP 1 674 919 A8

EP 1 674 919 A8

(in the formula, n denotes an average polymerization degree and is a positive number of 0-5) as a resin component, a curing agent, a curing accelerator and an inorganic filler is excellent in screen printability as a liquid crystal sealant in making a liquid crystal display device and can provide excellent reliability in moisture resistance for the liquid crystal display device obtained).