



(11) **EP 1 675 686 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
12.12.2007 Bulletin 2007/50

(21) Application number: **04796157.8**

(22) Date of filing: **19.10.2004**

(51) Int Cl.:
B05B 1/08 (2006.01)

(86) International application number:
PCT/US2004/035108

(87) International publication number:
WO 2005/042169 (12.05.2005 Gazette 2005/19)

(54) **FLUIDIC OSCILLATOR COMPRISING THREE POWER INLET NOZZLES AND AN OBSTRUCTION CREATING VORTICES**

FLUIDOSZILLATOR MIT DREI KRAFTEINLASSDÜSEN UND EINEM WIRBEL ERZEUGENDEN HINDERNIS

OSCILLATEUR FLUIDIQUE COMPRENANT TROIS INJECTEURS ET UN ILOT

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR**

(30) Priority: **21.10.2003 US 513068 P**

(43) Date of publication of application:
05.07.2006 Bulletin 2006/27

(73) Proprietor: **BOWLES FLUIDICS CORPORATION
Columbia, MD 21045-4704 (US)**

(72) Inventor: **GOPALAN, Shridhar
Westminster, MD 21157 (US)**

(74) Representative: **Bugnion Genève
BUGNION S.A.
Case 375
1211 Genève 12 (CH)**

(56) References cited:
**DE-A1- 10 324 494 US-A- 4 052 002
US-B1- 6 186 409**

EP 1 675 686 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

1. FIELD OF THE INVENTION

[0001] This invention relates to fluid handling processes and apparatus. More particularly, this invention relates to a fluidic oscillator that can control the spraying of high viscosity fluids so that such sprays are uniformly distributed over their target areas.

2. DESCRIPTION OF THE RELATED ART

[0002] Fluidic oscillators are well known in the prior art for their ability to provide a wide range of liquid spray patterns by cyclically deflecting a liquid jet. The operation of most fluidic oscillators is characterized by the cyclic deflection of a fluid jet without the use of mechanical moving parts. Consequently, an advantage of fluidic oscillators is that they are not subject to the wear and tear which adversely affects the reliability and operation of other spray devices.

[0003] Examples of fluidic oscillators may be found in many patents, including U.S. Patent Nos. 3,185,166 (Horton & Bowles), 3,563,462 (Bauer), 4,052,002 (Stouffer & Bray), 4,151,955 (Stouffer), 4,157,161 (Bauer), 4,231,519 (Stouffer), which was reissued as RE 33,158, 4,508,267 (Stouffer), 5,035,361 (Stouffer), 5,213,269 (Srinath), 5,971,301 (Stouffer), 6,186,409 (Srinath) which discloses the features or method steps, respectively, of the preambles of claims 1 or 10, and 6,253,782 (Raghu).

[0004] The nature of the typical oscillations in the flow of a liquid exhausting from such devices into a gaseous environment is shown in FIGS. 1A-1C. The alternating formation of vortices in the top and bottom regions of downstream end of the oscillator's interaction chamber is seen to cause the flow from its outlet to be alternately swept upward or downward such the oscillator's output is spread over a fan angle of approximately 20°.

[0005] This type of oscillating liquid jet can yield a variety of patterns for the downstream distribution of the liquid droplets that are formed as this liquid jet breaks apart in the surrounding gaseous environment. One such possible distribution pattern is shown in FIG. 1C.

[0006] For the spraying of high viscosity liquids, the "mushroom oscillator" disclosed in U.S. Patent No. 6,253,782 and shown in FIG. 2 has been found to be especially useful. However, the flow from such a fluidic oscillator is characterized by having the swept jet, that issues from it, dwell on the end positions of its sweep such that its downstream distribution of droplets, which impact upon a plane that is perpendicular to the direction of the spray, is heavy ended as characterized by a larger volume of the liquid being collected at the two ends of the distribution. See FIG. 3. Considerable difficulties have been encountered in trying to get this type of fluidic

oscillator to operate so as to yield more spatially uniform droplet distributions.

[0007] Despite much prior art relating to fluidic oscillators, there still exists a need for further technological improvements in this area. For example, there still exist situations in which the known fluidic oscillators are incapable of providing the desired spray patterns under all ranges of operating conditions (e.g., uniform spatial distribution of droplets from high viscosity sprays). Such situations are known to arise in various automotive applications under conditions of extremely cold temperatures.

3. OBJECTS AND ADVANTAGES

[0008] There has been summarized above, rather broadly, the prior art that is related to the present invention in order that the context of the present invention may be better understood and appreciated. In this regard, it is instructive to also consider the objects and advantages of the present invention.

[0009] It is an object of the present invention to provide new, improved fluidic oscillators and fluid flow methods that are capable of generating oscillating, fluid jets with spatially uniform droplet distributions over a wide range of operating temperatures.

[0010] It is another object of the present invention to provide improved fluidic oscillators and fluid flow methods that are capable of generating oscillating, fluid jets with high viscosity liquids.

[0011] It is yet another object of the present invention to provide improved fluidic oscillators and fluid flow methods that yield fluid jets and sprays of droplets having properties that make them more efficient for surface cleaning applications.

[0012] These and other objects and advantages of the present invention will become readily apparent as the invention is better understood by reference to the accompanying summary, drawings and the detailed description that follows.

SUMMARY OF THE INVENTION

[0013] Recognizing the need for the development of improved fluidic oscillators that are capable of operating to spray high viscosity fluids whose droplets are more uniformly distributed over their target areas, the present invention is generally directed to satisfying the needs set forth above and overcoming the disadvantages identified with prior art devices and methods.

[0014] In accordance with the present invention, the foregoing need can be satisfied by providing a fluidic oscillator according to claim 1 or a method according to claim 10.

[0015] In a first preferred embodiment, this oscillator is configured such that: (a) one of each of the power nozzles is located proximate each of the chamber's boundary edges, (b) its nozzles are configured to accelerate the movement of the pressurized fluid that flows

through the nozzles, (c) its throat has right and left sidewalls that diverge downstream, and (d) the power nozzles and island are oriented and scaled such as to generate flow vortices behind the island that are swept out of the throat in a manner such that these vortices flow alternately proximate the throat's right sidewall and then its left sidewall.

[0016] In a second preferred embodiment, this oscillator's interaction chamber has a floor that is sloped downward in the direction from the upstream to the downstream portion of the chamber, with a preferred magnitude for this slope to be in the range of 10 to 20 degrees.

[0017] In a third preferred embodiment, this oscillator has a step in the height elevation of the floor of the power nozzles with respect to that of the chamber's floor, with a preferred range for the ratio of the height of this step to the height of the power nozzle being 0.10 to 0.20.

[0018] Thus, there has been summarized above, rather broadly, the present invention in order that the detailed description that follows may be better understood and appreciated. There are, of course, additional features of the invention that will be described hereinafter and which will form the subject matter of the claims to this invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019]

FIGS. 1A-1C illustrate the nature of the typical oscillations in the flow of a liquid exhausting from a fluidic oscillator into a gaseous environment and how the droplets of the flow from such an oscillator are swept over the fan angle of 2θ.

FIG. 2, as disclosed in U.S. Patent No. 6,253,782, shows a prior art "mushroom oscillator" having an interaction region into which enters the jets from a pair of power nozzles; these jets interact to form interacting vortices which yield an oscillating flow from the fluidic's throat.

FIG. 3 illustrates the spray flow from a mushroom oscillator of FIG. 2 and how it results in a heavy ended distribution of liquid droplets on a plane perpendicular to the path of the spray; with such a distribution being characterized by a larger volume of the liquid being collected at the two ends of the distribution.

FIG. 4 shows an example of a typical fluidic spray device that is mounted in an automobile's hood to spray the front windshield.

FIG. 5A shows a preferred embodiment of the new "three jet island" fluidic circuit of the present invention and the flow phenomena in and from this oscillator at an instant when the vortices formed at the island's trailing edges are equivalent in size.

FIG. 5B illustrates more details of the geometry of the interaction chamber, power nozzles and throat shown in FIG. 5A.

FIG. 6 shows a preferred embodiment of the new "three jet island" fluidic circuit of the present invention

and the flow phenomena in and from this oscillator at an instant when the vortex behind the island's right trailing edge dominates.

FIG. 7 shows a preferred embodiment of the new "three jet island" fluidic circuit of the present invention and the flow phenomena in and from this oscillator at an instant when the vortex behind the island's left trailing edge dominates.

FIG. 8 illustrates for the fluidic circuit shown in FIGS. 5-7 the spatial distribution of liquid droplets that impact on a plane perpendicular to the path of the spray; with such a distribution being characterized as being uniform across the height of the spray.

FIG. 9 shows another preferred embodiment of the new "three jet island" fluidic circuit of the present invention; with this embodiment having a more compact geometry than that of the oscillator shown in FIGS. 5-7.

FIG. 10 shows another preferred embodiment of the new "three jet island" fluidic circuit of the present invention; with this embodiment having two rows of staggered filter posts.

FIG. 11 illustrates the flat or two-dimensional fan spray that is characteristic of the new "three jet island" fluidic circuits of the present invention.

FIGS. 12A - 12B illustrate the top and centerline, side views of the downstream end of a three-jet island oscillator whose interaction chamber has a downward sloped or tapered floor.

FIG. 13 illustrates a top-side perspective view of the downstream end of a three-jet island oscillator which has a downward step at each of the points where the power nozzles exit into the interaction chamber.

DESCRIPTION OF THE PREFERRED EMBODIMENT

[0020] Before explaining at least one embodiment of the present invention in detail, it is to be understood that the invention is not limited in its application to the details of construction and to the arrangements of the components set forth in the following description or illustrated in the drawings. The invention is capable of other embodiments and of being practiced and carried out in various ways.

[0021] Also, it is to be understood that the phraseology and terminology employed herein are for the purpose of description and should not be regarded as limiting. For example, the discussion herein below generally relates to liquid spray techniques; however, it should be apparent that the inventive concepts described herein are applicable also to the dispersal of other fluids, including gases, fluidized solid particles, etc.

[0022] The present invention involves methods for creating fluidic oscillators of the type that are suitable for generating oscillating, fluid jets having very distinctive and controllable flow patterns over a wide range of operating conditions, such as those that are encountered in various automotive windshield, headlamp and rear

windshield cleaning applications. FIG. 4 shows an example of a typical fluidic spray device that is mounted in an automobile's hood to spray the front windshield. This fluidic spray device consists of: (a) an automotive housing **10**, (b) a check valve **12**, consisting of a piston **12a** and a spring **12b**, which connects at the check valve's downstream end to the inlet of the housing flow tube **14**, and at its upstream end to an elbow **16** which directs fluid into the check valve, and (c) a fluid flow or fluidic insert **18** that is inserted into a cavity **20** that has been especially configured in the housing so as to receive the insert and form a fluid-tight seal between the cavity's sealing surfaces **22** and the insert's outer surfaces.

[0023] There are many different and well known designs of fluidic circuits or fluidic oscillators **2** that are suitable for use with these fluidic inserts. Many of these have some common features, including: at least one power nozzle **24** configured to accelerate the movement of the fluid that flows under pressure through the insert, an interaction chamber **26** through which the fluid flows and in which the fluid flow phenomena is initiated that will eventually lead to the flow from the insert being of an oscillating nature, a fluid source inlet **28**, an fluid outlet **30** from which the fluid exits the insert, and filter posts **32** that are located upstream of the power nozzle and serve to filter any larger diameter debris particles that are contained in the fluid flowing through the insert before these particles clog either the downstream power nozzles or the circuit's outlet.

[0024] As previously mentioned, it is desirable to have a fluidic oscillator that can operate with high viscosity liquids and give a more spatially uniform distribution of its spray droplets than that which is currently achieved with the "mushroom oscillator," see FIG. 2, the typical oscillator which is used in high viscosity, liquid applications. To satisfy this need, I invented the fluidic circuit shown in FIGS. 5-7 and which I refer to as a "three jet, island oscillator."

[0025] This new circuit is composed of three power nozzles **24**, an interaction chamber **26** and an island **34** that sits in the interaction region **26** and is downstream of the center of the three power nozzles **24**.

[0026] The interaction chamber **26** can be considered to have an upstream **26a** and a downstream **26b** portion, with the upstream portion having a pair of boundary edges **26c**, **26d** and a longitudinal centerline **26e** equally spaced from these edges. See FIG. 5B.

[0027] In a preferred embodiment, one of each of the power nozzles is seen to be located at each of the edges **26c**, **26d** of the interaction chamber's upstream portion, and the third power nozzle is located on approximately the centerline **26e** of the interaction chamber's upstream portion.

[0028] Additionally, the chamber's outlet or throat **30** from which a spray exhausts from the chamber's downstream portion **26b** has right **30a** and left **30b** sidewalls that diverge downstream. The island **34** is located directly downstream of the power nozzle that is located on the

centerline **26e** of the interaction chamber.

[0029] By appropriately orienting and scaling these elements, one is able to generate flow vortices behind the island that are swept out of the throat in a manner such that the vortices are alternately proximate the throat's right sidewall and then its left sidewall.

[0030] A triangular shape has been selected as a first preferred embodiment for this island **34**, although other shapes (e.g., circular) are possible. See FIG. 5B. This triangular island is oriented so that one of its intersection points **34a**, **34b**, **34c** faces the oncoming flow from the center power nozzle.

[0031] The flow patterns at successive instances in this oscillator are shown by the flow streamlines which are superimposed in FIGS. 5-7. Vortices are seen to be shed from the downstream edges of the triangular island **34**. At an instance when these vortices are of approximately the same size, they act to equally block the flow coming from the outer power nozzles so that more liquid flows through the center power nozzle, around the island and exits the oscillator along the direction of the centerline of the oscillator's outlet or throat **30**. See FIG. 5A.

[0032] Because of instabilities in this flow pattern, the vortices behind the island will not remain symmetric for long. Consequently, a flow pattern like that shown in either FIGS. 6 or 7 may quickly develop in alternating instances.

[0033] In FIG. 6, the situation is shown in which the vortex behind the right, trailing edge of the island **34** has grown at a faster rate than that being shed from its left, trailing edge. As a result, the flow through the right power nozzle is more blocked than that through the left or center power nozzles. With the majority of the flow through the interaction region **26** being from the left side, the flow from the oscillator's outlet **30** is seen to be deflected to the right side of the outlet's centerline.

[0034] As the vortex which is growing behind the island's right, trailing edge gets larger, it will eventually be swept further downstream and all or part of it will flow through the oscillator's outlet. Shortly after this instance, the vortices behind the island's trailing edges will be more nearly the same size, but the vortex behind the island's left side will now be growing faster than the one behind the island's right side. A short time later, the flow through the oscillator will more closely resemble that shown in FIG. 7.

[0035] At this instant, the left vortex dominates and blocks the flow through the left power nozzle. Consequently, flow through the right side of the oscillator **18** dominates and deflects the outlet flow from the oscillator so that its direction of flow is to the left of the centerline of the oscillator's outlet **30**. The combination of the flow phenomena seen in FIGS. 5-7 is the sweeping from one side to the other of the flow from the oscillator.

[0036] For flowrates and oscillator outlets sized appropriately for use in automotive windshield cleaning applications and using close to a water solution as the liquid flowing through such an oscillator, the Strouhal number,

S, for these flows has been observed to be almost constant, where:

$$S = fd/v$$

with:

f = frequency of oscillator's sweeping action (cps)
 d = width of the oscillator's island (cm)
 v = velocity through the oscillator's center power nozzle (cm/sec)
 S = Strouhal number.

[0037] Additionally, it has been found that placing the oscillator island 34 directly downstream of the oscillator's center power nozzle yields a uniform distribution of droplets in the spray flowing from the oscillator at fan angles in the range of 20 to 130 degrees. See FIG. 8. For such a uniform spatial distribution, the downstream location of the oscillator island 34 must not be too close to the center power nozzle or so far from it that the island would tend to split the flow from the power nozzles at the edges of the interaction chamber 26. For power nozzles of width 0.37 mm, a distance of 1.75 mm between the nozzle exit and the lead point on the island has been found to be sufficient to yield a relatively uniform droplet distribution.

[0038] Shown in FIG. 9 is another preferred embodiment for the present invention. In this embodiment, the geometry of the oscillator is more compact (i.e., its interaction region 26 is closer to its fluid source inlet 28) and the passageways leading to the two outside power nozzles are smaller in size and thus more restrictive than those for the embodiment of the oscillator shown in FIGS. 5-7. For example, with the center power nozzle having a width of 0.48 mm, the outside power nozzles have a width of 0.37 mm.

[0039] Shown in FIG. 10 is another preferred embodiment for the present invention. In this embodiment, the general geometry of the oscillator 18 is similar to that shown in FIG. 9 and to this embodiment has been added two rows of staggered filter posts 36 which are situated just downstream of the fluid source inlet 28. This staggered arrangement of filter posts has proven to be an improvement over the single row of filter posts that are typically used in fluidic oscillators. The minimum dimension here is the diagonal distance between the posts. The clogging of a path between these posts will not have as negative an effect as would the clogging of a path in the single row of filter posts.

[0040] As a result of the more uniform, spatial distribution of liquid droplets from fluidic oscillators of the type disclosed herein, the sprays from these oscillators are often referred to as uniform flat or uniform two-dimensional fan sprays. Such a spray is illustrated in FIG. 11.

[0041] In some instances, it is desirable to increase the thickness of such sprays. It has been found that this

can be accomplished by providing a downward taper 36 or slope to the floor 38 of the interaction region 26 of such oscillators. See FIGS. 12A - 12B which show the top view and a centerline, side view of the downstream end of a three-jet island oscillator that has a downward sloped floor.

[0042] Downward tapers 36 or slopes in the range of 10 to 20 degrees have been found to yield relative thick sprays, i.e., the top and bottom edges of such sprays are seen to diverge so as to have included angles in the range of 5 to 15 degrees.

[0043] In those instances when such oscillators are used in colder environments, it has been found helpful for maintaining their operating characteristics to provide them with higher input pressures (i.e., above their standard input pressures of 5-15 psi) so as to compensate for the resulting higher viscosities (i.e., approximately 20 centipoise and higher) of the liquids passing through them at lower temperatures. When it is not possible or convenient to impose such higher input pressures, it has been found that certain design modifications also help to preserve the operating characteristics of these circuits.

[0044] One such design modification is the introduction of a step 40a, 40b, 40c beneath each of the power nozzles at the point where their exits 42a, 42b, 42c intersect with the interaction chamber 26. See FIG. 13.

[0045] The effect of such steps is to cause a small flow separation region under the flow that jets from the power nozzles into the interaction chamber. The mixing of the relatively higher velocity jets exiting the power nozzles with that of the slower moving fluid that it entrains from below creates the desired instabilities in the jet's flow characteristics. This action is seen to promote the continued oscillatory nature of the flow from such an insert as the temperature of the fluid flowing through it is decreased.

[0046] It has been observed that the larger the relative height of the step to that of the power nozzle, the more the oscillating nature of the insert's spray can be preserved as the temperature of the fluid flowing through the insert is decreased. However, it also has been observed that the fan angles of such sprays tend to decrease slightly with such temperature decreases. Hence, it has proven best to identify at a desired colder operating temperature a specific ratio of the step height to the nozzle height so as to yield a sufficiently robust oscillating flow in which there is minimal decrease if in the fan angle of the resulting spray.

[0047] For power nozzles of height 0.85 - 0.92 mm in a fluidic insert that is operating at a pressure of 5-15 psi, a step height of in the range of 0.08 - 0.16 mm has been experimentally found to yield adequate flow instabilities in the interaction chamber so as to yield, at lower temperatures, a robust oscillating flow with minimal fan angle decreases from such an insert. Step height to power nozzle height ratios in the range of 0.10 - 0.20 have been found to significantly improve the cold performance of such oscillators. Optimal performance was achieved with

ratios of 0.12-0.15.

[0048] Although the foregoing disclosure relates to preferred embodiments of the invention, it is understood that these details have been given for the purposes of clarification only. Various changes and modifications of the invention will be apparent, to one having ordinary skill in the art, without departing from the scope of the invention as hereinafter set forth in the claims.

Claims

1. A fluidic oscillator (2) that operates on pressurized fluid flowing through said oscillator to generate an exhaust flow in the form of a spray of fluid droplets, said oscillator comprising:

an inlet (28) for said pressurized fluid,
a set of power nozzles (24) that are fed by said pressurized fluid from said inlet,
an interaction chamber (26) attached to said nozzles and which receives said flow from said nozzles,
said chamber having an upstream (26a) and a downstream (26b) portion, said upstream portion having a pair of boundary edges (26c, 26d) and a longitudinal centerline (26e) that is approximately equally spaced between said edges,
a throat (30) from which said spray exhausts from said interaction chamber,

characterised by a set of three power nozzles (24), one of said power nozzles (24) being located proximate said longitudinal centerline (26e) of said interaction chamber, and
an island (34) located in said interaction chamber (26),
said island (34) being situated downstream of said power nozzle (24) that is located proximate said longitudinal centerline (26e) of said interaction chamber.

2. The fluidic oscillator as recited in Claim 1, wherein:

one of said power nozzles (24) being located proximate each of said interaction chamber, upstream portion boundary edges (26c, 26d),
said nozzles (24) configured to accelerate the movement of said pressurized fluid that flows through said nozzles, and
said throat (30) having right (30a) and left (30b) sidewalls that diverge downstream.

3. The fluidic oscillator as recited in Claim 2, wherein said power nozzles (24) and said island (34) being oriented and scaled such as to generate flow vortices behind said island that are swept out of said

throat in a manner such that said vortices flow alternately proximate said right sidewall (30a) and then said left sidewall (30b) of said throat.

4. The fluidic oscillator as recited in Claim 1 or Claim 3, wherein:

said island (34) being configured to have a triangular shape with three intersection points (34a, 34b, 34c) defined by the sides of said island, and

said island being oriented such that one of said points (34a, 34b, 34c) faces the oncoming flow from said power nozzle (24) that is located proximate said longitudinal centerline (26e) of said interaction chamber.

5. The fluidic oscillator as recited in Claim 1 or claim 4, further comprising filter posts (32) situated between said fluid inlet (28) and said power nozzles (24).

6. The fluidic oscillator as recited in Claim 1 or claim 4, wherein:

said interaction chamber (26) having a floor (38), and
said floor being sloped downward in the direction from said upstream (26a) to said downstream (26b) portion of said chamber.

7. The fluidic oscillator as recited in Claim 6, wherein the amount of said floor slope being in the range of 10 to 20 degrees.

8. The fluidic oscillator as recited in Claim 1 or claim 4, further comprising a step (40a, 40b, 40c) in the height elevation of the floor of said power nozzles (24) with respect to that of said floor (38) of said interaction chamber.

9. The fluidic oscillator as recited in Claim 8, wherein the ratio of the height of said step (40a, 40b, 40c) to the height of said power nozzle (24) is in the range of 0.10 to 0.20.

10. A method of forming a spray of fluid droplets, said method comprising the steps of:

causing a pressurized fluid to flow into an inlet (28),
placing a set of power nozzles (24) downstream from said inlet,
attaching an interaction chamber (26) downstream from said nozzles and configuring said chamber to receive said flow from said nozzles,
said chamber (26) having an upstream (26a) and a downstream (26b) portion, said upstream portion having a pair of boundary edges (26c,

26d) and a longitudinal centerline (26e) that is approximately equally spaced between said edges,
providing said chamber with a throat (30) from which said spray exhausts from said interaction chamber,

characterised by providing a set of three power nozzles (24), one of said power nozzles (24) being located proximate said longitudinal centerline (26e) of said interaction chamber, and
locating an island (34) in said interaction chamber, said island (34) being situated downstream of said power nozzle (24) that is located proximate said longitudinal centerline (26e) of said interaction chamber.

11. The method as recited in Claim 10, wherein:

one of said power nozzles (24) being located proximate each of said interaction chamber, upstream portion boundary edges (26c, 26d), said nozzles (24) configured to accelerate the movement of said pressurized fluid that flows through said nozzles, and
said throat having right (30a) and left (30b) sidewalls that diverge downstream.

12. The method as recited in Claim 11, wherein said power nozzles (24) and said island (34) being oriented and scaled such as to generate flow vortices behind said island that are swept out of said throat (30) in a manner such that said vortices flow alternately proximate said right (30a) sidewall and then said left (30b) sidewall of said throat.

13. The method as recited in Claim 10 or 12, wherein:

said island (34) being configured to have a triangular shape with three intersection points (34a, 34b, 34c) defined by the sides of said island, and
said island being oriented such that one of said points (34a, 34b, 34c) faces the oncoming flow from said power nozzle (24) that is located proximate said longitudinal centerline (26e) of said interaction chamber.

14. The method as recited in Claim 10 or 13, further comprising the step of situating filter posts (32) between said fluid inlet (28) and said power nozzles (24).

15. The method as recited in Claim 10 or 13, wherein:

said interaction chamber having a floor (38), and said floor being sloped downward in the direction from said upstream (26a) to said downstream (26b) portion of said chamber.

16. The method as recited in Claim 15, wherein the amount of said floor slope being in the range of 10 to 20 degrees.

17. The method as recited in Claim 10 or 13, further comprising the step of providing a step (40a, 40b, 40c) in the height elevation of the floor of said power nozzles with respect to that of said floor of said interaction chamber.

18. The method as recited in Claim 17, wherein the ratio of the height of said step 40a, 40b, 40c) to the height of said power nozzle (24) is in the range of 0.10 to 0.20.

19. An automotive windshield washing apparatus comprising:

a fluidic oscillator (2) as claimed in any one of claims 1-9, configured as an insert (18), in a housing (19) of said apparatus.

Patentansprüche

1. Fluidikoszillator (2), welcher auf ein unter Druck stehendes Fluid, das diesen Fluidikoszillator durchströmt, einwirkt und eine Ausgangsströmung in Form eines Sprühstrahls aus Fluidtröpfchen erzeugt, wobei der genannte Fluidikoszillator einen Einlass (28) für das genannte unter Druck stehende Fluid, eine Anzahl von Leistungsdüsen (24), denen das genannte Druckfluid vom genannten Einlass her zugeführt wird, eine Wechselwirkungskammer (26) anschliessend an die Düsen, in welche das genannte Fluid aus den genannten Düsen eingeleitet wird, wobei diese genannte Kammer einen stromaufwärts gelegenen Bereich (26a) mit zwei begrenzenden Rändern (26c, 26d) und einen stromabwärts gelegenen Bereich (26b) sowie eine längsgerichtete Mittellinie (26e) aufweist, die von beiden genannten Rändern etwa gleich weit entfernt verläuft, und eine Einschnürung (30), durch welche der genannte Sprühstrahl aus der genannten Wechselwirkungskammer austritt, aufweist,

gekennzeichnet

durch eine Gruppe von drei Leistungsdüsen (24), wobei eine der genannten Leistungsdüsen (24) benachbart zur genannten längsgerichteten Mittellinie (26e) der genannten Wechselwirkungskammer angeordnet ist, und

durch eine Insel (34), welche in der genannten Wechselwirkungskammer (26) vorgesehen ist, wobei diese Insel (34) stromabwärts von derjenigen genannten Leistungsdüse (24) gelegen ist, welche be-

- nachbart zur genannten längsgerichteten Mittellinie (26e) der genannten Wechselwirkungskammer angeordnet ist.
2. Fluidikoszillator nach Anspruch 1, bei dem eine der genannten Leistungsdüsen (24) in der Nähe beider begrenzenden Ränder (26c, 26d) des stromaufwärts gelegenen Bereiches der Wechselwirkungskammer angeordnet ist, die Düsen (24) so konfiguriert sind, dass sie die Strömung des genannten unter Druck stehenden Fluids beschleunigen, welches durch die genannten Düsen strömt, und die genannte Einschnürung (30) eine rechte (30a) und eine linke (30b) Seitenwandung aufweist, wobei diese Wandungen stromabwärts auseinanderlaufen. 5
 3. Fluidikoszillator nach Anspruch 2, bei dem die genannten Leistungsdüsen (24) und die genannte Insel (34) derart orientiert und ausgelegt sind, dass hinter der genannten Insel Strömungswirbel erzeugt werden, die aus der Einschnürung derart ausgestossen werden, dass diese Wirbel abwechselnd nahe der rechten Seitenwandung (30a) und anschliessend nahe der linken Seitenwandung (30b) der genannten Einschnürung austreten. 10 15 20 25
 4. Fluidikoszillator nach Anspruch 1 oder 3, bei dem die genannte Insel (34) derart konfiguriert ist, dass sie eine dreieckige Form besitzt, welche drei Schnittpunkte (34a, 34b, 34c) aufweist, die von den Seiten der Insel definiert werden, und die genannte Insel derart orientiert ist, dass einer der genannten Punkte (34a, 34b, 34c) der ankommenden Strömung gegenüberliegt, die von der genannten Leistungsdüse (24) her kommt, welche benachbart zur genannten längsgerichteten Mittellinie (26e) der genannten Wechselwirkungskammer angeordnet ist. 30 35 40
 5. Fluidikoszillator nach Anspruch 1 oder 4, welcher weiterhin Filterstäbe (32) aufweist, welche zwischen dem genannten Fluideinlass (28) und den genannten Leistungsdüsen (24) angeordnet sind. 45
 6. Fluidikoszillator nach Anspruch 1 oder 4, bei dem die genannte Wechselwirkungskammer (26) eine Bodenfläche (38) aufweist und sich diese Bodenfläche in Richtung vom stromaufwärts gelegenen Bereich (26a) zum genannten stromabwärts gelegenen Bereich (26b) der genannten Kammer neigt. 50
 7. Fluidikoszillator nach Anspruch 6, bei dem die Neigung der Bodenfläche im Bereich zwischen 10° und 20° liegt. 55
 8. Fluidikoszillator nach Anspruch 1 oder 4, welcher weiterhin eine Stufe (40a, 40b, 40c) in Höhe des Bodens der genannten Leistungsdüsen (24) gegenüber der genannten Bodenfläche (38) der genannten Wechselwirkungskammer aufweist. 5
 9. Fluidikoszillator nach Anspruch 8, bei dem das Verhältnis der Höhe dieser Stufe (40a, 40b, 40c) zur Höhe der genannten Leistungsdüsen (24) im Bereich von 0,10 bis 0,20 liegt. 10
 10. Verfahren zur Erzeugung eines Sprühstrahls aus Fluidtröpfchen, welches die folgenden Schritte enthält:
 - Einleiten eines unter Druck stehenden Fluids durch einen Einlass (28),
 - Anordnen einer Anzahl von Leistungsdüsen (24) stromabwärts vom genannten Einlass,
 - Anbringen einer Wechselwirkungskammer (26) stromabwärts von den genannten Düsen und Konfigurieren dieser Kammer zur Aufnahme des Abstroms der genannten Düsen, wobei die genannte Kammer (26) einen stromaufwärts gelegenen Bereich (26a) mit zwei begrenzenden Rändern (26c, 26d) und einen stromabwärts gelegenen Bereich (26b) sowie eine längsgerichtete Mittellinie (26e) aufweist, die von beiden genannten Rändern etwa gleich weit entfernt verläuft,
 - Versehen der genannten Kammer mit einer Einschnürung (30), durch welche der genannte Sprühstrahl aus der genannten Wechselwirkungskammer austritt,

gekennzeichnet

durch den Einbau einer Gruppe von drei Leistungsdüsen (24), wobei eine der genannten Leistungsdüsen (24) benachbart zur genannten längsgerichteten Mittellinie (26e) der genannten Wechselwirkungskammer angeordnet ist, und Einsetzen einer Insel (34) in die genannte Wechselwirkungskammer, wobei diese Insel (34) stromabwärts von derjenigen genannten Leistungsdüse (24) gelegen ist, welche benachbart zur genannten längsgerichteten Mittellinie (26e) der genannten Wechselwirkungskammer angeordnet ist.

11. Verfahren nach Anspruch 10, bei dem eine der genannten Leistungsdüsen (24) in der Nähe beider begrenzenden Ränder (26c, 26d) des stromaufwärts gelegenen Bereiches der Wechselwirkungskammer angeordnet ist, die Düsen (24) so konfiguriert sind, dass sie die Strömung des genannten unter Druck stehenden Fluids beschleunigen, welches durch die genannten Düsen strömt, und die genannte Einschnürung eine rechte (30a) und

eine linke (30b) Seitenwandung aufweist, wobei diese Wandungen stromabwärts auseinanderlaufen.

12. Verfahren nach Anspruch 11, bei dem die genannten Leistungsdüsen (24) und die genannte Insel (34) derart orientiert und ausgelegt werden, dass hinter der genannten Insel Strömungswirbel erzeugt werden, die aus der Einschnürung (30) derart ausgestossen werden, dass diese Wirbel abwechselnd nahe der rechten Seitenwandung (30a) und anschliessend nahe der linken Seitenwandung (30b) der genannten Einschnürung austreten.
13. Verfahren nach Anspruch 10 oder 12, bei dem die genannte Insel (34) derart konfiguriert wird, dass sie eine dreieckige Form aufweist, welche drei Schnittpunkte (34a, 34b, 34c) aufweist, die von den Seiten der Insel definiert werden, und die genannte Insel derart orientiert wird, dass einer der genannten Punkte (34a, 34b, 34c) der ankommenden Strömung gegenüberliegt, die von der genannten Leistungsdüse (24) her kommt, welche benachbart zur genannten längsgerichteten Mittellinie (26e) der genannten Wechselwirkungskammer angeordnet ist.
14. Verfahren nach Anspruch 10 oder 13, welches als zusätzlichen Schritt die Anordnung von Filterstäben (32) zwischen dem genannten Fluideinlass (28) und den genannten Leistungsdüsen (24) umfasst.
15. Verfahren nach Anspruch 10 oder 13, bei dem die genannte Wechselwirkungskammer eine Bodenfläche (38) aufweist und sich diese Bodenfläche in Richtung vom stromaufwärts gelegenen Bereich (26a) zum genannten stromabwärts gelegenen Bereich (26b) der genannten Kammer neigt.
16. Verfahren nach Anspruch 15, bei dem die Neigung der Bodenfläche im Bereich zwischen 10 und 20° liegt.
17. Verfahren nach Anspruch 10 oder 13, bei dem als zusätzlicher Schritt eine Stufe (40a, 40b, 40c) in Höhe des Bodens der genannten Leistungsdüsen gegenüber der genannten Bodenfläche der genannten Wechselwirkungskammer vorgesehen wird.
18. Verfahren nach Anspruch 17, bei dem das Verhältnis der Höhe dieser Stufe (40a, 40b, 40c) zur Höhe der genannten Leistungsdüsen (24) im Bereich von 0,10 bis 0,20 liegt.
19. Waschanlage für Windschutzscheiben von Automobilen, welche einen Fluidkoszillator (2) nach einem der Ansprüche

1 bis 9 aufweist, der als Einsatz (18) in ein Gehäuse (19) der genannten Anlage ausgestaltet ist.

5 Revendications

1. Oscillateur de fluide (2) agissant sur un fluide sous pression circulant à travers ledit oscillateur afin de générer un flux de sortie sous forme d'un jet de gouttelettes de fluide, ledit oscillateur comprenant :

une entrée (28) dudit fluide sous pression, un jeu de tuyères de puissance (24) alimentées par ledit fluide sous pression arrivant de ladite entrée, une chambre d'interaction (26) attachée auxdites tuyères et qui reçoit le flux de fluide provenant desdites tuyères, cette chambre comprenant une partie en amont (26a) et une partie en aval (26b), cette partie en amont présentant une paire de bords de limitation (26c, 26d) et une ligne médiane longitudinale (26e) qui s'étend à une distance approximativement égale desdits bords, et un étranglement (30) à travers duquel ledit jet quitte ladite chambre d'interaction,

caractérisé

par un jeu de trois tuyères de puissance (24), une de ces tuyères de puissance (24) étant placée à proximité de ladite ligne médiane longitudinale (26e) de la chambre d'interaction, et par un îlot (34) situé dans ladite chambre d'interaction (26), cet îlot (34) étant placé en aval de cette tuyère de puissance (24) qui est disposée à proximité de ladite ligne médiane longitudinale (26e) de la chambre d'interaction.

2. Oscillateur de fluide selon la revendication 1, dans lequel :

une desdites tuyères de puissance (24) est située à proximité de chacun des bords de délimitation (26c, 26d) dans la partie en aval de ladite chambre d'interaction, lesdites tuyères (24) sont configurées pour accélérer le mouvement dudit fluide de pression qui s'écoule à travers desdites tuyères, et ledit étranglement (30) comporte des parois latérales droite (30a) et gauche (30b) qui divergent dans la direction aval.

3. Oscillateur de fluide selon la revendication 2, dans lequel lesdites tuyères de puissance (24) et ledit îlot (34) sont orientés et échelonnés pour générer des tourbillons du flux derrière ledit îlot, tourbillons qui sont portées à l'extérieur à travers ledit étranglement de telle façon que ces tourbillons s'écoulent alterna-

tivement à proximité de la paroi latérale droite (30a) et ensuite à proximité de ladite paroi latérale gauche (30b) dudit étranglement.

4. Oscillateur de fluide selon la revendication 1 ou 3, dans lequel :

ledit îlot 34 est configuré pour présenter une forme triangulaire avec trois points d'intersection (34a, 34b, 34c) définis par les côtés dudit îlot, et ledit îlot est orienté de telle façon qu'un desdits points (34a, 34b, 34c) est dirigé vers le flux arrivant à partir de ladite tuyère de puissance (24) qui est située à proximité de ladite ligne médiane longitudinale (26e) de ladite chambre d'interaction.

5. Oscillateur de fluide selon la revendication 1 ou 4, comprenant en plus des tiges de filtre (32) situées entre ladite entrée de fluide (28) et lesdites tuyères de puissance (24).

6. Oscillateur de fluide selon la revendication 1 ou 4, dans lequel :

ladite chambre d'interaction (26) présente un plancher (38), ledit plancher étant incliné à partir de la partie en amont (26a) vers la partie en aval (26b) de ladite chambre.

7. Oscillateur de fluide selon la revendication 6, dans lequel la grandeur de l'inclinaison du plancher est comprise entre 10° et 20°.

8. Oscillateur de fluide selon la revendication 1 ou 4, comprenant en plus une marche (40a, 40b, 40c) au niveau du plancher desdites tuyères de puissance (24) par rapport à la hauteur du plancher (38) de ladite chambre d'interaction.

9. Oscillateur de fluide selon la revendication 8, dans lequel le rapport entre la hauteur de ladite marche (40a, 40b, 40c) et la hauteur de ladite tuyère de puissance (24) est compris entre 0,10 et 0,20.

10. Procédé pour former un jet de gouttelettes de fluide, comprenant les étapes suivantes :

d'amener un fluide sous pression à affluer dans une entrée (28), de placer un jeu de tuyères de puissance (24) en aval de cette entrée, d'attacher une chambre d'interaction (26) en aval desdites tuyères et de configurer ladite chambre pour recevoir le flux de fluide provenant desdites tuyères, cette chambre (26) comprenant une partie en amont (26a) et une partie

en aval (26b), cette partie en amont présentant une paire de bords de délimitation (26c, 26d) et une ligne médiane longitudinale (26e) qui s'étend à une distance approximativement égale desdits bords, et de munir ladite chambre d'un étranglement (30) à travers lequel ledit jet quitte ladite chambre d'interaction,

caractérisé par le fait

qu'un jeu de trois tuyères de puissance (24) est prévu, une de ces tuyères de puissance (24) étant placée à proximité de ladite ligne médiane longitudinale (26e) de la chambre d'interaction, et

qu'un îlot (34) est disposé dans ladite chambre d'interaction, cet îlot (34) étant placé en aval de cette tuyère de puissance (24) qui est disposée à proximité de ladite ligne médiane longitudinale (26e) de la chambre d'interaction.

11. Procédé selon la revendication 10, dans lequel :

une desdites tuyères de puissance (24) est située à proximité de chacun des bords de délimitation (26c, 26d) dans la partie en aval de ladite chambre d'interaction, lesdites tuyères (24) sont configurées pour accélérer le mouvement dudit fluide de pression qui s'écoule à travers desdites tuyères, et ledit étranglement comporte des parois latérales droite (30a) et gauche (30b) qui divergent dans la direction aval.

12. Procédé selon la revendication 11, dans lequel :

lesdites tuyères de puissance (24) et ledit îlot (34) sont orientés et échelonnés pour générer des tourbillons de flux derrière ledit îlot, tourbillons qui sont portés à l'extérieur à travers ledit étranglement 30 de telle façon que ces tourbillons s'écoulent alternativement à proximité de la paroi latérale droite (30a) et ensuite à proximité de ladite paroi latérale gauche (30b) dudit étranglement.

13. Procédé selon la revendication 10 ou 12, dans lequel :

ledit îlot 34 est configuré pour présenter une forme triangulaire avec trois points d'intersection (34a, 34b, 34c) définis par les côtés dudit îlot, et ledit îlot est orienté de telle façon qu'un desdits points (34a, 34b, 34c) est dirigé vers le flux arrivant à partir de ladite tuyère de puissance (24) qui est située à proximité de ladite ligne médiane longitudinale (26e) de ladite chambre d'interaction.

14. Procédé selon la revendication 10 ou 13, comprenant en plus l'étape d'insérer des tiges de filtre (32) entre ladite entrée de fluide (28) et lesdites tuyères de puissance (24). 5
15. Procédé selon la revendication 10 ou 13, dans lequel :
 ladite chambre d'interaction présente un plancher (38), 10
 ledit plancher étant incliné à partir de la partie en amont (26a) vers la partie en aval (26b) de ladite chambre.
16. Procédé selon la revendication 15, dans lequel la grandeur de l'inclinaison du plancher est comprise entre 10° et 20°. 15
17. Procédé selon la revendication 10 ou 13, comprenant en plus l'étape de prévoir une marche (40a, 40b, 40c) au niveau du plancher desdites tuyères de puissance par rapport à la hauteur du plancher de ladite chambre d'interaction. 20
18. Procédé selon la revendication 17, dans lequel le rapport entre la hauteur de ladite marche (40a, 40b, 40c) et la hauteur de ladite tuyère de puissance (24) est compris entre 0,10 et 0,20. 25
19. Appareil de nettoyage du pare-brise d'un automobile, comprenant un oscillateur de fluide (2) selon l'une des revendications 1 à 9, configuré sous forme d'un insert (18) placé dans un boîtier (19) dudit appareil. 30

35

40

45

50

55

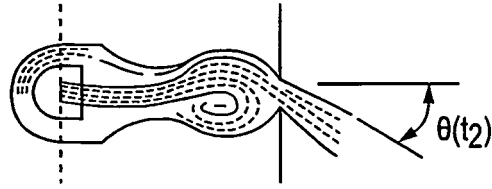


FIG. 1A

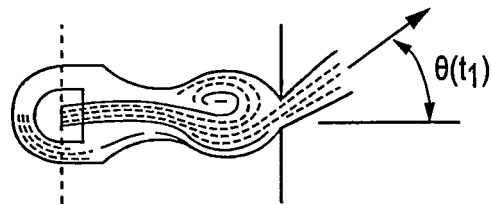


FIG. 1B

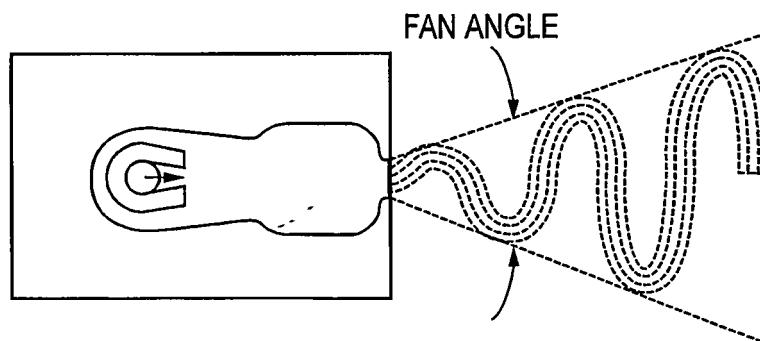


FIG. 1C

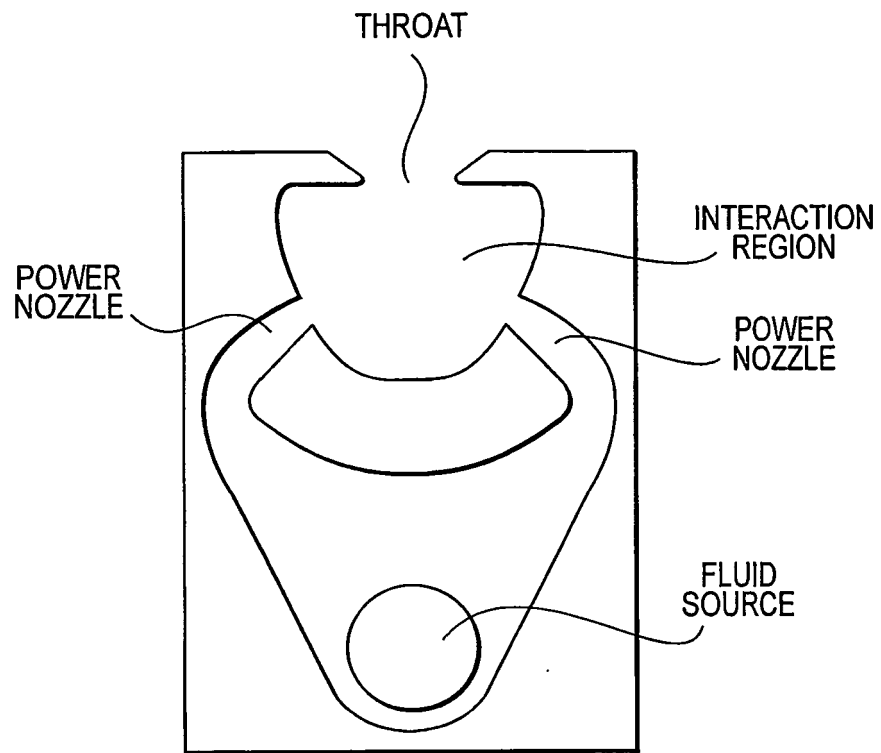


FIG. 2
(PRIOR ART)

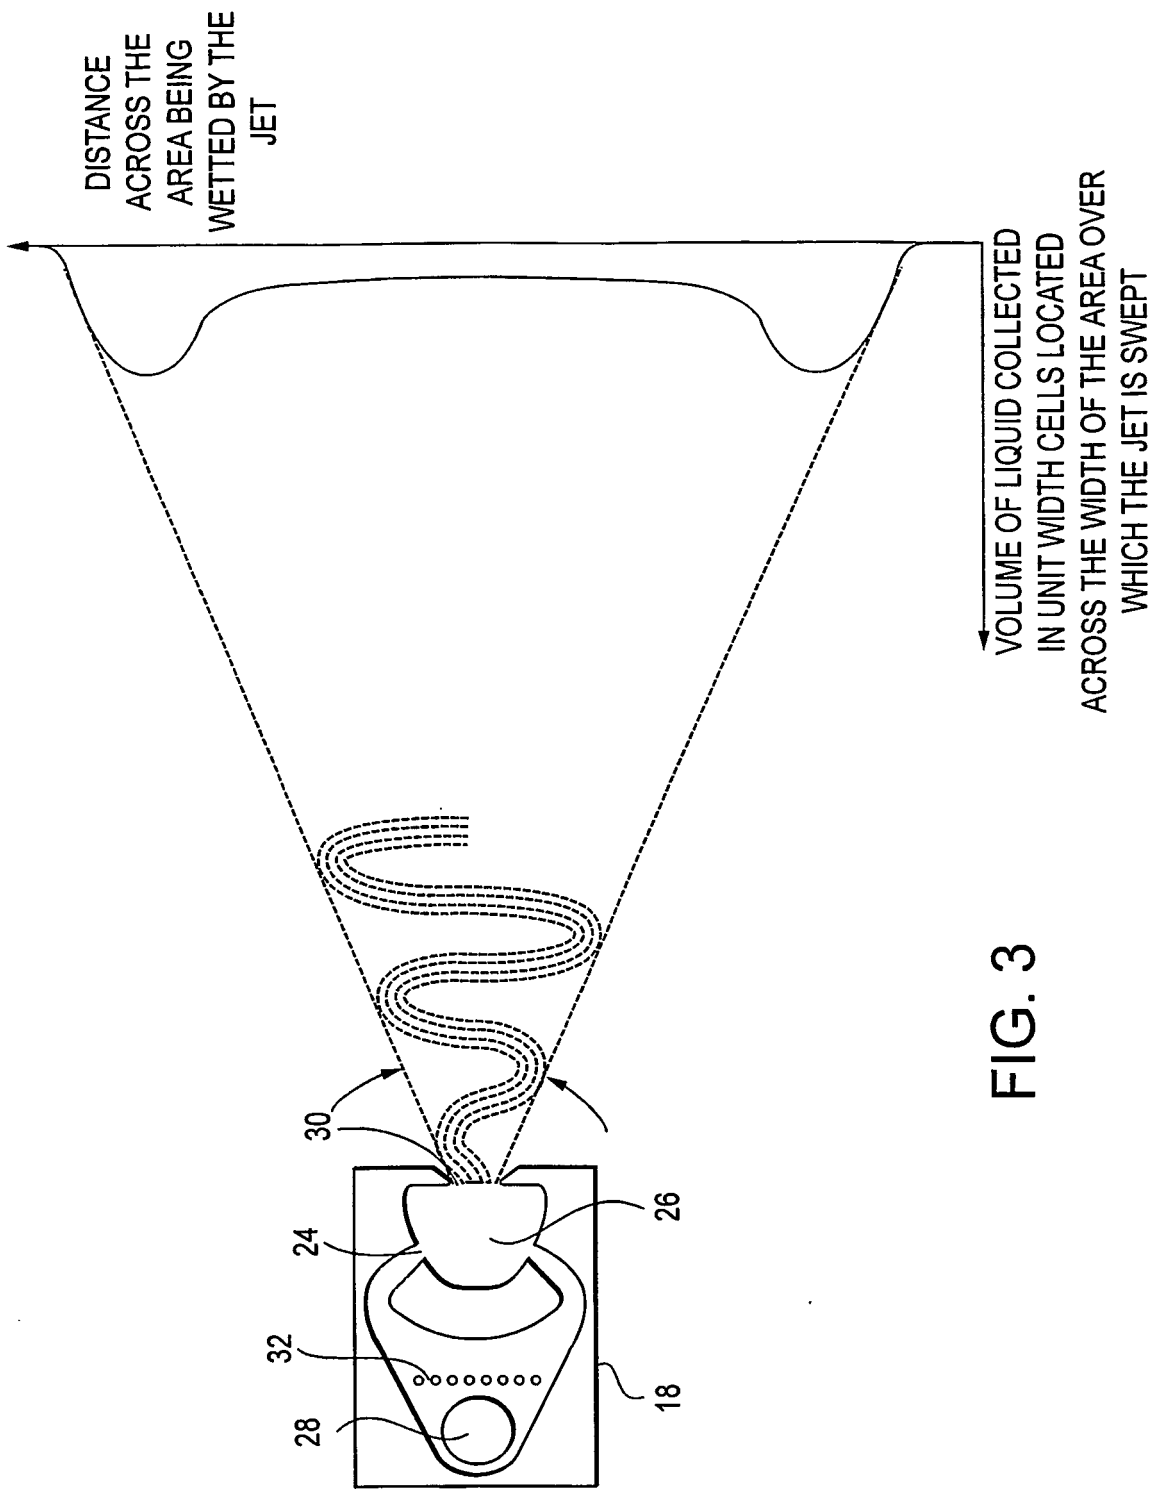


FIG. 3

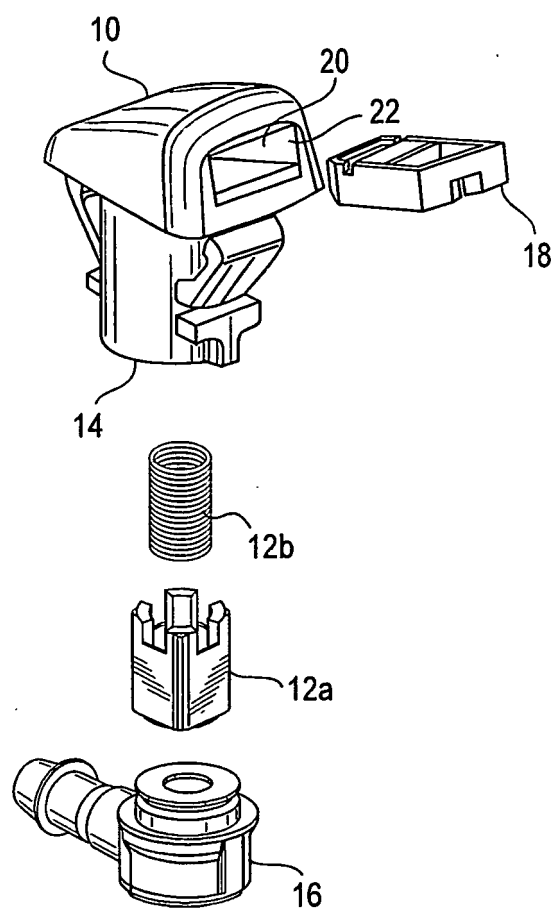


FIG. 4

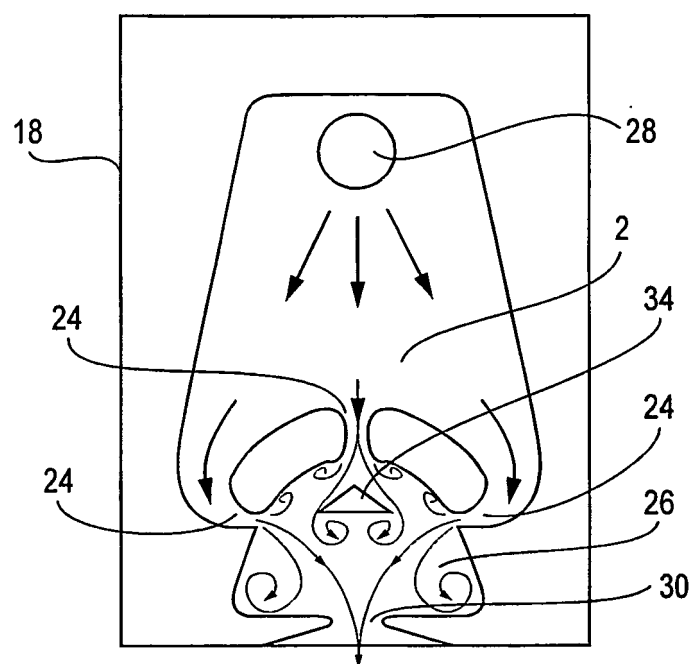
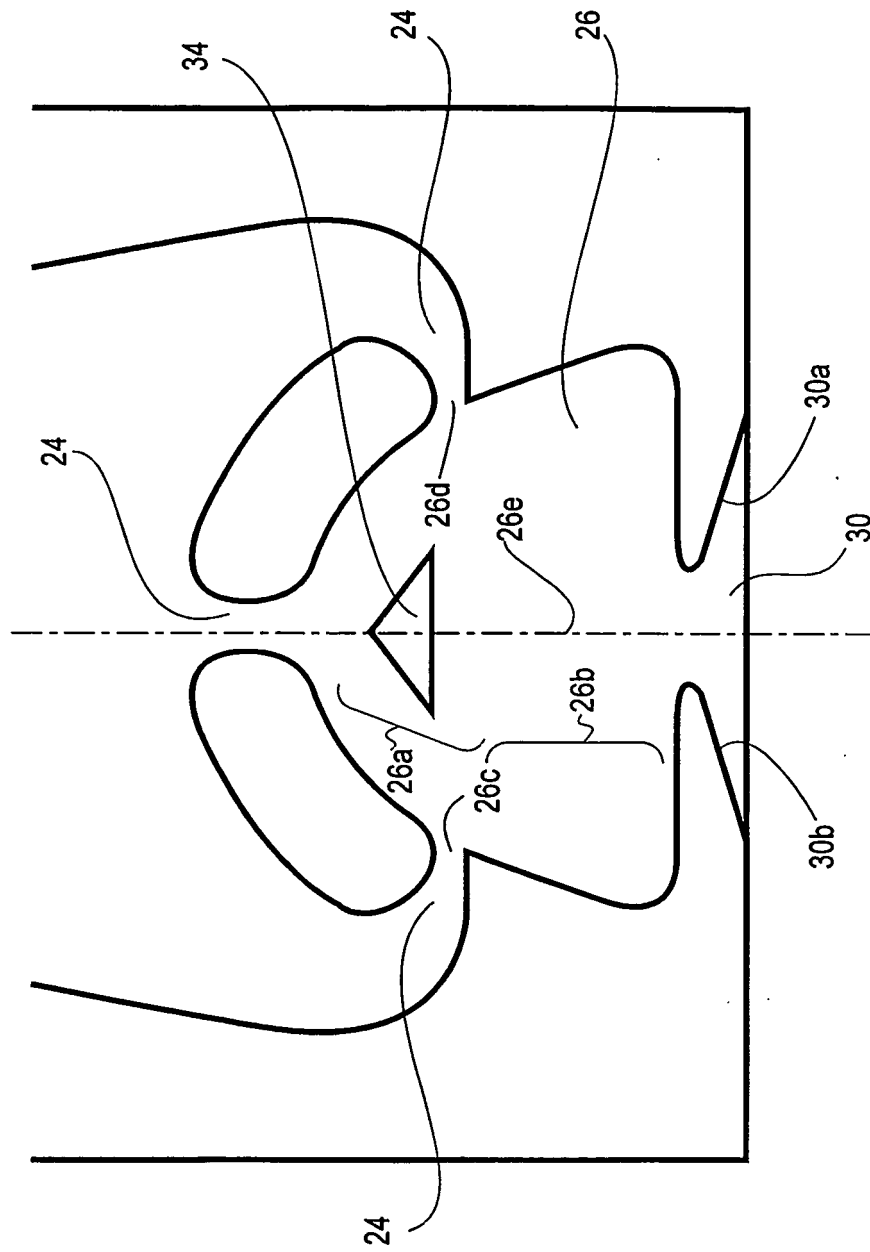


FIG. 5A

FIG. 5B



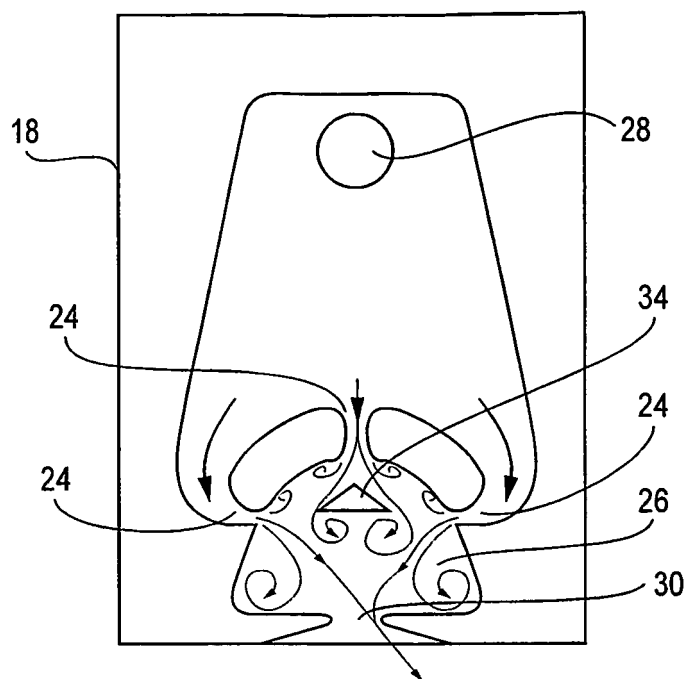


FIG. 6

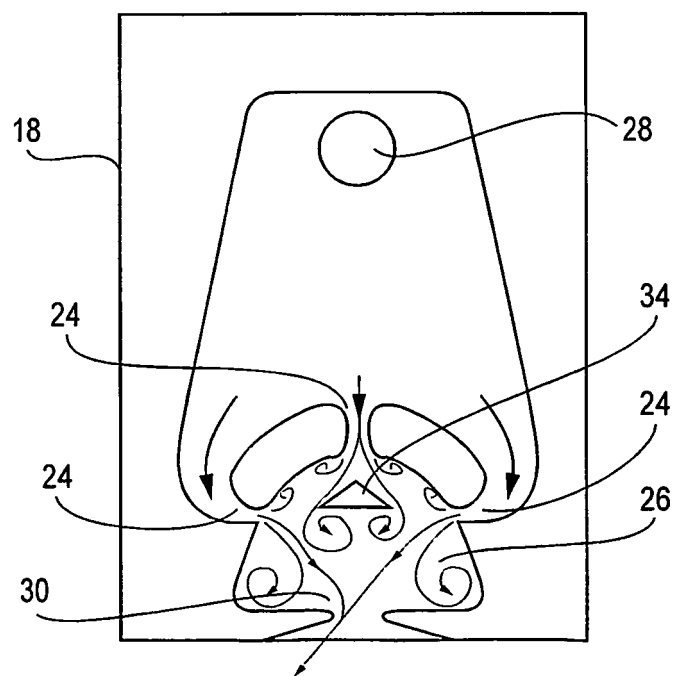
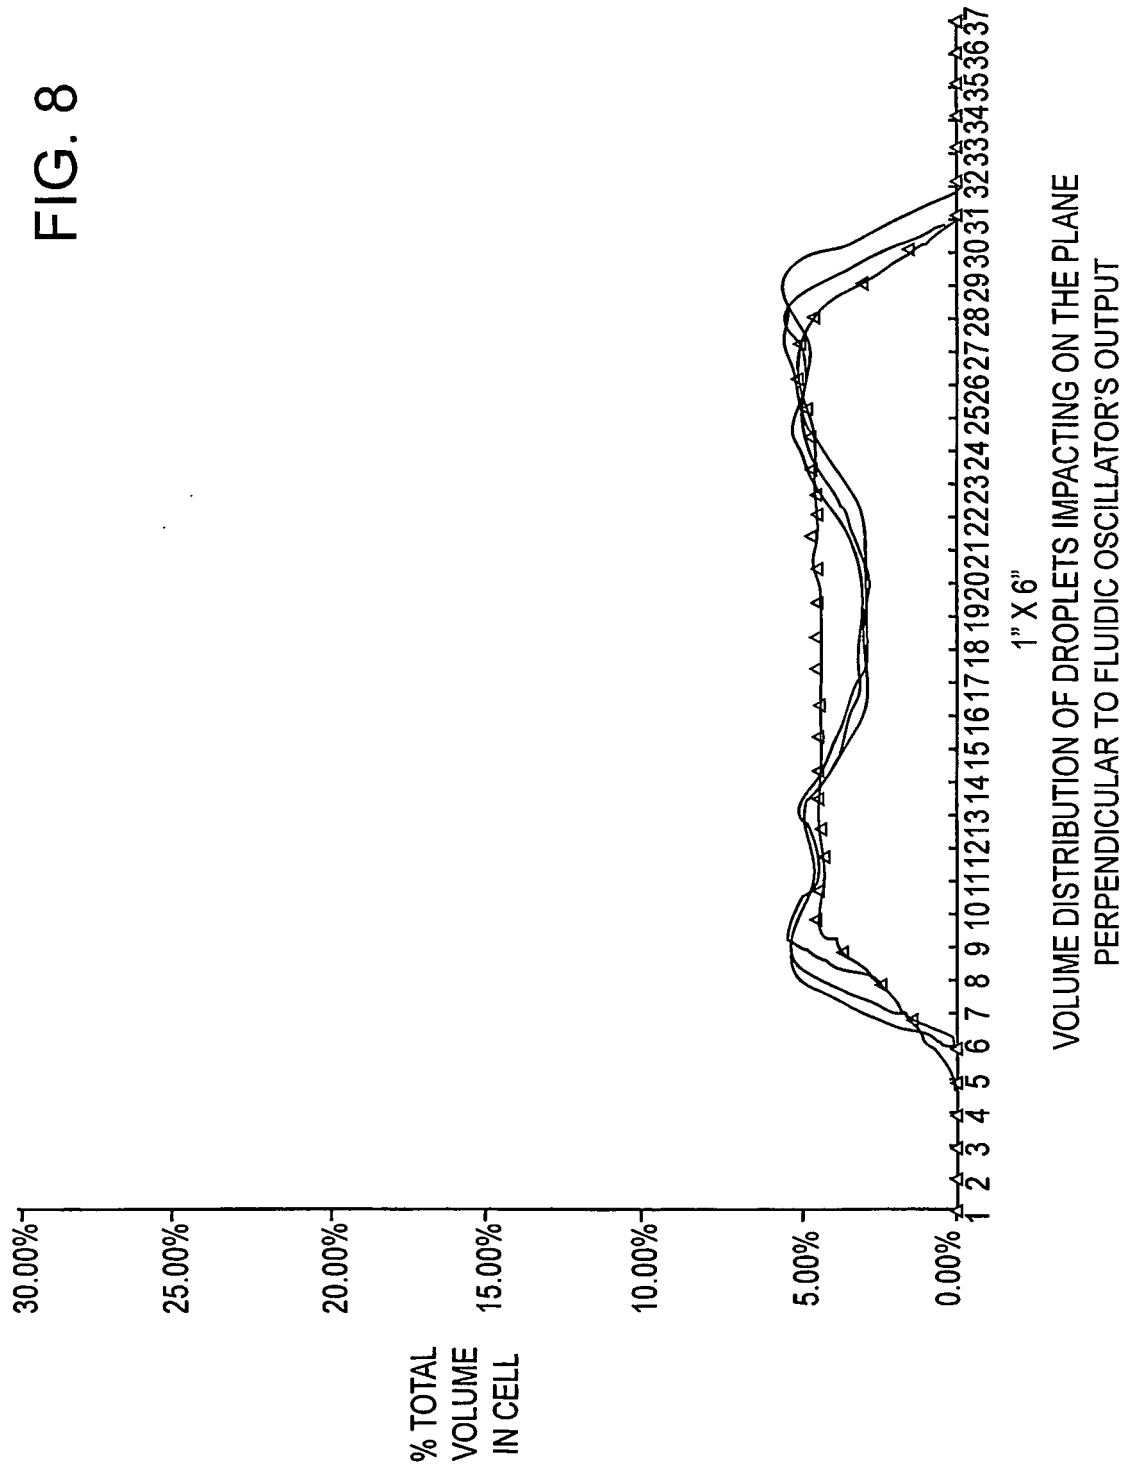


FIG. 7

FIG. 8



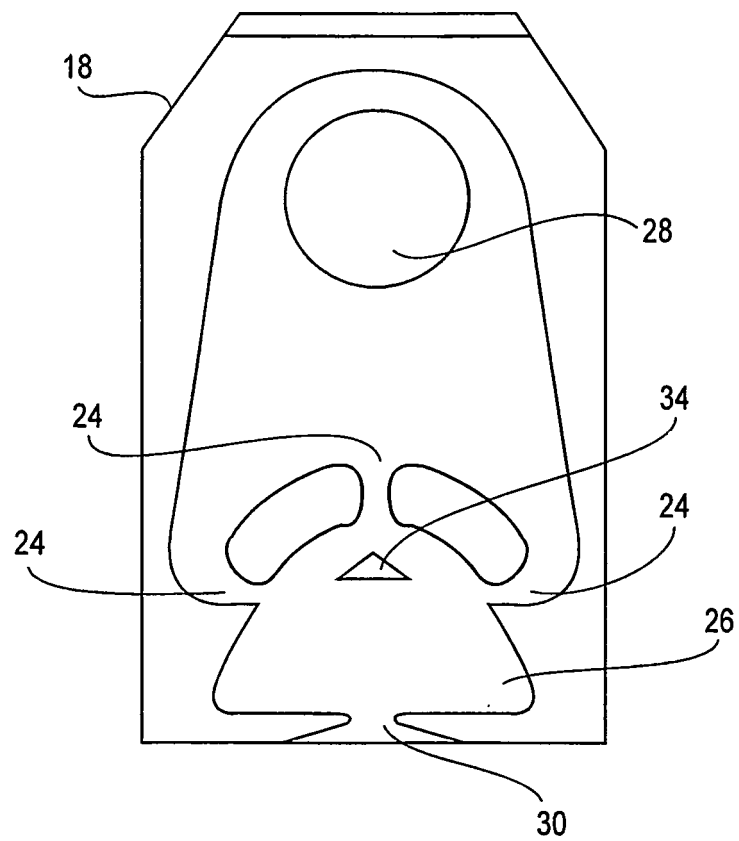


FIG. 9

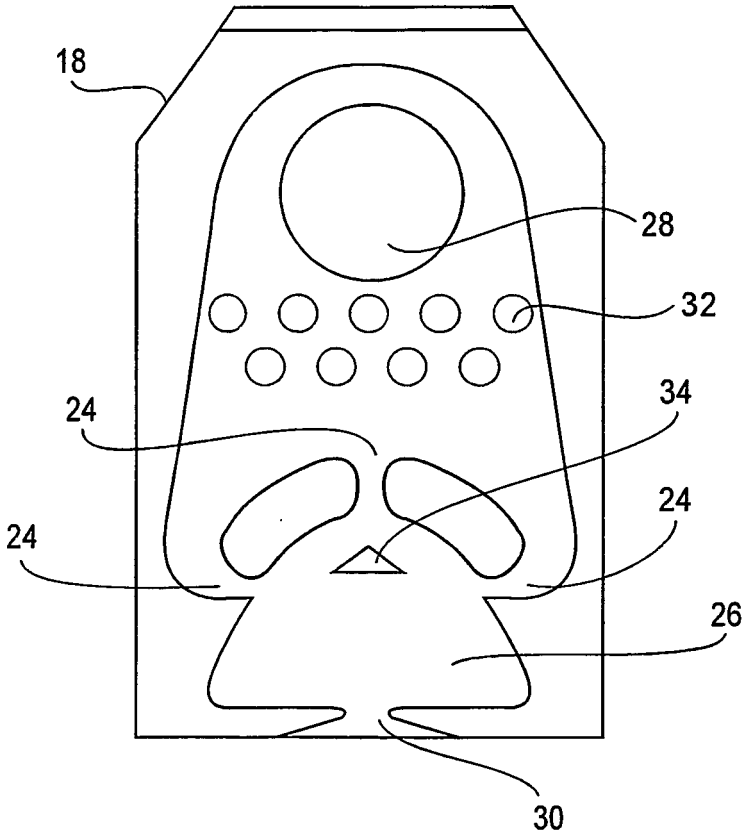


FIG. 10

FIG. 11

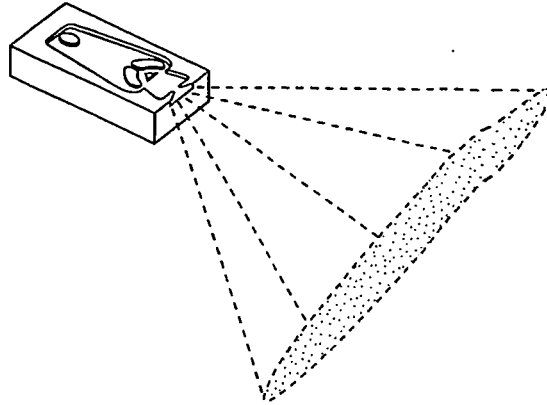


FIG. 12A

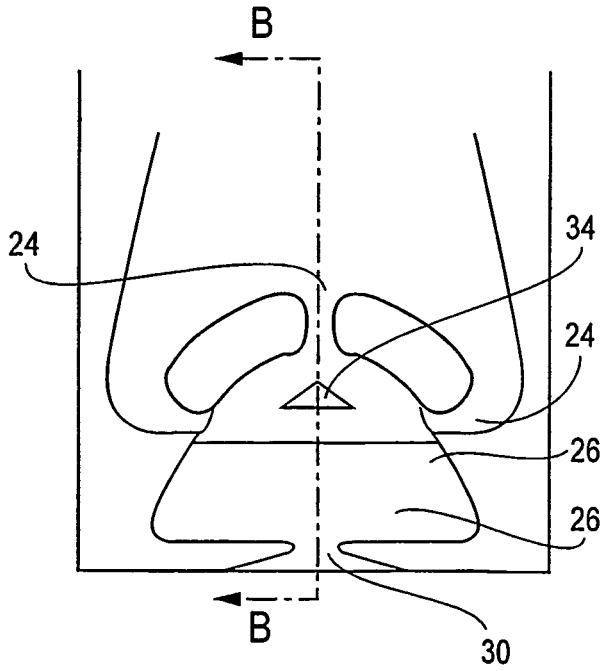
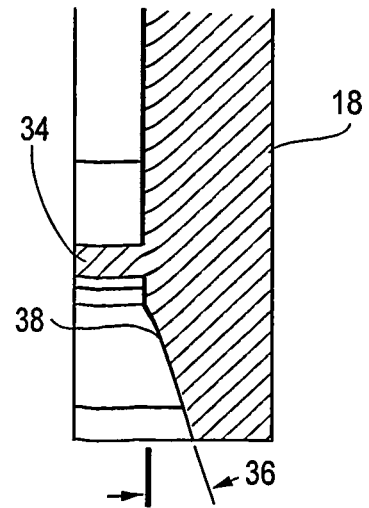


FIG. 12B

B-B



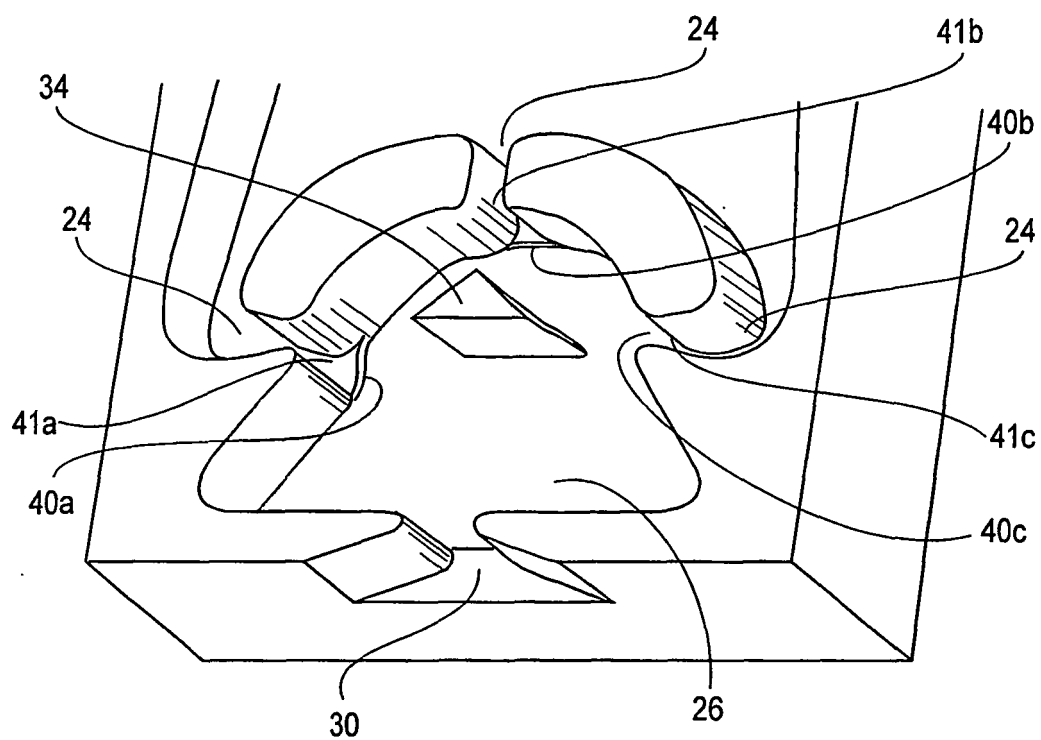


FIG. 13

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 3185166 A, Horton & Bowles **[0003]**
- US 3563462 A, Bauer **[0003]**
- US 4052002 A, Stouffer & Bray **[0003]**
- US 4151955 A, Stouffer **[0003]**
- US 4157161 A, Bauer **[0003]**
- US 4231519 A, Stouffer **[0003]**
- US RE33158 E **[0003]**
- US 4508267 A, Stouffer **[0003]**
- US 5035361 A, Stouffer **[0003]**
- US 5213269 A, Srinath **[0003]**
- US 5971301 A, Stouffer **[0003]**
- US 6186409 B, Srinath **[0003]**
- US 6253782 B, Raghu **[0003] [0006] [0019]**