



(11)

EP 1 675 899 B2

(12)

NEW EUROPEAN PATENT SPECIFICATION

After opposition procedure

(45) Date of publication and mention
of the opposition decision:
01.06.2016 Bulletin 2016/22

(51) Int Cl.:
C08K 9/04 ^(2006.01) **C08K 5/3467** ^(2006.01)
C08L 23/02 ^(2006.01)

(45) Mention of the grant of the patent:
19.01.2011 Bulletin 2011/03

(86) International application number:
PCT/EP2004/011798

(21) Application number: **04790622.7**

(87) International publication number:
WO 2005/040263 (06.05.2005 Gazette 2005/18)

(22) Date of filing: **19.10.2004**

(54) **MOLDING COMPOSITIONS OF A GLASS FIBER-REINFORCED OLEFIN POLYMER**

FORMMASSEN AUS EINEM GLASFASERVERSTÄRKTEN OLEFINPOLYMER

COMPOSITIONS DE MOULAGE D'UN POLYMERE OLEFINIQUE RENFORCE DE FIBRES DE
VERRE

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR**

(30) Priority: **21.10.2003 DE 10349480**
06.11.2003 US 518425 P
16.04.2004 DE 102004019180
21.05.2004 US 573132 P

(43) Date of publication of application:
05.07.2006 Bulletin 2006/27

(73) Proprietor: **Basell Poliolefine Italia S.r.l.**
20127 Milano (IT)

(72) Inventors:
• **MECKLENBURG, Thomas**
35510 Butzbach (DE)
• **ROHRMANN, Jürgen**
65779 Kelkheim (DE)

(74) Representative: **Colucci, Giuseppe et al**
Basell Poliolefine Italia S.r.l.
Intellectual Property
Piazzale G. Donegani 12
44122 Ferrara (IT)

(56) References cited:
EP-A1- 0 595 348 EP-A1- 1 357 144
EP-A2- 0 177 961 WO-A-00/48957
DE-A1- 10 349 480 GB-A- 1 359 200
US- - 4 728 573 US-A- 3 936 415
US-A- 4 448 917 US-A- 4 621 115
US-A- 5 056 426

• **JP60069146 and translation (D1a)**

- **jp 2001329178A and translation**
- **JP 59105812A-1 and translation**
- **JP 59108049a and translation**
- **J. L. THOMASON ET AL.: 'Influence of fibre length and concentration on the properties of glass fibre-reinforced polypropylene: 1. Tensile and flexural modulus' APPLIED SCIENCE AND MANUFACTURING vol. 27, no. 6, 1996, pages 477 - 484**
- **J.L. THOMASON ET AL.: 'The influence of fibre length and concentration on the properties of glass fibrereinforced polypropylene: 2. Thermal properties' APPLIED SCIENCE AND MANUFACTURING vol. 27, no. 7, 1996, pages 555 - 565**
- **J.L. THOMASON ET AL.: 'Influence of fibre length and concentration on the properties of glass fibre-reinforced polypropylene: Part 3. Strength and strain at failure' PROPERTIES OF GLASS FIBRE-REINFORCED POLYPROPYLENE vol. 27, no. 11, 1996, pages 1075 - 1084**
- **J.L. THOMASON ET AL.: 'Influence of fibre length and concentration on the properties of glass fibre-reinforced polypropylene: 4. Impact properties' INFLUENCE OF FIBRE LENGTH AND CONCENTRATION vol. 28, no. 3, 1997, pages 277 - 288**
- **J.L. THOMASON: 'Micromechanical parameters from macromechanical measurements on glass reinforcedpolypropylene' COMPOSITES SCIENCE AND TECHNOLOGY vol. 62, August 2002, pages 1455 - 1468**
- **H. DRAGAUN ET AL.: 'Einfluß von Pigmentpräparationen auf Struktur und Eigenschaften von Polymeren' KUNSTSTOFF ZEITSCHRIFT vol. 16, 1985, pages 9 - 12**

EP 1 675 899 B2

- | | |
|--|--|
| <ul style="list-style-type: none"> • S. SUZUKI ET AL.: 'Pigment-induced crystallization in colored plastics based on partially crystalline polymers' DYES AND PIGMENTS vol. 61, 2004, pages 69 - 77 • J.L. THOMASON ET AL.: 'An investigation of glass fibre/polypropylene interface strength and its effect on composite properties' COMPOSITES vol. 25, no. 3, June 1994, pages 197 - 203 • Datasheet Huntsman P4C6Z-059 • JP 590108050A and translation thereof • Experimental evaluation • Experimental evaluation part II • P. SINGH ET AL.: 'The Effect of Processing Variables on Microstructure of Injection Molded Short Fiber Reinforced Polypropylene Composites' POLYMER COMPOSITES vol. 10, no. 5, October 1989, pages 344 - 351 • G. ST.-JEAN ET AL.: 'Enhanced Spherulite Growth Rates of Isotactic Polypropylene in Incompatible Blends' POLYMER ENGINEERING AND SCIENCE vol. 30, no. 17, September 1990, pages 1098 - 1105 • DS/EN ISO 6427 • ASTM D5492-98 • Recipe of K65 G2-Xmod 9502 from SAP system excerpts from the sales of K65 G2-Xmod 9502 in the years 2000, 2001, 2002 | <ul style="list-style-type: none"> • internal product specification HF006SA, dated 29/11/2000 external raw material specification concerning #1001974 (glass fibre), signed 17/8/2000 • external raw material specification concerning #1001986 (compatibilizer = Exxelor PO 1020), dated 17/9/2004 and alternatively used "Polybond 3200" • screenshots from the archive.org concerning Exxelor PO 1020 • invoice concerning a batch of K65G2XMOD-9502 (GE Plastics B.V.) dated 03/04/2000 including screenshot showing payment (=clearing) Invoice concerning 4 batches of K65G2XMOD-9502 • (GE Plastics B.V.) dated 31/01/2002 (pages 1/3 and 2/3) Document Flow Chart • Information as to the vender; respective entities in 2000, 2001, 2002 • Borealis Test method BTM66147, dated 13/06/2001 • copy of:
http://www.webstore.jsa.or.jp/webstore/Com/FlowControl.jsp?lang=en&bunsyoid=JIS+K+7210%3A1999&dantaiCd=JIS&status=1&pageNo=0 |
|--|--|

Description

[0001] The invention relates to a molding composition composed of an olefin polymer, in Particular propylene polymer, containing 5-50% by weight glass fibers which are bonded to the olefin polymer by means of a compatibilizer, and from 10^{-4} to 1% by weight of a phthalocyanine pigment as the nucleating agent.

[0002] The reinforcement of olefin polymers with the aid of glass fibers has been known for some time. EP 663 418 A1 describes, for example, a polypropylene molding composition which is reinforced with glass fibers. However, to obtain good mechanical properties, it is necessary to use compatibilizers or coupling agents which ensure good binding of the glass fibers to the polyolefin matrix. The compatibilizers frequently comprise firstly a reactively modified polymer which is compatible with the matrix polymer as a coupler, and secondly a compound having reactive polar groups which can bond both to the glass fibers and to the coupler.

[0003] It is likewise generally customary to nucleate unreinforced polymers of propylene to improve the stiffness and strength, but also the transparency, of the molding produced therefrom. To this end, in addition to sodium benzoate, fine talc, phosphate ester salts, sorbitols, quinacridone pigments and others, phthalocyanine pigments are also used as nucleating agents. The nucleation generally leads to an improvement in the tensile strength and stiffness, but not to a significant improvement in the impact strengths, and often to a reduced yield elongation and tensile strain at break.

[0004] In Polymer 34, 4747 (1993) and in European Polymer Journal 32, 1425 (1996), the influence of nucleation on polypropylene-glass fiber composites using sodium benzoate as a nucleating agent was investigated. For the nucleated glass fiber composites, a modulus of elasticity increased by 10% and tensile strength increased by 10% compared to the nonnucleated composites was found.

[0005] The sodium benzoate, and also many other nucleating agents, as a consequence of their polar character which improves the nucleation, have the disadvantage that they can react with the coupler of the compatibilizer and thus interfere with the binding of the glass fibers, or, as a consequence of their high cost, are of little economic attractiveness.

[0006] A particular disadvantage of nucleating agents such as sodium benzoate is the only moderate hot water resistance and vapor resistance of the polyolefin molding compositions, especially in the case of long-term contact over several weeks or months.

[0007] It is an object of the present invention to provide a propylene polymer molding composition which exhibits improved matrix binding of the glass fibers and therefore better mechanical properties and is obtainable inexpensively and has improved resistance to hot water, especially in the presence of detergents.

[0008] We have found that this object is achieved, surprisingly, by the moulding composition according to claim 1. Accordingly, the molding compositions according to the invention comprise an propylene polymer containing 5-50% by weight of glass fibers and from 10^{-4} to 1% by weight, preferably from 10^{-3} to $10^{-1}\%$ by weight, of a phthalocyanine pigment as a nucleating agent. The low costs of the phthalocyanine pigment and the fact that even a very small fraction of the phthalocyanine pigment in the polymer leads to sufficient nucleation ensures extremely inexpensive production. In addition, the propylene polymer molding composition features excellent hot water resistance.

[0009] Essential for the propylene polymer molding composition according to the invention is firstly the content of from 5 to 50% by weight of glass fibers based on the overall composition. The glass fibers may be either cut glass fibers having a length of from 3 to 6 mm or long glass fibers, although preference is given to using cut glass fibers. Preference is further given to using from 10 to 40% by weight, more preferably from 20 to 40% by weight, of glass fibers.

[0010] Preference is given to using cut glass fibers, also known as chopped strands. When cut glass fibers are used, it is possible to attain by nucleation the stiffness of molding compositions comprising long glass fibers at a distinctly more favorable price. The glass fibers used preferably have a length of from 3 to 6 mm, more preferably from 3 to 4.5 mm, and a diameter of from 10 to 20 μm , preferably from 12 to 14 μm . Depending on the compounding and injection molding conditions, the length of the glass fibers in the molding composition (granules or injection-molded finished particles) is from 50 μm to 3 000 μm , preferably from 50 to 1 000 μm .

[0011] To bind glass fibers to the propylene polymer matrix, a polar-functionalized compatibilizer is used. One type which can be used is low molecular weight compounds which serve exclusively to make the glass fibers less hydrophilic and therefore more compatible with the polymer. Suitable compounds are, for example, silanes such as aminosilanes, epoxysilanes, amidosilanes or acrylosilanes. However, the compatibilizers preferably comprise a functionalized polymer and a low molecular weight compound having reactive polar groups. The functionalized polymer is preferably graft or block copolymers which are compatible with the matrix polymer. For a propylene homopolymer as the matrix component, preference is given, for example, to using a graft or block copolymer of propylene as the functionalized polymer.

[0012] In this context, preference is given to those polymers whose reactive groups are acid anhydrides, carboxylic acids, carboxylic acid derivatives, primary and secondary amines, hydroxyl compounds, oxazolines and epoxides, and also ionic compounds. Particular preference is given to using a propylene polymer grafted with maleic anhydride as the functionalized polymer. The low molecularweight compound serves to couple the glass fiberto the functionalized polymer and thus to bind it securely to the polyolefin matrix. These are usually bifunctional compounds, in which case one functional group can enter into a binding interaction with the glass fibers and the second functional group can enter into

a binding interaction with the functionalized polymer. The low molecular weight compound used is preferably an amino- or epoxysilane, more preferably an aminosilane. The aminosilanes bond with the silane hydroxyl groups to the glass fiber, while the amino groups form a stable amide bond, for example with polypropylene grafted with maleic anhydride.

[0013] The compatibilizers can be used preprepared or prepared in situ. It is particularly advantageous to apply the low molecular weight component to the glass fibers before it is incorporated into the polyolefin matrix. The functionalized polymer can be generated in situ in a simple manner by reactive extrusion of the matrix polymer, for example with maleic anhydride. It is also possible to use a masterbatch which comprises the glass fibers and the compatibilizer in premixed form.

[0014] It is also essential to the present invention that the glass fiber-reinforced polypropylene molding composition is nucleated with a phthalocyanine pigment. The phthalocyanine pigments themselves are well known and are derived from the basic phthalocyanine structure by incorporating a central metal ion and by substituting the phthalocyanine ring. In practice, the central atoms used in the pigments are copper, nickel and cobalt, and copper is the preferred central atom. The basic phthalocyanine structure may optionally be substituted, in particular with chlorine or bromine atoms. Substitution with organic radicals can also be carried out to adapt the nucleation properties. Suitable phthalocyanine pigments are, for example, unsubstituted copper-phthalocyanine (phthalocyanine blue), polychlorinated copper-phthalocyanine (phthalocyanine green, $C_{32}H_2N_8Cl_{14}Cu$), cobalt-phthalocyanine ($C_{32}H_{16}N_8Co$), nickel-phthalocyanine ($C_{32}H_{16}N_8Ni$). Particular preference is given to unsubstituted copper-phthalocyanine.

[0015] Unsubstituted copper-phthalocyanine and polychlorinated copper-phthalocyanine are sold, for example, by Clariant, Frankfurt, DE under the names PV Echtblau and PV Echtgrün respectively.

[0016] The proportion of nucleating agent is between 10^{-4} and 1% by weight, based on the overall composition. Preference is given to using from 10^{-3} to $10^{-1}\%$ by weight, particular preference to from $5 \cdot 10^{-3}$ to $5 \cdot 10^{-2}\%$ by weight, of the nucleating agent.

[0017] The combination of glass fiber reinforcement and nucleation with phthalocyanine pigments results in a molding composition which is improved over the prior art with regard to the stiffness and toughness. In addition, the adhesion of the glass fibers to the polymer matrix is surprisingly distinctly improved with the same compatibilizer, which results in an improvement in the propagation of cracks in the molding composition. In addition, the nucleation with phthalocyanine pigments surprisingly results in distinctly improved long-term stabilities in the tensile strengths and impact strengths in hot water and hot detergents, for example over testing times of 1 000 hours at $95^\circ C$, compared to nonnucleated glass fiber-reinforced comparative specimens. Advantages in the long-term stability of the inventive molding compositions can also be recognized, for example, in the long-term tests in aqueous detergents in accordance with the UL standards 2157 and 749, testing over 138 days at $82^\circ C$.

[0018] The particular advantage of the phthalocyanine pigment is that it is substantially compatible with the customary compatibilizers, i.e. there is no or hardly any mutual interference between the action of nucleating agent and compatibilizer.

[0019] The molding compositions according to the invention are obtainable by melting and mixing the propylene polymer with the phthalocyanine pigments and the glass fibers, and the mixing is effected in a mixing apparatus at temperatures of from 180 to $320^\circ C$, preferably from 200 to $280^\circ C$, more preferably from 220 to $260^\circ C$. Useful mixing apparatus in this context is in particular extruders or kneaders, and particular preference is given to twin-screw extruders. In the case of polymers present in powder form, it is appropriate to premix the polymer with the nucleating agent, and also any other additives, at room temperature in a mixing apparatus. The olefin polymer may be mixed with the nucleating agent and the glass fibers in one step or else in a plurality of steps. Preference is given to initially melting the propylene polymer with the nucleating agent and further additives in the mixing apparatus, and to mixing them, and subsequently mixing the glass fibers with the melt, in order to reduce the abrasion in the mixing apparatus and the fiber breakage.

[0020] Useful matrix components of the molding composition according to the invention are homopolymers of propene.

[0021] Preferred matrix components include, for example: isotactic or atactic homopolypropylene. Such propylene polymers may also contain an impact strength component, for example EPM or EPDM rubber, or SEBS.

[0022] The propylene polymer used is a propylene homopolymer.

[0023] Preference is given to using isotactic polypropylene having a xylene-insoluble fraction of over 95%, preferably of over 97%. The polyolefin generally has an MFR ($230^\circ C/2.16$ kg) of from 0.2 to 200 g/10 min to ISO 1133, preferably between 0.5 and 100 g/10 min and more preferably between 2 and 30 g/10 min. Preference is further given to polypropylene molding compositions having a monomodal molar mass distribution.

[0024] The molding compositions according to the invention may also comprise customary additives and auxiliaries, for example stabilizers against damaging processing effects, antioxidants against heat oxidation and aging, UV action, neutralizing agents, fillers, organic and inorganic pigments or pigment preparations, for example carbon black dispersions in polyolefins, antistats, nonpolar waxes or specific low molecular weight glidants and lubricants. UV stabilizers, especially monomeric and oligomeric HALS, antistats and polar waxes and also stearates are less suitable for the inventive molding compositions, or, if at all, in very low concentrations, since they may likewise react with the coupler of the compatibilizer and thus reduce the efficiency of the coupling. However, the amount of additives and auxiliaries should not exceed 10% by weight based on the total amount of the material, preferably 5% by weight. For visual reasons, it may also be advisable

to add appropriate suitable color pigments to the molding compositions according to the invention and color them to another, preferably darker color.

[0025] The propylene polymers used in the molding compositions according to the invention can be obtained with all common processes and catalysts. Preference is given to polymerizing the appropriate monomers by means of a Ziegler-Natta catalyst, of a Phillips catalyst based on chromium oxide or of a metallocene catalyst. In this context, metallocenes are complexes of metals of groups 3 to 12 of the Periodic Table with organic ligands which, together with metallocenium ion-forming compounds, result in effective catalyst systems.

[0026] To prepare the propylene polymers, the customary reactors used for the polymerization of C₂-C₁₀-olefins can be used. Suitable reactors include continuous horizontal or vertical stirred tanks, circulation reactors, loop reactors, stage reactors or fluidized bed reactors. The size of the reactors is of no great importance for the preparation of the molding compositions according to the invention. It depends on the output which is to be achieved in the individual reaction zone or zones. The polymerization process can be carried out in one or more stages: The polymerization can be effected in the gas phase, in bulk or suspension or a combination thereof.

[0027] The molding composition according to the invention is suitable in particular for the production of motor vehicle parts which place high demands on the stiffness and toughness of the material. It is particularly advantageous to use it in motor vehicle parts which are dark-colored or provided with a decorative layer, for example front ends or dashboard supports, in which the blue coloration caused by the phthalocyanine pigment is covered. Holdings produced from the molding composition according to the invention are suitable, as a result of their improved stiffness and toughness even when cut glass fibers are used, for applications which have hitherto been reserved for long fiber-reinforced propylene polymers.

[0028] The molding composition according to the invention also features very good durability toward hot water and detergents. They can therefore be used particularly advantageously as the material for moldings which are exposed to contact with hot water, wash and rinse liquors and other aggressive materials. The present invention therefore further provides the use of the molding composition according to the invention as a wash liquor vessel (preferably not visible) in washing machines, and also wash liquor vessels produced from the molding composition according to the invention, but also the use for water and liquor pump casings.

Example 1

a) Preparation of the glass fiber-reinforced polypropylene molding composition:

[0029] The following proportions by weight are based in each case on the total mass of the polymer molding composition, unless stated otherwise.

[0030] 69.19% by weight of polypropylene homopolymer (Moplen HP500H, Basell Polyolefine, Germany, MFR (230°C, 2.18 kg) = 1.2 g/10 min) was admixed in a twin-screw extruder (ZSK 53) with 30% by weight of a short glass fiber (ECS 03T-T480 chopped strands, NEG) having a length of 3 mm and a diameter of 13 µm. This was done by metering the short glass fibers into the polymer molding composition melt at element 3 or 4 of the 10-section twin-screw extruder. 0.01% by weight of phthalocyanine blue 15:3 (PV-Echtblau 2GL SP, Clariant) as a nucleating agent, 1.2% by weight of Polybond 3200 (from Crompton) as a compatibilizer, 0.1% by weight of an inorganic acid scavenger and 0.5% by weight of a stabilizer combination composed of a phenolic antioxidant, distearyl thiodipropionate and a di-tert-butylphenyl phosphite were simultaneously also added to the polypropylene homopolymer.

b) Hot water test

[0031] The polypropylene molding composition from example 1 was processed in an injection molding machine to give specimens in accordance with DIN EN ISO 527-2 and DIN EN ISO 179/1.

[0032] The tensile stress at break and the tensile modulus of elasticity of the samples were determined to ISO 527-01 and -1. In addition, the Charpy impact strength was measured in accordance with DIN EN ISO 179/1 eU.

[0033] The specimens were introduced into demineralized water at temperature of 95°C in a heatable bath. Depending on the application and requirements, different detergents may also be added with defined concentrations.

[0034] After the appropriate time, in each case at least 5 specimens were taken and the tensile stress at break and the tensile modulus of elasticity to DIN EN ISO 527-2 determined as the average of 5-10 individual measurements. In the same way, the Charpy impact strength was determined to DIN EN ISO 179/1eU.

[0035] The test results are compiled in tables 1 to 3 and in figures 1 to 3.

Example 2

[0036] Example 1 was repeated with a content of 0.05% by weight of phthalocyanine blue 15:3 (PV-Echtbau 2GL SP,

Clariant). The amount of polypropylene was adjusted for a combined total mass of the polymer molding composition of 100% by weight.

Comparative example 3

[0037] Example 1 was repeated with a content of 0.1 % by weight of sodium benzoate as a nucleating agent. The amount of polypropylene was adjusted for a combined total mass of the polymer molding composition of 100% by weight.

Comparative example 4

[0038] Example 1 was repeated with a content of 0.3% by weight of sodium benzoate as a nucleating agent. The amount of polypropylene was adjusted for a combined total mass of the polymer molding composition of 100% by weight.

Table 1: Tensile stress at break as a function of the duration of the hot water contact

Test duration [days]	Tensile stress at break [MPa]			
	Example 1 [◇]	Example 2 [□]	Comparative example 3 [▽]	Comparative example 4 [○]
0	82.6	88.2	91.9	92.5
1	81.5	87.0	82.1	81.5
3	81.7	87.4	77.2	72.9
5	79.4	84.7	70.2	66.2
10	78.5	82.8	65.1	59.8
20	73	76.5	57.4	50.6
30	71.5	73.8	55.0	48.4
40	69.4	71.4	53.4	48.4

Table 2: Tensile modulus of elasticity as a function of the duration of the hot water contact

Test duration [days]	Tensile modulus of elasticity [MPa]			
	Example 1 [◇]	Example 2 [□]	Comparative example 3 [▽]	Comparative example 4 [○]
0	6615	6692	6659	6679
1	6400	6530	6467	6440
3	6518	6670	6636	6514
5	6463	6607	6424	6284
10	6523	6579	6373	6134
20	6102	6239	5903	5445
30	6174	6373	6077	5570
40	6091	6134	5923	5496

Table 3: Charpy impact strength as a function of the duration of the hot water contact

Test duration [days]	Charpy impact strength [kJ/m ²]			
	Example 1 [◇]	Example 2 [□]	Comparative example 3 [▽]	Comparative example 4 [○]
0	42.1	45.7	49.0	48.1
1	31.7	32.8	25.0	24.4
3	28.7	30.4	21.1	18.3

(continued)

Test duration [days]	Charpy impact strength [kJ/m ²]			
	Example 1 [◇]	Example 2 [□]	Comparative example 3 [▽]	Comparative example 4 [○]
5	24.7	28.7	17.0	17.9
10	24.7	25.9	15.7	16.2
20	21.0	21.5	14.1	16.9
30	19.8	19.3	14.4	16.0
40	18.3	17.7	14.7	17.4

[0039] It can be seen that the fall in tensile stress at break and in the tensile modulus of elasticity and also in the Charpy impact strength is surprisingly lower in the case of the glass fiber-reinforced polypropylene molding compositions nucleated with phthalocyanine (symbols ◇ and □) than in the case of those nucleated with sodium benzoate (symbols ▽ and ○).

Claims

1. A moulding composition composed of a propylene polymer as the matrix component, wherein the propylene polymer is a propylene homopolymer, said olefin polymer having an MFR (230°C /2.16 kg) to ISO 1133 of between 2 and 30 g/10 min and
 - a) from 5 to 50% by weight of glass fibers having a length of from 3 to 6 mm and a diameter of from 10 to 20 μm and which are bonded to the olefin polymer by means of a compatibilizer, and
 - b) from 10⁻⁴ to 1 % by weight, of a phthalocyanine pigment as a nucleating agent.
2. A moulding composition as claimed in claim 1, wherein the propylene polymer used as the matrix component is an isotactic polypropylene having a xylene-insoluble fraction of over 95%.
3. A moulding composition as claimed in any of claims 1 to 2, comprising from 10 to 40% by weight of glass fibers.
4. A moulding composition as claimed in claim 1, wherein the composition compatibilizer further comprises as a to bind the glass fibers to the matrix, a functionalized polymer and a low molecular weight compound having reactive polar groups and wherein the low molecular weight compound serves to make the glass fiber less hydrophilic, and wherein the functionalized polymer is a graft or block copolymer of propylene compatible with said matrix polymer and functionalized with polar groups.
5. A moulding composition as claimed in claim 4, wherein the polar-functionalized compatibilizer comprises a propylene polymer grafted with maleic anhydride.
6. A moulding composition as claimed in claim 4 or 5, wherein the low molecular weight component is an aminosilane or epoxysilane and is applied to the glass fibers before it is incorporated into the polyolefin matrix.
7. A process for producing moulding compositions as claimed in any of the preceding claims, wherein, in a mixing apparatus, the propylene polymer is initially melted and mixed with the nucleating agent at temperatures of from 180 to 320°C, and the glass fibers are subsequently mixed with the melt.
8. Use of the moulding compositions as claimed in any of claims 1 to 6 as moulding for automobile construction or as a wash liquor vessel, water pump casing and liquor pump casing.
9. A wash liquor vessel, water pump casing or liquor pump casing obtained from the moulding compositions as claimed in any of claims 1 to 6.
10. A motor vehicle part, in particular a covering part of a motor vehicle, obtained from the molding compositions as claimed in any of claims 1 to 6.

Patentansprüche

1. Formmasse aus einem Propylenpolymer als Matrixkomponente, wobei das Propylenpolymer ein Propylenhomopolymer ist, wobei das Olefinpolymer ein MFR (230°C/2, 16 kg) gemäß ISO 1133 von zwischen 2 und 30 g/10 min hat, und
 - a) von 5 bis 50 Gew.-% Glasfasern mit einer Länge von 3 bis 6 mm und einem Durchmesser von 10 bis 20 µm, die an das Olefinpolymer mit Hilfe eines Kompatibilisierungsmittels gebunden sind, und
 - b) von 10⁻⁴ bis 1 Gew.-% eines Phthalocyaninpigments als Keimbildner.
2. Formmasse nach Anspruch 1, wobei das als Matrixkomponente verwendete Propylenpolymer ein isotaktisches Polypropylen mit einer in Xylol unlöslichen Fraktion von über 95% ist.
3. Formmasse nach einem der Ansprüche 1 bis 2, die von 10 bis 40 Gew.-% Glasfasern umfasst.
4. Formmasse nach Anspruch 1, wobei die Masse ferner als Kompatibilisierungsmittel zum Binden der Glasfasern an die Matrix ein funktionalisiertes Polymer und eine Verbindung von niedrigem Molekulargewicht mit reaktiven polaren Gruppen umfasst, und wobei die Verbindung von niedrigem Molekulargewicht dazu dient, die Glasfaser weniger hydrophil zu machen, und wobei das funktionalisierte Polymer ein Pfropf- oder Blockcopolymer von Propylen ist, das mit dem Matrixpolymer kompatibel ist und mit polaren Gruppen funktionalisiert ist.
5. Formmasse nach Anspruch 4, wobei das polar funktionalisierte Kompatibilisierungsmittel ein mit Maleinsäureanhydrid gepfropftes Propylenpolymer umfasst.
6. Formmasse nach Anspruch 4 oder 5, wobei die Komponente von niedrigem Molekulargewicht ein Aminosilan oder Epoxysilan ist und auf die Glasfasern aufgebracht wird, bevor sie in die Polyolefinmatrix eingebracht wird.
7. Verfahren zur Herstellung von Formmassen nach einem der vorhergehenden Ansprüche, wobei das Propylenpolymer in einer Mischvorrichtung zunächst geschmolzen und bei Temperaturen von 180 bis 320°C mit dem Keimbildner gemischt wird, und wobei die Glasfasern anschließend mit der Schmelze gemischt werden.
8. Verwendung der Formmassen nach einem der Ansprüche 1 bis 6 als Formteile für den Fahrzeugbau oder als Waschlaugenbehälter, Wasserpumpengehäuse und Laugenpumpengehäuse.
9. Waschlaugenbehälter, Wasserpumpengehäuse oder Laugenpumpengehäuse, hergestellt aus den Formmassen nach einem der Ansprüche 1 bis 6.
10. Kraftfahrzeugteil, insbesondere Abdeckteil eines Kraftfahrzeugs, hergestellt aus den Formmassen nach einem der Ansprüche 1 bis 6.

Revendications

1. Composition de moulage composée d'un polymère de propylène comme composant de matrice, dans laquelle le polymère de propylène est un homopolymère de propylène, ledit polymère oléfinique présentant un MFR (230°C/2, 16 kg) selon la norme ISO 1133 entre 2 et 30 g/10 min et
 - a) 5 à 50% en poids de fibres de verre présentant une longueur de 3 à 6 mm et un diamètre de 10 à 20 µm et qui sont liées au polymère oléfinique au moyen d'un agent de compatibilisation, et
 - b) 10⁻⁴ à 1% en poids, d'un pigment phtalocyanine comme agent de nucléation.
2. Composition de moulage selon la revendication 1, dans laquelle le polymère de propylène utilisé comme composant de matrice est un polypropylène isotactique comprenant une fraction insoluble dans le xylène supérieure à 95%.
3. Composition de moulage selon l'une quelconque des revendications 1 à 2, comprenant 10 à 40% en poids de fibres de verre.
4. Composition de moulage selon la revendication 1, dans laquelle la composition comprend en outre, comme agent de compatibilisation pour lier les fibres de verre à la matrice, un polymère fonctionnalisé et un composé de bas

poids moléculaire comprenant des groupes réactifs polaires et dans laquelle le composé de bas poids moléculaire sert à rendre la fibre de verre moins hydrophile, et dans laquelle le polymère fonctionnalisé est un copolymère greffé ou à blocs de propylène compatible avec ladite matrice polymère et est fonctionnalisé avec des groupes polaires.

- 5 **5.** Composition de moulage selon la revendication 4, dans laquelle l'agent de compatibilisation polaire fonctionnalisé comprend un polymère de propylène greffé avec de l'anhydride maléique.
- 10 **6.** Composition de moulage selon la revendication 4 ou 5, dans laquelle le composant de bas poids moléculaire est un aminosilane ou un époxysilane et est appliqué aux fibres de verre avant son incorporation dans la matrice polyoléfinique.
- 15 **7.** Procédé pour la production de compositions de moulage selon l'une quelconque des revendications précédentes, dans lequel, dans un appareil de mélange, le polymère de propylène est d'abord fondu et mélangé avec l'agent de nucléation à des températures de 180 à 320°C, et les fibres de verre sont ensuite mélangées avec la masse fondue.
- 20 **8.** Utilisation des compositions de moulage selon l'une quelconque des revendications 1 à 6 comme masse de moulage pour la construction automobile ou comme récipient de bain de lessive de lavage, corps de pompe à eau et corps de pompe à bain de lessive.
- 25 **9.** Récipient de bain de lessive de lavage, corps de pompe à eau ou corps de pompe à bain de lessive obtenu à partir des compositions de moulage selon l'une quelconque des revendications 1 à 6.
- 30 **10.** Partie d'un véhicule à moteur, en particulier une partie de recouvrement d'un véhicule à moteur, obtenue à partir des compositions de moulage selon l'une quelconque des revendications 1 à 6.

Fig. 1

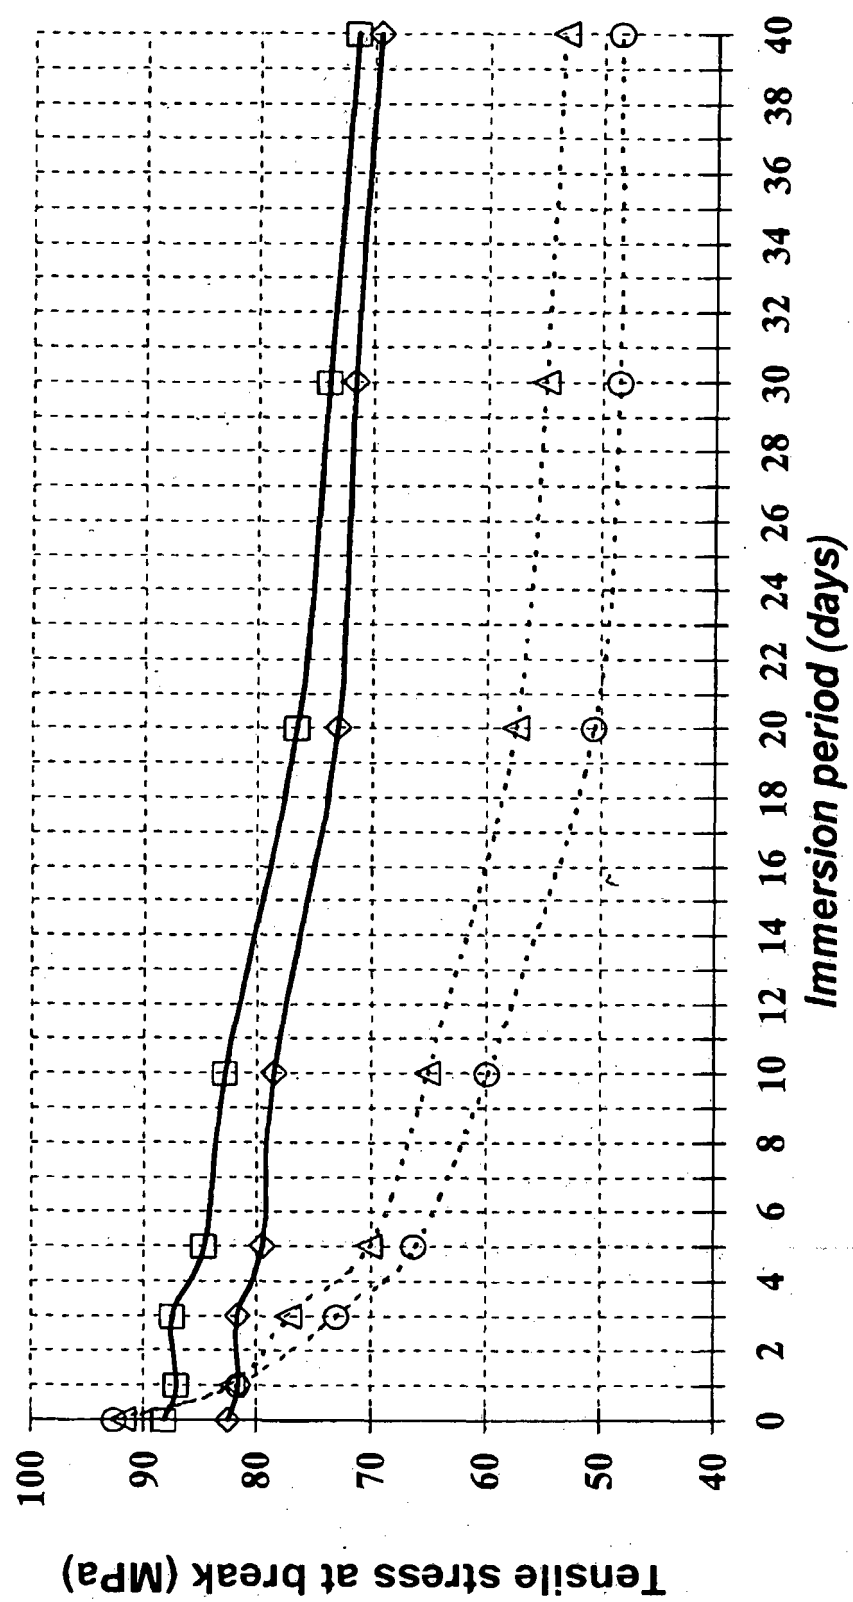


Fig. 2


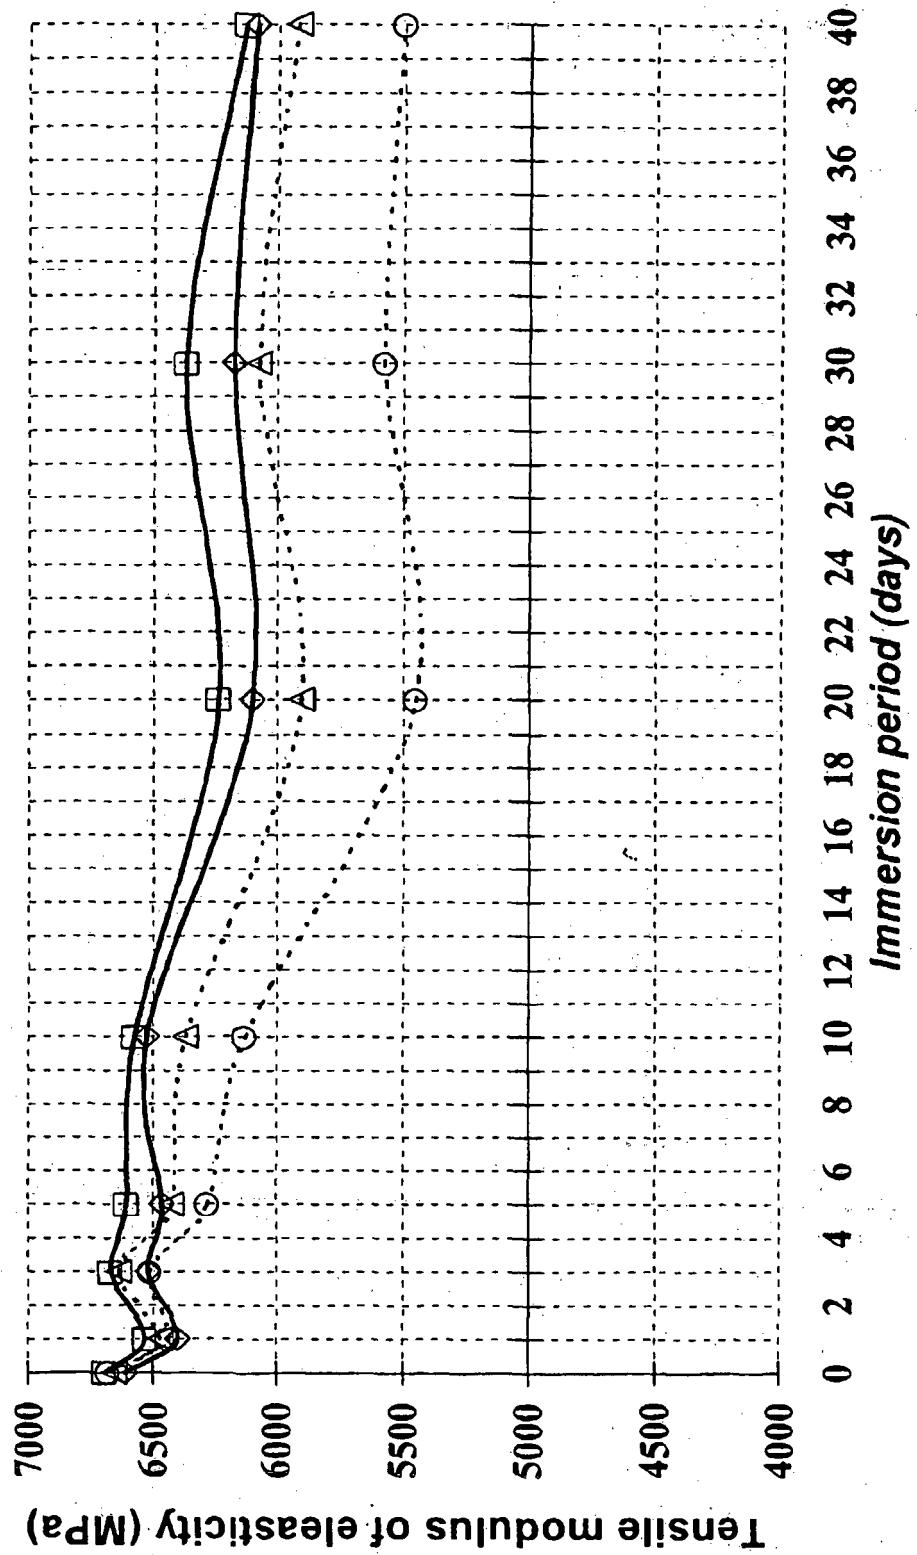


Fig. 3

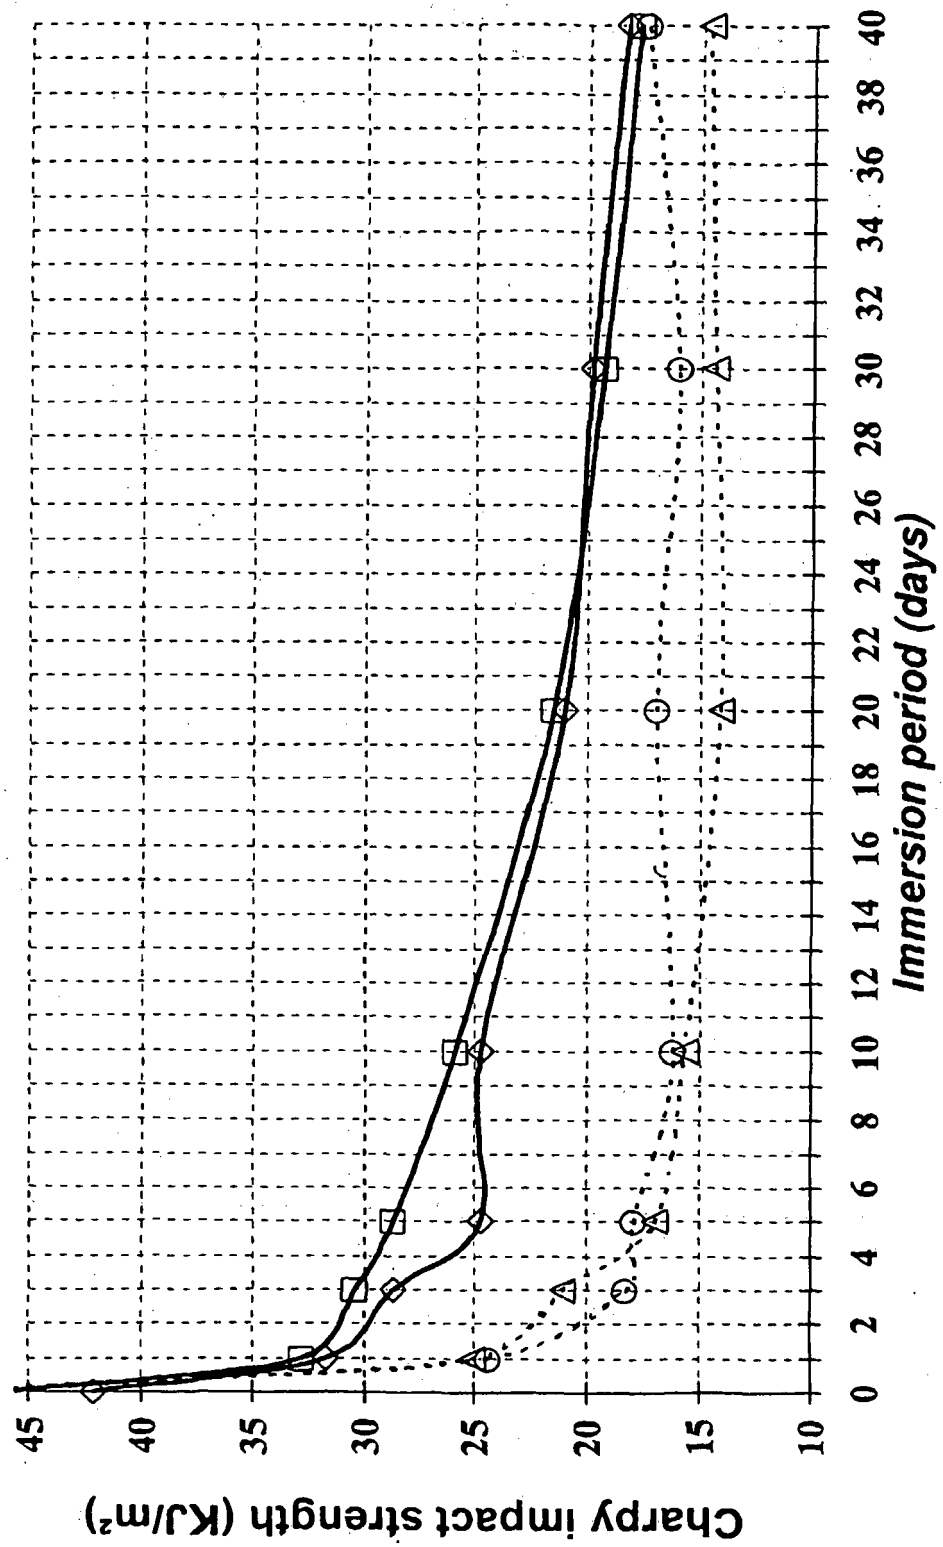

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 663418 A1 [0002]

Non-patent literature cited in the description

- *Polymer*, 1993, vol. 34, 4747 [0004]
- *European Polymer Journal*, 1996, vol. 32, 1425 [0004]