



(11) **EP 1 678 336 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

(15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see
Description Paragraph(s) 28, 48

(51) Int Cl.:
C22B 3/10 *(2006.01)* **C22B 3/00** *(2006.01)*
C22B 3/04 *(2006.01)* **C22B 3/06** *(2006.01)*
C22B 3/12 *(2006.01)* **C22B 23/00** *(2006.01)*

(48) Corrigendum issued on:
29.04.2015 Bulletin 2015/18

(86) International application number:
PCT/CA2004/001753

(45) Date of publication and mention
of the grant of the patent:
12.11.2014 Bulletin 2014/46

(87) International publication number:
WO 2005/031012 (07.04.2005 Gazette 2005/14)

(21) Application number: **04786671.0**

(22) Date of filing: **28.09.2004**

(54) **A PROCESS FOR THE RECOVERY OF VALUE METALS FROM BASE METAL SULFIDE ORES**
VERFAHREN ZUR GEWINNUNG VON WERTMETALLEN AUS NICHTEDELMETALLSULFIDERZEN
PROCEDE D'EXTRACTION DE METAUX DE VALEUR DE MINERAIS DE SULFURE METALLIQUE
DE BASE

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR

(30) Priority: **30.09.2003 US 506773 P**
02.04.2004 US 558571 P

(43) Date of publication of application:
12.07.2006 Bulletin 2006/28

(73) Proprietor: **Jaguar Nickel Inc.**
Toronto, Ontario M5H 1T1 (CA)

(72) Inventors:
• **HARRIS, Bryn, G.**
Montreal, Quebec H2X 2L4 (CA)
• **LAKSHMANAN, Vaikuntam, I.**
Mississauga, Ontario L5N 7H2 (CA)
• **SRIDHAR, Ramamritham**
Mississauga, Ontario L5K 1N7 (CA)

• **PUVVADA, George**
Markham, Ontario L3R 7J9 (CA)

(74) Representative: **Grünecker Patent- und**
Rechtsanwälte
PartG mbB
Leopoldstraße 4
80802 München (DE)

(56) References cited:
EP-A- 1 281 779 EP-B1- 0 155 250
CA-A- 844 536 CA-A1- 1 143 573
CA-A1- 2 385 775 US-A- 4 378 275
US-A- 4 536 214 US-A- 5 232 490
ZA-A- 9 200 939

• **WINAND R. HYDROMETALLURGY vol. 27, 1991,**
pages 285 - 316, XP008095325

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 678 336 B9

Description**FIELD OF THE INVENTION**

[0001] The present invention relates to a method for the leaching and recovery of value metals, especially nickel, copper, zinc and cobalt values, and Platinum Group Metals (PGMs) and gold from base metal sulfide ores, including from mixtures of sulfide and oxide ores. In particular embodiments, the base metal sulfide ores are value metal-containing ores or concentrates, especially pyrrhotite, pentlandite, chalcopyrite, arsenopyrite and other pyrites, sphalerite, and concentrates and mattes thereof. The leaching may be conducted using a low concentration of hydrochloric acid, in chloride media. In particular, the method may be operated such that sulfide in the ore is substantially converted to hydrogen sulfide, and preferably essentially converted to hydrogen sulfide, rather than to sulfate or to elemental sulfur. In preferred embodiments, the hydrogen sulfide formed is stripped from the leach solution, thereby providing leachate with a low concentration of sulfur and/or sulfate. Conversion of the sulfide of the ore to, in particular, hydrogen sulfide simplifies and/or allows for alternate steps for separation and recovery of value metals.


BACKGROUND OF THE INVENTION

[0002] Base metal sulfide ores exist in many areas of the world and are a potential source of many value metals. In particular, the ores may contain zinc, nickel, copper, cobalt and the PGMs, silver and gold. The principal ores are all iron-bearing, and examples particularly include nickeliforous pyrrhotite Fe_8S_9 , pentlandite $(\text{FeNi})_9\text{S}_8$, chalcopyrite CuFeS_2 , arsenopyrite FeAsS and sphalerite ZnS . Cobalt may be found in the lattice of a pentlandite ore. Base metal sulfide ores have been used extensively in the commercial production of nickel, cobalt, zinc and copper.



[0003] Base metal sulfide ores may be processed using hydrometallurgical or pyrometallurgical techniques. Recovery of nickel, copper and PGMs tends to be high with the pyrometallurgical route, typically being greater than 90%, and cobalt recovery is typically between 30 and 70%. Recovery of nickel, cobalt, zinc and copper is also high in the hydrometallurgical route, but PGMs and gold tend to be lost in the leach residue unless further, often complicated and costly, recovery processes are carried out.

[0004] Smelting of nickel sulfide concentrates produces a liquid furnace matte. The liquid furnace matte is then subjected to air oxidation, in a process known as converting, to remove most of the iron and sulfur. Iron and gangue impurities are removed as a disposable slag. The resulting converter matte, also known simply as matte, may then be treated to obtain the nickel, cobalt, copper and PGMs and gold. The treatment methods used are mainly hydrometallurgical, for example refining processes based on sulfate, carbonyl, ammoniacal and chloride chemistry. Sulfate and especially chloride-based refining processes are discussed by G. Van Weert in "Some Observations on the Chloride Based Treatment of Nickel-Copper-Cobalt Mattes" pages 277-298 of Chloride Metallurgy 2002 - Volume 1, 32nd Annual Hydrometallurgy Meeting, Edited by E. Peek and G. Van Weert, published by CIM.

[0005] In a chloride leach process, the most valuable component, viz. nickel, may be solubilized first, with little leaching of copper, thus achieving a separation of nickel from copper. In a known chloride leach process (Thornhill, P.G., Wigstol, E and Van Weert, G., "The Falconbridge Matte Leach Process", Journal of Metals, 23(7), 1971 p13) using very strong hydrochloric acid, the leach may be represented as follows:



[0006] In an alternative leach process based on chlorine, a granulated converter matte is ground and fed to a chlorine leach process where it is subjected in a first step to a redox controlled leach process solubilizing most of the nickel and part of the copper, but none of the PGMs:



[0007] To remove cupric copper, which is regarded as the leachant, additional matte is added without chlorine, followed by cementation. In another alternative, advantages of a chlorine leach could be achieved using sub-azeotropic hydrochloric acid and oxygen. Solubilized copper (cupric) chloride would again be the leaching agent.

[0008] The hydrometallurgy of complex sulfide bulk concentrates is discussed by D.S. Flett in "Chloride Hydrometallurgy for Complex Sulfides: a Review" pages 255-276 of Chloride Metallurgy 2002 - Volume 1 above. In particular, the ferric or cupric chloride leaching of Cu/Pb/Zn/Ag type sulfide concentrates is discussed. Recent activity in the treatment of single sulfide concentrates, particularly copper e.g. pressure leaching using BrCl_2^- as oxidant, is also reported. The article concludes that this is the most promising process for commercialization but the development of processing of

complex sulfide concentrates still has some way to go before commercialization is finally realized.

[0009] A process for recovering non-ferrous metal values from a metal-containing sulfide material containing at least one of zinc, copper, lead, cobalt, nickel, silver and gold, as well as iron, is disclosed in US Patent 4,378,275 of Adamson et al, issued March 29, 1983. The sulfide material is leached under oxidizing conditions with acidic aqueous chloride lixiviant solution containing magnesium chloride. The oxidizing conditions are disclosed as use of molecular oxygen in the form of air, oxygen-enriched air and pure oxygen. Although leaching at atmospheric pressure is stated to be possible, it is preferable to operate the leach stage under elevated partial pressures, i.e. under pressure leach conditions. Use of elevated temperatures is preferred, i.e. at least about 50°C to about 250°C, with temperatures in the range of 100°C to 180°C being preferred. The period for leaching is from about 5 minutes to about 12 hours. The use of low chloride levels is preferred. For example, Adamson et al. provides that the chloride ion concentration is typically from about 4 to about 6 grams of ions per liter. The kinetics of the process would indicate a need to use long periods of leaching at the lower temperatures and atmospheric pressure. Pressure leaching, using oxygen, of a Zn/Cu/Fe ore containing very low levels of nickel at 160°C is exemplified. In the process, non-ferrous metal values are solubilized, leaving iron oxide and sulfur as a residue. The leach liquor is subjected to liquid - liquid extraction using a hydrophobic extractant. The raffinate, containing magnesium chloride and any sulfates formed during the leach process, is subjected to pyrohydrolysis to yield hydrogen chloride and magnesium oxide. The sulfates are then removed by washing of the magnesium oxide formed, which counteracts many of the advantages of forming magnesium oxide by pyrohydrolysis.

[0010] ZA-A-9200939 discloses a process for extracting a precious metal comprising the steps of providing an ore or concentrate containing the precious metal; providing an acidic aqueous solution containing at least one metal chloride in an amount such that the concentration of chloride ions in the solution is greater than 8 mol/l, and an oxidizing agent capable of oxidizing the precious metal; and leaching the ore or concentrate with the solution at a temperature above 100°C.

SUMMARY OF THE INVENTION

[0011] The present invention provides a process for leaching a value metal from unroasted sulfide ore material, said sulfide ore material containing at least one value metal selected from the group consisting of nickel, copper, zinc, cobalt and mixtures thereof, and at least one of gold and a platinum group metal, comprising the step of leaching the unroasted sulfide ore material at atmospheric pressure with a lixiviant comprising hydrochloric acid, magnesium chloride and an oxidant selected from the group consisting of alkali metal peroxide, alkali metal perchlorate, ammonium perchlorate, magnesium perchlorate, alkali metal chlorate, alkaline earth metal perchlorate, chlorine, alkali metal hypochlorite, hydrogen peroxide and peroxysulfuric acid, and mixtures thereof, to obtain a leachate and a solid residue, said lixiviant having a pH of less than 2.5 and a redox potential in the range of from 250 to 600 mV, said leach being conducted at a temperature in the range of from 75°C to the boiling point of the solution at ambient pressure, the step of leaching being controlled so that base metals are leached from the sulfide ore material but platinum group metals and gold remain as part of the solids in the leach, and at least 99% by weight of the sulfide sulfur that is leached from the sulfide ore material is converted into hydrogen sulfide, said leachate and solid residue being subjected to a solids/liquid separation step and the solid residue being subjected to a further leaching step to recover at least a portion of the gold and the platinum group metals.

[0012] Preferred embodiments of the present invention are set forth in the sub-claims.

[0013] In one aspect, this invention provides a method for the separation of sulfur, which is derived from sulfides associated with base metals, from a lixiviant produced during the leaching of base metals from a base metal sulfide ore or concentrate, especially nickel, copper, zinc, cobalt and PGMs, silver and gold, that operates at atmospheric pressure. In accordance with this aspect, the process relates to a method for the reduction of the amount of sulfur in the leachate and leach solids by separation of sulfide in the ore as hydrogen sulfide during the leaching of a base value metal from a base metal sulfide ore. In particular, sulfur may be removed from the leachate and the solid leach residue by forming and stripping hydrogen sulfide in the leaching step. Some or all of the hydrogen sulfide may subsequently be converted to elemental sulfide. An advantage of this process is that sulfur in the form of hydrogen sulfide may be separated by simple gas/liquid separation techniques. The hydrogen sulfide may be used for downstream purification treatments of the leachate and/or as a relatively pure source of hydrogen sulfide for use in the production of sulfur compounds, such as elemental sulfur.

[0014] In another aspect, this invention provides a process for the recovery of value metals from base metal sulfide ore, concentrate or matte by leaching with a lixiviant having a high chloride concentration and a low concentration of hydrochloric acid. The use of a lixiviant with a high chloride loading permits the use of lower concentrations of hydrochloric acid in the lixiviant.

[0015] It has now been determined that by adjusting the redox potential and the pH of a lixiviant, base metals associated with a sulfide may be leached from a sulfide source material using a lixiviant having a high chloride content and a relatively low concentration of hydrochloric acid while PGMs and gold are essentially not leached and wherein a substantial portion,

and preferably essentially all, of the sulfide that is leached is converted to hydrogen sulfide. It will be appreciated that, in some embodiments, it may be determined to leach some of the PGMs and gold with the base metals. In other embodiments, it may be determined to conduct the leach of the base metals so that a portion of the sulfide sulfur that is dissolved is not converted to hydrogen sulfide. The extent to which some of the PGMs and gold may be leached with the base metals and the sulfide sulfur that is dissolved and converted to hydrogen sulfide will vary depending upon several factors including the composition of the sulfide source material, the degree of metal recovery that is selected and the reaction kinetics that are selected for the leaching step.

[0016] In one embodiment, the process further comprises selecting a sulfide ore material that comprises a base metal sulfide ore, a concentrate of a base metal sulfide ore, a matte obtained from a base metal sulfide ore, tailings from the processing of a base metal sulfide ore and mixtures thereof.

[0017] In another embodiment, the process further comprises selecting pyrrhotite, pentlandite, chalcopyrite, pyrite, arsenopyrite and sphalerite, and mixtures thereof as the base metal sulfide.

[0018] In another embodiment, the process further comprises selecting chlorine, sodium chlorate, hydrogen peroxide, sodium hypochlorite and sodium perchlorate and mixtures thereof as the oxidant.

[0019] In another embodiment, the process further comprises selecting sodium chlorate, chlorine and mixtures thereof as the oxidant.

[0020] In another embodiment, the process further comprises adjusting the redox potential during the leach so that the redox potential of the leach solution is in the range 250 - 450 mV.

[0021] In another embodiment, the process further comprises selecting the concentration of magnesium chloride to be at least 200 g/L, preferably to be in the range of 200-500 g/L and more preferably to be in the range of 200 - 400 g/L, the total concentration being formed essentially from magnesium chloride and hydrochloric acid. Optionally, the amount of hydrochloric acid is in the range of 30 - 150 g/L.

[0022] In another embodiment, the process further comprises adjusting the pH so that, at the end of the leach, the pH is less than 1.5 and, preferably less than 1.

[0023] In another embodiment, the solid residue is also treated for separation of a magnetic fraction.

[0024] In another embodiment, the process further comprises:

(a) subjecting the leachate to a series of value metal recovery steps and obtaining a value metal depleted leachate and

(b) treating the value metal depleted leachate to recycle at least a portion of the hydrochloric acid and chloride.

[0025] Step (b) preferably comprises pyrohydrolysis. Preferably, step (a) includes at least one precipitation step using a base. Preferably the base is magnesium oxide. Preferably, magnesium oxide is produced from the value metal depleted leachate.

[0026] In another embodiment, the process further comprises treating the leachate to precipitate iron.

[0027] In another embodiment, the leachate is treated by increasing the pH of the leachate, subsequent to removal of the residual solids to, to precipitate iron.

[0028] In another embodiment, the process further comprises adjusting the lixiviant so as to have a concentration of chloride ions of from 200-500g/L.

[0029] In another embodiment, the process further comprises selecting the sulfide source material from a base metal sulfide ore or a material derived from a base metal sulfide ore.

[0030] In another embodiment, the process further comprises the step of treating at least some of the hydrogen sulfide to obtain elemental sulfur.

BRIEF DESCRIPTION OF THE DRAWINGS

[0031] The present invention will be described with reference to the preferred embodiments of the invention shown in the drawings, in which:

Fig. 1 shows a flow sheet for the recovery of value metals from sulfide-based nickeliferous ore or concentrate; and,

Fig. 2 shows an alternate flow sheet for the recovery of value metals from sulfide-based nickeliferous ore or concentrate.

DETAILED DESCRIPTION OF THE INVENTION

[0032] The present invention relates to a process for the leaching of a value metal from a base metal sulfide source material. The base metal sulfide source material may be present with a base metal oxide source material. For example,

the source material may be a mixture of sulfide and oxide-based ores.

[0033] The ores may be an ore per se, but is preferably a concentrate thereof. In other embodiments, the ore may be in the form of any of the mattes discussed above, especially converter matte, or in the form of tailings of a base metal sulfide ore. It is understood that the expression "ore" also includes an ore and any materials derived from an ore. The ore is unroasted.

[0034] In embodiments of the invention, the ore comprises, and preferably consists essentially of, an ore known as pyrrhotite, pentlandite, chalcopyrite, arsenopyrite, sphalerite, a pyrite and mixtures thereof. As noted above, the ore may be a mixture of oxide and sulfide ores. Thus, in embodiments, the ore may additionally contain laterite ore or concentrate e.g. saprolite or limonite.

[0035] The base metal sulfide ores contain at least one of nickel, cobalt, copper and zinc, as well as at least one platinum group metal (PGM) and/or gold. The value metal content of the ore may vary widely in type and amount, depending on the source of the ore. In particularly preferred embodiments, the present invention is directed to the recovery of nickel from base metal sulfide ores, especially nickeliferous sulfide-based ores and mixtures of such ores with related oxide ores.

[0036] The process of the present invention may be operated without pre-treatment of the base metal sulfide ore. However, it may be beneficial to subject the ore to a grinding or beneficiation step prior to leaching. In particular embodiments of the invention, the ore to be treated may be in the form of a concentrate, and in further embodiments the ore to be treated may have been subjected to smelting or other steps to form a matte. Such steps are known, and are for example discussed in the references noted above.

[0037] Referring to Fig. 1 and Fig. 2, ore 10 in a form as discussed above is fed to a leaching step 12 in which the ore 10 is contacted and leached with a lixiviant comprising at least chloride, hydrochloric acid and at least one oxidant.

[0038] The chloride is magnesium chloride.

[0039] The oxidant is selected from alkali metal peroxides, alkali metal perchlorates, alkaline earth metal perchlorates, ammonium perchlorate, magnesium perchlorate, alkali metal chlorates, alkali metal hypochlorites, chlorine, hydrogen peroxide and peroxysulfuric acid, and mixtures thereof. Preferred examples of alkali metal peroxide are sodium peroxide and potassium peroxide. Preferred examples of alkali metal perchlorates are sodium perchlorate and potassium perchlorate. A preferred example of an alkali metal hypochlorite is sodium hypochlorite. Ammonium perchlorate, magnesium perchlorate and peroxysulfuric acid (Caro's acid, H_2SO_5) may also be used. Preferred examples of alkali metal chlorates are sodium chlorate and potassium chlorate. The preferred oxidants are chlorine, sodium hypochlorite, sodium perchlorate and sodium chlorate and the oxidant may comprise and more preferably consists essentially of one or more of these oxidants.

[0040] The leaching step may be conducted in any manner known in the art. For example, the leach may be conducted continuously as a cocurrent step, a countercurrent step or in another manner, or the leaching step may be conducted as a batch step. The leaching step is carried out at atmospheric (ambient) pressure i.e. it is not necessary to conduct the leaching step under pressure. In particular, in accordance with the instant invention, a leaching step having good reaction kinetics may be conducted at atmospheric pressure. In prior art processes, elevated pressures are required to obtain reaction kinetics sufficient rapid to enable a commercial process.

[0041] It has surprisingly been determined that the formation of sulfate and the co-dissolution of PGMs and gold may be reduced, and preferably substantially reduced, by appropriate selection of the redox potential and the pH of a lixiviant containing hydrochloric acid and metal chloride.

[0042] The Eh (redox potential versus SHE (standard hydrogen electrode)) is maintained in the range of 250-600 mV, preferably from 250 - 450 mV and most preferably from 350 - 450 mV. If the redox potential is less than 250 mV, then the lixiviant is highly reductive and base metal sulfides in the ore will not be leached at an appreciable rate. If the redox potential is higher than 600 mV, then the PGMs and gold will co-dissolve at an appreciable rate and sulfides leached from the ore will be converted to sulfates at an appreciable rate. Accordingly, it is preferred to maintain the redox potential sufficiently high to leach base metal sulfides from the ore but sufficiently low so as to essentially limit the co-dissolution of PGMs and gold and to convert sulfur that is associated with metal sulfides in the ore and is leached from the ore (i.e., sulfide sulfur) to hydrogen sulfide.

[0043] The amount of oxidant relates to the redox potential (Eh) of the leaching solution. A particular ore will have an emf. The amount of oxidant that is present in the lixiviant may be adjusted to obtain a desired redox potential for the lixiviant.

[0044] The pH of the lixiviant solution, as measured by conventional equipment, at the end of the leaching operation is less than 2.5, although it is preferable for the pH to be less than 1.5, more preferably less than 1.0 and most preferably in the range 0 - 0.8. It is to be understood that the pH in the leach solution will vary, and might be in the range of 0.5 - 4.0 initially. However, in order to reduce the residence time of the leaching step, the pH is preferably maintained in the selected range for most (e.g., more than 50%) of the duration of the leaching step. At a pH higher than 0.6 iron commences to precipitate as hematite and magnetic hydroxide (e.g., spinel). The precipitation of iron substantially increases when the pH is above 1 - 1.5. Accordingly, it is preferred to maintain a low pH, especially if there are significant amounts of PGMs and/or gold in the ore. In one preferred embodiment, if the ore contains amounts of PGMs and/or gold that are

not sufficient to warrant a separate recovery step, then it is preferred to conduct the leach so as to leach the iron and to precipitate the iron. The leaching and the precipitation may be conducted in a single step (e.g., reactor). Alternately, the leach may be conducted, the solids removed and the leachate then treated to precipitate the iron, thereby producing a separate iron residue for recovery of iron or disposal. Alternately, if it is desired to recover the PGMs and gold, then it is preferred to maintain the leached iron in the leachate so that the solid residue is relatively free of iron, thereby simplifying the recovery of the PGMs and gold.











[0045] The pH of the lixiviant is reduced by providing a sufficient concentration of chloride in the lixiviant. Accordingly, the chloride concentration of the lixiviant from all sources is adjusted to obtain the selected pH. The chloride concentration may be in the range 200 - 500 grams of chloride ions per litre of lixiviant solution, preferably 200-400 g/L and, more preferably 300 - 400 g/L. The upper limit on the chloride concentration may depend on the ions present in the leach solution, especially as a result of leaching of the ore, and resultant formation of complexes. In particular, the chloride concentration is preferably selected to minimize formation of anionic chloro complexes, especially of ferric iron, FeCl_4^- .




[0046] In preferred embodiments of the invention, the chloride ions are derived from metal chloride and hydrochloric acid, and the chloride concentration of, e.g., 200-400g/L, is calculated on the basis of the amount of chloride ions in solutions from both the metal chloride and the hydrochloric acid in the lixiviant solution. In particularly preferred embodiments, the amount of hydrochloric acid may be in the range of 30 - 150 g/L and the amount of metal chloride (magnesium chloride) may be in the range of 80 - 350 g/L.

[0047] The metal chloride/HCl (metal to hydrochloric acid) ratio expressed in terms of mass percentage (m/m) in the leach is preferably adjusted to optimize the leach, based on, for example, the particular ore being leached and the temperature of the leaching step. The metal/HCl ratio of the chloride lixiviant solution may be in the range of 0.1 - 2.0:1 and, preferably 0.4 - 1.0:1.

[0048] The leach is carried out at a temperature in the range of 75°C up to the boiling point of the leach solution at ambient pressure, which is about 115°C.

[0049] The leach may be carried out with a lixiviant having a low concentration of hydrochloric acid. Preferably, the hydrochloric acid is added in an amount sufficient to leach all of the base metals and, if desired, the iron and to obtain the selected pH. Therefore, the amount of hydrochloric acid that is added is preferably about the stoichiometric amount of acid required to leach the selected value metals and maintain the lixiviant in a selected pH range and, more preferably, a slight excess (e.g., 105%). Therefore, the amount of acid that is added to the lixiviant may be determined by monitoring the pH of the lixiviant during the leaching step and adding additional acid as the pH of the lixiviant increases above a selected value. The amount of acid that is required will vary depending upon the concentration of value metals in the ore the composition of the ore. In particular, higher amounts of acid will generally be required if the ore is more concentrated. Similarly, different sulfides require a different amount of acid during the leaching process. For examples, the overall reactions that can occur during the leaching are as follows.







[0050] For example, a 30% Ni concentrate will require much more acid (e.g., 10 -20 times) than a 3% Cu ore. Accordingly, the concentration of hydrochloric acid in the lixiviant may be 1 - 4N and may be less than 18% (mass ratio). Use of such a low concentration of hydrochloric acid, and control of the redox potential Eh and pH, are believed to be important aspects of the control of the form of the sulfur that is obtained from the sulfide in the ore i.e. conversion of the sulfide sulfur to hydrogen sulfide, rather than sulfate ion. The amount and type of oxidant used are factors in the control of Eh.

[0051] The lixiviant and leaching conditions are chosen so that base metals are leached from the base metal sulfide ore but platinum group metals (PGMs) and gold are essentially not leached i.e. the PGMs and gold remain as part of the solids in the leach and are separated as solids by liquid/solids separation, as discussed herein. Control of the leach so that PGMs and gold are separated as solids simplifies subsequent steps for recovery of value metals. In the invention, the leaching step is controlled so that the sulfide sulfur in the sulfide ore material is converted to hydrogen sulfide, rather than sulfate and that the PGMs and gold are essentially not leached (e.g., less than 10 %, preferably less than 5% and more preferably, less than 1%). However, it will be appreciated that, depending upon the subsequent recovery steps, some PGMs and gold may be leached during the base metal leach step and/or some sulfate may be produced.

[0052] As discussed herein, the leaching step is controlled so that sulfur in the sulfide ore material is converted to hydrogen sulfide, rather than sulfate. The hydrogen sulfide is stripped from the leach solution, most preferably stripped from the leach solution in a continuous manner so that the concentration in the leach solution of hydrogen sulfide is low. In preferred embodiments, a gas e.g. air or nitrogen, is fed to the leach solution to aid in the stripping of hydrogen sulfide.

[0053] It will be appreciated that at least some of the spent lixiviant is preferably regenerated and fed to leaching step 12. As shown in Figures 1 and 2, a recycled chloride lixiviant stream 14, as well as an oxidant stream 16 and a make up stream of chloride 18 are combined to produce the lixiviant that is used during the leaching step. It will be appreciated that leaching step 12 may be conducted in a single reactor or a plurality of reactors in series or parallel. Preferably, leaching step 12 comprises a single leaching reactor. It will also be appreciated that some or all of streams 14, 16 and 18 may be combined in any particular order prior to being introduced into the reactor or reactors in which leaching step 12 is conducted.

[0054] The hydrogen sulfide stripped from the leach solution may be treated in a variety of ways, preferably for recovery of elemental sulfur, as will be apparent to persons skilled in the art. For instance, as shown in Figure 2, the hydrogen sulfide stream 20 may be subjected to a Claus reaction in step 22. In a typical Claus reaction, an oxygen stream 24 is added and part of a stream of hydrogen sulfide is oxidized to form sulfur dioxide, and the sulfur dioxide is then reacted with remaining hydrogen sulfide to form elemental sulfur 26. The chemical reaction may be described as follows:



[0055] The reaction may be carried out in more than one stage, using more than one catalyst, and high efficiencies of recovery of elemental sulfur e.g. 94-97%, may be achieved. The Claus reaction is an exothermic reaction, and energy generated 28 (e.g. in the form of a heated liquid that is circulated in a heat exchanger) may be sent to the leaching process (e.g. an indirect heat exchanger) or used elsewhere in the process.

[0056] In other embodiments, the hydrogen sulfide may be contacted with a solution of a metal that will form a sulfide, especially a solution of a copper salt. The copper salt may be obtained from the spent lixiviant such as by selective solvent extraction and stripping. For example as shown by dotted line in Figure 2, stream 21 of hydrogen sulfide may be combined with the pregnant strip solution produced in extraction step 44. Examples of copper salts include cuprous chloride and cupric sulfate. If the recovery process is a so-called stand-alone process, i.e. streams of liquids in the sulfur recovery process are not recycled to the process for leaching and recovery of metal values from the sulfide ore material, then a variety of copper salts could be used. However, if streams from the sulfur recovery process are or might be recycled to the process for leaching and recovery of metal values, then it is particularly preferred that the copper salt be cuprous chloride. The leaching step is a chloride process, and use of cuprous chloride reduces or eliminates contamination of the leaching step with anions other than chloride. Contacting hydrogen sulfide with cuprous chloride solution results in the formation of copper (cuprous) sulfide, which may be separated in a liquid/solids separation step. The liquid may be recycled and recontacted with hydrogen sulfide. Copper sulfide may be converted to copper sulfate and elemental sulfur.

[0057] The leaching conditions, and especially the lixiviant, redox potential Eh and pH, are controlled so that at least

99% by weight of the sulfide sulfur that is leached from the sulfide ore material is converted into hydrogen sulfide. Under appropriate conditions, at least 99.9% and particularly at least 99.95%, by weight of the sulfide sulfur in the sulfide ore material may be converted into hydrogen sulfide.

[0058] The total amount of sulfate formed in the leaching step is less than 1%, more preferably less than 0.1 % and most preferably less than 0.05%, by weight of the amount of sulfur in the sulfide ore material 10 that is leached from the ore during leaching step 12. The formation of hydrogen sulfide, which is stripped, and the low levels of sulfate, simplifies subsequent steps in the recovery of value metals and/or recovery and recycling of components of the leach solution.

[0059] The leach mixture 30 comprises a value metal-rich solution (leachate) 32 and a residue (solids) is in the form of a suspension 34. The leach mixture 30 is fed to a solid/liquid separation step 36 to effect separation of the leachate 32 from the solids 34. The solids 34 may include unleached ore (e.g., the PGMs and gold) and iron solids, although it would be preferable to maintain iron in solution if significant values of PGMs and/or gold are in the ore feed. Techniques for such separation are known e.g. using a pressure or vacuum filter, counter-current decantation or centrifuge.

[0060] Solids 34 may comprise a magnetic portion, which may be separated and which might be useful for production of ferro-nickel or low-alloy stainless steels.

[0061] The PGMs and gold in the solids 34 may be recovered by any means known in the art. Preferably, solids 34 are leached to dissolve the PGMs and gold. Preferably, the lixiviant may be any of those taught herein for leaching the base metals, except that the redox potential is preferably greater than 700 mV and, more preferably, greater than 800 mV. In a particularly preferred embodiment, the lixiviant has the same composition as that used to leach the base metals from the sulfide ore except that the composition has been adjusted to increase the redox potential.

[0062] As discussed above, the leach is carried out so that the platinum group metals, and gold and optionally at least a portion of the silver, are not leached so that they may be separated with the leach residue, and separated therefrom using known techniques. If some of the platinum group metals and gold are in leachate stream 32 that is separated in liquid/solids separation step 36, then some or all of leachate 32 may be subjected to PGM separation step 38 to recover the PGM and gold, and silver if any is present. As shown in Figure 1, a bleed stream 40 may be removed from leachate 36 and subjected to PGM separation step 38. A PGM- and gold-poor leachate stream 42 is returned to leachate stream 32. PGM separation step 38 may be any process known in the art to remove dissolved PGMs and gold, and optionally silver if present. Preferably, PGM separation step 38 is a cementation step e.g. using copper, zinc or inorganic or organic reductants e.g. sodium borohydride or hydrazine.

[0063] The solids separated in liquid/solid separation step 36 may contain copper sulfide, depending on the Eh of the leach solution, and may be recovered by any process known in the art.

[0064] In embodiments of the invention, value metals e.g. nickel, copper, zinc and/or cobalt and PGMs and gold may be recovered from the leachate 32 by standard or other known methods e.g. ion exchange, solvent extraction, electrowinning or sulfide precipitation. Examples are given in Fig. 1 and Fig. 2.

[0065] In one embodiment for the separation of value metals from the leachate 32, copper ions are present in leachate 32 from leaching of copper values from ore 12 or from the addition of copper salts e.g. copper chloride, or copper sulfide (Cu_2S) may be formed in the solution e.g. from hydrogen sulfide generated in the leach. As shown in Figures 1 and 2, copper could be recovered from the leachate 32 by subjecting leachate 32 to a solvent extraction step 44 to obtain a copper reduced leachate 50. Accordingly, leachate 32 could be contacted with an appropriate extraction solution 46 to obtain a copper rich solution 48 that is treated to recover copper. The extraction solution 48 may then be regenerated and recycled as is known in the art to obtain extraction solution 46. It is however preferred to form hydrogen sulfide in the leach and strip the hydrogen sulfide from the leach solution, as discussed herein.

[0066] The copper reduced leachate 50 may also contain iron as Iron chloride. As shown in Figure 1, the iron may be recovered from leachate 50 by the addition of magnesium oxide 54 to precipitate an iron oxide (such as hematite or spinel) or a hydrated iron oxide in precipitation step 52. The former are preferable since they are easier to effect solid/liquid separation. The leach mixture 56 comprises a value metal-rich solution (leachate) 58 and a residue (solids) is in the form of a suspension 60. The leach mixture 56 may be fed to solid/liquid separation step 62 as is known in the art to effect separation of the leachate 58 from the solids 60. Solids 60 may be treated to recover value metals therefrom and/or disposed as spent solids. The iron may alternately be recovered by being pyrohydrolysed to form an oxide.

[0067] As shown in Figure 1, a portion of leachate 58 may be removed via stream 64 and then subjected to precipitation step 66. For example, magnesium oxide stream 68 may be combined with stream 64 to form a mixed hydroxide precipitate (e.g., nickel/cobalt hydroxide) to produce product 70 and a value metal depleted leachate 72. The remainder of leachate 58 may contain nickel and cobalt that may be individually recovered in separate recovery steps. For example, a portion of leachate 58 may be subjected to a solvent extraction step 74 to obtain a cobalt rich extraction solution 76 and a cobalt reduced leachate 78. The cobalt rich extraction solution may be treated to obtain a cobalt containing solution 80 and a value metal depleted leachate 82. Cobalt reduced leachate 78 may be treated to recover nickel and a value metal depleted leachate stream.

[0068] The value metal depleted leachates may be combined and treated to regenerate the lixiviant. In particular, the metal chloride and hydrochloric acid may be regenerated. Further, magnesium oxide used in the value metal recovery

steps may be obtained. Referring to Figure 1, a bleed stream of value metal depleted leachates may be treated in step 84 to remove impurities therefrom. A portion of the purified value metal depleted leachate 86 may then be treated in step 88, such as by hydroxide or sulfide precipitation to obtain metal chloride (magnesium chloride) for recycle. A portion of the purified value metal depleted leachate 86 may be subjected to pyrohydrolysis step 90 to obtain magnesium oxide stream 54, 68

[0069] The magnesium oxide reduced leachate 92 produced by hydrolysis step 90 comprises HCl that may be subjected to additional evaporation steps 94 to obtain recycle HCl. Off-gases from pyrohydrolysis may be used in pre-evaporation (not shown), to enrich the solution in HCl and reduce energy costs. However, the degree of partial or pre-evaporation may be reduced, or even eliminated, by feeding gaseous hydrogen chloride to the solution. The hydrogen chloride may be formed from chlorine. In this manner, energy required for evaporation of water may be reduced or eliminated.

[0070] In the alternate embodiment shown in Figure 2, leachate 50 is treated in two or three purification steps 100 to recover value metals that are precipitated from solution by the addition of magnesium oxide, which is provided by stream 102. After each purification step 100, a treated leachate 104 is subjected to solid/liquid separation step 106 to obtain a solid 108, which may be sent for disposal or for further processing to isolate the value metal, and a value metal reduced leachate 110. Subsequently, the treated leachate is subjected to a nickel/cobalt recovery step 112 to obtain a value metal reduced leachate 114, which may be recycled by pyrohydrolysis step 90, and a mixed nickel/cobalt hydroxide product, which may then be subjected to further processing to isolate the value metals. Alternately, the leachate may be treated sequentially to produce a nickel-containing product and cobalt-containing product.

[0071] It will be appreciated that by sequentially adding additional amounts of magnesium oxide, the pH of the leachate may be sequentially increased so as to precipitate a particular metal or group of metals. It will also be appreciated that the pH of the leachate may be adjusted by various means, including the addition of different pH adjustment agents (e.g. bases). An advantage of the use of magnesium oxide is that the required amount of magnesium oxide may be produced by the process and the addition of magnesium oxide does not add any additional ions in the leachate, which may require the use of additional treatment steps.

[0072] The lixiviant, especially redox potential (Eh), is controlled to effect conversion of sulfide in the sulfide ore material fed to the leaching step into hydrogen sulfide, rather than sulfate ion. The hydrogen sulfide is preferably stripped from the leaching step as gaseous hydrogen sulfide. In the embodiment in which hydrogen sulfide is formed, formation of sulfate may be reduced to very low levels e.g. 0.05% by weight or lower based on the total amount of sulfide sulfur leached from the ore, as exemplified herein, which facilitates separation of value metals in subsequent steps in the process.

[0073] Thus, as shown in Fig. 1 and Fig. 2, the present invention provides for the use of mixtures of magnesium chloride, at least one oxidant and hydrochloric acid in the leach step. The dissolution of iron may be controlled and minimized, without requiring expensive pre-treatment or post-treatment steps by adjustment of chloride concentration, pH, kinetics, redox and/or temperature. For example, lower leaching temperatures, lower chloride concentrations and a higher pH decrease the tendency of iron to be leached. Therefore, the temperature, chloride concentration and pH conditions for the leach may be selected, in part, based on the amount of iron to be leached. Subsequent to the iron being leached, the pH may be increased, preferably above 1.5 to precipitate the leach iron. The leach residue may be maintained in a form that is readily filterable. As discussed herein, the process is controlled so that hydrogen sulfide is formed during leaching, and stripped from the leach solution prior to subsequent liquid/solids separation of the leach solution.

[0074] In the process of the present invention, the metal chloride/HCl ratio e.g. metal/HCl ratio and the amount and type of oxidant in the leach step may be adjusted to reflect any specific requirements or characteristics of the process and ore fed to the process. In some instances, all of the chloride ion in the leach solution may be supplied from, for example, recycled magnesium chloride.

[0075] The leaching of the base metals may be conducted continuously in at least one stirred tank reactor. Alternately, at least two reactors may be used, the first for addition of base metal sulfide ore and the second for removal of the leached iron (e.g., increasing the pH to precipitate the iron either as part of the solid residue from the leach or, as shown in Figure 1, in a separate precipitation step 52 downstream from solid/liquid separation step 36). Should there be significant PGM and/or gold values in the feed, it will be preferable to maintain the iron in solution until after separation of the leach residue, which will be a PGM and/or gold concentrate. Three or more reactors may be more optimal. Process control may be effected by the rates of addition of base metal sulfide ore and/or lixiviant solution to the process, but it may be preferable to control the process using pH and redox potential Eh. As discussed above, the leaching may also be conducted batch, cocurrent or countercurrent, in whole or in part. It will also be appreciated that any of the downstream process steps may be conducted on a continuous or a batch basis.

[0076] An increase has been recognized in the activity of HCl when $MgCl_2$ is added to dilute solutions of HCl. Without being limited by theory, the increase in the reactivity of HCl is understood to be a function of chloride ion concentration. Magnesium chloride has a high hydration rate, which is believed to cause substantially increased activity of hydrogen ions in the lixiviant solution. However, as illustrated by comparative experiments below, especially Example II, use of

constant chloride concentrations in hydrochloric acid leaching of nickeliferous ore can lead to widely different levels of extraction of nickel.

[0077] The process provides for removal of sulfide sulfur derived from the sulfide ore as hydrogen sulfide, rather than the formation of sulfates. The removal of sulfur as hydrogen sulfide simplifies and/or allows for alternate steps for separation and recovery of value metals subsequent to the leaching step, because sulfate is present in not more than very minor amounts, as exemplified herein. In addition, leaching conditions, especially pH, redox potential (Eh) and chloride concentration, may be controlled thereby providing for control of leaching of value metals, formation of chloride complexes and extraction of iron, in addition to control so that sulfide sulfur is converted to hydrogen sulfide. The process of the present invention does not require pre-treatment of the base metal sulfide ore prior to the leaching step.

[0078] A particular advantage of the process of the present invention is that both high rates of extraction of value base metals and removal of sulfur hydrogen sulfide may be obtained in a leaching step that operates at atmospheric pressure. The use of low concentrations of hydrochloric acid and the use of high levels of chloride in the lixiviant at the selected redox potential results in the formation of hydrogen sulfide. The hydrogen sulfide is stripped from the leach solution, and results in very low amounts of sulfate in leachate and solids from the leach solution. This has significant economic advantages in subsequent steps for recovery of value metals and PGMs and gold. In addition, the use of the low concentrations of hydrochloric acid does not effect leaching of PGMs and gold from the ore, which also simplifies subsequent steps in the recovery of value metals from the leachate. The use of atmospheric pressure results in substantial economic advantages, especially in capital costs. The use of chloride chemistry offers advantages in operating and capital costs of the process. The leaching agent is regenerated and recycled, preferably using a pyrohydrolysis step with additional hydrochloric acid being formed from chlorine if required. Magnesium chloride is readily recycled to the leaching step.

[0079] While not being bound by any theory, the high activity of H^+ ions in the high strength chloride solutions is believed to enable use of lower concentrations of hydrochloric acid to effect leaching of value metals, and in embodiments it is believed that the amount of acid required may be only marginally higher than the stoichiometric amount of acid. The high activity of the proton, H^+ , in high concentration chloride solutions permits even small amounts of acid to act as though it were highly concentrated, and therefore has a driving force and hence very little excess over stoichiometric acid is required. Where the proton activity is not so high, then considerable excess acid is required to drive the leaching reaction. There is lower water activity in the chloride solutions, which is believed to result in lower concentrations of iron in solution, but with the relatively low amounts of iron in the ores percentage extraction is still high. The presence of magnesium ions in magnesium chloride solutions is believed to reduce dissolution of magnesium as a result of common ion effects. Use of magnesium chloride permits recycle of both hydrochloric acid and caustic (highly reactive) magnesia, both of which may be used in the process. The high proton activity achievable at the low acid concentrations herein permits the process to be operated under conditions that cause formation of hydrogen sulfide rather sulfate ion, so-called reductive leaching conditions at low redox potential. It is also believed that the low redox potential used in the process not only results in the formation of hydrogen sulfide instead of sulfate but also is not conducive to leaching of PGMs and gold. Both of these aspects are advantages of the process of the present invention.

[0080] The present invention is illustrated by the following examples.

Example I

[0081] A series of comparative laboratory-scale leaching experiments were carried out using a base metal sulfide ore concentrate that was a mixture of pyrrhotite, pentlandite and chalcopyrite. The ore concentrate had the following analysis: Ni (18.65%), Cu (1.38%), Co (0.19%) and Fe (26.6%). The leach solution (approximately 500 mL) was a hydrochloric acid (2N in Runs 1 and 3, 4N in Run 2) solution containing 20 w/w of solids. Ferric chloride ($FeCl_3 \cdot 6H_2O$) was added to each leach solution, so that the total chloride ion content (from HCl and ferric chloride) was 230 g/L. The temperature of the solution was 95°C and the leaching time was 4 hours. The redox potential (Eh) was measured in mV. The pH was less than 0.

[0082] Oxidant was not added in Runs 1 and 2. In Run 3, chlorine gas was bubbled through the leach solution at a rate of 0.5 mL/min.

[0083] The leached solution was subjected to a liquid/solids separation step. The washed solids obtained were subjected to analysis for the content of nickel, iron, cobalt and copper, and the liquid was subjected to analysis for nickel. The extraction of each metal was then calculated.

[0084] The results obtained, expressed as percentages based on the concentrate fed to the leach solution, are shown in Table I. Table I shows the redox potential, in mV, at the end of the leach.

TABLE I

	Run 1	Run 2	Run 3
Redox potential (Eh)	170	235	510
Ni extraction (solids)	36	23	84
Ni extraction (liquid)	47	23	65
Fe (solids)	70	46	68
Co extraction (liquid)	70	16	56
Cu extraction (liquid)	75	15	63

[0085] The results show that leaching of the sample using leach solution of hydrochloric acid and ferric chloride resulted in poor leaching of nickel (below 50% extraction) except when chlorine was bubbled through the leach solution (Run 3). The leach solution of Run 3 exhibited a higher redox potential.

Example II

[0086] In further comparative experiment, the procedure of Example 1 was repeated using 2N hydrochloric acid, except that for Run 4, the metal chloride was magnesium chloride ($\text{MgCl}_2 \cdot 6\text{H}_2\text{O}$). The total chloride ion content was 300 g/L. The pH was <0.

[0087] The results obtained are given in Table II.

TABLE II

	Run 4
Redox potential (Eh)	410
Ni extraction (solids)	64
Ni extraction (liquid)	66
Fe (solids)	74
Co extraction (liquid)	58
Cu extraction (liquid)	79

[0088] The results show that the use of magnesium chloride (Run 4) improved the extraction of nickel from 47% to 66% as against Run 1, and was equivalent to ferric chloride and chlorine (Run 3) in the extraction of iron, cobalt and copper and slightly poorer in the extraction of nickel

Example III

[0089] The procedure of Example II was repeated, except that an oxidant was added to the leach solution, in order to illustrate aspects of the present invention. Thus, in each Run, the leach contained both magnesium chloride and an oxidant. The amounts, based on 500 mL of solution, are shown in Table III; chlorine was fed into the leach solution in the amount shown. In Run 5, the hydrochloric acid was 2N and the amount of total chloride ion concentration was 300 g/L. In Runs 6-9, the hydrochloric acid was 4N and the amount of total chloride ion concentration was 400 g/L. The pH was <0.

[0090] The results obtained are shown in Table III.

TABLE III

	Run 5	Run 6	Run 7	Run 8	Run 9
Oxidant	NaClO_3	NaClO_3	NaClO_3	NaClO_3	Cl_2
Amount of oxidant	117 g	0.25 g	0.5 g	0.75 g	0.5mL/min
$\text{MgCl}_2 \cdot 6\text{H}_2\text{O}$	112 g	370 g	370 g	370 g	370g
Redox pot. (Eh)	340	430	440	420	510
Ni extrn. (solids)	54	95	96	92	98
Ni extrn. (liquid)	57	78	86	88	92
Fe (solids)	32	91	92	88	98
Co extrn. (liquid)	55	90	88	85	96
Cu extrn. (liquid)	64	48	28	24	99

[0091] The results show that high extractions of nickel, especially in excess of 90%, may be obtained using leach solutions containing hydrochloric acid, magnesium chloride and an oxidant. In addition, while the extraction of nickel increases at redox potentials above 250 mV, the extent of the extraction of nickel increases substantially at redox potentials above 350 mV.

Example IV

[0092] A series of laboratory-scale leaching experiments were carried out using a base metal sulfide ore concentrate that was a mixture of pyrrhotite, pentlandite and chalcopyrite. The feed ore was received at 100%-100 mesh feed size. The ore concentrate had the following analysis: Ni (18.90%), Cu (1.52%), Co (0.28%) and Fe (29.0%). The leach solution (1L) was a 4N hydrochloric acid solution containing 5% w/v of solids. The leach solution had a total chloride ion concentration of 400 g/L, obtained from hydrochloric acid and magnesium chloride (258.2 g/L) as Cl⁻. The leaching temperature was 95°C and the leaching time was 4 hours. The redox potential (Eh) was measured in mV. Chlorine was bubbled through the leach solution as oxidant. The pH was <0.

[0093] Cl₂ was bubbled through the leach solution to strip hydrogen sulfide formed during the leach from the leach solution.

[0094] The leached solution was subjected to a liquid/solids-separation step. The solids (washed) and liquid obtained were subjected to analysis for the content of nickel, iron, copper and cobalt. The extraction of each metal was then calculated. The liquid was also subjected to analysis for sulfate.

[0095] The results obtained, expressed as percentages based on the analysis of the solids and liquid for each metal, are shown in Table IV. The analysis for sulfate is reported as both g/L of sulfate and percentage removal of sulfide sulfur as hydrogen sulfide. Table IV shows the redox potential, in mV, at the end of the leach. In each run reported in Table IV, visual examination of the solids showed no evidence of elemental sulfur.

TABLE IV

	Run 10	Run 11	Run 12
Redox potential (Eh)	190	186	295
Ni extraction (%)	87.9	59.4	67.6
Fe extraction (%)	83.5	72.3	73.2
Cu extraction (%)	34.8	50.0	61.7
Co extraction (%)	72.0	38.8	50.1
Sulfate (liquid, g/L)	0.011	0.020	0.010
Removal of sulfide sulfur (%)	>99	>99	>99

[0096] The results show that in each of Runs 10-12 at least 99% of the sulfur, which was in the form of sulfide in the sulfide ore concentrate fed to the leach, had been removed during the leaching step. The amount of sulfate ion in the liquid obtained was very low.

Example V

[0097] The procedure of Example IV was repeated, except that chlorine was not bubbled through the leach solution. The oxidant used was sodium perchlorate, which was added in amounts as follows: Runs 13 and 14 - 20 kg/tonne of concentrate sample; Run 15 - 10 kg/tonne of concentrate sample. In addition to the sodium perchlorate, in Runs 14-15 oxygen was bubbled through the leach solution (1L) at a rate of 100 mL/min. Sodium perchlorate was the only oxidant used in Run 13. The pH was <0.

[0098] The results obtained are shown in Table V. In each run reported in Table V, visual examination of the solids showed no evidence of elemental sulfur.

TABLE V

	Run 13	Run 14	Run 15
Redox potential (Eh)	405	250	365
Ni extraction (%)	96.1	51.2	97.3
Fe extraction (%)	90.4	65.5	92.2
Cu extraction (%)	81.7	52.4	79.3
Co extraction (%)	83.2	33.4	83.5

(continued)

	Run 13	Run 14	Run 15
Sulfate (liquid, g/L)	0.004	0.042	0.007
Removal of sulfide sulfur (%)	>99	>99	>99

[0099] The results for removal of sulfide sulfur using sodium perchlorate or sodium perchlorate/oxygen as oxidant are similar to those of Example IV in which chlorine was used as oxidant. High extractions of nickel, in excess of 90%, were obtained in Runs 13 and 15. This example shows that sodium perchlorate may be used as oxidant instead of chlorine. At least 99% of the sulfide sulfur was removed in all Runs.

Example VI

[0100] The procedure of Example V was repeated, except that the only oxidant used was sodium hypochlorite. A solution of sodium hypochlorite (5.25% w/v) was added as follows: Run 16 - 560 L/tonne of concentrate sample; Run 17 - 160 L/tonne of concentrate sample; and Run 18 - 960 L/tonne of concentrate sample. The pH was <0.

[0101] The results obtained are shown in Table VI. In each run reported in Table VI, visual examination of the solids showed no evidence of elemental sulfur.

TABLE VI

	Run 16	Run 17	Run 18
Redox potential (Eh)	398	295	190
Ni extraction (%)	98.2	98.8	42.2
Fe extraction (%)	91.9	89.5	56.6
Cu extraction (%)	85.8	75.7	43.2
Co extraction (%)	86.2	83.4	23.1
Sulfate (liquid, g/L)	0.023	0.017	0.018
Removal of sulfide sulfur (%)	>99	>99	>99

[0102] The results for removal of sulfide sulfur using sodium hypochlorite as oxidant are similar to those of Examples IV and V, in which chlorine, sodium perchlorate and sodium perchlorate/oxygen were used as oxidant. High extractions of nickel, in excess of 90%, were obtained in Runs 16 and 17. In Run 18, the high concentration of sodium hypochlorite is believed to have resulted in re-precipitation of dissolved metals, but the removal of sulfide sulfur as hydrogen sulfide gas was still high.

Example VII

[0103] A series of laboratory-scale leaching experiments were carried out using a material identified as an anode slime material and oxidants such as sodium hypochlorite, sodium chlorate and oxygen. The anode slime material had the following analysis: Ni (5.1%), Cu (1.1%), Fe (1.2%), Au (7.01g/t), Ag (2.20g/t), Pt (24.40g/t), Pd (87.90g/t) and Rh (3.50g/t). The sulfur content was 91.9 wt%, with the content of elemental sulfur being 80 wt%. The leach solution (1 L) was a 4N hydrochloric acid solution containing 5% w/v of solids. The leach solution had a total chloride ion concentration of 400 g/L, obtained from hydrochloric acid and magnesium chloride (258.2 g/L). The leaching temperature was 95°C and the leaching time was 6 hours (Run 19 and Run 20). The redox potential (Eh) was measured in mV. The pH was <0.

[0104] Air was bubbled through the leach solution to strip hydrogen sulfide formed during the leach from the leach solution.

[0105] The leached solution was subjected to a liquid/solids separation step. The solids (washed) and liquid obtained were subjected to analysis for the content of nickel, iron, copper, gold, silver, platinum, palladium and rhodium. The extraction of each metal was then calculated.

[0106] The results obtained, expressed as percentages based on the analysis of the solids, are shown in Table VII, together with the weight loss of the anode slime after leaching. Table VII shows the redox potential, in mV, at the end of the leach. In Run 19 the oxidant was sodium hypochlorite at 120 L of 5.25 w/v% NaOCl per tonne of anode slime sample; and in Run 20 the oxidant was sodium chlorate added at 160 kg/tonne of ore.

TABLE VII

	Run 19	Run 20
Redox potential (Eh)	550	>850
Weight loss (%)	18.8	18.8
Ni extraction (%)	86	107
Fe extraction (%)	117	132
Cu extraction (%)	92	104
Au extraction (%)	n/a	64
Ag extraction (%)	n/a	>82
Pt extraction (%)	n/a	56
Pd extraction (%)	n/a	62
Rh extraction (%)	n/a	64
n/a = not analyzed		

[0107] The results show that value metals can be extracted from a secondary feed such as an anode slime material. The results also demonstrate that at higher redox levels, PGMs and gold may also be leached.

Example VIII

[0108] A sample of a copper sulfide/oxide ore containing 1.275 wt% copper, 2.61 wt% iron and 0.83 wt% sulfur was subjected to a leach using a leach solution of hydrochloric acid (4N) and magnesium chloride, at a total chloride ion concentration of 400 g/L, that additionally contained 20 kg/tonne of sodium chlorate. The leach was conducted for 4 hours at 95-105°C. The pH was <0. The ore was minus 150 mesh and was used at 5 wt% solids. The residue from the leach was analyzed for copper, iron and sulfur.

[0109] It was found that 97.3% of the copper, 69.4% of the iron and 54.6% of the sulfur in the ore had been leached, thereby demonstrating the leaching of a mixed sulfide/oxide ore of copper. The weight loss in leaching was 10.2 % and the terminal redox potential was greater than 450 mV.

Example IX

[0110] The procedure of Example VIII was- repeated, using the same ore, except that the leach was conducted on 10 wt% solids and the sodium chlorate was used in an amount of 10 kg/tonne. In addition, the resultant leach solution, not the residue was analyzed. In this test (Run 21), it was found that 96.5% of the copper and 88.8% of the iron had been leached into solution, thereby illustrating the invention. The weight loss in leaching was 17.8 % and the terminal redox was 450 mV. The pH <0.

[0111] The procedure of Example VIII was repeated using the same ore, except that the oxidant used was 48 kg/tonne of hydrogen peroxide and the leach was conducted for 6.5 hours. Analysis of the leach solution showed that 92.4 wt% of the copper and 88.5 wt% of the iron had been leached into solution, thereby showing that hydrogen peroxide was less effective than sodium chlorate as oxidant. The weight loss in leaching was 11.8 % and the terminal redox was greater than 450 mV. The pH was <0.

[0112] In a comparative test (Run 22), the procedure of Example VIII was repeated using the same ore but without addition of any oxidant. The leach time was increased from 4 hours to 12 hours. Analysis of the leach solution showed that 96.2 wt% of the copper and 82.1 wt% of the iron had been leached into solution, thereby showing that a substantially increased leach time was required in the absence of oxidant. The weight loss in leaching was 11.0 % and the terminal redox was 420 mV. The pH was <0.

Example X

[0113] A sample of a polymetallic sulfide feed material containing 0.93 wt% copper, 44.9 wt% iron, 0.66 wt% nickel, 0.06 wt% cobalt, 23.9 wt% sulfur, 0.50 g/t platinum, 1.79 g/t palladium, 0.02 g/t rhodium, 0.03 g/t gold and 1.6 g/t silver was subjected to a leach using a leach solution of hydrochloric acid (4N) and magnesium chloride, at a total chloride ion concentration of 400 g/L, that additionally contained 20 kg/tonne of sodium chlorate. The leach was conducted for 4 hours at 100-105°C. The feed material was used at 5 wt% solids. The pregnant leach solution obtained from the leach was analyzed for copper, iron, nickel and cobalt. The pH was <0.

[0114] It was found that 97.1% of the copper, 98.1 % of the iron, 93.2% of the nickel and 71.5% of the cobalt in the

polymetallic sulfide feed material had been leached into solution, thereby demonstrating the leaching of a polymetallic sulfide material. The weight loss in leaching was 82.8% and the terminal redox potential was 480 mV. Only 0.1% Pt, 0.02% Pd, 2.6% Rh, 0.6% Au and 16.3% Ag were extracted in this controlled oxidation leach test.

Claims

1. A process for leaching a value metal from unroasted sulfide ore material, said sulfide ore material containing at least one value metal selected from the group consisting of nickel, copper, zinc, cobalt and mixtures thereof, and at least one of gold and a platinum group metal, comprising the step of leaching the unroasted sulfide ore material at atmospheric pressure with a lixiviant comprising hydrochloric acid, magnesium chloride and an oxidant selected from the group consisting of alkali metal peroxide, alkali metal perchlorate, ammonium perchlorate, magnesium perchlorate, alkali metal chlorate, alkaline earth metal perchlorate, chlorine, alkali metal hypochlorite, hydrogen peroxide and peroxysulfuric acid, and mixtures thereof, to obtain a leachate and a solid residue, said lixiviant having a pH of less than 2.5 and a redox potential in the range of from 250 to 600 mV, said leach being conducted at a temperature in the range of from 75°C to the boiling point of the solution at ambient pressure, the step of leaching being controlled so that base metals are leached from the sulfide ore material but platinum group metals and gold remain as part of the solids in the leach, and at least 99% by weight of the sulfide sulfur that is leached from the sulfide ore material is converted into hydrogen sulfide, said leachate and solid residue being subjected to a solids/liquid separation step and the solid residue being subjected to a further leaching step to recover at least a portion of the gold and the platinum group metals.
2. The process of Claim 1 further comprising selecting a sulfide ore material that comprises a base metal sulfide ore, a concentrate of a base metal sulfide ore, a matte obtained from a base metal sulfide ore, tailings from the processing of a base metal sulfide ore and mixtures thereof.
3. The process of Claim 2 further comprising selecting pyrrhotite, pentlandite, chalcopyrite, pyrite, arsenopyrite and sphalerite, and mixtures thereof as the base metal sulfide.
4. The process of Claim 1 further comprising selecting chlorine, sodium chlorate, hydrogen peroxide, sodium hypochlorite and sodium perchlorate and mixtures, thereof as the oxidant.
5. The process of Claim 3 further comprising selecting sodium chlorate, chlorine and mixtures thereof as the oxidant.
6. The process of Claim 1 further comprising selecting the concentration of magnesium chloride to be at least 200 g/L.
7. The process of Claim 6 further comprising selecting the total concentration of chloride ions to be in the range of 200-500 g/L.
8. The process of Claim 7 further comprising selecting the total concentration of chloride ions to be in the range of 200 - 400 g/L, said total concentration being formed essentially from magnesium chloride and hydrochloric acid.
9. The process of Claim 8 further comprising selecting the amount of hydrochloric acid to be in the range of 30 - 150 g/L.
10. The process of Claim 7 further comprising adjusting the pH so that, at the end of then leach, the pH is less than 1.5.
11. The process of Claim 8 further comprising adjusting the pH so that, at the end of the leach, the pH is less than 1.
12. The process of claim 1 in which the solid residue is also treated for separation of a magnetic fraction.
13. The process of claim 1 further comprising selecting the ore or concentrate to comprise values of nickel and iron, and one or more of cobalt and copper.
14. The process of claim 1 further comprising:
 - (a) subjecting the leachate to a series of value metal recovery steps and obtaining a value metal depleted leachate, and
 - (b) treating the value metal depleted leachate to recycle at least a portion of the hydrochloric acid and chloride.

15. The process of claim 14 wherein step (b) comprises pyrohydrolysis.
16. The process of claim 15 wherein step (a) includes at least one precipitation step using a base.
- 5 17. The process of claim 16 further comprising selecting magnesium oxide as the base.
18. The process of claim 17 wherein step (b) includes producing magnesium oxide from the value metal depleted leachate.

Patentansprüche

1. Verfahren zum Laugen eines Wertmetalls aus ungeröstetem Sulfiderzmaterial, wobei das Sulfiderzmaterial wenigstens ein Wertmetall, ausgewählt aus der Gruppe bestehend aus Nickel, Kupfer, Zink, Cobalt und Mischungen davon, und wenigstens eines von Gold und einem Platingruppenmetall, enthält, umfassend den Schritt des Laugens des ungerösteten Sulfiderzmaterials bei Atmosphärendruck mit einem Laugungsmittel, umfassend Chlorwasserstoffsäure, Magnesiumchlorid und ein Oxidationsmittel ausgewählt aus der Gruppe bestehend aus Alkalimetallperoxid, Alkalimetallperchlorat, Ammoniumperchlorat, Magnesiumperchlorat, Alkalimetallchlorat, Erdalkalimetallperchlorat, Chlor, Alkalimetallhypochlorit, Wasserstoffperoxid und Peroxoschwefelsäure, und Mischungen davon, um eine Laugungslösung und einen festen Rückstand zu erhalten, wobei das Laugungsmittel einen pH-Wert von weniger als 2,5 und ein Redoxpotenzial im Bereich von 250 bis 600 mV aufweist, wobei die Laugung bei einer Temperatur im Bereich von 75°C bis zum Siedepunkt der Lösung bei Umgebungsdruck durchgeführt wird, wobei der Schritt der Laugung so geregelt wird, dass Unedelmetalle aus dem Sulfiderzmaterial gelaugt werden, aber Platingruppenmetalle und Gold als Teil der Feststoffe in der Laugung zurückbleiben, und wenigstens 99 Gew.-% des Sulfidschwefels, der aus dem Sulfiderzmaterial gelaugt wird, in Schwefelwasserstoff umgewandelt wird, wobei die Laugungslösung und der feste Rückstand einem Feststoff/Flüssigkeits-Trennschritt unterworfen werden und der feste Rückstand einem weiteren Laugungsschritt unterworfen wird, um wenigstens einen Teil des Goldes und der Platingruppenmetalle zu gewinnen.
2. Verfahren nach Anspruch 1, außerdem umfassend das Auswählen eines Sulfiderzmaterials, welches ein Unedelmetallsulfiderz, ein Konzentrat eines Unedelmetallsulfiderzes, einen aus einem Unedelmetallsulfiderz erhaltenen Stein, Abgänge von der Verarbeitung eines Unedelmetallsulfiderzes und Mischungen davon umfasst.
3. Verfahren nach Anspruch 2, außerdem umfassend das Auswählen von Pyrrhotin, Pentlandit, Chalcopyrit, Pyrit, Arsenpyrit und Sphalerit und Mischungen davon als das Unedelmetallsulfid.
4. Verfahren nach Anspruch 1, außerdem umfassend das Auswählen von Chlor, Natriumchlorat, Wasserstoffperoxid, Natriumhypochlorit und Natriumperchlorat und Mischungen davon als das Oxidationsmittel.
5. Verfahren nach Anspruch 3, außerdem umfassend das Auswählen von Natriumchlorat, Chlor und Mischungen davon als das Oxidationsmittel.
6. Verfahren nach Anspruch 1, außerdem umfassend das Auswählen der Konzentration von Magnesiumchlorid, so dass sie wenigstens 200 g/L beträgt.
7. Verfahren nach Anspruch 6, außerdem umfassend das Auswählen der Gesamtkonzentration von Chloridionen, so dass sie im Bereich von 200-500 g/L liegt.
8. Verfahren nach Anspruch 7, außerdem umfassend das Auswählen der Gesamtkonzentration von Chloridionen, so dass sie im Bereich von 200-400 g/L liegt, wobei die Gesamtkonzentration im Wesentlichen aus Magnesiumchlorid und Chlorwasserstoffsäure gebildet wird.
9. Verfahren nach Anspruch 8, außerdem umfassend das Auswählen der Menge an Chlorwasserstoffsäure, so dass sie im Bereich von 30-150 g/L liegt.
10. Verfahren nach Anspruch 7, außerdem umfassend das Einstellen des pH-Werts so, dass am Ende der Laugung der pH-Wert weniger als 1,5 beträgt.

11. Verfahren nach Anspruch 8, außerdem umfassend das Einstellen des pH-Werts so, dass am Ende der Laugung der pH-Wert weniger als 1 beträgt.
12. Verfahren nach Anspruch 1, in dem der feste Rückstand auch zur Abtrennung einer magnetischen Fraktion behandelt wird.
13. Verfahren nach Anspruch 1, außerdem umfassend das Auswählen des Erzes oder Konzentrats, so dass es Werte von Nickel und Eisen und einem oder mehreren von Cobalt und Kupfer umfasst.
14. Verfahren nach Anspruch 1, außerdem umfassend:
 - (a) das Unterwerfen der Laugungslösung einer Reihe von Wertmetallrückgewinnungsschritten und das Erhalten einer an Wertmetall verarmten Laugungslösung und
 - (b) das Behandeln der an Wertmetall verarmten Laugungslösung, um wenigstens einen Teil der Chlorwasserstoffsäure und des Chlorids zu rezyklieren.
15. Verfahren nach Anspruch 14, wobei Schritt (b) eine Pyrohydrolyse umfasst.
16. Verfahren nach Anspruch 15, wobei Schritt (a) wenigstens einen Ausfällungsschritt unter Verwendung einer Base einschließt.
17. Verfahren nach Anspruch 16, außerdem umfassend das Auswählen von Magnesiumoxid als die Base.
18. Verfahren nach Anspruch 17, wobei Schritt (b) das Erzeugen von Magnesiumoxid aus der an Wertmetall verarmten Laugungslösung einschließt.

Revendications

1. Procédé pour la lixiviation d'un métal de valeur à partir d'un minerai sulfuré non grillé, ledit minerai sulfuré contenant au moins un métal de valeur choisi dans le groupe constitué par le nickel, le cuivre, le zinc, le cobalt et les mélanges de ceux-ci, ainsi que de l'or et/ou un métal du groupe du platine, comprenant l'étape de lixiviation du minerai sulfuré non grillé à la pression atmosphérique avec un agent lixiviant comprenant de l'acide chlorhydrique, du chlorure de magnésium et un oxydant choisi dans le groupe constitué par un peroxyde de métal alcalin, un perchlorate de métal alcalin, du perchlorate d'ammonium, du perchlorate de magnésium, un chlorate de métal alcalin, un perchlorate de métal alcalino-terreux, du chlore, un hypochlorite de métal alcalin, du peroxyde d'hydrogène et de l'acide peroxy-sulfurique, et les mélanges de ceux-ci, pour obtenir un lixiviat et un résidu solide, ledit agent lixiviant ayant un pH inférieur à 2,5 et un potentiel redox situé dans la plage de 250 à 600 mV, ladite lixiviation étant conduite à une température située dans la plage de 75 °C au point d'ébullition de la solution à la pression ambiante, l'étape de lixiviation étant régulée de façon à ce que les métaux communs soient lixiviés du minerai sulfuré mais les métaux du groupe du platine et l'or restent en faisant partie des solides dans la solution de lixiviation, et au moins 99 % en poids du soufre du sulfure qui est lixivié du minerai sulfuré est converti en sulfure d'hydrogène, lesdits lixiviat et résidu solide étant soumis à une étape de séparation solides/liquide et le résidu solide étant soumis à une nouvelle étape de lixiviation pour récupérer au moins une partie de l'or et des métaux du groupe du platine.
2. Procédé de la revendication 1 comprenant en outre le choix d'un minerai sulfuré qui comprend un minerai sulfuré de métaux communs, un concentré d'un minerai sulfuré de métaux communs, une matte obtenue à partir d'un minerai sulfuré de métaux communs, des résidus de la transformation d'un minerai sulfuré de métaux communs et des mélanges de ceux-ci.
3. Procédé de la revendication 2 comprenant en outre le choix de pyrrhotite, pentlandite, chalcopryrite, pyrite, arsénopyrite et sphalérite, et mélanges de ceux-ci en tant que sulfure de métaux communs.
4. Procédé de la revendication 1 comprenant en outre le choix de chlore, chlorate de sodium, peroxyde d'hydrogène, hypochlorite de sodium et perchlorate de sodium et mélanges de ceux-ci en tant qu'oxydant.
5. Procédé de la revendication 3 comprenant en outre le choix de chlorate de sodium, chlore et mélanges de ceux-ci en tant qu'oxydant.

- 5 6. Procédé de la revendication 1 comprenant en outre le choix de la concentration de chlorure de magnésium à une valeur d'au moins 200 g/L.
7. Procédé de la revendication 6 comprenant en outre le choix de la concentration totale d'ions chlorure à une valeur située dans la plage de 200 à 500 g/L.
- 10 8. Procédé de la revendication 7 comprenant en outre le choix de la concentration totale d'ions chlorure à une valeur située dans la plage de 200 à 400 g/L, ladite concentration totale étant essentiellement formée de chlorure de magnésium et d'acide chlorhydrique.
9. Procédé de la revendication 8 comprenant en outre le choix de la quantité d'acide chlorhydrique à une valeur située dans la plage de 30 à 150 g/L.
- 15 10. Procédé de la revendication 7 comprenant en outre l'ajustement du pH de façon à ce que, à la fin de la lixiviation, le pH soit inférieur à 1,5.
11. Procédé de la revendication 8 comprenant en outre l'ajustement du pH de façon à ce que, à la fin de la lixiviation, le pH soit inférieur à 1.
- 20 12. Procédé de la revendication 1 dans lequel le résidu solide est également traité en vue de la séparation d'une fraction magnétique.
13. Procédé de la revendication 1 comprenant en outre le choix du minerai ou du concentré pour qu'il comprenne des valeurs de nickel et de fer, ainsi que du cobalt et/ou du cuivre.
- 25 14. Procédé de la revendication 1 comprenant en outre :
- 30 (a) l'exposition du lixiviat à une série d'étapes de récupération de métaux de valeur et l'obtention d'un lixiviat appauvri en métaux de valeur, et
(b) le traitement du lixiviat appauvri en métaux de valeur pour recycler au moins une partie de l'acide chlorhydrique et du chlorure.
15. Procédé de la revendication 14 dans lequel l'étape (b) comprend une pyrohydrolyse.
- 35 16. Procédé de la revendication 15 dans lequel l'étape (a) inclut au moins une étape de précipitation au moyen d'une base.
17. Procédé de la revendication 16 comprenant en outre le choix d'oxyde de magnésium en tant que base.
- 40 18. Procédé de la revendication 17 dans lequel l'étape (b) inclut la production d'oxyde de magnésium à partir du lixiviat appauvri en métaux de valeur.
- 45
- 50
- 55

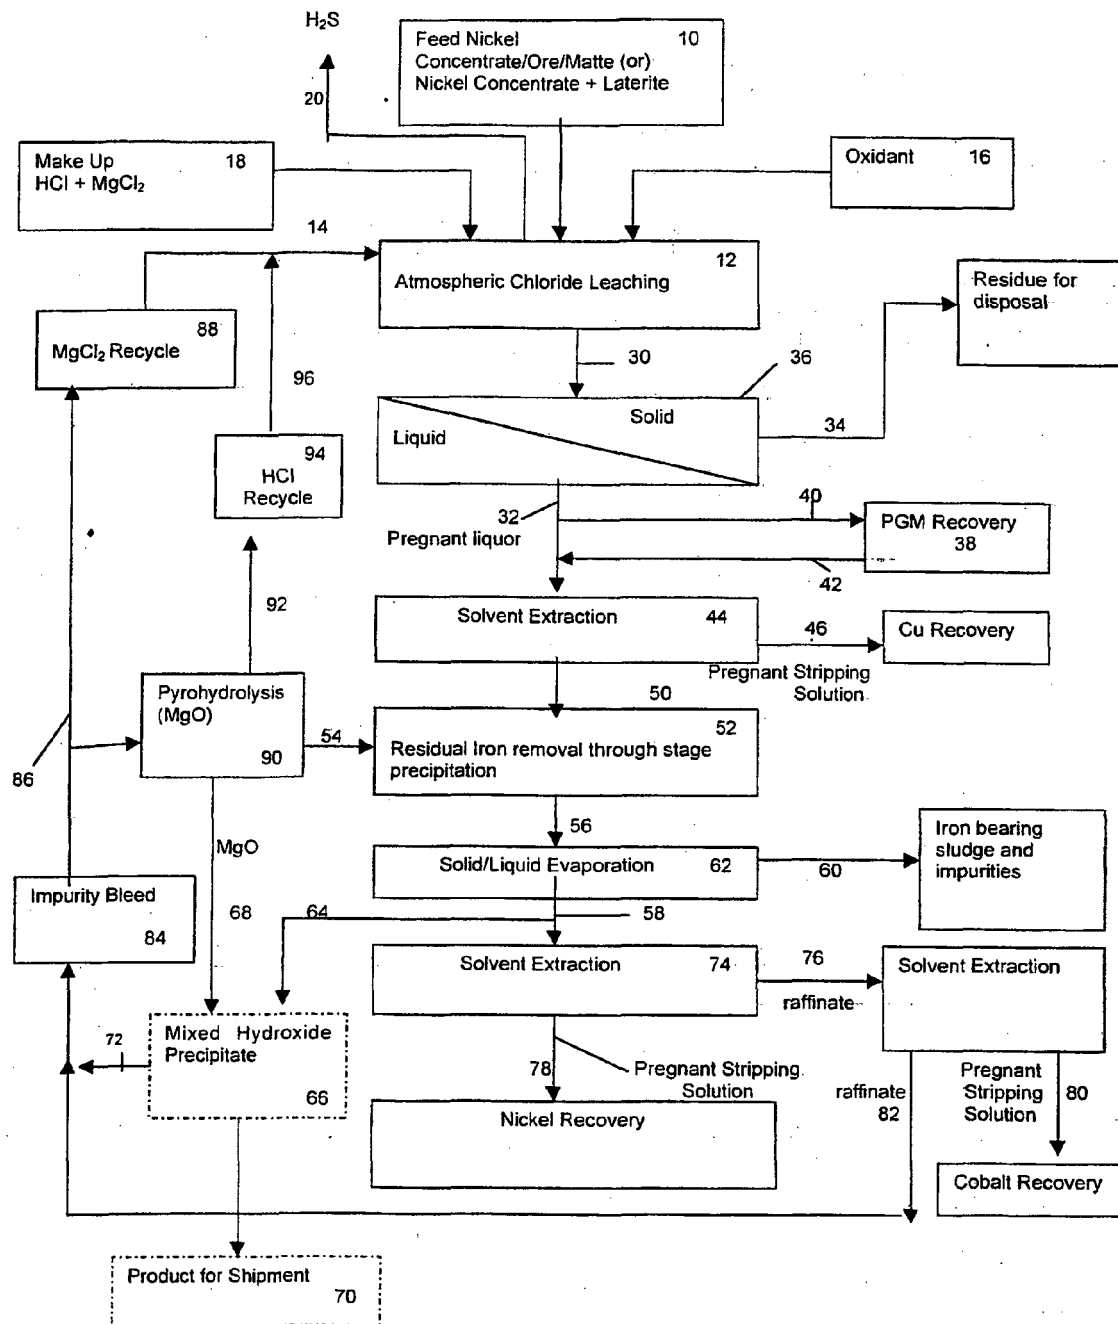


FIGURE 1

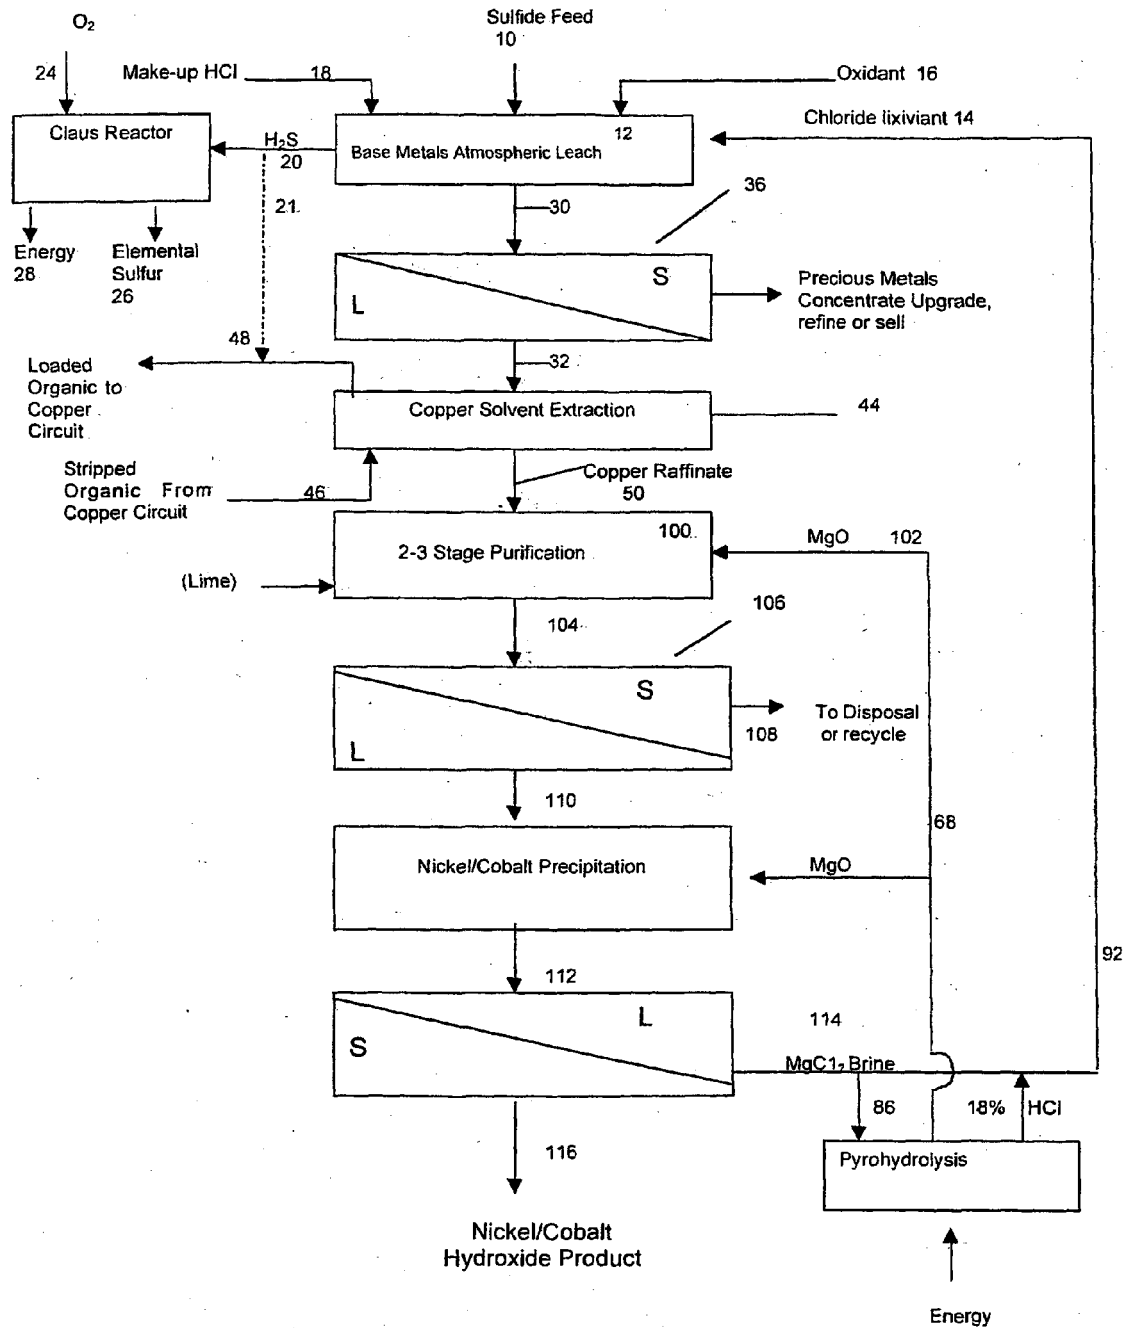


FIGURE 2

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 4378275 A, Adamson [0009]
- ZA 9200939 A [0010]

Non-patent literature cited in the description

- Some Observations on the Chloride Based Treatment of Nickel-Copper-Cobalt Mattes. **G. VAN WEERT**. Chloride Metallurgy 2002 - Volume 1, 32nd Annual Hydrometallurgy Meeting. CIM, 2002, vol. 1, 277-298 [0004]
- **THORNHILL, P.G. ; WIGSTOL, E ; VAN WEERT, G.** The Falconbridge Matte Leach Process. *Journal of Metals*, 1971, vol. 23 (7), 13 [0005]
- **D.S. FLETT**. Chloride Hydrometallurgy for Complex Sulfides: a Review. *Chloride Metallurgy*, 2002, vol. 1, 255-276 [0008]