



(11) **EP 1 679 415 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
02.01.2008 Bulletin 2008/01

(51) Int Cl.:
E05C 9/18 (2006.01)

(21) Application number: **05256838.3**

(22) Date of filing: **04.11.2005**

(54) **A locking mechanism and parts therefor**

Verriegelung und Teile dafür

Dispositif de verrouillage et parties associées

(84) Designated Contracting States:
BE DE ES FR IT NL

(30) Priority: **24.12.2004 GB 0428396**

(43) Date of publication of application:
12.07.2006 Bulletin 2006/28

(73) Proprietor: **SECURISTYLE LIMITED**
Cheltenham, Gloucestershire GL51 7RE (GB)

(72) Inventor: **Moore, Stephen**
Cheltenham
Gloucestershire, GL51 7JJ (GB)

(74) Representative: **Jackson, Richard Eric et al**
Carpmaels & Ransford
43-45 Bloomsbury Square
London WC1A 2RA (GB)

(56) References cited:
EP-A- 0 777 026 **WO-A-98/41718**

EP 1 679 415 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This invention relates to locking mechanisms, and in particular to a locking mechanism for an espagnolette assembly and a bar for such a mechanism.

[0002] Espagnolette assemblies are well known for locking vents, such as windows and doors, in fixed frames. In general, an espagnolette assembly comprises a drive mechanism mounted in or on a vent which, when activated by a handle, drives rods or bars which extend or retract from the sides of the vent into holes or keeps in the sides of the fixed frame.

[0003] Locking systems for espagnolette assemblies are well known in the art. For example, UK patent application GB 2164382A describes an espagnolette fastener for doors or windows comprising a plurality of spaced apart bolts for engagement with a corresponding plurality of keepers. The bolts are operated by an external handle which slides the bolts longitudinally along a rail plate to engage or disengage the keepers.

[0004] UK patent application GB 22701 10A describes a locking mechanism for a sash whereby a plurality of projections on an elongate carrier attached to the vent frame engage complementary retainers on the sash. The elongated carrier is shifted, to engage or disengage the plurality of projections, by means of turning a handle.

[0005] UK patent application GB 2241531A describes a keep, or keeper, for receiving a locking pin mounted on a movable espagnolette bar such that the associated espagnolette bar is held in a closed position, and a second channel, having a respective open end for receiving the locking pin, inclined from its open end away from the first channel to restrain the espagnolette bar in a partially open position.

[0006] International patent application WO 98/41718 describes a latching strip and a latching mechanism for windows or doors of the pivoting, swivelling or sliding type and especially those incorporating uPVC frame members and having latching/locking components along one or more edges thereof. The latching strip incorporates a plurality of hook members adapted to co-operate with respective hook-shaped members of a plurality of keeps.

[0007] European patent application EP0777026 describes a fitting for a pivoting and tiltable wing of a window, door or the like. The fitting comprises a push rod device with three adjustment positions which is fitted on a pane or a panel frame. A pressure eccentric and a bolt hook are connected to the push rod device. A closure piece is arranged on the opening side of the lower cross rail of the window or door frame. The closure piece has a lateral through passage and two connecting pockets in the displacement direction of the push rod. The bolt hook, at least in the closure position of the fixture, engages in one of the pockets and in the rotary opening position locates in the area of the lateral through passage of the closure piece. The closure piece in the displacement direction of the push rod on the end side is formed on one side with

a pressure recess, in which in the closure position of the fixture the pressure eccentric engages.

[0008] A secure locking mechanism on windows and/or doors is essential to prevent unwanted intruders.

5 The espagnolette locking mechanisms described above offer many advantages over conventional window locks in terms of security. However, there is always the need to improve security of espagnolette locking mechanisms as the methods of potential intruders become sophisticated. Current espagnolette assemblies rely on a bar, comprising means for engaging a keep. They suffer from the disadvantage that a force, applied perpendicular to the direction of travel of the locking bar, will generate a rotational force around the axis of the engagement means. This force may allow sufficient movement in the window/door to facilitate the insertion of a lever or jemmy between sash and frame, thereby increasing the likelihood of the locking mechanism being forced open.

10 **[0009]** With the foregoing in mind, the present invention aims to improve upon the security of the prior art locking mechanisms for espagnolette assemblies. The improved locking mechanism does so by providing a security device for preventing said rotation around the engagement means, thereby preventing movement of the window/door away from the frame. Although the present invention is particularly applicable to an espagnolette assembly, it is envisaged that the locking mechanism herein described could be used in other types of vent lock and, indeed, in other apparatus requiring a secure fastening means.

20 **[0010]** According to the present invention there is provided a bar for an espagnolette locking mechanism, the bar comprising means for engaging a keep, wherein the bar further comprises a security device which follows the engagement means in use into the same keep without engaging the keep, wherein the security device prevents rotation about the engagement means during a security attack.

25 **[0011]** According to a preferred embodiment of the present invention the engagement means is a pin or spigot designed to engage a keep. Preferably the pin or spigot is mushroom headed and may be attached to the moveable bar by any means known in the art, including riveting and welding. The engagement means may be made from metal, plastics or other suitable material.

30 **[0012]** According to a preferred embodiment of the present invention the security device is a pin or spigot. The pin or spigot may be any shape suitable for engaging a keep, including mushroom headed. The security device may be attached to the moveable bar by any means known in the art; preferably, it is rigidly fixed to the bar. The security device may be made from metal, plastics or other suitable material.

35 **[0013]** Preferably, the spacing between the engagement means and the security device is <5cm.

40 **[0014]** According to a preferred embodiment of the present invention the bar is flat. However, it may be other shapes.

[0015] According to a preferred embodiment of the present invention the engagement means and security device extended substantially perpendicular to the bar, although these angles may be altered if appropriate.

[0016] According to a preferred embodiment of the present invention the engagement means and security device each have substantially the same height.

[0017] According to a still further embodiment of the present invention, there is provided an espagnolette assembly comprising at least one bar as herein claimed. The espagnolette assembly may further comprise a keep having two engagement slots. One engagement slot will allow the window to be engaged in the locked position whilst the other will allow the window to be engaged in a night vent position. Preferably, the engagement slots are defined by flanges to retain the mushroom-headed engagement means within the slot.

[0018] According to a still further embodiment of the present invention, there is provided a vent comprising a sash, a fixed frame and an espagnolette assembly as herein described.

[0019] A specific embodiment of the present invention is now described, by way of example only, with reference to the accompanying drawings in which:

Figure 1 shows a perspective view of an espagnolette assembly comprising a first embodiment of locking mechanism according to the present invention.

Figure 2 shows a perspective view of a bar assembly of the present invention.

Figure 3 shows a perspective view of a passive universal keep of the present invention.

Figure 4 shows a perspective view of the bar assembly of Figure 2 engaged with the keep of Figure 3 in the locked position.

Figure 5 shows a cross-sectional view of the bar assembly engaged with keep through line V-V.

[0020] An espagnolette assembly (Figure 1) comprises two espagnolette rods 2, a drive mechanism 4 and a handle 6 to be mounted on a sash 8. Each espagnolette rod 2 comprises a fixed bar 10, further comprising a slot 12, and a moveable bar 14, further comprising an engagement means 16, which is mushroom headed 17, and a security pin 18. The fixed bar 10 is secured to the sash 8 and drive mechanism housing 20. The moveable bar 14 is positioned in a groove 22 between the sash 8 and fixed bar 10. The moveable bar 14 is moveably attached to the fixed bar 10 via the engagement means 16 which extends through the slot 12 in the fixed bar 10 and is flanged to prevent separation of the bars. The moveable bar 14 is also attached to gears within the drive mechanism 4. The espagnolette assembly (Figure 1) is activated by the handle 6, which rotates the gears within the

drive mechanism 4. These gears extend or retract the moveable bars 14 in opposite directions. The bars can engage various keeps on the vent frame by methods known in the art.

[0021] A locking mechanism of the present invention for use in an espagnolette assembly comprises two parts. The first part (Figure 2) comprises an espagnolette rod 2 having a fixed bar 10 and a moveable bar 14. The fixed bar 10 further comprises a slot 12. The moveable bar 14 further comprises a mushroom headed 17 engagement means 16 and a security pin 18. The espagnolette assembly, when in use, is mounted on a sash 8.

[0022] The second part (Figure 3) comprises a universal keep 24 for mounting on a vent frame 26. The keep 24 comprises an engagement slot 28 for use in a locking position, a similar engagement slot 30 for use in a night vent position and two slotted fixing positions 32 to allow cam engagement adjustment, with a triangulated third circular final fixing position 34 to ensure keep stability following fixing. The engagement slots 28 & 30, are both flanged 31 to retain the mushroom headed 17 engagement means 16.

[0023] In use, with the vent in the closed position, rotation of the handle 6 engages the gears within the drive mechanism 4. These gears extend the moveable bars 14 causing both the engagement means 16 and the security pin 18 to engage the engagement slot 28 of the keep 24 (Figures 4 and 5). Alternatively, the vent may be positioned so as to allow engagement of the engagement means 16 and the security pin 18 with the night vent slot 30. This allows airflow through the vent whilst preventing access.

[0024] Reversing this process unlocks the mechanism. Thus, the moveable bar 14 is moved in the opposite direction by means of rotating the espagnolette handle 6 in an opposite direction, thereby retracting the engagement means 16 and security pin 18 from the engagement slot 28/30.

[0025] An espagnolette assembly of the present invention gives a clear advantage over the prior art by reducing the chance of a window or door being forced open. If a force is applied perpendicular to the direction of travel of the moveable bar 14 and to the axis of the engagement means 16, rotation around the axis of the engagement means 16 will be prevented by the security pin 18. This will subsequently prevent movement of the sash 8 away from the vent frame 26 and decrease the chance of a lever or jemmy being inserted between the sash 8 and vent frame 26.

[0026] It will, of course, be understood that the present invention has been described above purely by way of example, and that modifications of detail can be made within the scope of the invention as defined by the claims.

Claims

1. A bar (14) for an espagnolette locking mechanism,

the bar (14) comprising means for engaging (16) a keep, wherein the bar (14) further comprises a security device (18) which follows the engagement means (16) in use into the same keep (24) without engaging the keep (24), wherein the security device (18) prevents rotation about the engagement means (16) during a security attack.

2. A bar (14) as claimed in claim 1, wherein the engagement means (16) is a pin.

3. A bar (14) as claimed in any preceding claim, wherein the engagement means (16) is a mushroom headed pin.

4. A bar (14) as claimed in any preceding claim, wherein the security device (18) is a pin or spigot.

5. A bar (14) as claimed in any preceding claim, wherein the security device (18) is rigidly fixed to the bar (14).

6. A bar (14) as claimed in any preceding claim, wherein the bar (14) is flat.

7. A bar as claimed in any preceding claim, wherein the engagement means (16) and security device (18) extended substantially perpendicular to the bar (14).

8. A bar (14) as claimed in any preceding claim wherein the engagement means (16) and security device (18) each have substantially the same height.

9. An espagnolette assembly comprising at least one bar (14) as claimed in any preceding claim.

10. An espagnolette assembly as claimed in claim 9, further comprising a keep having two engagement slots (28).

11. An espagnolette assembly as claimed in claim 10, wherein each engagement slot (28) is defined by flanges (31) to retain the engagement means (16) within the slot.

12. A vent comprising a sash, a fixed frame and an espagnolette assembly as claimed in any of claims 9-11.

Patentansprüche

1. Stange (14) für einen Espagnoletten- bzw. Drehstangen-Verriegelungsmechanismus, wobei die Stange (14) Mittel zum Ineingriffnehmen (16) eines Gegenkastens bzw. einer Schließmulde bzw. Halterung umfasst, wobei die Stange (14) ferner eine Sicherheitseinrichtung (18) umfasst, die den Eingriffsmitteln (16) bei Gebrauch in denselben Gegenka-

sten (24) folgt, ohne den Gegenkasten (24) in Eingriff zu nehmen, wobei die Sicherheitseinrichtung (18) eine Drehung um die Eingriffsmittel (16) während eines Sicherheitsangriffs verhindert.

2. Stange (14) nach Anspruch 1, wobei das Eingriffsmittel (16) ein Stift ist.

3. Stange (14) nach einem der vorhergehenden Ansprüche, wobei das Eingriffsmittel (16) ein Flachrundkopf- bzw. Pilzkopfstift ist.

4. Stange (14) nach einem der vorhergehenden Ansprüche, wobei die Sicherheitseinrichtung (18) ein Stift oder Zapfen ist.

5. Stange (14) nach einem der vorhergehenden Ansprüche, wobei die Sicherheitseinrichtung (18) starr an der Stange (14) fixiert ist.

6. Stange (14) nach einem der vorhergehenden Ansprüche, wobei die Stange (14) flach ist.

7. Stange nach einem der vorhergehenden Ansprüche, wobei sich die Eingriffsmittel (16) und die Sicherheitseinrichtung (18) im Wesentlichen senkrecht zu der Stange (14) erstrecken.

8. Stange (14) nach einem der vorhergehenden Ansprüche, wobei die Eingriffsmittel (16) und die Sicherheitseinrichtung (18) jeweils im Wesentlichen die gleiche Höhe aufweisen.

9. Espagnoletten- bzw. Drehstangenanordnung, umfassend wenigstens eine Stange (14) nach einem der vorhergehenden Ansprüche.

10. Espagnolettenanordnung nach Anspruch 9, ferner umfassend einen Gegenkasten bzw. eine Schließmulde bzw. Halterung, der bzw. die zwei Eingriffsschlitze (28) aufweist.

11. Espagnolettenanordnung nach Anspruch 10, wobei jeder Eingriffsschlitz (28) durch Flansche (31) definiert ist, um die Eingriffsmittel (16) innerhalb des Schlitzes zu halten.

12. Entlüftung bzw. Entlüfter, umfassend einen Flügel bzw. Flügelrahmen, einen festen bzw. fixierten Rahmen und eine Espagnolettenanordnung nach einem der Ansprüche 9-11.

Revendications

1. Barre (14) pour un mécanisme de verrouillage à l'espagnolette, la barre (14) comprenant un moyen pour la mise en prise (16) d'un taquet, dans laquelle la

- barre (14) comprend, en outre, un dispositif de sécurité (18) qui suit le moyen de prise (16) en utilisation dans le même taquet (24) sans venir en prise du taquet (24), dans laquelle le dispositif de sécurité (18) empêche la rotation autour du moyen de prise (16) pendant une attaque de la sécurité. 5
2. Barre (14) selon la revendication 1, dans laquelle le moyen de prise (16) est une tige. 10
3. Barre (14) selon l'une quelconque des revendications précédentes, dans laquelle le moyen de prise (16) est une tige à tête de champignon.
4. Barre (14) selon l'une quelconque des revendications précédentes, dans laquelle le dispositif de sécurité (18) est une tige ou un ergot. 15
5. Barre (14) selon l'une quelconque des revendications précédentes, dans laquelle le dispositif de sécurité (18) est fixé rigidement à la barre (14). 20
6. Barre (14) selon l'une quelconque des revendications précédentes, dans laquelle la barre (14) est plane. 25
7. Barre selon l'une quelconque des revendications précédentes, dans laquelle le moyen de prise (16) et le dispositif de sécurité (18) s'étendent sensiblement perpendiculairement à la barre (14). 30
8. Barre (14) selon l'une quelconque des revendications précédentes, dans laquelle le moyen de prise (16) et le dispositif de sécurité (18) ont chacun sensiblement la même hauteur. 35
9. Ensemble à l'espagnolette comprenant au moins une barre (14) selon l'une quelconque des revendications précédentes. 40
10. Ensemble à l'espagnolette selon la revendication 9, comprenant, en outre, un taquet ayant deux fentes de prise (28).
11. Ensemble à l'espagnolette selon la revendication 10, dans lequel chaque fente de prise (28) est définie par des rebords (31) pour retenir le moyen de prise (16) dans la fente. 45
12. Défecteur comprenant un châssis, un cadre fixe et un ensemble à l'espagnolette selon l'une quelconque des revendications 9 à 11. 50

55

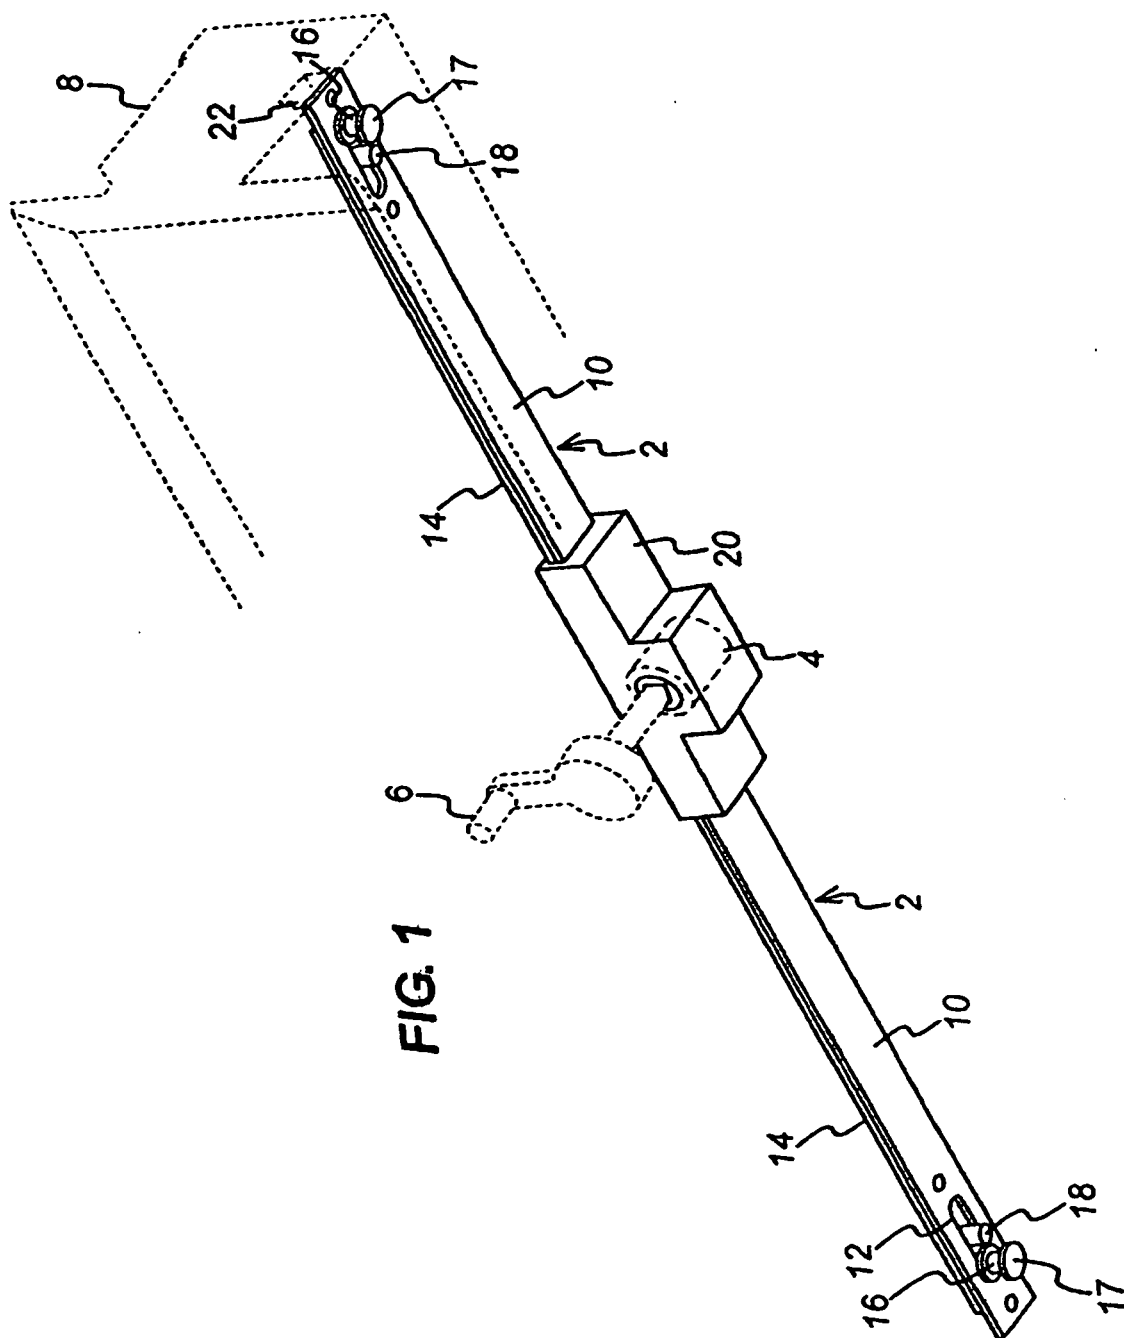


FIG. 2

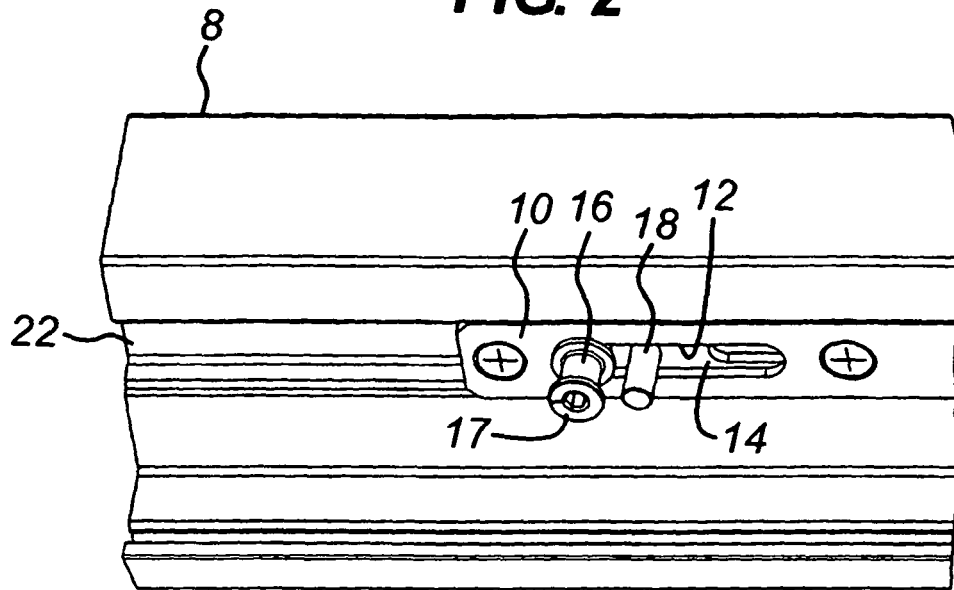


FIG. 3

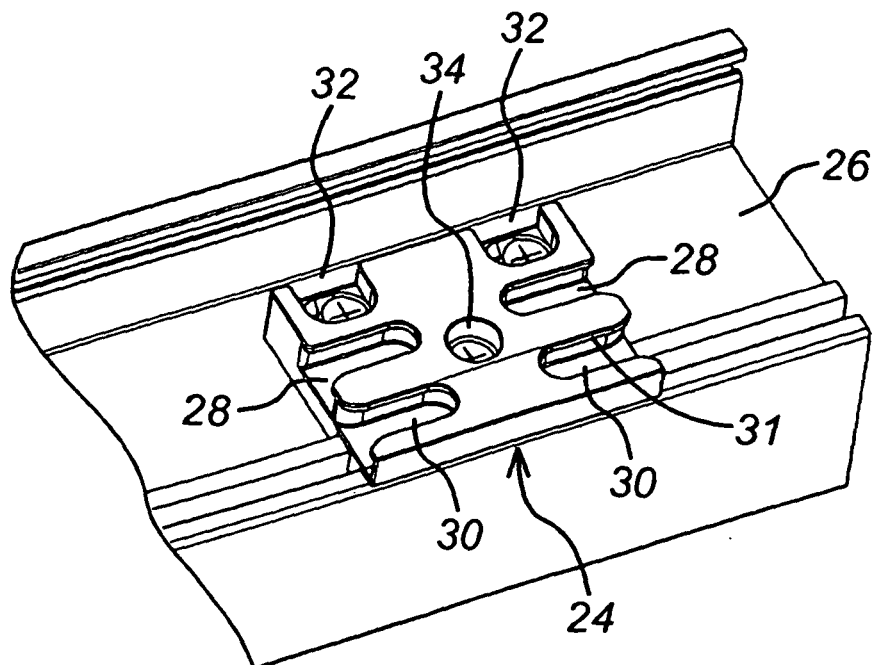


FIG. 4


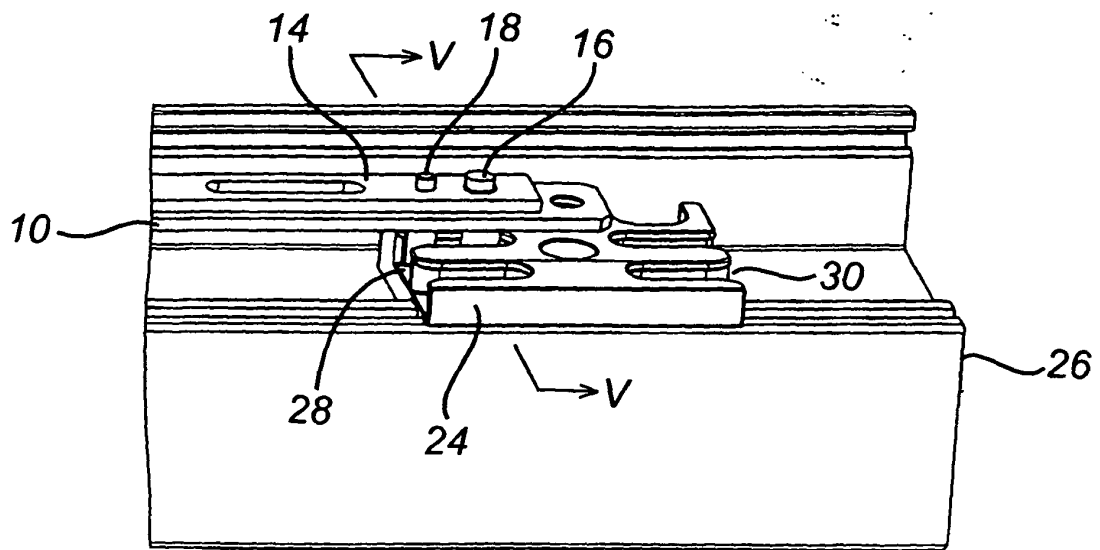


FIG. 5

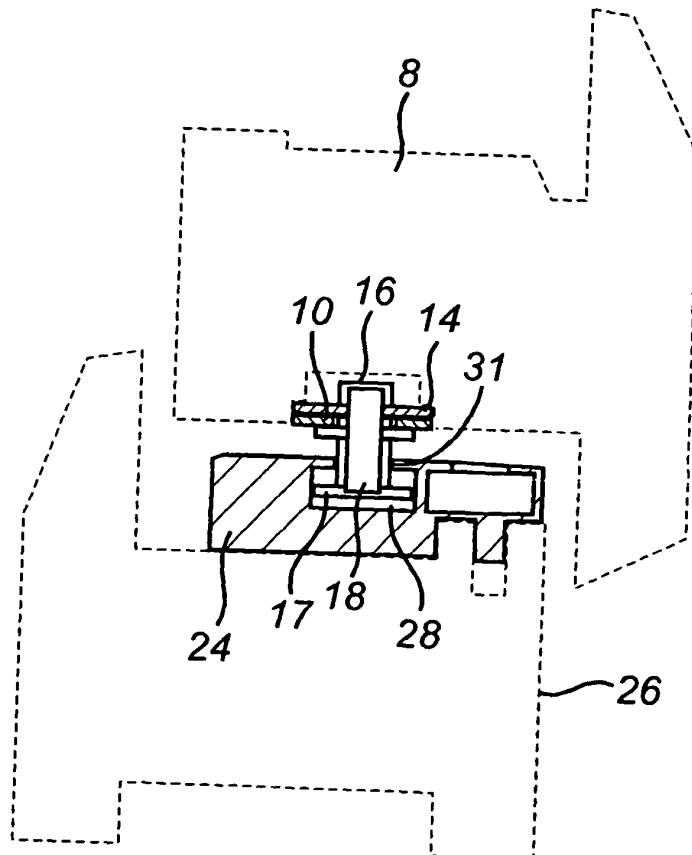

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- GB 2164382 A [0003]
- GB 2270110 A [0004]
- GB 2241531 A [0005]
- WO 9841718 A [0006]
- EP 0777026 A [0007]