



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 681 121 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**

Note: Bibliography reflects the latest situation

(15) Correction information:

Corrected version no 1 (W1 A2)
INID code(s) 71

(51) Int Cl.:

B23K 9/095 (2006.01) B23K 11/25 (2006.01)

(48) Corrigendum issued on:

06.12.2006 Bulletin 2006/49

(43) Date of publication:

19.07.2006 Bulletin 2006/29

(21) Application number: **06250231.5**

(22) Date of filing: **17.01.2006**

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**

Designated Extension States:

AL BA HR MK YU

(30) Priority: **17.01.2005 JP 2005008765**

(71) Applicants:

- **KAWASAKI JUKOGYO KABUSHIKI KAISHA**
Kobe shi, Hyogo 650-8670 (JP)
- **Central Motor Wheel Co., Ltd.**
Anjo-shi,
Aichi 446-0004 (JP)

(72) Inventors:

- **Onoue, Kazuhiko**
Nishi-ku
Kobe-shi
Hyogo 651-2146 (JP)
- **Yamasumi, Satoru**
Itami-shi
Hyogo 664-0001 (JP)

• **Uchikoshi, Kunio**

Higashinada-ku
Kobe-shi
Hyogo 658-0073 (JP)

• **Iwamoto, Tetsuo,**
Central Motor Wheel Co., Ltd.
Anjo-shi

Aichi 446-0004 (JP)

• **Suzuki, Yukimitsu,**
Central Motor Wheel Co., Ltd.
Anjo-shi
Aichi 446-0004 (JP)

• **Arita, Ichiro,**
Central Motor Wheel Co., Ltd.
Anjo-shi
Aichi 446-0004 (JP)

(74) Representative: **Piésold, Alexander James**

Frank B. Dehn & Co.
St Bride's House
10 Salisbury Square
London EC4Y 8JD (GB)

(54) **Processing system**

(57) A processing system including a carry-in stage including a carry-in device; an operation stage wherein the workpieces are measured and processed, the operation stage including a measurement device and a processing device in this order from a carry-in stage side thereof, the measurement device being separated from the processing device; a carry-out stage including a carry-out device; a slide device disposed between the measurement device and the processing device of the operation stage, the slide device including a plurality of lanes

respectively provided with fixing jigs movable back and forth; and a controller configured to perform control such that the carry-in device sequentially moves the workpieces onto the respective fixing jigs, the fixing jigs are moved along the slide device, the measurement device measures workpiece measurement portions of the workpieces and the processing device processes the workpiece measurement portion, and thereafter the carry-out device carries the workpieces out.

EP 1 681 121 A8

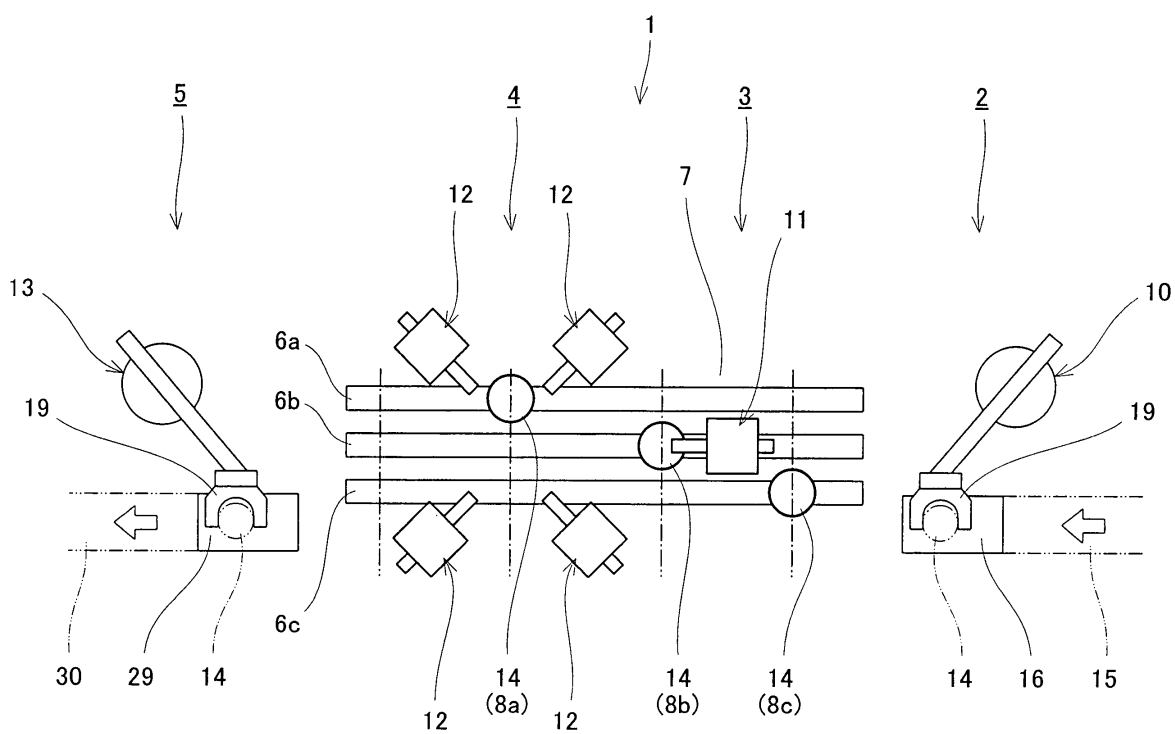


Fig. 1