



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 688 262 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
09.08.2006 Bulletin 2006/32

(51) Int Cl.:
B41J 2/19 (2006.01)

(21) Application number: **06100828.0**

(22) Date of filing: **25.01.2006**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**
Designated Extension States:
AL BA HR MK YU

(30) Priority: **03.02.2005 NL 1028178**
07.09.2005 EP 05108188

(71) Applicant: **Océ-Technologies B.V.**
5914 CC Venlo (NL)

(72) Inventors:
• **Boesten, Hubertus M.J.M.**
6074 ES, Melick (NL)
• **Reinten, Hans**
5941 BD, Velden (NL)

(74) Representative: **Janssen, Paulus J. P.**
Océ-Technologies B.V.
Corporate Patents,
P.O. Box 101
5900 MA Venlo (NL)

(54) **Printing method for an inkjet printer and an inkjet printer which has been modified for this method to be applied**

(57) The invention relates to a method for application in an inkjet printer containing a substantially closed ink chamber (19) comprising a nozzle (8), said ink chamber being operationally connected to an electro-mechanical converter (16), the method comprising: printing an image for the purposes of which the converter is actuated according to a predetermined printing strategy in order to eject ink drops from the nozzle for the formation of the image onto a carrier, detecting the presence of an obstruction, in particular a gas bubble, inside the ink cham-

ber during printing, followed by interrupting the printing process, said method further comprising: modifying the printing strategy in such a way that the obstruction will not produce ink chamber failure while the process of printing the image continues, by actuation of the converter using the modified printing strategy, and continuing the printing process by application of this modified printing strategy. The invention also relates to an inkjet printer which has been modified for this method to be applied.

EP 1 688 262 A1

Description

[0001] The invention relates to a method for application in an inkjet printer containing a substantially closed ink chamber comprising a nozzle, said ink chamber being operationally connected to an electro-mechanical converter, the method comprising: printing an image for the purposes of which the converter is actuated according to a predetermined printing strategy in order to eject ink drops from the nozzle for the formation of the image onto a carrier, detecting the presence of an obstruction, in particular a gas bubble, inside the ink chamber during printing, followed by interrupting the printing process. The invention also relates to an inkjet printer which has been modified for this method to be automatically applied.

[0002] A method of this kind is known from American patent US 4,695,852 (Scardovi, 1987). The printer in question comprises an ink chamber which is connected to a piezo-electrical converter. By actuating this converter, pressure waves are generated inside the ink chamber, said pressure waves in turn being able to cause ink drops to be ejected from the nozzle. By actuating the converter image-wise, an image, made up of individual ink drops, may be formed onto a carrier. To this end, the printer comprises a calculation unit which determines an adequate printing strategy prior to printing the image. This printing strategy comprises information on the times at which and the actuation pulse with which the ink chamber is to be actuated for the correct ink drop to take on the required pixel on the carrier. In the known method, the inkjet printer comprises only one ink chamber, said ink chamber being part of a printhead which is a fixed arrangement in the printer. The carrier is led along the printhead in a number of scanning movements, so that ultimately, the entire carrier may be provided with ink drops. In other types of inkjet printers, the printhead is a movable arrangement in the printer, so that it may make this scanning movement in an initial (main) scanning direction. As the printheads usually do not extend along the entire length of the carrier, the carrier is usually moved along the printhead in a number of (sub) scanning directions. The combination of both scanning movements means that the entire carrier may be provided with ink drops, despite the limited dimensions of the printhead. As is generally known from the prior art, it will be necessary to take these scanning movements into account when determining the printing strategy, in particular when determining the exact times at which the ink drops are to be ejected from the ink chamber, as this determines the position the printhead takes on relative to the carrier at each moment during the printing process. Prior to the image being printed, a strategy is thus determined with which the image may in principle - i.e. if no unforeseen problems occur - be printed. According to one embodiment, a total image to be printed, e.g. the image of a photograph in A3 format, is divided into a number of part images, where the printing strategy is determined per part image, prior to it being printed. An example of such part image is a

strip of the total image, said strip having a width that is equal to the width of an image that may be printed in one scan action of the printhead. In the known printer, a detection circuit has been provided to determine whether an obstruction - i.e. anything that hinders the inkdrop formation process, in particular a gas bubble, is present in the chamber while an image is being printed (i.e. immediately after the piezo-electrical converter has been actuated in order to provide the first pixel on the carrier with an ink drop). If such an obstruction is detected, the printing process will be interrupted, as such obstructions usually have an adverse effect on the drop formation process: for example, ink drops are formed that are too small or which do not have the correct speed. This means that ink drops of an unintended size end up on the carrier or on an unintended location of the carrier, which may result in print artefacts. Furthermore, it is known that where the ink chamber is permanently loaded, an obstruction will usually produce ink chamber failure (i.e. a state in which the ink chamber is no longer able to eject an ink drop when the converter is actuated). Thus it is known that gas bubbles may grow quickly due to the pressure waves generated. From a certain size upwards, it will no longer be possible to eject ink drops from the ink chamber since their presence interferes too much with the acoustics in the chamber such that for example all acoustic energy is absorbed or reflected by the gas bubble. Failure of the ink chamber will virtually always produce highly undesirable print artefacts. In order to prevent this as far as possible, the obstruction is removed from the ink chamber after the printing process has been interrupted, for example by purging the ink chamber with fresh ink, after which the printing process may be resumed.

[0003] However, the known method does have a number of major disadvantages. Interrupting the printing process is relatively time-consuming, which is considered a nuisance by any user of the printer. Furthermore, a relatively large amount of ink is required to ensure that the obstruction is indeed removed during the purge operation. Another important disadvantage is that joining errors often occur between the part of the image printed before the obstruction was detected and the part printed after the obstruction has been removed. This is because, to enable the ink chamber to be purged with fresh ink, it will move to a purge station, so that the purging ink cannot soil the carrier. After the purge operation, the printhead will need to be repositioned in the exact same place where it was when the printing process was interrupted. Here, it is virtually impossible to prevent positioning errors in the region of 20 to 200 µm, often producing visible joining errors.

[0004] The object of the invention is to obviate the problems described above. To this end, a method has been invented according to the preamble, which is characterised in that it further comprises: modifying the printing strategy so that the obstruction will not produce ink chamber failure while the process of printing the image continues by actuation of the converter using the modified

printing strategy, and continuing the printing process by application of this modified printing strategy.

This invention is partly based on the recognition that an obstruction inside the ink chamber does not necessarily need to produce visible print artefacts. Often, the ink chamber may still be used to eject ink drops despite the presence of an obstruction, without producing visible print artefacts. Research has shown that obstructions, in particular gas bubbles inside the ink chamber, may grow the more frequently the ink chamber (or at least its associated converter) is actuated after the obstruction initially occurred. Ultimately, a point may be reached where the obstruction is so strong that the ink chamber will fail, i.e. that it will no longer be able to eject ink drops despite actuation of its associated converter. Further research has shown that the self-reinforcing effect of an obstruction can be obviated (and even prevented) by reducing the load on the ink chamber, e.g. by modifying the printing strategy in such a way that fewer ink drops are ejected from the ink chamber than originally provided for.

According to this invention, all existing knowledge and insight is now used advantageously. When an obstruction is detected, the printing strategy is modified. The modified printing strategy is chosen in such a way that the obstruction will not grow to a size that will cause the ink chamber to fail. At a high actuation frequency of the converter (e.g. 20kHz), a gas bubble, for example, will quickly grow to a size that will cause the chamber to fail. If previous research has shown, for example, that this gas bubble will take on a small equilibrium size at a frequency of 10kHz, at which size the ink chamber will still be available for printing, then it will be possible to modify the printing strategy in such a way that this ink chamber will only be loaded at a frequency of 10kHz maximum. Surprisingly, the presence of an obstruction, as long as it is sufficiently small (for the ink chamber not to fail), has such a minor effect on the drop formation process that it will not usually produce visible print artefacts. In other words, despite the presence of the obstruction in the chamber, the printing process may be continued as normal using this ink chamber. This does mean that the printing strategy will have been modified, for example in such a way that a smaller number of ink drops may be ejected from the nozzle per time unit, but the major advantage of this method is that the ink chamber is still available for printing without a purge operation being required. Furthermore, the modified printing strategy may be combined with another method of scanning the printhead relative to the carrier. In this way, it is still possible to provide ink drops to each pixel of the image on the carrier and no information needs to be lost at all. The printing strategy may be modified very quickly, for example by using modifications stored in the printer memory. It will also be possible for a powerful processor to calculate a new strategy very quickly, immediately after the obstruction has been detected, and said new strategy may usually be implemented within a few seconds. This then often eliminates the need for a noticeable interruption of the printing process.

The present invention allows the printing process to continue using an ink chamber in which an obstruction is present, without producing visible print artefacts. This invention implies knowing the correlation between the obstruction present, its effect on the drop formation process, and the behaviour of this obstruction (growing and thus causing the chamber to fail, shrinking, reaching equilibrium) as a function of the printing strategy. The knowledge required to apply the present invention may easily be determined by experiments. An example of this has been included in the further

description of the invention.

[0005] It should be noted, moreover, that modification of the actuation of a piezo-electrical converter to the measured state of the ink chamber is known from patent EP 1 378 359. However, it is not known from said patent that this actuation (and subsequent actuations) is (are) modified in such a way that the ink chamber will not fail during the process of printing the envisaged image.

[0006] According to one embodiment, the predetermined printing strategy is modified by changing the frequency at which the converter is actuated, i.e. the average number of actuations per second directed at the ejection of ink droplets. The load on the ink chamber in this embodiment is modified by modifying the way in which the converter is actuated. Research has shown that by modifying the frequency of the actuation pulses at which the converter is actuated, e.g. by lowering the amount of ink droplet ejections by 50%, it is very easy to provide a strategy that will not produce ink chamber failure. Thus it has been shown that by reducing the frequency, it is possible to prevent the gas bubble from growing larger and larger. A lower amplitude of the actuation pulse may have the same effect, but this also leads to droplets of other sizes or speed which has to be taken into account when devising an alternative print strategy.

[0007] According to another embodiment, the printing process is automatically interrupted when it is detected that the process of printing the entire image by application of the predetermined printing strategy would produce ink chamber failure during this printing process. In this embodiment, it is first determined, before the printing process is interrupted, whether the present obstruction will actually produce ink chamber failure, if the printing process were continued using the original printing strategy. If the obstruction is, for example, a small gas bubble, and the ink chamber in question is only required to eject a few more drops of ink in order to complete the image, then this bubble will normally not grow to a size that will cause the ink chamber to fail. Interrupting the printing process and modifying the printing strategy will then not be required despite the presence of the obstruction inside the ink chamber. If, however, continuing the printing process by application of the predetermined printing strategy will produce ink chamber failure within the envisaged image, then the printing process will be interrupted and the

strategy will be modified according to the present invention. The advantage of this embodiment is that the printing process will not need to be interrupted if that is not required to prevent ink chamber failure.

[0008] According to one embodiment, the part of the image still to be printed using said ink chamber will be taken into account when modifying the printing strategy. It appears to be advantageous to take into account the information still to be printed as originally envisaged when modifying the printing strategy. Let us assume, for example, that at the moment of detecting a gas bubble inside the ink chamber, this chamber is still to be used to generate a maximum number of ink drops for the remainder of the image still to be printed (for example because this ink chamber is used to print a solid area of ink). This produces a completely different situation than when this chamber is still to be used to eject, on average, one ink drop every tenth pixel for the remainder of the image (for example to form accents in the background of a landscape photograph). In the first case, the load on the chamber (in the event of an air bubble of equal size) compared to the originally envisaged actuation (according to the predetermined strategy) will need to be reduced much less than in the second case. In the latter case, it may suffice to leave out every fifth envisaged ink drop (20% fewer drops), whereas in the first case it may suffice to leave out every second drop (50% fewer drops) in the new printing strategy. This more considerable reduction will obviously also depend on the time reduction between two actuations of the ink chamber in the first case. This is because this time reduction increases the intrinsic load of the ink chamber, which causes the gas bubble to be stimulated more strongly to grow to a critical size at which the chamber will fail. In order to prevent this, the load will need to be reduced relatively strongly.

The part image still to be printed may also give rise to a modification of the printing strategy where, given the nature of the information to be printed around the one pixel, barely any to no modification of the predetermined strategy takes place, whereas at a different pixel, the strategy will be modified strongly. According to this embodiment, the printing strategy may be modified in such a way that the maximum load of the chamber is sought locally where the obstruction will just not produce ink chamber failure.

[0009] According to one embodiment, the obstruction is removed while the process of printing the image continues. In this embodiment, the possibility of removing the obstruction is used as soon as an opportunity presents itself. If the obstruction is, for example, a small contamination on the exterior of the nozzle, then this contamination may be removed between two scan actions (between which the ink chamber is at rest), for example by wiping the nozzle. If the obstruction is a gas bubble, then it may likely be possible to remove it at a time during the printing process where the ink chamber is not temporarily being used to generate ink drops (for example if there is a white area in the image). The removal will then most likely proceed passively (by the gas bubble dissolv-

ing) as known from European patent application EP 1 075 952. Once the obstruction has been removed, it is possible to continue the printing process using the printing strategy predetermined originally.

[0010] According to another embodiment, where the obstruction is a gas bubble, the frequency and/or amplitude will be modified in such a way that the gas bubble is actively removed from the ink chamber. Research has shown that a gas bubble may be actively removed from an ink chamber by targeted actuation of the converter associated with this ink chamber. This has shown that under certain conditions, a gas bubble will take on a smaller equilibrium size at a lower actuation frequency. This may be used advantageously by exposing the ink chamber to an actuation pattern in which the frequency is decreased further and further. As such, the gas bubble may shrink until it is removed.

[0011] According to one embodiment, the presence of an obstruction inside the ink chamber is detected by application of the electro-mechanical converter as a sensor. Application of the converter as a sensor is known from the prior art, for example as described in EP 1 013 453 or EP 1 378 360. This involves exploiting the fact that the pressure waves generated inside the ink chamber in turn deform the electro-mechanical converter. This deformation causes the converter to generate an electrical signal. By measuring this signal as a function of time, information may be obtained on the state of the ink chamber, as the pressure waves generated inside the ink chamber will be directly dependent on the state of the ink chamber. If, for example, there is a gas bubble inside the ink chamber, then a different pressure wave will be generated by actuation of the converter compared to when there is no gas bubble present. This difference in pressure wave produces a difference in deformation of the converter, which in turn produces a different electrical signal. By analysing this signal (as is also known from EP 1 013 453), it is possible to obtain information on the obstruction inside the ink chamber.

[0012] According to one embodiment where the inkjet printer comprises a plurality of ink chambers and where the application of the printing strategy produces a loss of printed pixels that would originally have been formed by the ink drops originating from the ink chamber in which the obstruction is present, this loss will at least partly be compensated by ink drops from one or more other ink chambers. According to this embodiment, the inkjet printer comprises, for example, a printhead with some tens to hundreds of ink chambers and associated nozzles. If an obstruction is present inside one of these ink chambers, the printing strategy is modified according to the invention so that at least the load on this ink chamber will be modified to ensure that this ink chamber does not fail. In many cases, this modification will involve a lower load, for example by ejecting fewer ink drops from this ink chamber than originally envisaged when forming the image. This may cause part of the information on the image to be lost. However, in this embodiment, this information,

or at least some of it, is printed by ink drops originating from one or more of the other ink chambers. These will therefore be subject to a higher load than when using the predetermined printing strategy. The extent to which the other ink chambers may be able to take over this function will, of course, depend to a large extent on the printhead configuration, the movement of the printhead relative to the carrier, the amount of loss to be compensated, the load originally envisaged for the other ink chambers, etc.

[0013] According to one embodiment, the method according to the invention is applied when printing a two-dimensional image onto the carrier where more than 50% of the carrier is covered with ink and, in particular where more than 70% of it is covered. It is known that the inkjet printing process may be used to produce three-dimensional images, such as specimens prior to making final templates. The present invention may be used for printing this type of image. However, the method according to the present invention has been shown to be particularly suitable when printing flat images (i.e. relief images where the height differences in the image are typically less than 1 mm) with relatively high coverage rates, for example photographic images or displays, such as poly-LED displays, which may be formed onto a carrier by application of inkjet printers. This is because, with these high coverage rates, any failure of an ink chamber will virtually always produce print artefacts which are visible to the naked eye. Application of the present invention obviates the above problem.

[0014] According to one embodiment, the method is applied when printing an image in one-pass mode. When using a so-called one-pass mode, as generally known from the prior art, there is only one nozzle (or chamber) is available for each pixel in which it may be provided with an ink drop. If, therefore, a certain pixel is not printed because its associated ink chamber has failed, it is not possible to still provide an alternative ink drop from a different chamber. In such applications, it is very important to modify the printing strategy as soon as an obstruction is detected in order to prevent failure of the ink chamber. For example when printing electronic circuits, it is important that each ink chamber remains available for printing, as any loss of a substantial part of the information to be printed will correspond to a loss in the circuit's functionality.

[0015] The invention can also be applied in a two (or multi-) pass mode, i.e. a mode wherein two (or multi-) nozzles are available for printing a pixel. For example, a printer which uses two printheads in a row is often used to print ink of the same colour. For each pixel-line both printheads are being used typically at half their maximum printfrequency. If in that case for example in the downstream printhead a gas bubble is detected, then this printhead could be operated at even a lower frequency which is compensated by increasing the print frequency of the upstream printhead.

The other way around, when in the upstream printhead a bubble is detected, the downstream printhead can take

over partly. In the latter case, ideally the upstream printhead continues with its original print strategy until the position is reached where the downstream printhead has started printing with its alternative print strategy.

[0016] Apart from the method described above, the invention also relates to an inkjet printer containing a substantially closed ink chamber comprising a nozzle, said ink chamber being operationally connected to an electro-mechanical converter, and a controller which has been programmed to control the printer to automatically carry out the method described above. This controller does not need to form a designatable unit of the printer but may also be composed of several components, which may or may not be programmable, distributed across the printer and the printer's control units, in particular a control unit located at a distance from the printer itself.

[0017] The invention will now be further explained with reference to the following examples.

[0018] Fig. 1 is a diagram showing an inkjet printer.

[0018] Fig. 2 is a diagram showing an ink duct assembly and its associated transducer.

Fig. 3 is a block diagram showing a circuit that is suitable for measuring the state inside the ink duct by application of the transducer used as a sensor.

[0018] Fig. 4 shows the correlation between the size of an air bubble and the actuation frequency in equilibrium.

Fig. 5 shows how an air bubble that is present inside an ink duct may be actively removed.

[0018] Fig. 6 is a diagram showing a number of images which have been printed onto a carrier by application of various methods.

Figure 1

[0019] Figure 1 is a diagram showing an inkjet printer. According to this embodiment, the printer comprises a roller 1 used to support a receiving medium 2, such as a sheet of paper or a transparency, and move it along the carriage 3. This carriage comprises a carrier 5 to which four printheads 4a, 4b, 4c and 4d have been fitted. Each printhead contains its own colour, in this case cyan (C), magenta (M), yellow (Y) and black (K) respectively. The printheads are heated using heating elements 9, which have been fitted to the rear of each printhead 4 and to the carrier 5. The temperature of the printheads is maintained at the correct level by application of a central control unit 10 (controller).

The roller 1 may rotate around its own axis as indicated by arrow A. In this manner, the receiving medium may be moved in the sub-scanning direction (often referred to as the X direction) relative to the carrier 5, and therefore also relative to the printheads 4. The carriage 3 may be moved in reciprocation using suitable drive mechanisms (not shown) in a direction indicated by double arrow B, parallel to roller 1. To this end, the carrier 5 is moved across the guide rods 6 and 7. This direction is generally referred to as the main scanning direction or Y direction. In this manner, the receiving medium may be fully

scanned by the printheads 4.

In the embodiment as shown in the figure, each printhead 4 comprises a number of internal elongated ink chambers (not shown). These ink chambers will be referred to as ink ducts in the remainder of the description. Each of these ink ducts comprises a nozzle (an exit opening for jetting ink drops) 8. The nozzles in this embodiment form one row per printhead perpendicular to the axis of roller 1 (i.e. the row extends in the sub-scanning direction). In a practical embodiment of an inkjet printer, the number of ink ducts per printhead will be many times greater and the nozzles will be arranged over two or more rows. Each ink duct comprises an electro-mechanical converter, in this case a piezo-electric transducer (not shown) that may generate a pressure wave inside the ink duct so that an ink drop is ejected from the nozzle of the associated duct in the direction of the receiving medium. The transducers may be actuated image-wise via an associated electrical drive circuit (not shown) by application of the central control unit 10. In this manner, an image made up of ink drops may be formed on receiving medium 2.

If a receiving medium is printed using such a printer where ink drops are ejected from ink ducts, this receiving medium, or some of it, is imaginarily split into fixed locations that form a regular field of pixel rows and pixel columns. According to one embodiment, the pixel rows are perpendicular to the pixel columns. The individual locations thus produced (also referred to as pixels) may each be provided with one or more ink drops. The number of locations per unit of length in the directions parallel to the pixel rows and pixel columns is referred to as the resolution of the printed image, for example indicated as 400x600 d.p.i. ("dots per inch"). By actuating a row of printhead nozzles of the inkjet printer image-wise when it is moved relative to the receiving medium as the carrier 5 moves, an image, or some of it, made up of ink drops is formed on the receiving medium, or at least in a strip as wide as the length of the nozzle row.

Figure 2

[0020] Figure 2 shows an ink duct 19 comprising a piezo-electric transducer 16. Ink duct 19 is formed by a groove in base plate 15 and is limited at the top mainly by piezo-electric transducer 16. Ink duct 19 changes into an exit opening 8 at the end, this opening being partly formed by a nozzle plate 20 in which a recess has been made at the level of the duct. When a pulse is applied across transducer 16 by a pulse generator 18 via actuation circuit 17, this transducer bends in the direction of the duct. This produces a sudden pressure rise in the duct, which in turn generates a pressure wave in the duct. According to an alternative embodiment, the transducer first bends away from the duct, thus sucking in ink via an inlet opening (not shown), after which the transducer is moved back into its initial position. This also produces a pressure wave in the duct. If the pressure wave is strong enough, an ink drop is ejected from exit opening 8. After

expiry of the ink drop ejection process, the pressure wave, or some of it, is still present in the duct, after which the pressure wave will damp fully over time. This pressure wave in turn results in a deformation of transducer 16, which then generates an electric signal. This signal depends on all the parameters that influence the generation and the damping of the pressure wave. In this manner, as known from, for example, European patent application EP 1 013 453, or alternative embodiments from EP 1 378 359 and EP 1 378 360, it is possible by measuring this signal, to obtain information on these parameters, such as the presence of gas bubbles (also referred to as "air bubbles") or other obstructions in the duct. This information may then, in turn, be used to check and control the printing process.

Figure 3

[0021] Figure 3 is a block diagram showing the piezo-electric transducer 16, the actuation circuit (items 17, 25, 30, 16 and 18), the measuring circuit (items 16, 30, 25, 24, and 26) and control unit 33 according to one embodiment. The actuation circuit, comprising a pulse generator 18, and the measuring circuit, comprising an amplifier 26, are connected to transducer 16 via a common line 30. The circuits are opened and closed by two-way switch 25. Once a pulse has been applied across transducer 16 by pulse generator 18, item 16 is in turn deformed by the resulting pressure wave inside the ink duct. This deformation is converted into an electric signal by transducer 16. After expiry of the actual actuation, two-way switch 25 is converted so that the actuation circuit is opened and the measuring circuit is closed. The electric signal generated by the transducer is received by amplifier 26 via line 24. According to this embodiment, the resulting voltage is fed via line 31 to A/D converter 32, which offers the signal to control unit 33. This is where analysis of the measured signal takes place. If necessary, a signal is sent to pulse generator 18 via D/A converter 34 so that a subsequent actuation pulse is modified to the current state of the duct. Control unit 33 is connected to the central control unit of the printer (not shown in this figure) via line 35, allowing information to be exchanged with the rest of the printer and/or the outside world.

Figure 4

[0022] Figure 4 shows a correlation 100 for the inkjet printhead as described beneath figure 1, between the size of an air bubble (vertical axis, arbitrary units) and the frequency with which the transducer of the duct with the air bubble is actuated (horizontal axis in kilohertz), where an equilibrium exists and ink drops are ejected from the duct nozzle as a result of the actuation. Research has shown that the size of an air bubble inside an ink duct of which the transducer is actuated at a certain frequency will normally increase to a certain equilibrium level due to said actuations. The size of a bubble at this

equilibrium depends i.a. on whether or not ink drops are ejected during actuation. If ink drops are ejected as a result of the actuation, the equilibrium follows curve 100. It may be seen that the curve continues up to approximately 17,500 Hz (indicated by "i" in the figure). At this frequency, the air bubble present will just not cause the failure of the ink chamber. If the frequency increases a tiny bit more, the duct will fail and ink drops will no longer be ejected, causing the size of the air bubble to increase very quickly until it reaches a size that reflects curve 101 (indicated by "ii" in the figure). Curve 101 shows the equilibrium between the size of an air bubble and the frequency when no ink drops are ejected. The exact position of the curves depends on many factors such as the geometries of the duct and the nozzle, the ink type, the temperature of the printhead, etc. and may be determined by experiments. The size of the air bubble itself may, for example, be derived from analysing the signal generated by the transducer when the latter is used as a sensor (see figures 2 and 3). As the size of the air bubble is an important parameter for the acoustics in the duct, this size may be derived by application of a simple model for these acoustics by measuring a pressure wave present in the duct after the associated converter has been actuated. As is generally known, the pressure wave is directly dependent on the acoustics in the duct.

[0023] The present invention exploits the knowledge that, despite the presence of an obstruction, it may still be possible to reliably eject ink drops from the duct in many cases. In the example given, let us assume that an air bubble is detected inside an ink duct, while the predetermined printing strategy is such that this duct must be loaded at a 18,000Hz jet frequency for the next minute. As experience has shown, at least in the case of the printhead in this example, that an air bubble will grow to its equilibrium size within 20 seconds, this means that the duct will fail after approximately 20 seconds if the predetermined printing strategy is maintained (as 18,000Hz exceeds the critical frequency of 17,500Hz). Next, the duct will no longer be instantly available for printing, which will in all likelihood produce an unacceptable loss of information in the image. In order to prevent this, an alternative strategy will be determined after the air bubble has been detected. As such a printing strategy will take less than 1 second to calculate, the printing process using the predetermined printing strategy will not need to be interrupted immediately after the air bubble has been detected (because it will take approximately 20 seconds for the air bubble to grow to a critical value). Therefore, prior to this interruption, an alternative strategy will first be determined, with which the printing process may be continued without the associated duct failing. In this case, the strategy may easily be modified by reducing the maximum jet frequency of the associated duct to for example 15,000 Hz (as the duct will not fail at this frequency according to correlation 100). It should be noted that 15,000 Hz is very near to the critical frequency of 17,500 Hz. This could mean that the ink droplet for-

mation process is not optimal. If so, the frequency could be lowered to e.g. 10,000 Hz. The necessity of this depends i.a. on the required image quality but also on the jetting characteristics of the printhead.

- 5 As soon as this strategy has been determined, the printing process using the predetermined strategy will be interrupted. However, the printing process will immediately continue by application of the modified printing strategy. Therefore, there is no noticeable interruption of the printing process. Furthermore, the printing strategy will be modified in such a way that the number of ink drops ejected from the duct will barely be reduced (in a solid area, for example, 1 in 18 ink drops will not be jetted). In the image, this reduction will produce little or no undesirable print artefact. According to an alternative embodiment, the printing strategy will be modified by applying, in addition to a minor reduction in frequency, a minor change in amplitude of the actuation pulses (providing this will not produce ink duct failure). This allows slightly larger ink drops to be jetted, which may offset the loss of ink caused by the reduction in frequency.

Figure 5

- 25 **[0024]** Figure 5 shows correlation 100 again. This example describes a manner in which an air bubble present inside an ink duct may be actively removed by performing a targeted actuation of the converter associated with this ink chamber. In this example, an ink duct of an inkjet printhead is actuated at a frequency of 20,000Hz. While performing a scan action, an air bubble of a size between d_2 and d_e is detected inside one of the ink chambers (in the area indicated by B). If the printing strategy were not modified, this air bubble would quickly grow until it reached the critical size and caused the duct to fail (as at a frequency of 20,000Hz, an air bubble as indicated in the figure will not be able to reach an equilibrium size according to curve 100). Thus, the predetermined printing strategy will be interrupted and modified in such a way that the air bubble will not produce ink chamber failure while the process of printing the image continues, by actuation of the converter using this modified printing strategy. To this end, it would be possible to reduce the printing frequency to 15,000Hz so that the air bubble will take on an equilibrium size d_e . In this state, the ink duct will not fail but will remain available for printing. However, according to this embodiment, it is possible to use a targeted actuation sequence where the duct will continue to eject ink drops although the air bubble is actively removed too. To this end, the transducer of the associated duct will be actuated at a frequency of 8,000Hz for 20 seconds, where the amplitude of each pulse is such that an ink drop will be ejected from the duct. These ink drops will then be applied according to the invention to continue to print the image. These actuations will cause the air bubble to shrink to a size d_2 . Next, the transducer will be actuated for 10 seconds at a frequency of 2,000Hz, again at an amplitude high enough to ensure that ink drops are

ejected from the duct. These drops too will form pixels of the image in question onto the carrier. This second series of actuations at an even lower frequency will cause the air bubble to further shrink to a size d_1 . An air bubble of this size may be deemed to have been removed as it is so small that it will disappear during printing, for example by being ejected from the duct together with an ink drop. As the obstruction has now been removed, the modified printing strategy may be abandoned and the printing process may be resumed by application of the predetermined printing strategy. A major advantage of this embodiment is that the obstruction will quickly disappear so that only a very small part of the image needs to be printed by application of the modified printing strategy, which might involve a minor loss of information. Next, the remainder of the image may be printed again using the predetermined strategy.

Figure 6

[0025] Figure 6 shows a number of images which have been printed onto a carrier. In each of the images, a pixel that has been provided with an ink drop has been indicated by a little black square. The pixels that have not been printed and those that fall outside the image have been indicated by a little white square (so that they will disappear as a white area against the white background). Figure 6a shows the image as it presented for printing. The image is made up of three part images, i.e. (from left to right) a solid square made up of 42 pixels (7 pixel columns x 6 pixel rows), a diagonal line made up of 6 pixels and the letter H made up of 17 pixels. This image may easily be printed using a properly functioning printhead 4 containing a row of 6 nozzles (coinciding with the 6 pixel rows making up the image), by moving it along the carrier in the direction indicated by F once by actuating the associated ink chambers image-wise.

Figure 6b shows that one ink duct, i.e. the duct that corresponds to the third pixel row, contains an obstruction that has led to failure of this duct (shown by a cross of solid lines drawn through the nozzle associated with this duct). If this printhead is required to print the same image, it will not be possible for one entire line of the image to be provided with ink drops. This will produce a highly undesirable print artefact, particularly in the solid area and at letter H.

Figure 6c shows a solution provided for this problem as known from the prior art, for example from American patent US 6,270,187, where the information associated with pixels that cannot be printed due to failure of their associated ink duct will be transferred to adjacent ducts. This will not be an improvement for the solid area: as the adjacent ducts are already fully loaded, they will not be able to jet additional ink drops to compensate for the loss of information. At the diagonal line and letter H, there will be some improvement but the chance of producing a visible print artefact will continue to be relatively high here.

Figure 6d shows the image which may be printed by application of the method according to the present invention. If it is known that a small air bubble is present inside the ink duct (which may be detected after jetting the first ink drops for the first pixel column of the solid area by application of the analysis method described with reference to figures 2 and 3), the maximum jet frequency of this duct will immediately be reduced to half its value (as it is known in this case that an air bubble will then not produce failure of this duct). This has been shown in figure 6d by the cross of dotted lines. This means that the second pixel of the third row of the solid area will not be printed. As far as the remaining pixels of the third row are concerned, no two pixels adjacent to one another may be printed. This will mean that the solid area will have a number of unprinted pixels. However, the diagonal line may in any case be printed without any print artefact as the pixel that is to be printed using the duct in which the air bubble is present, will not immediately follow or precede another pixel to be printed. As far as the letter H is concerned, half of the pixels from the horizontal line may be provided with an ink drop. In the embodiment shown, part of the information missed will be transferred to the adjacent ink ducts. This letter H will show a print artefact that will be less noticeable in the image than the artefact of the letter H as described beneath figure 6c.

Claims

1. A method for application in an inkjet printer containing a substantially closed ink chamber comprising a nozzle, said ink chamber being operationally connected to an electro-mechanical converter, the method comprising:

- printing an image for the purposes of which the converter is actuated according to a predetermined printing strategy in order to eject ink drops from the nozzle for the formation of the image onto a carrier,
- detecting the presence of an obstruction, in particular a gas bubble, inside the ink chamber during the printing process, followed by
- interrupting the printing process,

characterised in that the method further comprises:

- modifying the printing strategy in such a way that the obstruction will not produce ink chamber failure while the process of printing the image continues by actuation of the converter using the modified printing strategy, and
- continuing the printing process by application of this modified printing strategy.

2. A method according to claim 1, **characterised in**

that the predetermined printing strategy is modified by changing the frequency at which the converter is actuated.

out the method described above according to any one of claims 1 to 10.

3. A method according to any one of the preceding claims, **characterised in that** the printing process is automatically interrupted when it is detected that the process of printing the entire image by application of the predetermined printing strategy would produce ink chamber failure during this printing process. 5
10
4. A method according to any one of the preceding claims, **characterised in that** the part of the image still to be printed using said ink chamber will be taken into account when modifying the printing strategy. 15
5. A method according to any one of the preceding claims, **characterised in that** the obstruction is removed while the process of printing the image continues. 20
6. A method according to claim 5, where the obstruction is a gas bubble, **characterised in that** the frequency and/or amplitude are modified in such a way that the gas bubble is actively removed from the ink chamber. 25
7. A method according to any one of the preceding claims, **characterised in that** the presence of an obstruction inside the ink chamber is detected by application of the electro-mechanical converter as a sensor. 30
8. A method according to any one of the preceding claims, where the inkjet printer comprises a plurality of ink chambers and where the application of the printing strategy produces a loss of printed pixels that would originally have been formed by the ink drops originating from the chamber in which the obstruction is present, **characterised in that** this loss will at least partly be compensated by ink drops from one or more other ink chambers. 35
40
9. A method according to any one of the preceding claims, **characterised in that** this method is applied when printing a two-dimensional image onto the carrier where more than 50% of the carrier is covered with ink and, in particular where more than 70% of it is covered. 45
10. A method according to any one of the preceding claims, **characterised in that** this method is applied when printing an image in one-pass mode. 50
11. An inkjet printer containing a substantially closed ink chamber comprising a nozzle, said ink chamber being operationally connected to an electro-mechanical converter, and a controller which has been programmed to control the printer to automatically carry 55

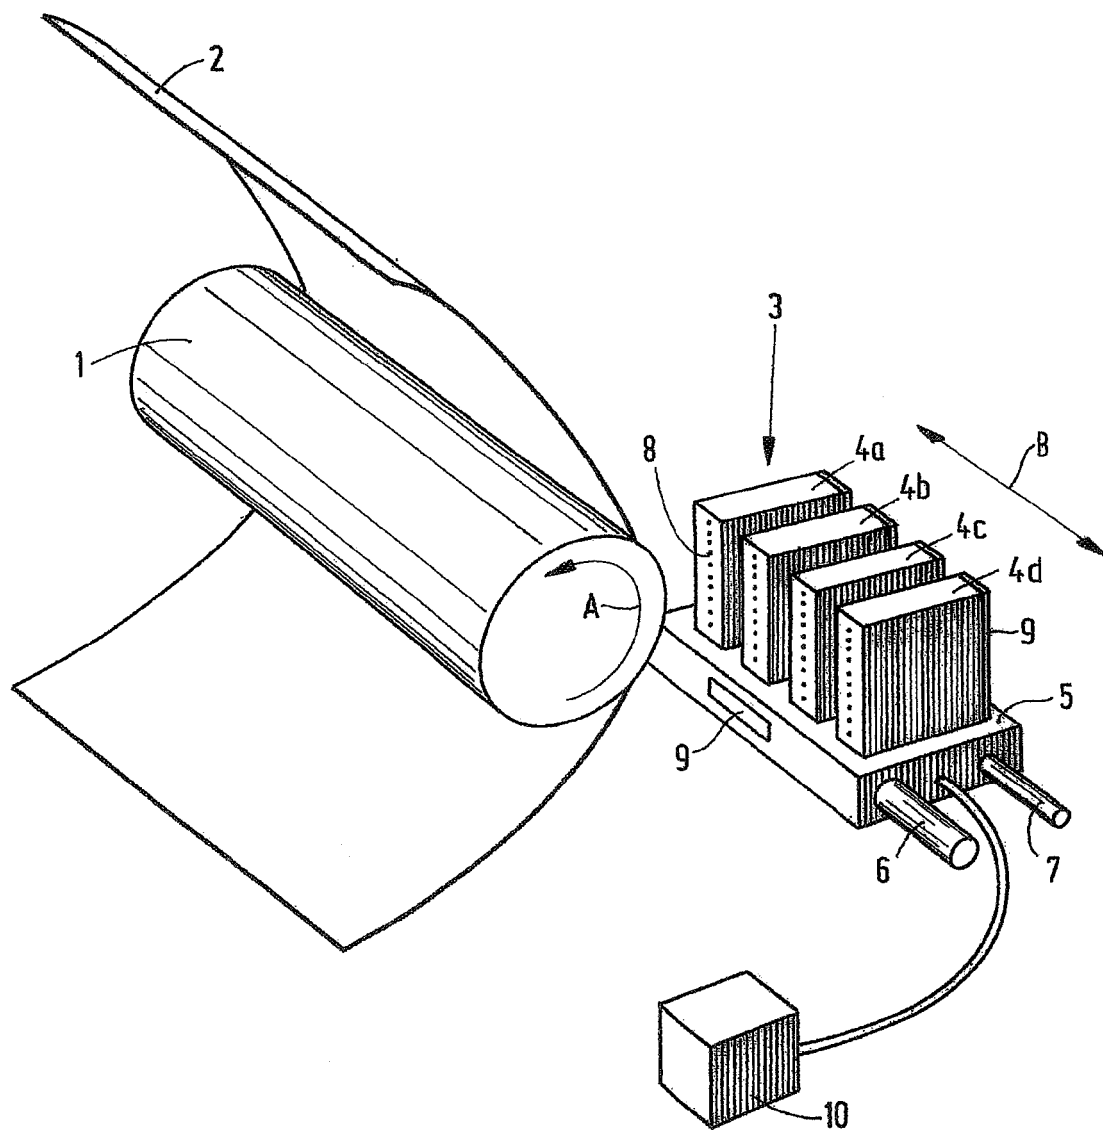


FIG. 1

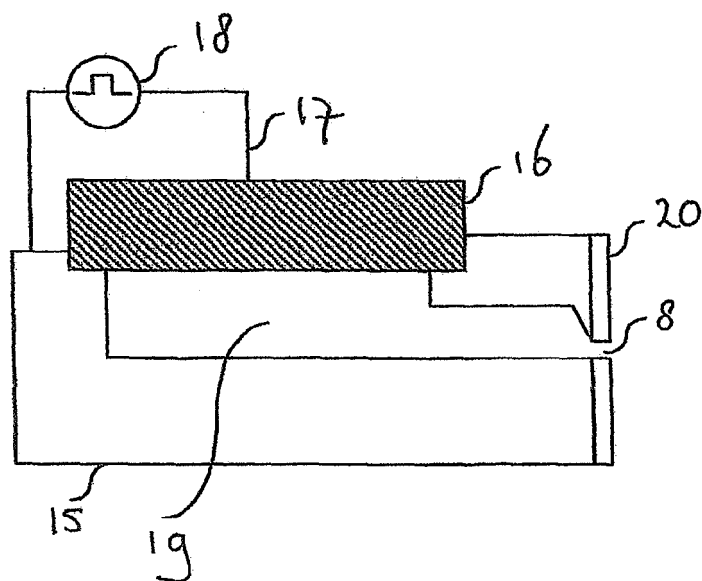


FIG. 2

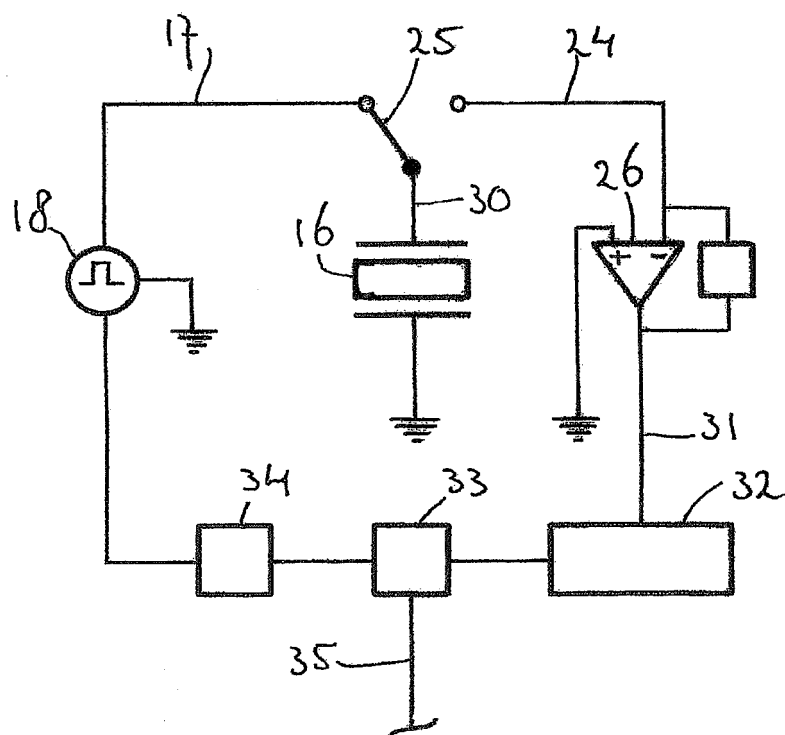


FIG. 3

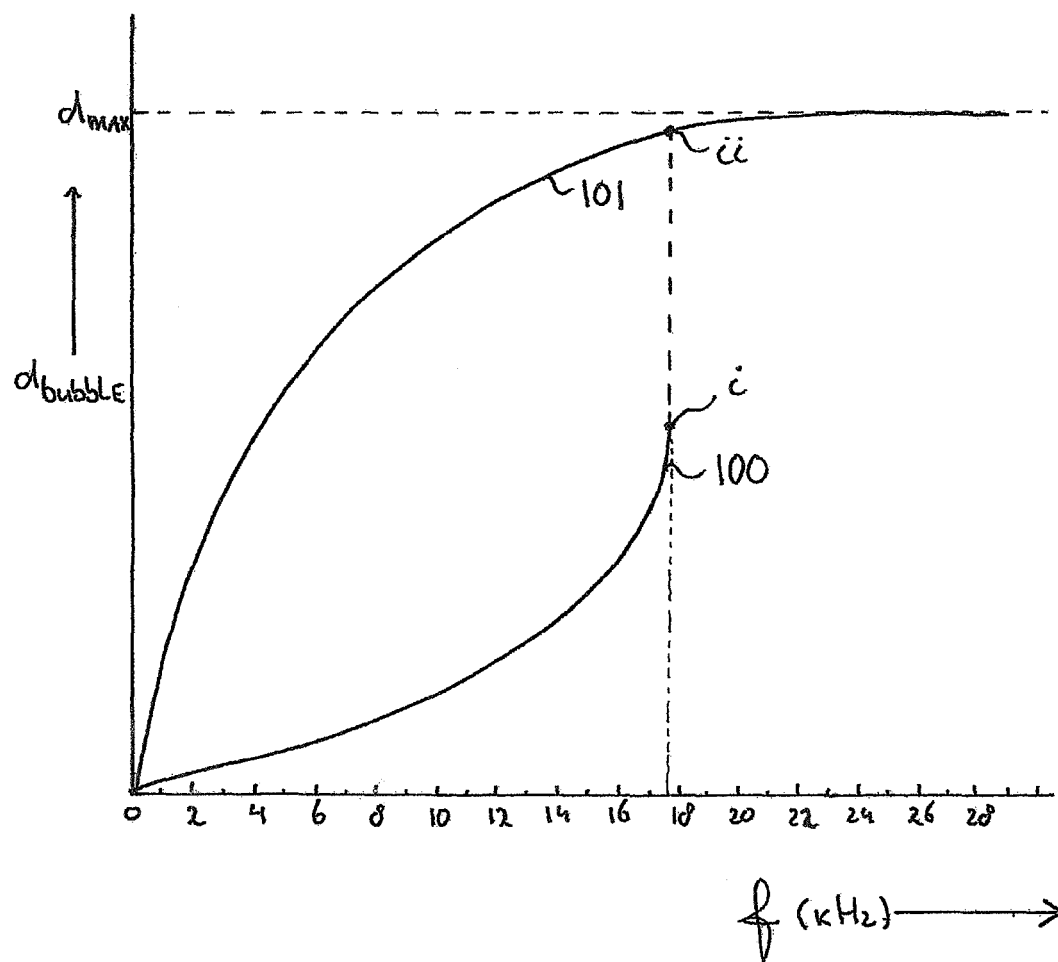


FIG. 4

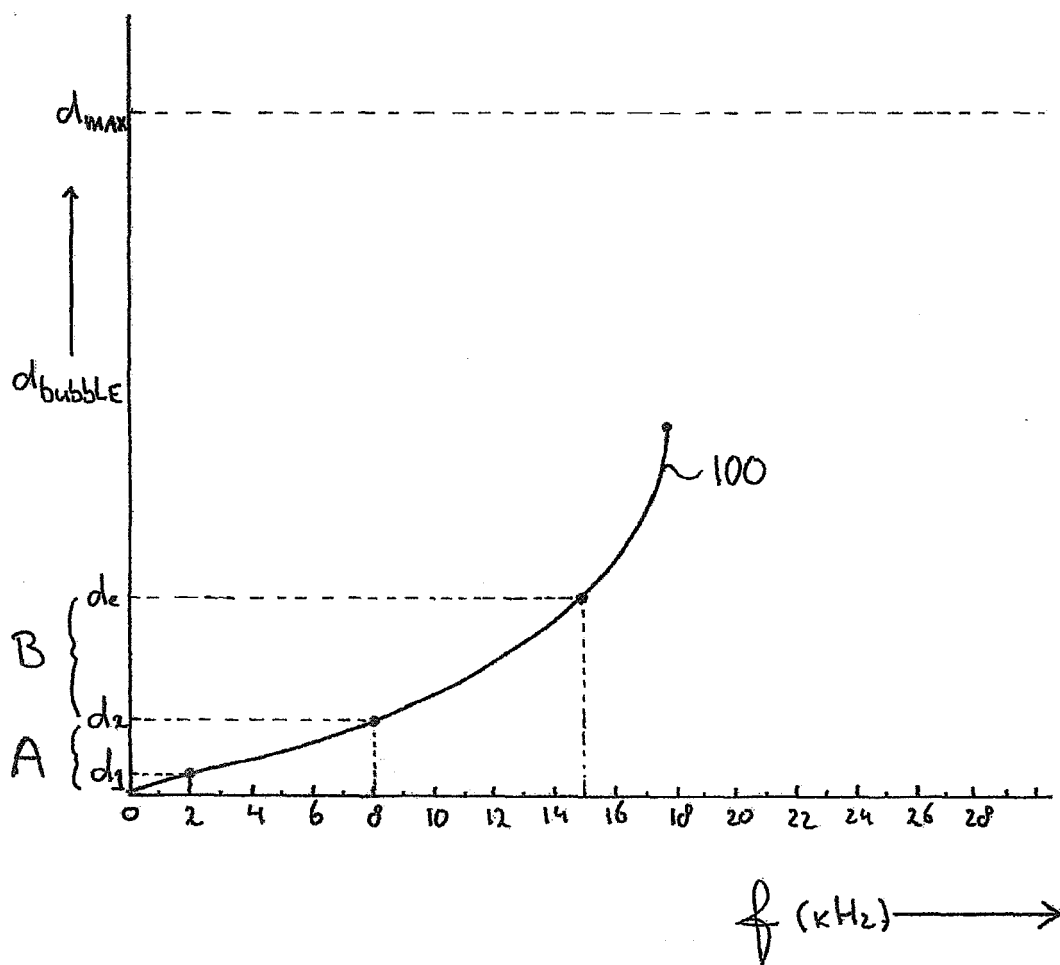


FIG. 5

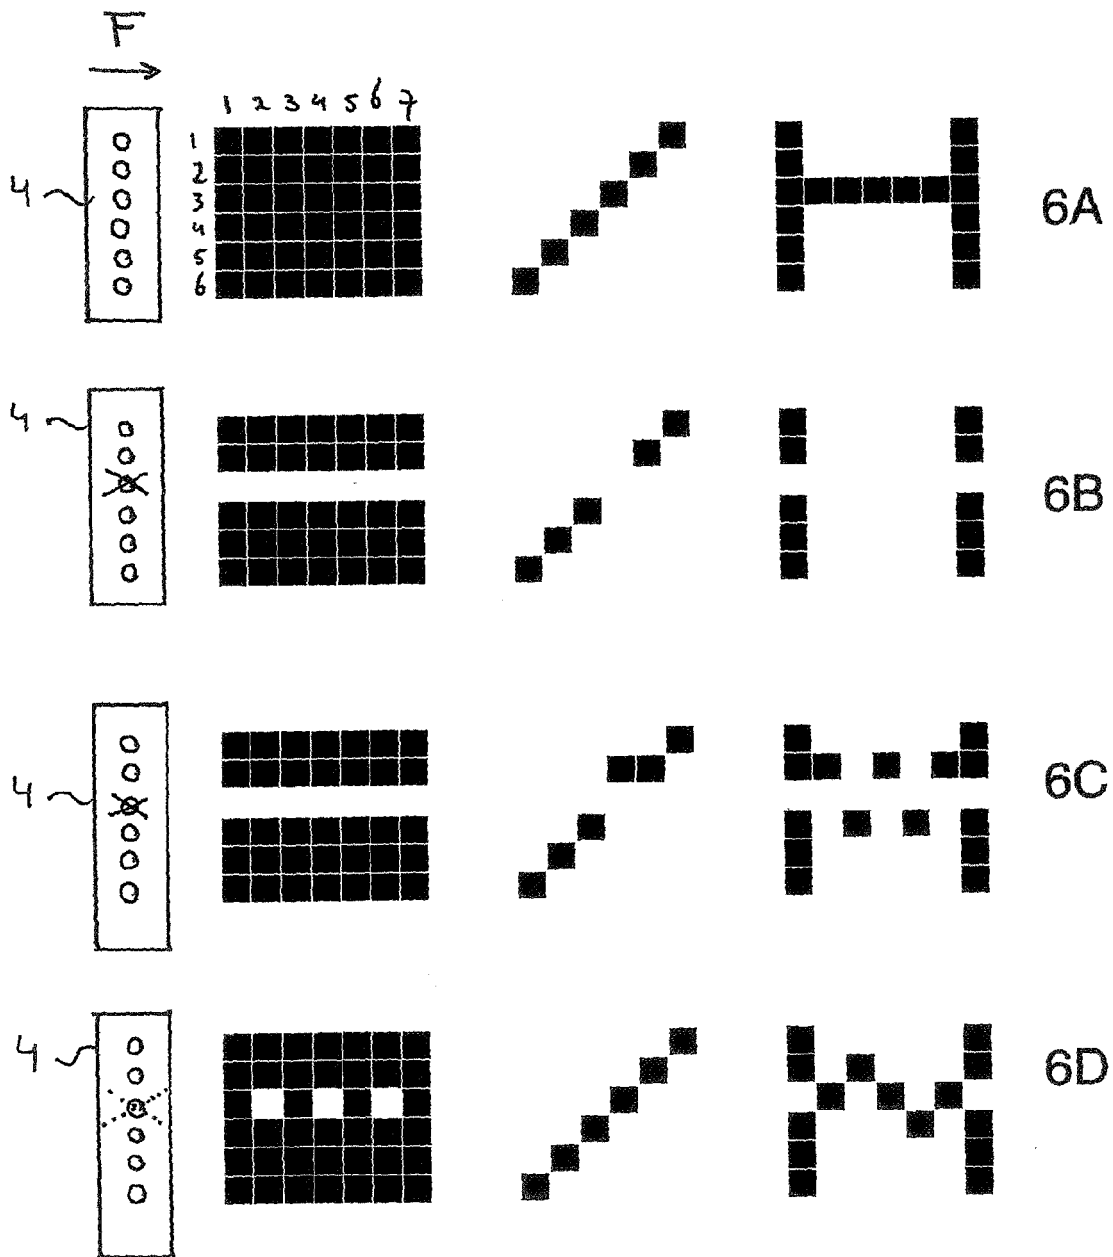


FIG. 6



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 06 10 0828

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
D,A	US 4 695 852 A (SCARDOVI ET AL) 22 September 1987 (1987-09-22) * column 3, line 65 - column 4, line 60 * * figures 1,2 *	1-11	INV. B41J2/19
A	----- PATENT ABSTRACTS OF JAPAN vol. 013, no. 282 (M-843), 28 June 1989 (1989-06-28) & JP 01 078846 A (MATSUSHITA ELECTRIC IND CO LTD), 24 March 1989 (1989-03-24) * abstract *	1-11	
A	----- PATENT ABSTRACTS OF JAPAN vol. 009, no. 034 (M-357), 14 February 1985 (1985-02-14) & JP 59 176056 A (RICOH KK), 5 October 1984 (1984-10-05) * abstract *	1-11	
			TECHNICAL FIELDS SEARCHED (IPC)
			B41J
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 23 May 2006	Examiner Van den Meerschaut,G
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

2
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 06 10 0828

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-05-2006

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4695852	A	22-09-1987	DE 3674538 D1	31-10-1990
			EP 0221703 A1	13-05-1987
			IT 1182645 B	05-10-1987
			JP 62108061 A	19-05-1987

JP 01078846	A	24-03-1989	JP 2006620 C	11-01-1996
			JP 7029424 B	05-04-1995

JP 59176056	A	05-10-1984	NONE	
