

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 688 512 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

09.08.2006 Bulletin 2006/32

(51) Int Cl.:

C22C 38/18 ^(2006.01)

C22C 38/54 ^(2006.01)

C22C 38/60 ^(2006.01)

(21) Application number: **06005867.4**

(22) Date of filing: **10.02.2000**

(84) Designated Contracting States:

**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:

00902931.5 / 1 270 757

(71) Applicant: **SANYO SPECIAL STEEL CO., LTD.**

Himeji-shi

Hyogo-ken 672-8677 (JP)

(72) Inventors:

- **Iwama, Naoki,**
Aichi Steel Works. Ltd
Tokai-shi
Aichi-ken 476-8666 (JP)
- **Owaki, Susumu,**
Aichi Steel Works. Ltd
Tokai-shi
Aichi-ken 476-8666 (JP)
- **Uchiyama, Masao,**
Aichi Steel Works. Ltd
Tokai-shi
Aichi-ken 476-8666 (JP)
- **Fujii, Isao,**
Aichi Steel Works. Ltd
Tokai-shi
Aichi-ken 476-8666 (JP)
- **Nishimon, Syoji,**
Aichi Steel Works. Ltd
Tokai-shi
Aichi-ken 476-8666 (JP)

- **Tsunekage, Norimasa,**
Sanyo Special Steel Co.Ltd
Himeji-shi
Hyogo-ken 672-8677 (JP)

- **Kobayashi, Kazuhiro,**
Sanyo Special Steel Co.Ltd
Himeji-shi
Hyogo-ken 672-8677 (JP)

- **Mori, Motohide,**
Toyota Jidosha K.K
Toyota-shi
Aichi-ken 471-8572 (JP)

- **Ogo, Kazutaka,**
K.K. Toyota Chuo Kenkyusho
Aichi-gun
Aichi-ken 480-1192 (JP)

- **Naito, Kunio,**
K.K. Toyota Chuo Kenkyusho
Aichi-gun
Aichi-ken 480-1192 (JP)

(74) Representative: **Kramer - Barske - Schmidtchen**

Radeckestrasse 43

81245 München (DE)

Remarks:

This application was filed on 22-03 - 2006 as a
divisional application to the application mentioned
under INID code 62.

(54) **Lead-free steel for machine structural use with excellent machinability and low strength anisotropy**

(57) A lead-free steel for machine structural use with excellent machinability and low strength anisotropy, which does not contain Pb and is equal to or higher than a conventional Pb-containing free cutting steel in properties, is provided. This steel includes, on the weight basis, C: 0.10 to 0.65%; Si: 0.03 to 1.00%; Mn: 0.30 to

2.50%; S: 0.03 to 0.35%; Cr: 0.1 to 2.0%; Al: less than 0.010%; Ca: 0.0005 to 0.020%; Mg: 0.0003 to 0.020%; O: less than 20 ppm; and the balance being Fe and inevitable impurities.

EP 1 688 512 A1

Description

Technical Field

[0001] The present invention relates to a lead-free steel for machine structural use which exhibits low anisotropy in mechanical properties and excellent machinability in various cutting methods and cutting conditions and which does not contain lead.

Background Art

[0002] Following recent acceleration and automation in cutting, importance has been given to the machinability of a steel employed for machine structural parts and a demand for so-called free cutting steels having improved machinability has risen. Further, the request for the strength of a steel material is becoming stricter. If the strength of a steel material is increased, the machinability thereof is deteriorated. That is, improvements in contradicting properties, i.e., high strength and machinability, are required for recent structure steels.

[0003] At present, steel materials which contain Pb, S and Ca, respectively, are known as ordinary-used free cutting steels. Among these steels, the Pb-containing free cutting steel which contains Pb exhibits excellent properties that it is lower in the deterioration of mechanical properties than a standard steel, it has improved chip disposability (the property capable of discharging chips more smoothly) in ordinary turning, and it is capable of lengthening the life of a tool employed for drilling, tapping, reaming, boring or the like. Furthermore, the Pb-containing free cutting steel facilitates discharging chips at the time of deep drilling to give (hole depth/drill diameter) ≥ 3 and is excellent in the prevention of the breakage of the tool due to sudden chip clogging.

[0004] In addition, various types of Pb composite free cutting steels are under development, which have the above excellent properties by adding elements such as S and Ca other than Pb.

[0005] However, the conventional Pb-containing free cutting steels has the following disadvantages.

[0006] Namely, although Pb is a quite effective element for the improvement of machinability of steels, it is an environmentally hazardous material. Due to this, because of a recent increase in interest in the environmental issues, it is desired to develop a steel material without Pb and comparable to the Pb-containing free cutting steel.

[0007] On the other hand, although there are conventionally known other free cutting steels without Pb, they cannot be replaced with the Pb-containing free cutting steel. It's because these steels have the following disadvantages.

[0008] For example, an S-containing free cutting steel which contains S has an improvement effect of lengthening the life of a tool for a relatively wide range of cutting; however, it is inferior to the Pb-containing free cutting steel in chip disposability. In addition, if a steel contains S, MnS which exists as an inclusion is extended during hot rolling or hot forging. Due to this, such a steel has a disadvantage in strength anisotropy, i.e. the mechanical properties of such a steel including impact strength are deteriorated as the direction is closer from a rolling direction to a right angle direction. Accordingly, it is necessary to suppress the S content of a steel material intended to be employed as a component which is considered to be given much importance to impact strength, which in turn provides insufficient machinability.

[0009] Further, a Ca-deoxidized free cutting steel in which the melting point of an oxide-based inclusion in the steel is lowered by Ca deoxidization, hardly influences the strength property of the steel material and exhibits an excellent effect of lengthening the life of a carbide tool in a high velocity cutting region. However, the Ca-deoxidized free cutting steel has little effect in machinability improvement other than the effect of lengthening the life of the carbide tool. Normally, therefore, the Ca-deoxidized free cutting steel is employed in combination with S or Pb so as to obtain all-round machinability.

[0010] There is a steel material described in Japanese Examined Patent Publication No. 5-15777 which illustrates an example in which the disadvantage of the S-containing free cutting steel, i. e. strength anisotropy, is improved by adding Ca and uniformly dispersing and distributing inclusions in the steel and, at the same time, the machinability of the steel is improved, opposed to the conventional Ca-deoxidized free cutting steels. In this case, the steel material is free from the disadvantage like the Ca-deoxidized free cutting steel has; however, it is required to add a large quantity of S to the steel material so as to ensure adequate machinability. In the above case, a sufficient quantity of Ca should be added to the steel material to control the form of the sulfide. However, in this case, Ca yield is lowered, which make it quite difficult to realize the quantity-production of steels.

[0011] Additionally, there is known steel materials described in Japanese Examined Patent Publication No. 52-7405 as an example of steels intended to attain the same effect as that of adding Ca described above. These are free cutting steels which contain one or two of Group I elements of Mg and Ba and one or more of Group II elements of S, Se and Te. Since O is actively added to these steel materials in a range of 0.004 to 0.012%, they might be low in fatigue strength. Besides, oxides in the steels increase by the active addition of O, thereby possibly deteriorating machinability such as drilling machinability.

[0012] Moreover, Japanese Examined Patent Publication No. 51-4934 discloses a free cutting steel which contains

one or two of Group I elements of Mg and Ba and one or more of Group II elements of S, Se and Te, as well as a free cutting steel which selectively contains Ca. However, O is actively added to these steels in a range of 0.002 to 0.01%. Therefore, they might be low in fatigue strength. Besides, oxides in the steels increase by the active addition of O, thereby possibly deteriorating machinability such as drilling machinability.

[0013] Japanese Patent Publication No. 51-63312 discloses a free cutting steel which contains S, Mg and one or more elements of Ca, Ba, Sr, Se and Te. However, 51-63312 fails to concretely show the composition of the steel and insufficiently discloses the technique. In addition, since this steel is based on the assumption of Al deoxidization, there is fear that an Al content thereof exceeds 0.02%, no restriction is given to an O content thereof and fatigue strength is lowered. There is also fear that the quantity of oxides in the steel increase by the active addition of O, and the machinability such as drilling machinability is, therefore, deteriorated.

[0014] The present invention has been achieved in view of the above-stated conventional disadvantages and has an object to provide a lead-free steel for machine structural use, which does not contain Pb and is equal to or higher than the conventional Pb-containing free cutting steels in properties, excellent in machinability and low in strength anisotropy.

Disclosure of the Invention

[0015] The invention claimed in claim 1 is a lead-free steel for machine structural use with excellent machinability and low strength anisotropy, comprising, on the weight basis, C: 0.10 to 0.65%; Si: 0.03 to 1.00%; Mn: 0.30 to 2.50%; S: 0.03 to 0.35%; Cr: 0.1 to 2.0%; Al: less than 0.010%; Ca: 0.0005 to 0.020%; Mg: 0.0003 to 0.020%; O: less than 20 ppm; and the balance being Fe and inevitable impurities.

[0016] The most notable advantages of the present invention are that an Al content and an O content are decreased to the above specific ranges, respectively, an S content is made higher than an ordinary level, Mg and Ca are added, and the addition of Pb is completely eliminated.

[0017] Steels for machine structural use are roughly classified to three types of a heat-treated steel, a non-heat treated steel and a case hardening steel which are employed differently according to purposes and the like. Due to this, in the lead-free steel for machine structural use of the present invention, these three types of steels are different slightly in preferred composition ranges.

[0018] Now, the reason for restricting the composition ranges will be described below while referring to preferred ranges for the three types of steels. C: 0.10 to 0.65%

[0019] C is an essential element for securing strength as the steel for machine structural use and not less than 0.10% of C is added. However, too much C causes the increase of hardening and deteriorates toughness and machinability. Therefore, the upper limit is set at 0.65%.

[0020] The C content of the heat-treated steel is, in particular, preferably 0.28 to 0.55%, more preferably 0.32 to 0.48%.

[0021] The C content of the non-heat treated steel is preferably 0.10 to 0.55%, more preferably 0.35 to 0.50%.

[0022] The C content of the case hardening steel is preferably 0.10 to 0.30%, more preferably 0.12 to 0.28%. Si: 0.03 to 1.00%

[0023] Since Si is an essential element as a deoxidizing agent in the manufacturing of a steel, the lower limit is set at 0.03%. However, too much Si deteriorates ductility; besides, it also deteriorates machinability by generating SiO₂ which forms inclusion of high hardness in the steel. Therefore the upper limit thereof is set at 1.00%.

[0024] The Si content of any of the above three types of steels is preferably 0.10 to 0.50%, more preferably 0.15 to 0.35%. Mn: 0.30 to 2.50%

[0025] Generally, Mn is an important element to secure the strength, toughness, ductility in hot rolling and hardenability, and Mn is an essential element to generate a sulfide-based inclusion according to the present invention. Therefore, not less than 0.30% of Mn is added. However, too much Mn causes the increase of hardness and deteriorates machinability. Therefore, the upper limit is set at 2.50%.

[0026] The Mn content of any of the above three types of steel is preferably 0.40 to 2.00%, more preferably 0.60 to 1.50%. S: 0.03 to 0.35%

[0027] S is an element for generating a sulfide-based inclusion which can improve machinability. To obtain a machinability improvement effect, it is necessary to add at least not less than 0.03% of S. As S content increases, machinability improves. However, too much S makes it difficult to control the form of the sulfide by Ca and Mg and deteriorates impact-resistance anisotropy. Therefore, the upper limit is set at 0.35%.

[0028] The S content of any of the above three types of steel is preferably 0.04 to 0.30%, more preferably 0.08 to 0.20%. Cr: 0.1 to 2.0%

[0029] Cr is added to improve the hardenability and toughness of the steel. To obtain the effects, not less than 0.1% of Cr is necessary. On the other hand, if a large quantity of Cr is added, the hardness of a work material increases. It is, therefore, necessary to set a Cr content at not more than 2.0% so as to secure machinability.

[0030] The Cr content of any of the above three types of steels is preferably 0.10 to 1.50%, more preferably 0.15 to 1.20%. Al: less than 0.010%

[0031] If an Al content is not less than 0.010%, an inclusion consisting of Al_2O_3 with a high hardness is generated, which causes the deterioration of machinability and that of fatigue strength.

[0032] The preferred range for the Al content hardly differs among the above three types of steels. Ca: 0.0005 to 0.020%

[0033] Ca as well as Mn and Mg is an element for generating a sulfide. In addition, Ca generates a mixed oxide of Al and Si and contributes to the improvement effects of a machinability and an anisotropy of mechanical property by the control of the conformation of a sulfide. To obtain the effects, it is necessary to add at least not less than 0.0005% of Ca. On the other, Ca yield is very low in the manufacturing of the steel. The effects are saturated if Ca is included more than required. Therefore the upper limit thereof is set at 0.020%.

[0034] The Ca content of any of the above three types of steels is preferably 0.0005 to 0.0060%, more preferably 0.0005 to 0.0040%.

Mg: 0.0003 to 0.020%

[0035] Mg exhibits the same effects as those of Ca. If combined with Ca, Mg contributes to a great improvement effects of a machinability and an anisotropy of mechanical property. To obtain the effects, it is necessary to add at least not less than 0.0003% of Mg. The effects are saturated in vain if Mg is included more than required. Therefore the upper limit thereof is set at 0.020%.

[0036] The Mg content of any of the above three types of steels is preferably 0.0003 to 0.0060%, more preferably 0.0005 to 0.0040%.

O: less than 20 ppm

[0037] It is desirable that O is decreased as much as possible so as to suppress the generation of an oxide-based hard inclusion harmful to machinability. If not less than 20 ppm of O is included, the quantity of generated oxide-based hard inclusion increases, which deteriorates machinability and fatigue strength. It is, therefore, necessary to set the quantity of O at less than 20 ppm.

[0038] The preferred range for O hardly differs among the three types of steels.

[0039] As can be understood, according to the present invention, it is possible to restrict the form of an oxide by giving such limitations to the Al content and O content, respectively, and it is possible to minimize the deterioration of impact properties, particularly impact-resistance anisotropy (strength anisotropy) and to improve the machinability of the steel comparably to that of a Pb-containing free cutting steel by setting the S content higher than an ordinary level and simultaneously including Ca and Mg in the steel. These strength anisotropy and machinability improvement effects are greater than a case where only one of Ca or Mg is contained in the steel material.

[0040] Further, according to the present invention, it is possible to obtain a fatigue strength improvement effect and the like besides the machinability improvement effect by giving the above-stated restrictions to the Al content and the O content, respectively.

[0041] Next, the invention claimed in claim 2 is a lead-free steel for machine structural use with excellent machinability and low strength anisotropy, comprising, on the weight basis, C: 0.10 to 0.65%; Si: 0.03 to 1.00%; Mn: 0.30 to 2.50%; S: 0.03 to 0.35%; Cr: 0.1 to 2.0%; Al: less than 0.005%; Ca: 0.0005 to 0.020%; Mg: 0.0003 to 0.020%; O: less than 20 ppm; and the balance being Fe and inevitable impurities.

[0042] The most notable advantage of the present invention is that the Al content is further decreased from that of the lead-free steel for machine structural use according to claim 1, to less than 0.005%.

[0043] The continuous casting property of this lead-free steel for machine structural use, which influences practical manufacturing, can be greatly improved by setting the Al content at less than 0.005%.

[0044] That is, the Al content of not less than 0.005% accelerates the generation of CaS in large quantities in the molten steel, whereby CaS is deposited on continuous casting nozzles and the nozzles tend to be clogged. By restricting the Al content to less than 0.005%, this disadvantage can be surely overcome.

[0045] Further, as shown in the invention claimed in claim 3, it is preferable that the lead-free steel for machine structural use further comprises one or more elements selected from a group of, on the weight basis, Mo: 0.05 to 1.00%, Ni: 0.1 to 3.5%, V: 0.01 to 0.50%, Nb: 0.01 to 0.10%, Ti: 0.01 to 0.10% and B: 0.0005 to 0.0100%.

[0046] The reason for restricting the preferred composition ranges will be described hereinafter.

Mo: 0.05 to 1.00%, and Ni: 0.1 to 3.5%

[0047] Mo and Ni are elements which can improve the hardenability and toughness of the steel and are added if necessary. To obtain these effects, it is preferable to add not less than 0.05% of Mo and not less than 0.1% of Ni. Too much Mo and Ni cause the increase of the hardness of the work material. Therefore, to secure machinability, it is preferable that the Mo content is set at not more than 1.00% and the Ni content is set at not more than 3.5%.

[0048] The Mo content of any of the above three types of steels is preferably 0.10 to 0.40%, more preferably 0.15 to 0.30%.

[0049] Further, the Ni content of any of the above three types of steels is preferably 0.40 to 3.00%, more preferably 0.40 to 2.00%.

V: 0.01 to 0.50%

[0050] Since V is an element which has a strong precipitation strengthening effect, it is added if hardening and

tempering treatments are omitted. To obtain this effect, it is preferable to add not less than 0.01% of V. If the V content is more than 0.50%, the effect is saturated. It is, therefore, preferable to set the upper limit at 0.50%.

[0051] The V content of the non-heat treated steel is preferably 0.05 to 0.35%, more preferably 0.05 to 0.30%. Nb: 0.01 to 0.10%, and Ti: 0.01 to 0.10%

[0052] Nb and Ti have effects of generating carbonitrides and making crystal grains finer by the pinning effect, respectively, and are added if necessary. To obtain these effects, it is necessary to add not less than 0.01% of Nb and not less than 0.01% of Ti. However, if more than 0.10% of Nb and more than 0.10% of Ti are included in the steel, these effects are saturated. Therefore, the respective upper limits are preferably 0.10%. The range is more preferably 0.01 to 0.08%, most preferably 0.01 to 0.06%

B: 0.0005 to 0.0100%

[0053] Even a low B content has effects of improving the hardenability and mechanical properties of the steel, and B is added if necessary. To obtain the effects, it is necessary to add not less than 0.0005% of B. If more than 0.0100% of B is contained, the effects are saturated. The upper limit is, therefore, preferably 0.0100%. The range is more preferably 0.0005 to 0.0060%, most preferably 0.0005 to 0.0040%.

[0054] Furthermore, as shown in the invention claimed in claim 4, it is preferable that the lead-free steel for machine structural use further comprises one or two elements selected from a group of, on the weight basis, Bi: 0.01 to 0.30% and REM: 0.001 to 0.10%.

[0055] The reason for restricting the preferred composition ranges will be described hereinafter.
Bi: 0.01 to 0.30%

[0056] Since Bi is effective to improve the chip disposability and drilling property of the steel with hardly deteriorating an anisotropy of mechanical property, it is added if these properties are necessary. To obtain the effect, it is necessary to add not less than 0.01% of Bi. However, if more than 0.30% of Bi is contained, the effect is saturated and cost increases. Therefore, the upper limit is preferably 0.30%. The range is more preferably 0.01 to 0.10%, most preferably 0.01 to 0.08%. REM: 0.001 to 0.10%

[0057] Since an REM (rare-earth element) has a great effect of controlling the form of a sulfide, it is employed to accelerate the effects of Mg and Ca. It is noted that the REM mainly consists of mixed alloys of Ce, La, Nd, Pr and Sm. To obtain this effect, it is necessary to add not less than 0.001% of REM. However, if more than 0.10% of REM is contained, the effect is saturated and cost increases. Therefore, the upper limit is preferably 0.10%. The range is more preferably 0.001 to 0.006%, most preferably 0.001 to 0.004%.

[0058] Moreover, as shown in the invention claimed in claim 5, it is preferable that the lead-free steel for machine structural use comprises one or two selected from a group of (Ca, Mg)S and (Ca, Mg, Mn)S as a sulfide-based inclusion. There are various sulfides combining S with Ca, Mg and Mn. Among them, as described above, by particularly including at least one of a mixed sulfide (Ca, Mg)S consisting of Ca, Mg and S or a mixed sulfide (Ca, Mg, Mn)S consisting of Ca, Mg, Mn and S, it is possible to greatly improve the carbide tool wear property.

Brief Description of the Drawings

[0059]

Fig. 1 is an explanatory view showing an evaluation method for deep-drilling properties in the first embodiment;
Fig. 2 is a drawing-replacing photograph which shows images of respective elements in a steel X according to the present invention in the sixth embodiment;
Fig. 3 is a drawing-replacing photograph which shows images of respective elements adhering to a tool employed to cut the steel X according to the present invention in the seventh embodiment;
Fig. 4 is a drawing-replacing photograph which shows images of respective elements adhering to a tool employed to cut a conventional steel Y in the seventh embodiment; and
Fig. 5 is a drawing-replacing photograph which shows images of respective elements adhering to a tool employed to cut a conventional steel Z in the seventh embodiment.

Best Modes for Carrying out the Invention

[0060] To evaluate the excellent properties of a lead-free steel for machine structural use according to the present invention, various tests have been conducted for each of three types of steels, i.e. heat-treated steels, non-heat treated steels and case hardening steels.

[0061] The results of these tests will be shown below as embodiments.

First Embodiment

[0062] In this embodiment, as shown in Tables 1 and 3, a steel A according to the present invention and conventional steels B and C, which are all heat-treated steels, are prepared and compared with one another.

[0063] The conventional steel B is a Pb-containing free cutting steel which contains 0.1% of Pb. This conventional steel B is out of the scope of the present invention in terms of an S content and an O content.

[0064] Further, the conventional steel C is a steel to which Ca and Mg are not added.

[0065] Each steel material is molten in a vacuummelting furnace with the capacity of 100 kg, forged and extended to $\phi 60$ mm at 1200°C, and a part thereof is further forged and extended to a rectangular steel material of 40x70 mm. Thereafter, each steel is subjected to a heat treatment including hardening at 880°C and then tempering at 580°C.

[0066] Using the steel material of $\phi 60$ mm, machinability tests, a tensile test and an impact test in a forging and extending direction (which direction will be referred to as L-direction herein after) are conducted. In addition, using the rectangular steel products of 40x70 mm, impact tests in a direction which is perpendicular to the forging and extending direction (which direction will be referred to as T-direction hereinafter) are conducted.

[0067] Machinability test methods and cutting conditions are shown in Table 2. A JIS No. 4 specimen and a JIS No. 3 specimen are employed as a tensile test specimen and an impact test specimen, respectively.

[0068] Considering that the object of the present invention is to develop a steel which replaces a Pb-containing free cutting steel, the machinability test evaluation items are evaluated with an emphasis on chip disposability and drilling machinability which are advantages of the Pb-containing free cutting steel.

[0069] Further, as shown in Fig. 1, in a deep drilling test which is one of machinability tests, a cutting force (torque T_2) is measured from the start of drilling. While assuming drilling time t required until the torque T_2 becomes twice as large as a stable drilling torque T_1 as "stable drilling time", "stable drilling depth (mm)" which is defined as "stable drilling time (sec)" x "feed (mm/sec)" is calculated and evaluated.

[0070] The test result and the like are shown in Table 3.

[0071] As seen in Table 3, the steel A according to the present invention, as the heat-treated steel, exhibits superior properties to those of the conventional steels B and C for all the evaluation items. As for the drill life, in particular, the steel A is far superior to the conventional Pb-containing free cutting steels.

(Table 1) First Embodiment-Third Embodiment

Embodiment No.	steel type	Chemical Component(% by weight; Ca,Mg,O:ppm by weight)																
		C	Si	Mn	P	S	Cu	Ni	Cr	Mo	Al	Nb	V	Pb	Bi	Ca	Mg	O
1 heat-treated steel	steel of the present invention	A	0.39	0.24	0.99	0.014	0.096	0.13	0.15	1.14	-	0.007	-	-	-	20	27	11
	conventional steel	B	0.38	0.22	0.81	0.013	0.015	0.12	0.08	1.13	-	0.003	-	-	0.10	-	-	21
		C	0.40	0.25	0.90	0.013	0.062	0.12	0.08	1.09	-	0.006	-	-	-	-	-	15
2 non-heat treated steel	steel of the present invention	D	0.40	0.26	1.19	0.023	0.175	0.10	0.04	0.18	-	0.002	-	0.12	-	20	14	11
	conventional steel	E	0.39	0.25	0.86	0.019	0.015	0.11	0.05	0.20	-	0.029	-	0.11	0.17	-	-	19
		F	0.40	0.25	0.90	0.018	0.060	0.09	0.04	0.18	-	0.014	-	0.11	0.18	-	22	16
3 case hardening steel		G	0.40	0.25	0.99	0.018	0.098	0.10	0.04	0.19	-	0.014	-	0.11	-	-	-	18
	steel of the present invention	H	0.21	0.23	0.98	0.018	0.090	0.13	0.70	0.49	0.20	0.003	0.050	-	-	30	21	17
	conventional steel	I	0.20	0.24	0.97	0.019	0.092	0.12	0.69	0.50	0.20	0.003	0.040	-	-	0.040	24	11
		J	0.20	0.24	0.76	0.019	0.020	0.14	0.71	0.49	0.19	0.025	0.050	-	0.11	-	-	16
		K	0.21	0.25	0.86	0.017	0.054	0.12	0.70	0.50	0.20	0.020	0.050	-	-	-	-	19

EP 1 688 512 A1

(Table 2)

	test item			
	carbide tool loss by wear	chip disposability	deep drilling property	drill life
tool	P20	P20	SKH51(ϕ 6mm)	SKH51(ϕ 5mm)
cutting speed	150m/min	150m/min	19m/min	27m/min
feed	0.2mm/rev	0.10, 0.15, 0.20mm/rev	0.1mm/rev	0.2mm/rev
cutting depth	1.5mm	1.5mm	-	drilling depth:15mm
cutting oil	dry type	dry type	dry type	dry type
evaluation criterion	flank wear after cutting for 5 minutes minutes	chip disposability index (number of chips/ weight of chips)	stable drilling depth (Fig.1)	drilling number until damage by melting and fracture

(Table 3) First Embodiment-Third Embodiment

Embodiment No.	steel type	test result							
		carbide tool lose by wear (mm)	chip disposability index	deep drilling property (mm)	drill life (drilling number)	cutting test specimen hardness(Hv)	mechanical test specimen hardness (Hv)	tensile strength (Mpa)	impact-resistance anisotropy (T-direction/L-direction)
1 heat-treated steel	steel of the present invention	0.12	13	63	622	295	293	957	0.30
	conventional steel	0.17	13	60	587	293	293	949	0.32
		0.13	8	35	294	292	292	951	0.18
2 non-heat treated steel	steel of the present invention	0.07	32	94	1149	244	244	791	0.35
	conventional steel	0.14	21	69	688	244	244	789	0.52
		0.12	32	94	928	240	240	780	0.42
		0.12	26	47	933	241	241	780	0.27
	steel of the present invention	0.06	22	73	845	193	429	1294	0.48
		0.06	39	94	996	192	430	1302	0.44
3 case hardening steel	steel of the present invention	0.09	21	73	730	188	426	1265	0.62
	conventional steel	0.07	6	29	341	192	430	1297	0.23

Second Embodiment

[0072] In this embodiment, as shown in Tables 1 and 3 already described above, a steel D according to the present invention and conventional steels E to G, all of which are non-heat treated steels, are prepared and compared with one another.

[0073] The conventional steel E is a Pb-containing free cutting steel which contains 0.17% of Pb. The conventional steel F is a Pb-containing free cutting steel to which Pb and Ca are added, namely which contains 0.18% of Pb and 22 ppm of Ca. The conventional steel G does not contain Ca and Mg. The Al content of each of the conventional steels E to G exceeds 0.010%.

[0074] Respective steel materials are molten in a vacuum melting furnace with the capacity of 30 kg, forged and extended to $\phi 40$ mm at 1200°C, and a part thereof is further forged and extended to a rectangular steel material of 40x70 mm. Thereafter, each of the steels is held for 30 minutes at 1200°C, and then an air-cooling heat treatment is conducted thereto.

[0075] Using the $\phi 40$ mm steel materials, machinability tests, a tensile test and an L-direction impact test are conducted.

Using the 40x70 mm rectangular steel materials, a T-direction impact test is conducted.

[0076] Test methods, cutting conditions, tensile test specimens and impact test specimens are the same as those in the first embodiment.

[0077] The test result and the like are shown in Table 3.

[0078] As seen in Table 3, the steel D according to the present invention, as the non-heat treated steel, exhibits superior properties to those of the conventional steels E to G in all the evaluation items. The steel D particularly exhibits far superior performances in carbide tool loss by wear and drill life to those of the conventional Pb-containing free cutting steels.

[0079] The reason that the drill life, which is an advantage of the Pb-containing free cutting steel, of the steel D is considerably lengthened compared with that of the conventional steel F which is a lead composite free cutting steel which is excellent in machinability does lie in the fact that the Al content and the O content are simultaneously reduced, the quantity of oxides and the forms thereof are controlled so as to elevate an S content level and add both of Mg and Ca to the steel, compared with the conventional steels. This improvement cannot be obtained until these processes are performed.

Third Embodiment

[0080] In this embodiment, as shown in Tables 1 and 3 already described above, steels H and I according to the present invention and conventional steels J and K, all of which are case hardening steels, are prepared and compared with one another.

[0081] The greatest difference between the steels H and I according to the present invention is that Bi is added to the steel H.

[0082] The conventional steel J is a free cutting steel to which S and Pb are added in large quantities. The Al content of each of the conventional steels J and K exceeds 0.010%.

[0083] Each steel material is molten in a vacuum melting furnace with the capacity of 100 kg, forged and extended to $\phi 60$ mm at 1200°C, and a part thereof is further forged and extended to a rectangular steel material of 40x70 mm. Thereafter, each steel material is subjected to a normalizing heat treatment for 60 minutes at 900°C.

[0084] Using the $\phi 60$ mm steel materials, machinability tests are conducted. The specimens for tensile test and L-direction impact test are cut out of above $\phi 60$ mm steel materials and the specimens for T-direction impact test are cut out of the above 40x70 mm rectangular steel materials. After these specimens are hardened at 880°C and tempered at 180°C, they are finished and then subjected to mechanical tests.

[0085] Test methods and the like are the same as those in the first embodiment.

[0086] A test result and the like are shown in Table 3.

[0087] As seen in Table 3, the steels H and I according to the present invention, as the case hardening steels, exhibit superior properties at least in machinability to those of the conventional steels J and K. In addition, the steels H and I maintain almost the same mechanical properties as those of the conventional steels.

[0088] The drill life of the steel H according to the present invention to which Bi is added is, in particular, lengthened surprisingly. This improvement is derived from the fact that the deformation of inclusions are accelerated by the low melting behavior of Bi and the mixed sulfide has an effect of suppressing the progress of the tool wear.

Fourth Embodiment

[0089] In this embodiment, a steel L according to the present invention, conventional steels M and N and a comparison steel O, which are non-heat treated steel, are prepared and compared with one another in fatigue properties.

[0090] The conventional steel M is a free cutting steel which contains Pb, and the conventional steel N is a Pb composite free cutting steel which contains Ca in addition to Pb.

[0091] The comparison steel O is a steel obtained by increasing an O content to more than 20 ppm in the steel according to the present invention.

5 **[0092]** Each steel material is molten in a vacuummelting furnace with the capacity of 30 kg, forged and extended to $\phi 60$ mm at 1200°C, held at 1200°C for 30 minutes and then subjected to an air-cooling heat treatment.

[0093] Specimens are cut out from the $\phi 60$ mm steel materials respectively, and tensile tests and Ono-type rotating and bending fatigue tests are conducted.

[0094] A test result is shown in Table 5.

10 **[0095]** As seen in Table 5, the steel L according to the present invention exhibits tensile strength which has little difference from that of the conventional steel M (lead-containing free cutting steel) and that of the conventional steel N (lead composite free cutting steel) and exhibits a fatigue limit and an endurance ratio which are equal to or higher than those of the conventional steels M and N. In addition, the comparison steel O which is higher in oxygen content than the steel L according to the present invention, is inferior in fatigue properties. It is considered that this is due to the
15 increase of the quantity and magnitude of an oxide inclusion.

20

25

30

35

40

45

50

55

(Table 4) Fourth Embodiment (non-heat treated steel)

steel type		Chemical Component (% by weight; Ca,Mg,O:ppm by weight)													
		C	Si	Mn	P	S	Cu	Ni	Cr	Al	V	Pb	Ca	Mg	O
steel of the present invention	L	0.41	0.23	1.19	0.016	0.177	0.10	0.07	0.21	0.002	0.12	-	15	20	14
	M	0.43	0.25	0.86	0.019	0.015	0.11	0.06	0.19	0.029	0.11	0.15	-	-	14
conventional steel	N	0.43	0.23	0.87	0.018	0.060	0.16	0.07	0.20	0.014	0.12	0.19	24	-	17
	O	0.41	0.22	1.20	0.015	0.174	0.10	0.07	0.20	0.001	0.12	-	8	7	31

(Table 5) Fourth Embodiment (non-heat treated steel)

steel type		fatigue property			
		tensile strength (Mpa)	fatigue limit (Mpa)	endurance ratio	hardness (Hv)
steel of the present invention	L	759	343	0.452	239
conventional steel	M	762	343	0.450	242
	N	765	343	0.448	240
comparison steel	O	761	299	0.393	241

Fifth Embodiment

[0096] In this embodiment, heat-treated steels and non-heat treated steels are evaluated for continuous casting properties.

In this evaluation, as shown in Table 6, steels P to S according to the present invention and comparison steels T to W are prepared. The comparison steels T to W are obtained by increasing the Al contents to not less than 0.05%, respectively, in the steels P to S according to the present invention.

[0097] A continuous casting test is conducted using a bloom continuous casting machine of the rating type of 370mm X 530mm after melting the steels in an electric furnace with the capacity of 130-ton-LF (ladle refining furnace)-RH (vacuum degassing machine). It is then tested whether or not molten metals of 130 tons are cast by the continuous casting machine.

[0098] A test result is shown in Table 7.

[0099] As seen in Table 7, all of 130-ton molten metals are, without choking the nozzles of the casting machine, cast from the respective steels P to S according to the present invention in which Al contents thereof are suppressed to be as low as less than 0.005%.

[0100] As for the comparison steels T to W each having an Al content of not less than 0.005%, nozzle choking occurs and the entire 130-ton molten metal cannot be continuously cast.

(Table 6) Fifth Embodiment

steel type		Chemical Component (% by weight; Ca,Mg,O:ppm by weight)															
		C	Si	Mn	P	S	Cu	Ni	Cr	Mo	Al	V	Ca	Mg	O	N	
steel of the present invention	non-heat treated steel	P	0.39	0.22	1.20	0.019	0.174	0.19	0.10	0.19	0.03	0.002	0.12	10	9	11	127
		Q	0.42	0.23	1.20	0.020	0.169	0.09	0.07	0.20	0.02	0.002	0.12	12	10	14	122
	heat-treated steel	R	0.39	0.24	0.99	0.014	0.096	0.10	0.15	1.14	0.00	0.003	-	20	27	9	85
		S	0.41	0.23	1.03	0.020	0.101	0.13	0.16	1.09	0.02	0.002	-	19	19	10	74
comparison steel	non-heat treated steel	T	0.42	0.29	1.18	0.016	0.175	0.10	0.05	0.20	0.03	0.008	0.12	9	23	16	118
		U	0.40	0.43	1.25	0.017	0.152	0.15	0.08	0.20	0.05	0.008	0.12	8	10	13	124
	heat-treated steel	V	0.40	0.25	1.00	0.012	0.103	0.07	0.16	1.10	0.01	0.007	-	18	25	11	87
		W	0.40	0.26	0.98	0.018	0.100	0.13	0.16	1.12	0.03	0.009	-	20	21	11	82

(Table 7) Fifth Embodiment

steel type			continuous casting test result	evaluation
steel of the present invention	heat-treated steel	P	all of 130-ton molten metals were cast, without choking the nozzles of the casting machine.	○
		Q	all of 130-ton molten metals were cast, without choking the nozzles of the casting machine.	○
	non-heat treated steel	R	all of 130-ton molten metals were cast, without choking the nozzles of the casting machine.	○
		S	all of 130-ton molten metals were cast, without choking the nozzles of the casting machine.	○
comparison steel	heat-treated steel	T	nozzle choking occurred at the time of casting 80-ton molten metals, and then the casting was stopped.	×
		U	nozzle choking occurred at the time of casting 100-ton molten metals, and then the casting was stopped.	×
	non-heat treated steel	V	nozzle choking occurred at the time of casting 50-ton molten metals, and then the casting was stopped.	×
		W	nozzle choking occurred at the time of casting 60-ton molten metals, and then the casting was stopped.	×

Sixth Embodiment

[0101] In this embodiment, steel X which is a non-heat treated steel according to the present invention shown in Table 8 is prepared and inclusions in the steel are observed.

[0102] The steel X according to the present invention is molten in a vacuummelting furnace with the capacity of 30 kg and forged and extended to $\phi 40$ mm at 1200°C. Thereafter, the steel is held at 1200°C for 30 minutes and then subjected to an air-cooling heat treatment.

[0103] The result of inclusion observation is shown in Fig. 2. Fig. 2 is a drawing-replacing photograph which shows SEM (scanning electron microscope) images and the respective images of elements Mn, Si, Mg, S, Al, Fe, O, P and Ca at the same position of the SEM image.

[0104] As seen in Fig. 2, Mn, Mg, S and Ca are detected in the same inclusion and the existence of MnS, (Mg, Ca) S and (Mn, Mg, Ca) S is confirmed. Further, as for the form of the inclusion, while a sulfide normally represented by MnS is formed into rod-like form after forging and extending, that in the steel according to this invention is spherical. This is considered to demonstrate that the notch effect by the inclusions is decreased during the mechanical property tests and that impact-resistance anisotropy in mechanical properties is improved.

(Table 8)

(% by weight; Ca, Mg, O: ppm by weight)

steel type	C	Si	Mn	P	S	Ni	Cr	Mo	Al	V	Pb	Ca	Mg	O	
steel of the present invention	X	0.45	0.21	0.79	0.018	0.058	0.06	0.14	0.01	0.002	0.12	-	19	9	12
	Y	0.44	0.24	0.82	0.017	0.051	0.05	0.22	0.01	0.033	0.08	0.11	26	-	24
	Z	0.44	0.25	0.84	0.019	0.058	0.06	0.21	0.02	0.031	0.09	-	-	-	22

Seventh Embodiment

[0105] In this embodiment, a steel X according to the present invention and conventional steels Y and Z are prepared and subjected to tests for carbide tool loss by wear, chip disposability indices, deep drilling properties and drill lives. Test conditions and the like are the same as those in the first embodiment. In addition, the distribution of alloy elements on the face worn parts (crater worn parts) of the respective tools is observed.

[0106] The conventional steel Y is a lead composite free cutting steel which contains Pb and Ca. The conventional steel Z is a steel which does not contain Pb but in which an Al content is increased, without adding Ca and Mg. A manufacturing method for the steels Y and Z is the same as that of the steel X according to the present invention.

[0107] A test result is shown in Table 9.

(Table 9)

steel type		carbide tool loss by wear (mm)	chip disposability index	deep drilling property (mm)	drill life (drilling number)
steel of the present invention	X	0.07	32	87	922
conventional steel	Y	0.12	32	87	920
	Z	0.20	3	39	393

[0108] As seen in Table 9, the steel X according to the present invention is superior in all of the evaluation items to the conventional steels Y and Z.

[0109] Next, the observation results of alloy element distribution are shown in Figs. 3 to 5. These figures are drawing-replacing photographs each of which shows the SEM image of the surface of the face worn part of the tool after the wear test and the images of elements Ca, S, Mn, Mg, W, Fe, Si, Al and O at the same position of the SEM image.

[0110] As seen in Fig. 3, in the steel X according to the present invention, Mn, S, Ca and Mg adhere to the face worn part of the tool. This is considered to demonstrate that the steel exhibits a lubricating function resulting from the composite effect of MnS and (Ca, Mg) S so as to suppress the progress of tool wear.

[0111] As seen in Fig. 4, in the conventional steel Y, Ca and S adhere to the worn part and Pb adheres to the end portion of the worn part. Although it can be estimated from this result that the lubricating function of CaS can suppress the progress of tool wear, the suppression degree is lower than that of the steel X according to the present invention.

[0112] As seen in Fig. 5, in the conventional steel Z, S is slightly distributed on the worn part of the tool but Fe and O adhere thereto in large quantities. An Fe oxide is substituted for Co contained in the tool and functions to accelerate the tool wear. It is considered that this is why the tool is largely worn.

Eighth Embodiment

[0113] In this embodiment, more steels according to the present invention and comparison steels are prepared and evaluated for machinability and the other properties as in the case of the first embodiment.

[0114] First, as the steels according to the present invention, 78 types of steels, a1 to a78 obtained by variously changing compositions in composition ranges according to the present invention, respectively, are prepared as shown in Tables 10 to 12.

[0115] As the comparison steels, eight types of steels, b1 to b8 which do not fall within respective composition ranges according to the present invention are prepared as shown in Table 13.

[0116] The comparison steel b1 has an S content below the lower limit and the comparison steel b2 has an S content exceeding the upper limit. The comparison steel b3 has an Al content exceeding the upper limit. The comparison steel b4 has a Ca content below the lower limit and the comparison steel b5 has a Ca content exceeding the upper limit. The comparison steel b6 has an Mg content below the lower limit and the comparison steel b7 has an Mg content exceeding the upper limit. The comparison steel b8 has an O content exceeding the upper limit.

[0117] Heat-treated steels are manufactured in the same manner as that in the first embodiment and non-heat treated steels are manufactured in the same manner as that in the second embodiment. In Tables 14 to 17 to be described later, those that have data in hardening and tempering item are the heat-treated steels and those that have data in an air-cooling treatment (afterheating at 1200°C) item are the non-heat treated steels.

[0118] As to heat-treated steels, mechanical tests are conducted after hardening and tempering; and as to non-heat treated steels, they are conducted after heating at 1200 °C followed by air-cooling treatment. The other conditions are the same as those in the first to third embodiments.

[0119] Evaluation results are shown in Tables 14 to 17.

[0120] For the clarity of the results, a very good result is indicated by mark ◎, a good result is indicated by mark ○ and a bad result is indicated by mark ×.

[0121] Judgment criteria for ◎, ○ and × in the respective evaluation items are shown in Table 18.

[0122] As seen in Tables 14 to 16, all the steels according to the present invention exhibit superior results in all the evaluation items.

[0123] In contrast, as seen in Table 17, none of the comparison steels exhibit satisfactory results in all the evaluation items.

[0124] Specifically, the comparison steel b1 the S content of which is below the lower limit cannot attain sufficient properties in carbide tool loss by wear, chip disposability, deep drilling property and drill life.

[0125] The comparison steel b2 the S content of which exceeds the upper limit is inferior in impact-resistance anisotropy and endurance ratio.

[0126] The comparison steel b3 the Al content of which exceeds the upper limit is inferior in carbide tool loss by wear and endurance ratio. Further, compared to non-heat treated steel (air-cooled steels) among the steels a1 to a78 of the present invention, since the comparison steel b3 consists of the non-heat treated steel, the deep drilling property and drill life of the comparison steel b3 do not reach very good level but remain at good level, whereas almost all the steels according to the present invention exhibit very good levels in deep drilling and drill life like Pb-containing free cutting steels.

[0127] The comparison steel b4 the Ca content of which is below the lower limit does not exhibit excellent carbide tool loss by wear, drill life and impact-resistance anisotropy.

[0128] The comparison steel b5 the Ca content of which exceeds its upper limit does not exhibit an excellent endurance ratio.

[0129] The comparison steel b6 the Mg content of which is below the lower limit does not exhibit excellent carbide tool loss by wear, drill life and impact-resistance anisotropy.

[0130] The comparison steel b7 the Mg content of which exceeds the upper limit does not exhibit an excellent endurance ratio.

[0131] The comparison steel b8 the O content of which exceeds the upper limit does not exhibit excellent carbide tool loss by wear, drill life and endurance ratio.

(Table 10)

steel type	No.	Chemical Component (% by weight)																
		C	Si	Mn	S	Cr	Al	Ca	Mg	O	Mo	Ni	V	Nb	Ti	B	Bi	REM
steel of the present invention	a1	0.11	0.25	0.91	0.101	0.50	0.002	0.0012	0.0009	0.0015	0.16	0.75	-	-	-	-	-	-
	a2	0.63	0.24	0.78	0.177	0.22	0.003	0.0015	0.0012	0.0011	-	-	-	-	-	-	-	-
	a3	0.36	0.23	0.81	0.103	1.01	0.001	0.0015	0.0010	0.0013	-	-	-	-	-	-	-	-
	a4	0.46	0.26	0.85	0.101	1.07	0.002	0.0016	0.0017	0.0013	-	-	-	-	-	-	-	-
	a5	0.37	0.25	1.21	0.161	0.25	0.002	0.0018	0.0012	0.0016	-	-	0.12	-	-	-	-	-
	a6	0.43	0.25	1.18	0.172	0.22	0.002	0.0015	0.0013	0.0014	-	-	0.10	-	-	-	-	-
	a7	0.32	0.24	0.97	0.106	1.24	0.003	0.0014	0.0016	0.0014	-	-	-	-	-	-	-	-
	a8	0.51	0.22	0.71	0.099	0.84	0.002	0.0015	0.0014	0.0015	-	-	-	-	-	-	-	-
	a9	0.32	0.26	1.48	0.165	0.23	0.003	0.0015	0.0014	0.0012	-	-	0.15	-	-	-	-	-
	a10	0.48	0.27	1.00	0.164	0.23	0.002	0.0017	0.0012	0.0011	-	-	0.07	-	-	-	-	-
	a11	0.41	0.05	0.96	0.171	0.25	0.002	0.0020	0.0015	0.0016	-	-	0.10	-	-	-	-	-
	a12	0.40	0.93	0.65	0.168	0.20	0.002	0.0022	0.0012	0.0014	-	-	0.10	-	-	-	-	-
	a13	0.39	0.15	0.80	0.100	1.03	0.002	0.0014	0.0017	0.0011	-	-	-	-	-	-	-	-
	a14	0.39	0.35	0.78	0.104	1.12	0.001	0.0021	0.0008	0.0018	-	-	-	-	-	-	-	-
	a15	0.40	0.15	1.22	0.168	0.20	0.002	0.0022	0.0012	0.0012	-	-	0.11	-	-	-	-	-
	a16	0.40	0.35	1.21	0.172	0.21	0.002	0.0016	0.0018	0.0016	-	-	0.12	-	-	-	-	-
	a17	0.39	0.10	0.80	0.100	1.03	0.002	0.0014	0.0017	0.0011	-	-	-	-	-	-	-	-
	a18	0.39	0.45	0.78	0.104	1.12	0.001	0.0021	0.0008	0.0018	-	-	-	-	-	-	-	-
	a19	0.40	0.10	1.22	0.168	0.20	0.002	0.0022	0.0012	0.0012	-	-	0.11	-	-	-	-	-
	a20	0.40	0.45	1.21	0.172	0.21	0.002	0.0016	0.0018	0.0016	-	-	0.12	-	-	-	-	-
	a21	0.40	0.25	0.32	0.040	1.98	0.003	0.0020	0.0016	0.0013	-	-	-	-	-	-	-	-
	a22	0.40	0.25	2.48	0.040	0.11	0.002	0.0018	0.0015	0.0012	-	-	-	-	-	-	-	-
	a23	0.41	0.24	0.60	0.101	1.19	0.002	0.0015	0.0013	0.0016	-	-	-	-	-	-	-	-
	a24	0.40	0.25	0.85	0.100	0.92	0.001	0.0018	0.0008	0.0014	-	-	-	-	-	-	-	-
	a25	0.40	0.25	1.10	0.174	0.25	0.002	0.0016	0.0012	0.0011	-	-	0.12	-	-	-	-	-
	a26	0.40	0.26	1.30	0.169	0.15	0.002	0.0018	0.0010	0.0013	-	-	0.12	-	-	-	-	-
	a27	0.40	0.25	0.51	0.101	1.24	0.002	0.0015	0.0013	0.0016	-	-	-	-	-	-	-	-
	a28	0.40	0.23	0.99	0.100	0.82	0.001	0.0018	0.0008	0.0014	-	-	-	-	-	-	-	-
	a29	0.39	0.27	0.80	0.172	0.53	0.002	0.0015	0.0018	0.0012	-	-	0.12	-	-	-	-	-
	a30	0.40	0.25	1.50	0.172	0.11	0.002	0.0015	0.0009	0.0013	-	-	0.12	-	-	-	-	-

(Table 11)

steel type	No.	Chemical Component (% by weight)											Nb	Ti	B	Bi	REM
		C	Si	Mn	S	Cr	Al	Ca	Mg	O	Mo	Ni	V				
steel of the present invention	a31	0.40	0.25	0.92	0.032	0.20	0.002	0.0021	0.0014	0.0014	-	-	0.12	-	-	-	-
	a32	0.41	0.24	1.37	0.347	0.19	0.003	0.0039	0.0028	0.0016	-	-	0.12	-	-	-	-
	a33	0.40	0.25	0.78	0.080	1.07	0.002	0.0015	0.0011	0.0016	-	-	-	-	-	-	-
	a34	0.40	0.23	0.83	0.120	1.09	0.002	0.0019	0.0015	0.0013	-	-	-	-	-	-	-
	a35	0.39	0.25	0.81	0.140	1.00	0.002	0.0014	0.0017	0.0013	-	-	-	-	-	-	-
	a36	0.40	0.25	0.85	0.180	1.03	0.003	0.0018	0.0010	0.0015	-	-	-	-	-	-	-
	a37	0.40	0.24	1.03	0.080	0.21	0.002	0.0025	0.0011	0.0011	-	-	0.12	-	-	-	-
	a38	0.39	0.25	1.03	0.120	0.19	0.002	0.0023	0.0017	0.0014	-	-	0.12	-	-	-	-
	a39	0.40	0.24	1.20	0.140	0.20	0.002	0.0021	0.0012	0.0011	-	-	0.11	-	-	-	-
	a40	0.40	0.24	1.20	0.180	0.20	0.003	0.0020	0.0020	0.0011	-	-	0.12	-	-	-	-
	a41	0.40	0.25	2.48	0.040	0.11	0.002	0.0018	0.0015	0.0012	-	-	-	-	-	-	-
	a42	0.40	0.25	0.32	0.040	1.98	0.003	0.0020	0.0016	0.0013	-	-	-	-	-	-	-
	a43	0.40	0.25	0.85	0.100	0.92	0.001	0.0018	0.0008	0.0014	-	-	-	-	-	-	-
	a44	0.41	0.24	0.60	0.101	1.19	0.002	0.0015	0.0013	0.0016	-	-	-	-	-	-	-
	a45	0.40	0.26	1.30	0.169	0.15	0.002	0.0018	0.0010	0.0013	-	-	0.12	-	-	-	-
	a46	0.40	0.25	1.10	0.174	0.25	0.002	0.0016	0.0012	0.0011	-	-	0.12	-	-	-	-
	a47	0.40	0.23	0.99	0.100	0.82	0.001	0.0018	0.0008	0.0014	-	-	-	-	-	-	-
	a48	0.40	0.25	0.51	0.101	1.24	0.002	0.0015	0.0013	0.0016	-	-	-	-	-	-	-
	a49	0.40	0.25	1.50	0.172	0.11	0.002	0.0015	0.0009	0.0013	-	-	0.12	-	-	-	-
	a50	0.39	0.27	0.80	0.172	0.53	0.002	0.0015	0.0018	0.0012	-	-	0.12	-	-	-	-
	a51	0.40	0.25	1.20	0.166	0.20	0.004	0.0024	0.0009	0.0014	-	-	0.12	-	-	-	-
	a52	0.40	0.25	1.20	0.166	0.20	0.004	0.0024	0.0009	0.0014	-	-	0.12	-	-	-	-
	a53	0.41	0.25	1.19	0.162	0.20	0.002	0.0005	0.0011	0.0012	-	-	0.12	-	-	-	-
	a54	0.40	0.26	1.20	0.163	0.20	0.002	0.0068	0.0012	0.0009	-	-	0.12	-	-	-	-
	a55	0.40	0.24	0.79	0.100	1.09	0.002	0.0005	0.0008	0.0014	-	-	-	-	-	-	-
	a56	0.39	0.24	0.80	0.103	1.11	0.002	0.0040	0.0009	0.0015	-	-	-	-	-	-	-
	a57	0.41	0.25	1.19	0.162	0.20	0.002	0.0005	0.0011	0.0012	-	-	0.12	-	-	-	-
	a58	0.40	0.25	1.21	0.167	0.19	0.002	0.0040	0.0013	0.0010	-	-	0.12	-	-	-	-
	a59	0.40	0.25	1.20	0.165	0.20	0.002	0.0023	0.0003	0.0014	-	-	0.12	-	-	-	-
	a60	0.40	0.27	1.21	0.172	0.20	0.002	0.0019	0.0064	0.0009	-	-	0.11	-	-	-	-

(Table 12)

steel type	No.	Chemical Component (% by weight)																
		C	Si	Mn	S	Cr	Al	Ca	Mg	O	Mo	Ni	V	Nb	Ti	B	Bi	REM
steel of the present invention	a61	0.39	0.24	0.81	0.103	1.08	0.002	0.0018	0.0005	0.0013	-	-	-	-	-	-	-	-
	a62	0.40	0.25	0.79	0.100	1.05	0.002	0.0022	0.0040	0.0011	-	-	-	-	-	-	-	-
	a63	0.40	0.25	1.24	0.171	0.20	0.001	0.0016	0.0005	0.0017	-	-	0.12	-	-	-	-	-
	a64	0.40	0.25	1.20	0.172	0.20	0.002	0.0015	0.0040	0.0011	-	-	0.12	-	-	-	-	-
	a65	0.40	0.25	1.29	0.161	0.20	0.002	0.0014	0.0012	0.0018	-	-	0.12	-	-	-	-	-
	a66	0.40	0.25	1.29	0.161	0.20	0.002	0.0014	0.0012	0.0018	-	-	0.12	-	-	-	-	-
	a67	0.40	0.25	1.20	0.165	0.20	0.002	0.0022	0.0012	0.0012	-	-	0.12	-	-	-	0.02	-
	a68	0.40	0.25	1.21	0.164	0.20	0.001	0.0020	0.0014	0.0015	-	-	0.12	-	-	-	0.18	-
	a69	0.40	0.24	0.80	0.103	1.02	0.002	0.0014	0.0014	0.0011	-	-	-	-	-	-	0.02	-
	a70	0.40	0.25	0.82	0.102	1.04	0.002	0.0017	0.0010	0.0013	-	-	-	-	-	-	0.10	-
	a71	0.40	0.25	1.20	0.166	0.20	0.002	0.0022	0.0012	0.0012	-	-	0.12	-	-	-	0.02	-
	a72	0.40	0.25	1.21	0.166	0.20	0.001	0.0020	0.0014	0.0015	-	-	0.12	-	-	-	0.10	-
	a73	0.41	0.26	1.20	0.166	0.20	0.002	0.0015	0.0012	0.0012	-	-	0.12	-	-	-	-	0.002
	a74	0.40	0.25	1.19	0.168	0.20	0.002	0.0020	0.0012	0.0013	-	-	0.12	-	-	-	-	0.260
	a75	0.40	0.24	0.79	0.099	1.02	0.002	0.0014	0.0014	0.0011	-	-	-	-	-	-	-	0.050
	a76	0.39	0.25	0.81	0.104	1.04	0.002	0.0017	0.0010	0.0013	-	-	-	-	-	-	-	0.100
	a77	0.40	0.25	1.22	0.166	0.20	0.002	0.0013	0.0013	0.0010	-	-	0.12	-	-	-	-	0.050
	a78	0.40	0.25	1.21	0.168	0.20	0.002	0.0022	0.0017	0.0014	-	-	0.12	-	-	-	-	0.150

(Table 13)

steel type	No.	Chemical Component (% by weight)																
		C	Si	Mn	S	Cr	Al	Ca	Mg	O	Mo	Ni	V	Nb	Ti	B	Bi	REM
comparison steel	b1	0.40	0.25	0.82	0.020	0.20	0.002	0.0016	0.0013	0.0015	-	-	0.12	-	-	-	-	-
	b2	0.40	0.26	1.38	0.370	0.20	0.002	0.0014	0.0011	0.0016	-	-	0.12	-	-	-	-	-
	b3	0.41	0.25	1.20	0.171	0.20	0.012	0.0022	0.0010	0.0016	-	-	0.11	-	-	-	-	-
	b4	0.41	0.25	1.22	0.161	0.20	0.002	0.0003	0.0011	0.0012	-	-	0.12	-	-	-	-	-
	b5	0.40	0.24	1.20	0.165	0.19	0.002	0.0210	0.0018	0.0009	-	-	0.12	-	-	-	-	-
	b6	0.40	0.25	1.19	0.162	0.20	0.002	0.0016	0.0002	0.0016	-	-	0.12	-	-	-	-	-
	b7	0.40	0.25	1.20	0.162	0.21	0.002	0.0018	0.0210	0.0014	-	-	0.12	-	-	-	-	-
	b8	0.41	0.26	1.23	0.162	0.20	0.002	0.0013	0.0011	0.0022	-	-	0.12	-	-	-	-	-

(Table 14)

steel type	No.	carbide tool loss by wear		chip disposability index		deep drilling property		drill life		air-cooling treatment		hardening and tempering		impact-resistance anisotropy		endurance ratio
		(mm)	E	(index)	E	(mm)	E	(drilling number)	E	hardness	tensile strength (Mpa)	hardness (Hv)	tensile strength (Mpa)	(T/L)	E	
steel of the present invention	a1	0.05	○	21	○	73	◎	861	◎	182	-	401	1281	0.47	○	0.49
	a2	0.09	○	29	○	76	◎	754	○	-	-	301	972	0.36	○	0.47
	a3	0.11	○	14	○	67	○	650	○	-	-	282	918	0.33	○	0.50
	a4	0.12	○	13	○	62	○	614	○	-	-	306	994	0.33	○	0.49
	a5	0.06	○	34	○	94	◎	1241	◎	238	776	-	-	0.36	○	0.46
	a6	0.08	○	31	○	94	◎	1117	◎	254	820	-	-	0.34	○	0.45
	a7	0.12	○	14	○	68	○	675	○	-	-	280	912	0.31	○	0.51
	a8	0.12	○	13	○	64	○	622	○	-	-	325	1054	0.30	○	0.49
	a9	0.06	○	32	○	94	◎	1212	◎	245	798	-	-	0.35	○	0.47
	a10	0.07	○	34	○	94	◎	1160	◎	248	807	-	-	0.33	○	0.44
	a11	0.08	○	32	○	94	◎	1121	◎	252	818	-	-	0.33	○	0.45
	a12	0.08	○	31	○	94	◎	1106	◎	257	820	-	-	0.35	○	0.45
	a13	0.11	○	15	○	68	○	666	○	-	-	289	935	0.32	○	0.51
	a14	0.11	○	14	○	66	○	648	○	-	-	292	935	0.32	○	0.50
	a15	0.07	○	32	○	94	◎	1128	◎	249	809	-	-	0.34	○	0.46
	a16	0.08	○	31	○	94	◎	1100	◎	254	821	-	-	0.34	○	0.45
	a17	0.11	○	15	○	68	○	666	○	-	-	289	935	0.32	○	0.51
	a18	0.11	○	14	○	66	○	648	○	-	-	292	935	0.32	○	0.50
	a19	0.07	○	32	○	94	◎	1128	◎	249	809	-	-	0.34	○	0.46
	a20	0.08	○	31	○	94	◎	1100	◎	254	821	-	-	0.34	○	0.45
	a21	0.11	○	13	○	62	○	664	○	-	-	294	938	0.41	○	0.49
	a22	0.12	○	14	○	61	○	621	○	-	-	288	934	0.40	○	0.49
	a23	0.11	○	15	○	66	○	668	○	-	-	290	936	0.33	○	0.50
	a24	0.11	○	14	○	64	○	643	○	-	-	296	940	0.32	○	0.51
	a25	0.08	○	31	○	94	◎	1106	◎	253	820	-	-	0.34	○	0.45
	a26	0.08	○	31	○	94	◎	1097	◎	258	823	-	-	0.34	○	0.45
	a27	0.11	○	15	○	66	○	668	○	-	-	290	936	0.33	○	0.50
	a28	0.11	○	14	○	64	○	643	○	-	-	296	940	0.32	○	0.51
	a29	0.08	○	32	○	94	◎	1111	◎	243	790	-	-	0.33	○	0.46
	a30	0.08	○	31	○	94	◎	1102	◎	251	809	-	-	0.34	○	0.45

E:evaluation

(Table 15)

steel type	No.	carbide tool loss by wear		chip disposability index		deep drilling property		drill life		air-cooling treatment		hardening and tempering		impact-resistance anisotropy		endurance ratio	
		(mm)	E	(index)	E	(mm)	E	(drilling number)	E	hardness (Hv)	tensile strength (Mpa)	hardness (Hv)	tensile strength (Mpa)	(T/L)	E	(endurance ratio)	E
steel of the present invention	a31	0.07	○	32	○	68	○	821	○	245	793	-	-	0.39	○	0.45	○
	a32	0.06	○	36	⊙	94	⊙	1296	⊙	242	792	-	-	0.31	○	0.45	○
	a33	0.11	○	14	○	66	○	660	○	-	-	288	937	0.33	○	0.51	○
	a34	0.10	○	15	○	68	○	692	○	-	-	284	932	0.32	○	0.50	○
	a35	0.10	○	24	○	94	⊙	835	○	-	-	291	935	0.31	○	0.51	○
	a36	0.10	○	26	○	94	⊙	898	⊙	-	-	286	932	0.31	○	0.50	○
	a37	0.08	○	27	○	94	⊙	1074	⊙	250	810	-	-	0.35	○	0.46	○
	a38	0.08	○	29	○	94	⊙	1082	⊙	247	808	-	-	0.33	○	0.46	○
	a39	0.08	○	31	○	94	⊙	1124	⊙	251	810	-	-	0.34	○	0.46	○
	a40	0.07	○	33	○	94	⊙	1155	⊙	251	810	-	-	0.33	○	0.45	○
	a41	0.12	○	14	○	61	○	621	○	-	-	288	934	0.40	○	0.49	○
	a42	0.11	○	13	○	62	○	664	○	-	-	294	938	0.41	○	0.49	○
	a43	0.11	○	14	○	64	○	643	○	-	-	296	940	0.32	○	0.51	○
	a44	0.11	○	15	○	66	○	668	○	-	-	290	936	0.33	○	0.50	○
	a45	0.08	○	31	○	94	⊙	1097	⊙	258	823	-	-	0.34	○	0.45	○
	a46	0.08	○	31	○	94	⊙	1106	○	253	820	-	-	0.34	○	0.45	○
Eievaluation	a47	0.11	○	14	○	64	○	643	○	-	-	296	940	0.32	○	0.51	○
	a48	0.11	○	15	○	66	○	668	○	-	-	290	936	0.33	○	0.50	○
	a49	0.08	○	31	○	94	⊙	1102	⊙	251	809	-	-	0.34	○	0.45	○
	a50	0.08	○	32	○	94	⊙	1111	⊙	243	790	-	-	0.33	○	0.46	○
	a51	0.09	○	32	○	94	⊙	1072	⊙	251	808	-	-	0.34	○	0.44	○
	a52	0.09	○	32	○	94	⊙	1072	⊙	251	808	-	-	0.34	○	0.44	○
	a53	0.08	○	33	○	94	⊙	1121	⊙	248	811	-	-	0.32	○	0.45	○
	a54	0.06	○	32	○	94	⊙	1157	⊙	253	814	-	-	0.36	○	0.45	○
	a55	0.12	○	15	○	65	○	633	○	-	-	295	932	0.31	○	0.51	○
	a56	0.10	○	13	○	66	○	649	○	-	-	293	933	0.33	○	0.50	○
	a57	0.08	○	33	○	94	⊙	1121	⊙	248	811	-	-	0.32	○	0.45	○
	a58	0.07	○	33	○	94	⊙	1149	⊙	249	811	-	-	0.35	○	0.45	○
	a59	0.08	○	32	○	94	⊙	1155	⊙	247	808	-	-	0.33	○	0.46	○
	a60	0.07	○	33	○	94	⊙	1196	⊙	251	810	-	-	0.35	○	0.45	○

Eievaluation

(Table16)

steel type	No.	carbide tool loss by wear		chip disposability index		deep drilling property		drill life		air-cooling treatment		hardening and tempering		impact-resistance anisotropy		endurance ratio	
		(mm)	E	(index)	E	(mm)	E	(drilling number)	E	hardness (Hv)	tensile strength (Mpa)	hardness (Hv)	tensile strength (Mpa)	(T/L)	E	(endurance ratio)	E
steel of the present invention	a61	0.11	○	15	○	67	○	651	○	-	-	292	938	0.31	○	0.51	○
	a62	0.09	○	15	○	69	○	673	○	-	-	294	937	0.33	○	0.50	○
	a63	0.09	○	32	○	94	⊙	1158	⊙	244	802	-	-	0.32	○	0.45	○
	a64	0.07	○	33	○	94	⊙	1188	⊙	253	812	-	-	0.35	○	0.45	○
	a65	0.09	○	31	○	94	⊙	1089	⊙	254	821	-	-	0.34	○	0.45	○
	a66	0.09	○	31	○	94	⊙	1089	⊙	254	821	-	-	0.34	○	0.45	○
	a67	0.07	○	37	⊙	94	⊙	1384	⊙	249	809	-	-	0.34	○	0.45	○
	a68	0.07	○	40	⊙	94	⊙	1453	⊙	251	813	-	-	0.33	○	0.45	○
	a69	0.11	○	24	○	68	○	850	⊙	-	-	289	935	0.32	○	0.51	○
	a70	0.11	○	26	○	72	○	904	⊙	-	-	293	940	0.31	○	0.50	○
	a71	0.07	○	37	⊙	94	⊙	1384	⊙	249	809	-	-	0.34	○	0.45	○
	a72	0.07	○	38	⊙	94	⊙	1407	⊙	251	813	-	-	0.33	○	0.45	○
	a73	0.07	○	32	○	94	⊙	1329	⊙	250	810	-	-	0.34	○	0.45	○
	a74	0.07	○	35	⊙	94	⊙	1425	⊙	250	810	-	-	0.33	○	0.45	○
	a75	0.09	○	23	○	66	○	847	○	-	-	290	936	0.32	○	0.50	○
	a76	0.08	○	25	○	69	○	900	⊙	-	-	291	936	0.31	○	0.50	○
	a77	0.07	○	33	○	94	⊙	1333	⊙	248	809	-	-	0.34	○	0.45	○
	a78	0.07	○	34	○	94	⊙	1408	⊙	253	811	-	-	0.33	○	0.45	○

E:evaluation

(Table 17)

steel type	No.	carbide tool loss by wear		chip disposability index		deep drilling property		drill life		air-cooling treatment		hardening and tempering		impact-resistance anisotropy		endurance ratio	
		(mm)	z	(index)	z	(mm)	z	(drilling number)	z	(Hv)	(Mpa)	(Hv)	(Mpa)	(T/L)	z	(endurance ratio)	z
comparison steel	b1	0.15	x	8	x	25	x	343	x	245	793	-	-	0.39	○	0.45	○
	b2	0.06	○	36	⊙	94	⊙	1306	⊙	242	792	-	-	0.15	x	0.40	x
	b3	0.14	x	30	⊙	71	○	846	○	253	810	-	-	0.34	○	0.41	x
	b4	0.14	x	33	⊙	94	⊙	530	x	250	813	-	-	0.26	x	0.45	○
	b5	0.06	○	32	⊙	94	⊙	1159	⊙	256	811	-	-	0.36	○	0.41	x
	b6	0.14	x	32	⊙	94	⊙	538	x	247	802	-	-	0.25	x	0.45	○
	b7	0.07	○	33	⊙	94	⊙	1162	⊙	246	799	-	-	0.36	○	0.40	x
	b8	0.13	x	30	⊙	87	⊙	544	x	249	804	-	-	0.34	○	0.41	x

E:evaluation

(Table 18)

	evaluation criterion					
	carbide tool loss by wear	chip disposability index	deep drilling property	drill life	impact-resistance anisotropy	endurance ratio
5	⊙	0.04 or less	35 or more	73 or more	850 or more	0.50 or more
10	○	0.05 - 0.12	13 - 34	61 - 72	600 - 849	0.30 - 0.49
	×	0.13 or more	12 or less	60 or less	599 or less	0.29 or less

[0132] As described so far, according to the present invention, it is possible to provide a lead-free steel for machine structural use which does not contain Pb and is equal to or higher than the conventional Pb-containing free cutting steels in properties, excellent in machinability and low in strength anisotropy.

It is explicitly stated that all features disclosed in the description and/or the claims are intended to be disclosed separately and independently from each other for the purpose of original disclosure as well as for the purpose of restricting the claimed invention independent of the compositions of the features in the embodiments and/or the claims. It is explicitly stated that all value ranges or indications of groups of entities disclose every possible intermediate value or intermediate entity for the purpose of original disclosure as well as for the purpose of restricting the claimed invention.

Claims

1. A lead-free steel for machine structural use with excellent machinability and low strength anisotropy, comprising:
on the weight basis,
C: 0.10 to 0.65%;
Si: 0.03 to 1.00%;
Mn: 0.30 to 2.50%;
S: 0.03 to 0.35%;
Cr: 0.1 to 2.0%;
Al: less than 0.010%;
Ca: 0.0005 to 0.020%;
Mg: 0.0003 to 0.020%;
O: less than 20 ppm; and
the balance being Fe and inevitable impurities.
2. A lead-free steel for machine structural use with excellent machinability and low strength anisotropy, comprising:
on the weight basis,
C: 0.10 to 0.65%;
Si: 0.03 to 1.00%;
Mn: 0.30 to 2.50%;
S: 0.03 to 0.35%;
Cr: 0.1 to 2.0%;
Al: less than 0.005%;
Ca: 0.0005 to 0.020%;
Mg: 0.0003 to 0.020%;
O: less than 20 ppm; and
the balance being Fe and inevitable impurities.
3. The lead-free steel for machine structural use with excellent machinability and low strength anisotropy according to claim 1 or 2, further comprising one or more elements selected from a group of, on the weight basis, Mo: 0.05 to 1.00%, Ni: 0.1 to 3.5%, V: 0.01 to 0.50%, Nb: 0.01 to 0.10%, Ti: 0.01 to 0.10% and B: 0.0005 to 0.0100%.
4. The lead-free steel for machine structural use with excellent machinability and low strength anisotropy according to any of claims 1 to 3, further comprising one or two elements selected from a group of, on the weight basis, Bi: 0.01 to 0.30% and REM: 0.001 to 0.10%.

EP 1 688 512 A1

5. The lead-free steel for machine structural use with excellent machinability and low strength anisotropy according to any of claims 1 to 4, comprising one or two selected from a group of (Ca, Mg)S and (Ca, Mg, Mn)S as a sulfide-based inclusion.

5

10

15

20

25

30

35

40

45

50

55

FIG. 1

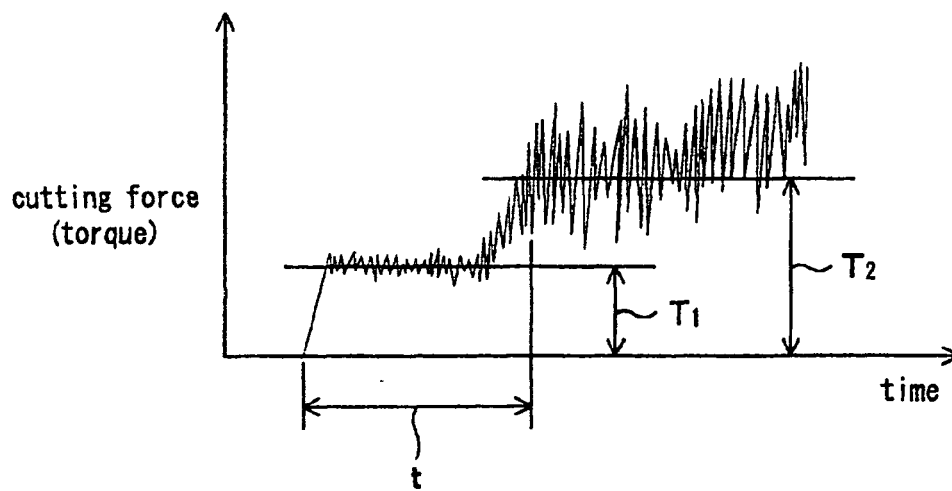


FIG. 2

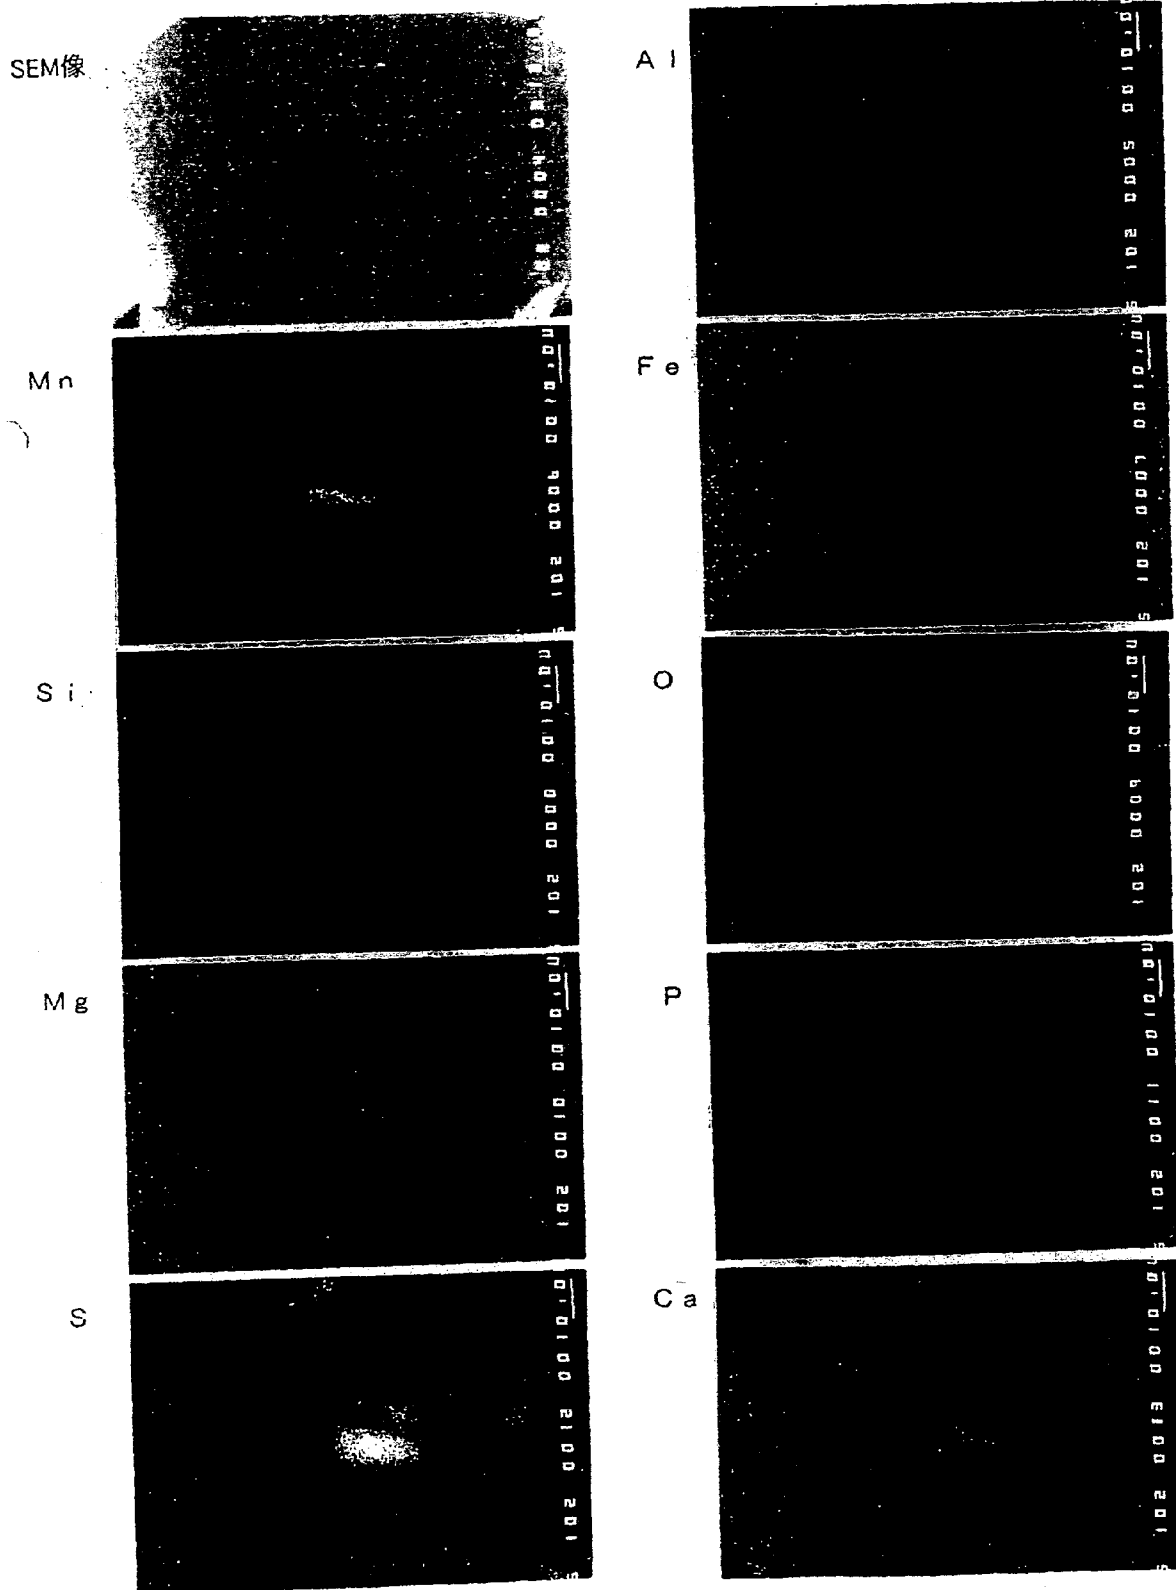


FIG. 3

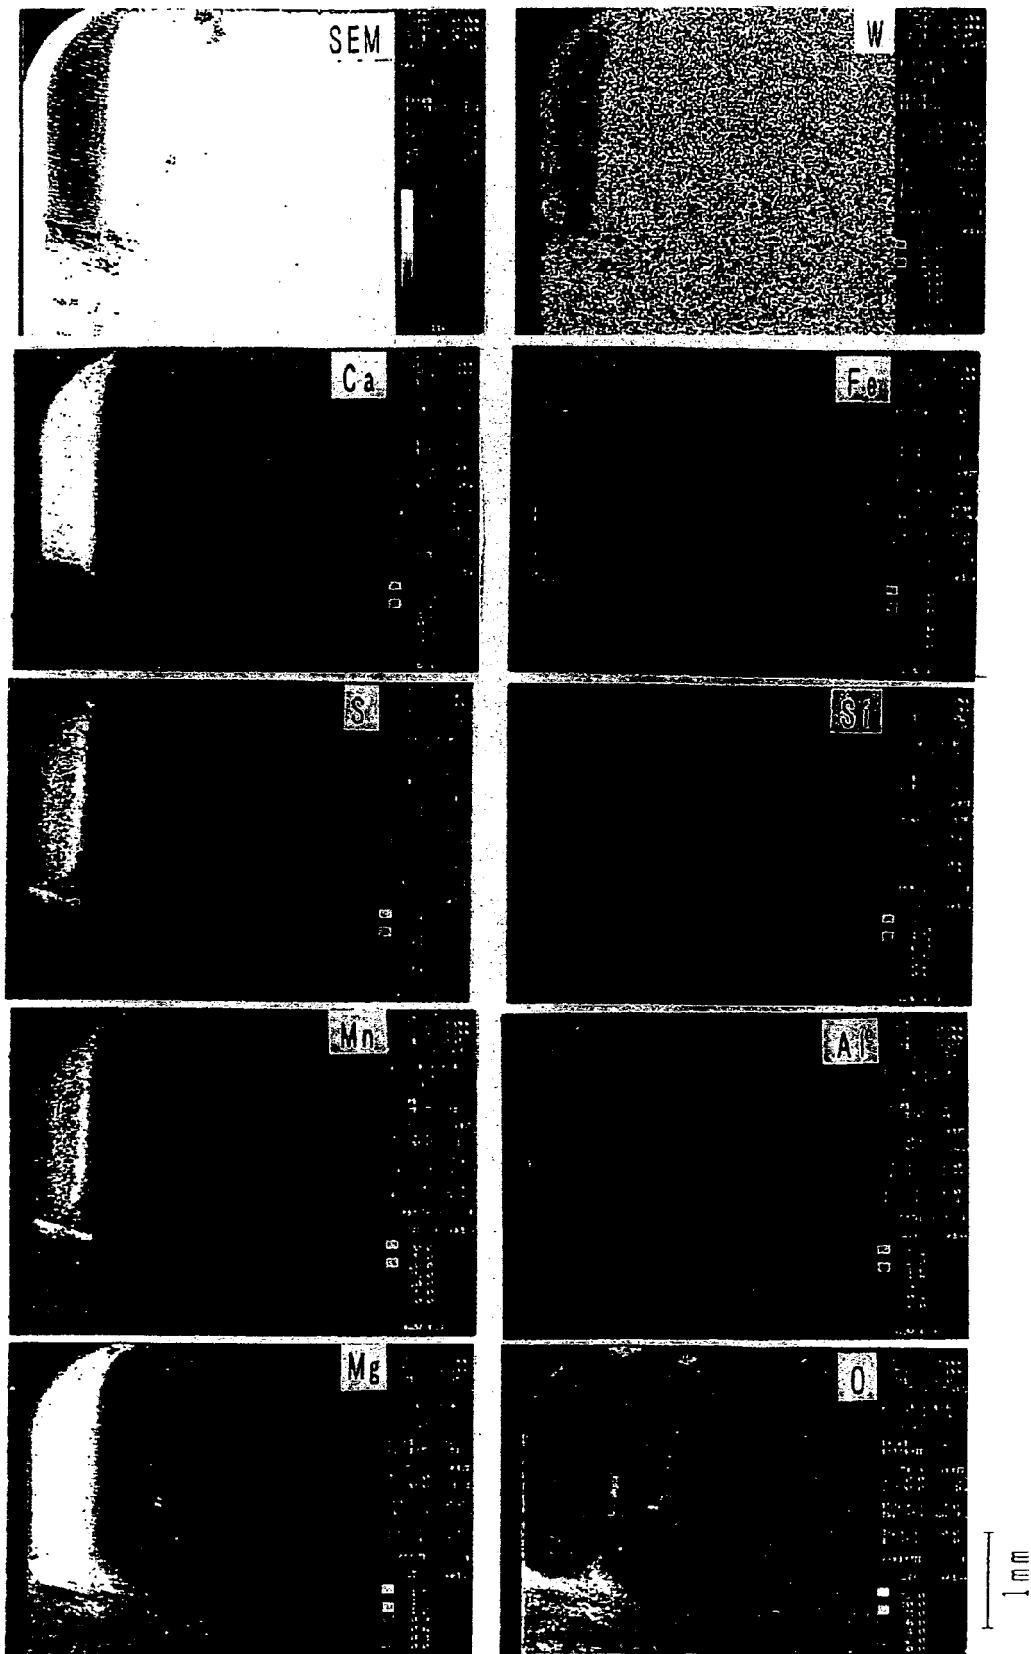


FIG. 4


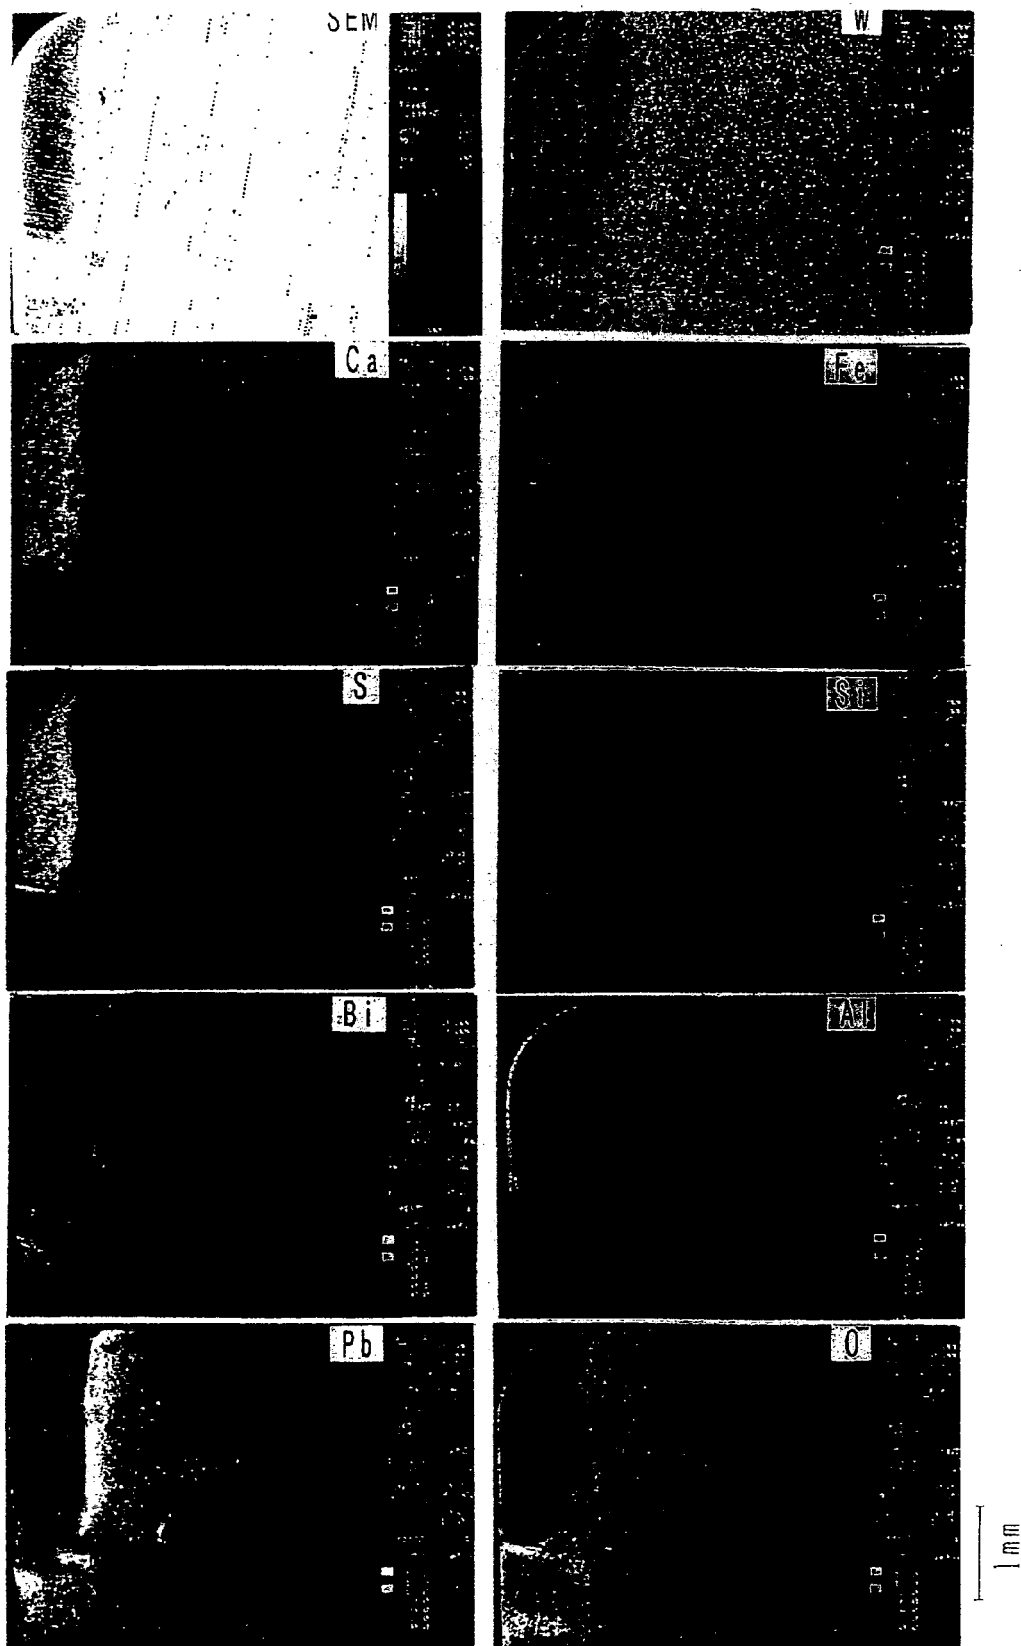


FIG. 5



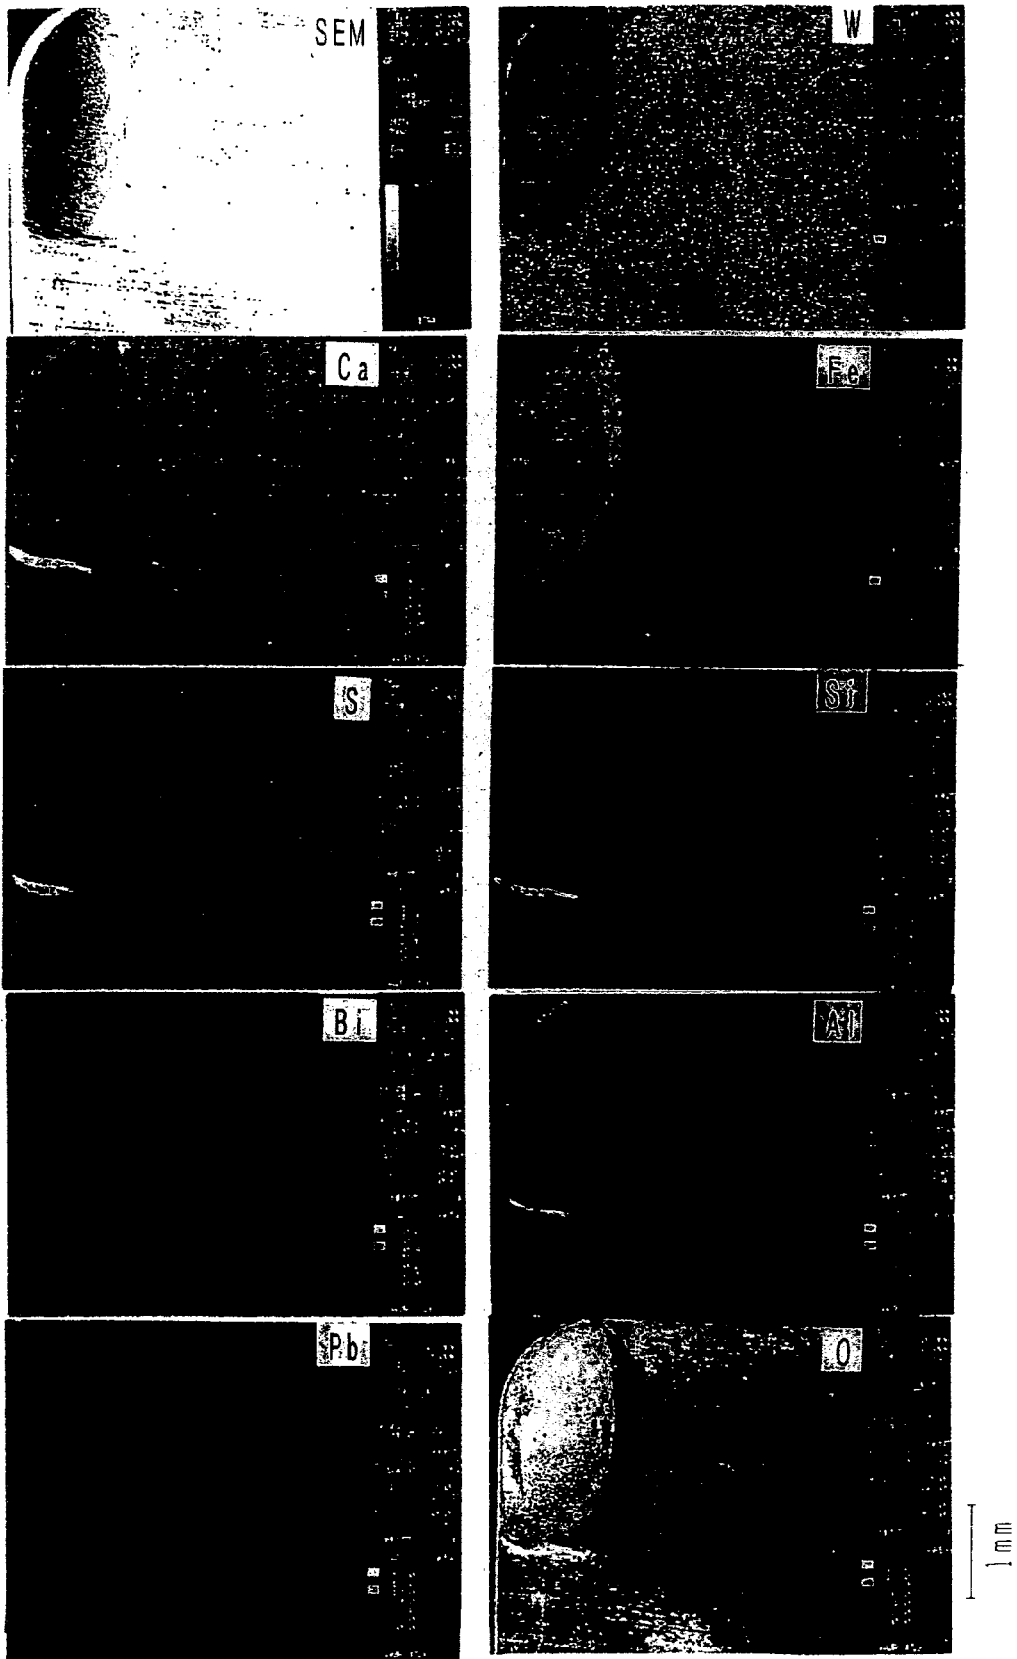

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 06 00 5867

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
Y	PATENT ABSTRACTS OF JAPAN vol. 006, no. 239 (C-137), 26 November 1982 (1982-11-26) -& JP 57 140853 A (SHIN NIPPON SEITETSU KK), 31 August 1982 (1982-08-31) * abstract; table 1 *	1-5	INV. C22C38/18 C22C38/54 C22C38/60
Y	PATENT ABSTRACTS OF JAPAN vol. 006, no. 239 (C-137), 26 November 1982 (1982-11-26) -& JP 57 140854 A (SHIN NIPPON SEITETSU KK), 31 August 1982 (1982-08-31) * abstract; table 1 *	1-5	
Y	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 03, 30 March 2000 (2000-03-30) -& JP 11 350065 A (DAIDO STEEL CO LTD), 21 December 1999 (1999-12-21) * abstract; table 1 *	1-5	
Y	PATENT ABSTRACTS OF JAPAN vol. 1998, no. 11, 30 September 1998 (1998-09-30) -& JP 10 176241 A (NIPPON STEEL CORP), 30 June 1998 (1998-06-30) * abstract; tables 1,2 *	1-5	TECHNICAL FIELDS SEARCHED (IPC) C22C
Y,D	US 4 004 922 A (THIVELLIER DANIEL ET AL) 25 January 1977 (1977-01-25) * column 1, line 59 - column 3, line 21; tables 1-9 *	1-5	
A	EP 0 487 024 A (NIPPON STEEL CORP) 27 May 1992 (1992-05-27) * claims 1-4; table 1 *	1-5	
		-/--	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 27 June 2006	Examiner Catana, C
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

5
EPO FORM 1503 03.82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 06 00 5867

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	PATENT ABSTRACTS OF JAPAN vol. 1995, no. 10, 30 November 1995 (1995-11-30) -& JP 07 188849 A (KAWASAKI STEEL CORP), 25 July 1995 (1995-07-25) * abstract; tables 1,2,4 *	1-5	
A	PATENT ABSTRACTS OF JAPAN vol. 1995, no. 10, 30 November 1995 (1995-11-30) -& JP 07 188847 A (KAWASAKI STEEL CORP), 25 July 1995 (1995-07-25) * abstract; tables 1-10 *	1-5	
A	US 3 647 425 A (YOSHIO MIYASHITA ET AL) 7 March 1972 (1972-03-07) * abstract *	1-5	
			TECHNICAL FIELDS SEARCHED (IPC)
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 27 June 2006	Examiner Catana, C
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

5

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 06 00 5867

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

27-06-2006

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 57140853	A	31-08-1982	NONE
JP 57140854	A	31-08-1982	JP 61016337 B 30-04-1986
JP 11350065	A	21-12-1999	NONE
JP 10176241	A	30-06-1998	NONE
US 4004922	A	25-01-1977	AT 347992 B 25-01-1979 AT 774975 A 15-06-1978 BE 834372 A1 12-04-1976 CA 1052133 A1 10-04-1979 DE 2545104 A1 22-04-1976 DK 451375 A 12-04-1976 ES 441586 A1 01-04-1977 FR 2287521 A1 07-05-1976 GB 1533122 A 22-11-1978 IE 43069 B1 17-12-1980 IN 148704 A1 16-05-1981 IT 1043204 B 20-02-1980 JP 51063312 A 01-06-1976 LU 73563 A1 19-08-1976 NL 7511978 A 13-04-1976 SE 7511338 A 12-04-1976
EP 0487024	A	27-05-1992	JP 2573118 B2 22-01-1997 JP 5005157 A 14-01-1993 US 5213633 A 25-05-1993
JP 07188849	A	25-07-1995	NONE
JP 07188847	A	25-07-1995	NONE
US 3647425	A	07-03-1972	AT 318683 B 25-10-1974 CA 920843 A1 13-02-1973 CH 516000 A 30-11-1971 DE 2016561 A1 07-01-1971 JP 51006088 B 25-02-1976 NL 7004992 A 09-10-1970 SE 369736 B 16-09-1974

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82