



(11)

EP 1 691 448 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
16.08.2006 Bulletin 2006/33

(51) Int Cl.:
H01Q 21/28 (2006.01) **H01Q 3/24** (2006.01)
H01Q 1/24 (2006.01) **H04B 7/08** (2006.01)

(21) Application number: **05250740.7**

(22) Date of filing: **09.02.2005**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR**
Designated Extension States:
AL BA HR LV MK YU

• **Man, Ying Tong**
Kitchener, Ontario, N2M 5G1 (CN)
• **Jarmuszewski, Perry**
Guelph, Ontario, N2E SW4 (CN)

(71) Applicant: **Research In Motion Limited**
Waterloo, Ontario N2L 3W8 (CA)

(74) Representative: **Roberts, Gwilym Vaughan et al**
Kilburn & Strode
20 Red Lion Street
London WC1R 4PJ (GB)

(72) Inventors:
• **Qi, Yihong**
Waterloo, Ontario, N2T 2H3 (CN)

Remarks:

Amended claims in accordance with Rule 86 (2) EPC.

(54) **Mobile wireless communications device providing pattern/frequency control features and related method**

(57) A mobile wireless communications device may include a portable housing, a wireless transceiver carried by the portable housing, and a plurality of antennas also carried by the portable housing. Each antenna may have a different gain pattern at a different respective operating frequency, and the antennas may have different shapes to define different gain patterns at a given operating frequency. The mobile wireless communications device may further include a frequency/pattern diversity controller for controlling the wireless transceiver to preferentially operate with the plurality of antennas.

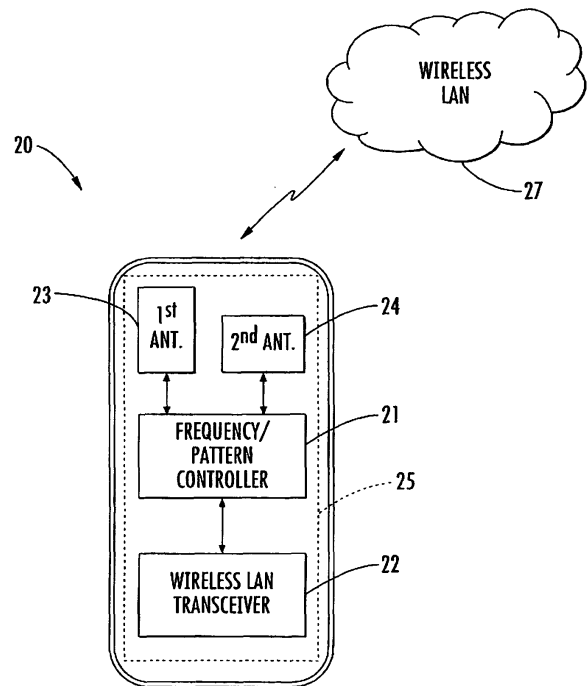


FIG. 1

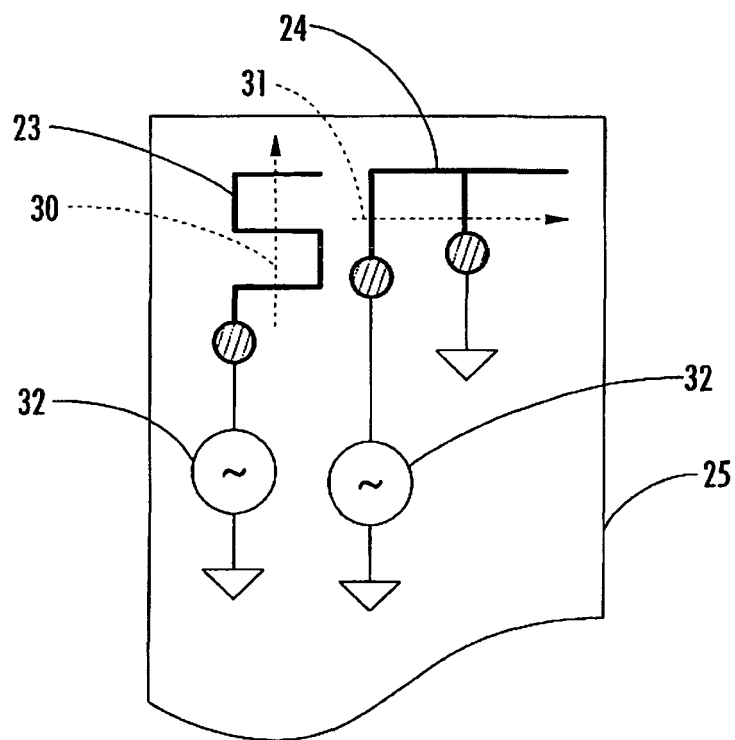


FIG. 3

Description

Field of the Invention

[0001] The present invention relates to the field of communications systems, and, more particularly, to wireless communications systems and related methods.

Background of the Invention

[0002] Computers are often connected together as part of a Local Area Network (LAN). The LAN permits computers to share data and programs with one another. Many typical LANs are based upon physical connections between individual computers and a server, for example. The connections may be twisted pair conductors, coaxial cables, or optical fibers, for example.

[0003] There is also another class of LAN based upon wireless communication to the individual computers. A wireless LAN is not restricted to having physical connections to the individual computers. Accordingly, original installation may be simplified. Additionally, one or more of the computers may be used in a mobile fashion. In other words, the user may use a laptop computer and move from place to place while still being connected via the wireless LAN.

[0004] Various standards have been created to define operating protocols for wireless LANs, such as the IEEE 802.11 and Bluetooth standards. The IEEE 802.11 standard, for example, defines the protocol for several types of networks including ad-hoc and client/server networks. An ad-hoc network is a network where communications are established between multiple stations in a given coverage area without the use of an access point or server. The standard provides methods for arbitrating requests to use the medium to ensure that throughput is maximized for all of the users in the base service set.

[0005] The client/server network uses an access point that controls the allocation of transmit time for all stations and allows mobile stations to roam from one access point to another. The access point is used to handle traffic from the mobile radio to the wired or wireless backbone of the client/server network. This arrangement allows for point coordination of all of the stations in the basic service area and ensures proper handling of the data traffic. The access points route data between each station and other wired/wireless stations, or to and from the network server (i.e., a base station). Of course, two or more LANs may be interconnected using wireless LAN devices at respective access points. This may be considered a network bridge application.

[0006] One of the challenges of wireless LAN implementation is designing suitable antennas that can provide desired performance characteristics, yet are relatively small in size to fit within mobile devices. For example, with wireless LAN devices such as laptop computers, it is desirable to keep the overall size of the laptop as small as possible. Furthermore, internal antennas are

generally preferred over external antennas, as externally mounted antennas take up more space and are generally more acceptable to damage while traveling, etc.

[0007] One example of a wireless LAN antenna that is implemented on a PCMCIA card to be inserted in a PCMCIA slot of a laptop computer is disclosed in U.S. Patent No. 6,031,503 to Preiss, II et al. The antenna assembly includes two folded, U-shaped antennas, which may be dipoles or slot radiators, that are disposed orthogonally to one another to provide polarization diversity. Polarization diversity means that signals are transmitted and received on two different polarizations to increase the likelihood that the signal is received. Signals are carried to and from the antenna by microstrip feed lines. The microstrip lines are placed off center along each antenna slot to establish an acceptable impedance match for the antenna, and the feed lines are coupled to the communications card by coaxial cables.

[0008] Another exemplary wireless LAN antenna configuration is disclosed in U.S. Patent No. 6,624,790 to Wong et al. This patent discloses first and second dual-band printed monopole antennas which are disposed orthogonally to one another on a substrate. The antenna elements are the same shape (i.e., an "F" shape). In particular, the antenna elements provide 2.4 GHz and 5.2 GHz WLAN operation.

[0009] There is an increasing trend toward using other portable, handheld communications devices in wireless LANs which are even smaller than laptops, such as personal digital assistants (PDAs) and cellular phones, for example. Accordingly, with even more restrictive space constraints for such handheld devices, there is a need for antennas which are appropriately sized for such applications yet still provide desired performance characteristics.

Summary of the Invention

[0010] In view of the foregoing background, it is therefore an object of the present invention to provide a mobile wireless communications device including an antenna system which provides desired performance using frequency/pattern diversity and related methods.

[0011] This and other objects, features, and advantages in accordance with the present invention are provided by a mobile wireless communications device which may include a frequency/pattern diversity controller. The mobile wireless communications device may further include a portable housing, a wireless transceiver carried by the portable housing, and a plurality of antennas also carried by the portable housing. Each antenna may have a different gain pattern at a different respective operating frequency, and the antennas may have different shapes to define different gain patterns at a given operating frequency. Moreover, the frequency/pattern diversity controller may control the wireless transceiver to preferentially operate with the plurality of antennas.

[0012] More particularly, the frequency/pattern diver-

sity controller may control the wireless transceiver to preferentially switch at least one antenna on and at least one antenna off for receiving signals. Thus, a given antenna may be selected for receiving if its respective gain pattern at the given operating frequency provides better reception than the other antennas. Alternately, the frequency/pattern diversity controller may control the wireless transceiver to preferentially weight received signals.

[0013] In addition, the frequency/pattern diversity controller may control the wireless transceiver to preferentially switch at least one antenna on and at least one antenna off for transmitting signals. Furthermore, each antenna may be designated for transmitting signals at different respective operating frequencies, and the frequency/pattern diversity controller may control the wireless transceiver to preferentially switch the antennas on and off for transmitting signals based upon a given operating frequency.

[0014] The different gain patterns may comprise different gain patterns for different polarizations in some embodiments. Further, each antenna may have a respective boresight aligned in a common direction. The mobile wireless communications device may further include a circuit board carried by the portable housing and carrying the wireless transceiver, and it may also carry the frequency/pattern diversity controller. Moreover, at least one of the antennas may comprise a conductive trace on the circuit board. That is, at least one of the antennas may be carried within the portable housing. By way of example, the wireless transceiver may be a wireless local area network (LAN) transceiver.

[0015] A method aspect of the invention is for operating a mobile wireless communications device, such as the one described briefly above. The method may include controlling the wireless transceiver to preferentially operate with the plurality of antennas to provide frequency/pattern diversity.

Brief Description of the Drawings

[0016] FIG. 1 is a schematic block diagram of a mobile wireless communications device in accordance with the present invention.

[0017] FIG. 2 is an end view of the circuit board of the mobile wireless communications device of FIG. 1 illustrating respective boresights of the antenna thereon.

[0018] FIG. 3 is a front elevational view of an exemplary embodiment of the antennas of the mobile wireless communications device of FIG. 1 illustrating respective polarizations thereof.

[0019] FIGS. 4 and 5 are flow diagrams illustrating methods of operating a mobile wireless communications device in accordance with the present invention.

[0020] FIG. 6 is a schematic block diagram illustrating exemplary components of a mobile wireless communications device in accordance with the present invention.

Detailed Description of the Preferred Embodiments

[0021] The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like numbers refer to like elements throughout and prime notation is used to indicate similar elements or steps in different embodiments.

[0022] Referring initially to FIGS. 1-3, a mobile wireless communications device **20** in accordance with the present invention illustratively includes a portable housing **21**, a wireless transceiver **22** carried by the portable housing, and a plurality of antennas **23**, **24** also carried by the portable housing. In the illustrated embodiment, the wireless transceiver **22** is a wireless local area network (LAN) transceiver for communicating over a wireless LAN **27**. However, it should be noted that in other embodiments the mobile wireless communications device **20** may be used with other wireless communication networks, such as a cellular telephone network, for example. The antennas **23** and **24** are referred to herein as the first and second antennas, respectively, for clarity of explanation.

[0023] The wireless transceiver **22** and first and second antennas **23**, **24** may be carried by a circuit board **25**, such as a printed circuit board (PCB), for example. More particularly, the first and second antennas **23**, **24** may comprise printed conductive traces on the circuit board **25**. In other embodiments, the first and second antenna elements **23**, **24** need not be on the circuit board **25**, but may instead be on a separate antenna substrate, which need not be coplanar with the circuit board. Of course, portions of either antenna element **23**, **24** may be on both the circuit board **25** and a separate antenna substrate. In still another embodiment, one or more of the antennas **23**, **24** may be carried on the exterior of the housing **21**, for example.

[0024] Despite the particular configuration in a given embodiment, each antenna **23**, **24** preferably has a different gain pattern at a different respective operating frequency, and they preferably have different shapes to define different gain patterns at a given operating frequency. Moreover, the mobile wireless communications device **20** further illustratively includes a frequency/pattern diversity controller **26** for controlling the wireless transceiver **22** to preferentially operate with the antennas **23**, **24**. That is, the controller **26** advantageously provides frequency/pattern diversity by controlling the frequency and/or gain pattern used for either transmission or reception.

[0025] By way of example, the wireless LAN **27** may utilize multiple operating frequency bands such as a 2.4

GHz frequency band (i.e., approximately 2.4 to 2.483 GHz) and a 5 GHz frequency band (i.e., approximately 4.9 to 6 GHz), as will be appreciated by those skilled in the art. Because the 5 GHz frequency band is roughly double the 2.4 GHz frequency band, it is possible to make each of the antennas **23**, **24** resonate in both frequency bands. This may be done by varying the effective length of the antennas **23**, **24** using appropriate design techniques for the given antenna types used, as will be appreciated by those skilled in the art.

[0026] Thus, in accordance with the present example, both of the antennas **23**, **24** are designed to resonate in both the 2.4 and 5 GHz frequency bands, but they each have different gain patterns in the two frequency bands, and the gain patterns of each antenna are different from the gain patterns of the other antenna at a given operating frequency. More particularly, the first antenna **23** is designed so that its maximum gain along its boresight **28** (FIG. 2) occurs at the 2.4 operating frequency, while the maximum gain of the second antenna **24** along its boresight **29** occurs at the 5 GHz operating frequency. Preferably, the respective boresights **28**, **29** are aligned in a common direction, such as at a same angle α (e.g., 90°) with respect to the circuit board **25**, as shown in FIG. 2. It should be noted that the antenna elements **23**, **24** are shown with hatching in FIG. 2 for clarity of illustration, even though this is not a cross-sectional view.

[0027] As such, the frequency/pattern diversity controller **26** may control the wireless transceiver **22** to preferentially switch one of the antennas **23**, **24** on and the other off for receiving signals based upon which antenna's gain pattern is providing the best reception. The frequency/pattern controller **26** may make this determination based upon signal strength or noise measurements, for example, as will be appreciated by those skilled in the art. Thus, a given one of the antennas **23**, **24** may be selected for receiving if its respective gain pattern at the given operating frequency provides better reception than the other antenna.

[0028] Alternately, rather than using one of the antennas **23**, **24** and not the other, the frequency/pattern diversity controller **26** may control the wireless transceiver **22** to preferentially weight received signals. Thus, based upon signal strength and noise considerations, for example, the frequency/pattern diversity controller **26** may control the wireless LAN transceiver to weight the signals received by each of the first and second antennas **23**, **24**.

[0029] The frequency/pattern diversity controller **26** may similarly control the wireless transceiver **22** to preferentially operate the antennas **23**, **24** during transmission. That is, the frequency/pattern diversity controller **26** may control the wireless transceiver **22** to preferentially switch one of the antennas **23**, **24** on and the other off for transmitting signals. More particularly, each of the antennas **23**, **24** may be designated for transmitting signals at different respective operating frequencies.

[0030] For example, the first antenna **23** may be designated for transmitting in the 2.4 GHz frequency band,

while the second antenna **24** may be designated for transmitting in the 5.2 GHz band, as will be discussed further below. Of course, both antennas **23**, **24** could be used for transmitting signals and their outputs weighted, as similarly discussed for received signals above. Thus, the frequency/pattern diversity controller **26** may preferentially switch the antennas **23**, **24** on and off for transmitting signals based upon the given operating frequency (i.e., the 2.4 GHz or 5 GHz frequency band) being used by the receiving wireless LAN device (e.g., an access point, etc.).

[0031] The mobile wireless communications device **20** therefore not only provides frequency/pattern diversity, but it may also provide polarization diversity in certain embodiments. That is, the different gain patterns of the first and second antennas **23**, **24** may comprise different gain patterns for different polarizations. As shown in FIG. 3, for example, the first antenna **23** has substantially horizontal polarization as illustrated by a dashed arrow **30**, while the second antenna **24** has a substantially vertical polarization as illustrated by a dashed arrow **31**. Of course, other polarization arrangements may also be used.

[0032] In the illustrated example, the first antenna **23** is a monopole antenna with a single feed point connected to a signal source **32** (i.e., the wireless transceiver). The second antenna **24** is a slot inverted F antenna which has a first feed point connected to the signal source **32**, and a second feed point connected to ground. The monopole antenna **24** has a meandering shape in the illustrated example, which may be used to change the effective length, for example. However, various other shapes (including a straight conductor) and antenna types may also be used in accordance with the present invention, as will be appreciated by those skilled in the art.

[0033] Because the first antenna **23** is a single feed antenna, it will have a stronger current flow on the circuit board **25** than the second antenna **24**, it is well suited for providing the maximum gain along the boresight **28** at the 2.4 GHz operating frequency. On the other hand, because the antenna **24** has multiple feed points the current distribution on the circuit board **25** will be more limited, it is well suited for providing a maximum gain along the boresight **29** at the 5 GHz operating frequency, as will be appreciated by those skilled in the art. It should be noted that more than two antennas element may be used in some embodiments, and that in such embodiments the frequency/pattern diversity controller **26** need not control the wireless transceiver to preferentially operate all of such antennas. Moreover, the antennas **23**, **24** need not always be adjacent the top of the device **20**, e.g., one or more of the antennas may be adjacent the bottom of the device.

[0034] A method aspect of the invention for operating the mobile wireless communications device **20** is now described with reference to FIG. 4. Beginning at Block **40**, a determination is made as to which operating frequency or frequency band is to be used, at Block **41**.

Using the above noted example, when the device **20** is first turned on it may attempt to establish communications with the wireless LAN **27** over both the 2.4 and 5 GHz frequency bands, as will be appreciated by those skilled in the art. If the wireless LAN **27** is using the first (2.4 GHz) operating frequency band, then the first antenna **23** (which is the designated or default antenna for transmitting in this frequency band) is switched on and the second antenna **24** is switched off, at Block **42**.

[0035] Furthermore, the frequency/pattern diversity controller **26** may determine which antenna **23, 24** is providing better reception, as discussed above, and switch that antenna on and the other off for receiving wireless signals, at Blocks **43-45**, thus concluding the illustrated method (Block **46**). Similar steps to those illustrated in Blocks **42-45** would be performed if the wireless LAN was using the second (5GHz) operating frequency band (which are not shown in FIG. 4 for clarity of illustration) as will be appreciated by those skilled in the art.

[0036] In an alternate embodiment illustrated in FIG. 5, rather than initially determining which antenna **23, 24** provides better reception as described above with reference to Block **43**, each antenna may be designated as the initial (or default) receiving antenna for a given operating frequency band (e.g., the first antenna **23** for the 2.4 GHz frequency band, and the second antenna **24** for the 5 GHz frequency band), over that at Block **50'**. If the reception quality (e.g., signal strength) using the default antenna **23** remains above a desired threshold over the first operating frequency band, at Block **51'**, then the first antenna would continue to be used, at Block **52'**. However, if the received signal strength fell below the desired threshold, then the second antenna **24** may be used, or the received signals from both the first and second antennas weighted accordingly, at Block **53'**, as discussed further above. Of course, the above described method steps are merely exemplary, and different variations may be used in other embodiments. For example, the reception quality may be determined based upon whether a noise level or bit error rate exceeds a threshold, for example.

[0037] Exemplary components which may be used in accordance with the present invention are now described with reference to a handheld mobile wireless communications device **1000** is shown in FIG. 6. The device **1000** includes a housing **1200**, a keyboard **1400** and an output device **1600**. The output device shown is a display **1600**, which is preferably a full graphic LCD. Other types of output devices may alternatively be utilized. A processing device **1800** is contained within the housing **1200** and is coupled between the keyboard **1400** and the display **1600**. The processing device **1800** controls the operation of the display **1600**, as well as the overall operation of the mobile device **1000**, in response to actuation of keys on the keyboard **1400** by the user.

[0038] The housing **1200** may be elongated vertically, or may take on other sizes and shapes (including clam-shell housing structures). The keyboard may include a

mode selection key, or other hardware or software for switching between text entry and telephony entry.

[0037] In addition to the processing device **1800**, other parts of the mobile device **1000** are shown schematically in FIG. 6. These include a communications subsystem **1001**; a short-range communications subsystem **1020**; the keyboard **1400** and the display **1600**, along with other input/output devices **1060, 1080, 1100** and **1120**; as well as memory devices **1160, 1180** and various other device subsystems **1201**. The mobile device **1000** is preferably a two-way RF communications device having voice and data communications capabilities. In addition, the mobile device **1000** preferably has the capability to communicate with other computer systems via the Internet.

[0038] Operating system software executed by the processing device **1800** is preferably stored in a persistent store, such as the flash memory **1160**, but may be stored in other types of memory devices, such as a read only memory (ROM) or similar storage element. In addition, system software, specific device applications, or parts thereof, may be temporarily loaded into a volatile store, such as the random access memory (RAM) **1180**. Communications signals received by the mobile device may also be stored in the RAM **1180**.

[0039] The processing device **1800**, in addition to its operating system functions, enables execution of software applications **1300A-1300N** on the device **1000**. A predetermined set of applications that control basic device operations, such as data and voice communications **1300A** and **1300B**, may be installed on the device **1000** during manufacture. In addition, a personal information manager (PIM) application may be installed during manufacture. The PIM is preferably capable of organizing and managing data items, such as e-mail, calendar events, voice mails, appointments, and task items. The PIM application is also preferably capable of sending and receiving data items via a wireless network **1401**. Preferably, the PIM data items are seamlessly integrated, synchronized and updated via the wireless network **1401** with the device user's corresponding data items stored or associated with a host computer system.

[0040] Communication functions, including data and voice communications, are performed through the communications subsystem **1001**, and possibly through the short-range communications subsystem. The communications subsystem **1001** includes a receiver **1500**, a transmitter **1520**, and one or more antennas **1540** and **1560**. In addition, the communications subsystem **1001** also includes a processing module, such as a digital signal processor (DSP) **1580**, and local oscillators (LOs) **1601**. The specific design and implementation of the communications subsystem **1001** is dependent upon the communications network in which the mobile device **1000** is intended to operate. For example, a mobile device **1000** may include a communications subsystem **1001** designed to operate with the Mobitex™, Data TAC™ or General Packet Radio Service (GPRS) mobile data communications networks, and also designed to op-

erate with any of a variety of voice communications networks, such as AMPS, TDMA, CDMA, PCS, GSM, etc. Other types of data and voice networks, both separate and integrated, may also be utilized with the mobile device **1000**.

[0041] Network access requirements vary depending upon the type of communication system. For example, in the Mobitex and DataTAC networks, mobile devices are registered on the network using a unique personal identification number or PIN associated with each device. In GPRS networks, however, network access is associated with a subscriber or user of a device. A GPRS device therefore requires a subscriber identity module, commonly referred to as a SIM card, in order to operate on a GPRS network.

[0042] When required network registration or activation procedures have been completed, the mobile device **1000** may send and receive communications signals over the communication network **1401**. Signals received from the communications network **1401** by the antenna **1540** are routed to the receiver **1500**, which provides for signal amplification, frequency down conversion, filtering, channel selection, etc., and may also provide analog to digital conversion. Analog-to-digital conversion of the received signal allows the DSP **1580** to perform more complex communications functions, such as demodulation and decoding. In a similar manner, signals to be transmitted to the network **1401** are processed (e.g. modulated and encoded) by the DSP **1580** and are then provided to the transmitter **1520** for digital to analog conversion, frequency up conversion, filtering, amplification and transmission to the communication network **1401** (or networks) via the antenna **1560**.

[0043] In addition to processing communications signals, the DSP **1580** provides for control of the receiver **1500** and the transmitter **1520**. For example, gains applied to communications signals in the receiver **1500** and transmitter **1520** may be adaptively controlled through automatic gain control algorithms implemented in the DSP **1580**.

[0044] In a data communications mode, a received signal, such as a text message or web page download, is processed by the communications subsystem **1001** and is input to the processing device **1800**. The received signal is then further processed by the processing device **1800** for an output to the display **1600**, or alternatively to some other auxiliary I/O device **1060**. A device user may also compose data items, such as e-mail messages, using the keyboard **1400** and/or some other auxiliary I/O device **1060**, such as a touchpad, a rocker switch, a thumb-wheel, or some other type of input device. The composed data items may then be transmitted over the communications network **1401** via the communications subsystem **1001**.

[0045] In a voice communications mode, overall operation of the device is substantially similar to the data communications mode, except that received signals are output to a speaker **1100**, and signals for transmission are

generated by a microphone **1120**. Alternative voice or audio I/O subsystems, such as a voice message recording subsystem, may also be implemented on the device **1000**. In addition, the display **1600** may also be utilized in voice communications mode, for example to display the identity of a calling party, the duration of a voice call, or other voice call related information.

[0046] The short-range communications subsystem enables communication between the mobile device **1000** and other proximate systems or devices, which need not necessarily be similar devices. For example, the short-range communications subsystem may include an infrared device and associated circuits and components, or a Bluetooth communications module to provide for communication with similarly-enabled systems and devices.

[0047] Many modifications and other embodiments of the invention will come to the mind of one skilled in the art having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. Therefore, it is understood that the invention is not to be limited to the specific embodiments disclosed, and that modifications and embodiments are intended to be included within the scope of the appended claims.

Claims

1. A mobile wireless communications device comprising:
 - a portable housing;
 - a wireless transceiver carried by said portable housing;
 - a plurality of antennas carried by said portable housing, each antenna having a different gain pattern at a different respective operating frequency, said antennas having different shapes to define different gain patterns at a given operating frequency; and
 - a frequency/pattern diversity controller for controlling said wireless transceiver to preferentially operate with said plurality of antennas.
2. The wireless communications device of Claim 1 wherein said frequency/pattern diversity controller controls said wireless transceiver to preferentially switch at least one antenna on and at least one antenna off for receiving signals.
3. The wireless communications device of Claim 1 wherein said frequency/pattern diversity controller controls said wireless transceiver to preferentially weight received signals.
4. The wireless communications device of Claim 1 wherein said frequency/pattern diversity controller controls said wireless transceiver to preferentially switch at least one antenna on and at least one an-

tenna off for transmitting signals.

5. The wireless communications device of Claim 1 wherein each antenna is designated for transmitting signals at different respective operating frequencies, and wherein said frequency/pattern diversity controller controls said wireless transceiver to preferentially switch said antennas on and off for transmitting signals based upon a given operating frequency. 5
6. The mobile wireless communications device of Claim 1 where the different gain patterns comprise different gain patterns for different polarizations. 10
7. The mobile wireless communications device of Claim 1 wherein each antenna has a respective boresight aligned in a common direction. 15
8. The mobile wireless communications device of Claim 1 wherein at least one of said antennas is carried within said portable housing. 20
9. The mobile wireless communications device of Claim 1 further comprising a circuit board carried by said portable housing and carrying said wireless transceiver. 25
10. The mobile wireless communications device of Claim 1 wherein said wireless transceiver comprises a wireless local area network (LAN) transceiver. 30
11. A method of operating a mobile wireless communications device comprising a portable housing, a wireless transceiver carried by the portable housing, and a plurality of antennas carried by the portable housing, each antenna having a different gain pattern at a different respective operating frequency, and the antennas having different shapes to define different gain patterns at a given operating frequency, the method comprising: 35

controlling the wireless transceiver to preferentially operate with the plurality of antennas to provide frequency/pattern diversity. 40
12. The method of Claim 11 wherein controlling comprises controlling the wireless transceiver to preferentially switch at least one antenna on and at least one antenna off for receiving signals. 45
13. The method of Claim 11 wherein controlling comprises controlling the wireless transceiver to preferentially weight received signals. 50
14. The method of Claim 11 wherein controlling comprises controlling the wireless transceiver to preferentially switch at least one antenna on and at least one antenna off for transmitting signals. 55

15. The method of Claim 11 wherein each antenna is designated for transmitting signals at different respective operating frequencies, and wherein controlling comprises controlling the wireless transceiver to preferentially switch the antennas on and off for transmitting signals based upon a given operating frequency.

16. The method of Claim 11 where the different gain patterns comprise different gain patterns for different polarizations.

Amended claims in accordance with Rule 86(2) EPC.

1. A mobile wireless communications device (20) comprising a portable housing (21), a wireless transceiver (22) carried by said portable housing, **characterized in that** the device further comprises:

a plurality of antennas (23, 24) carried by said portable housing, each antenna has a different gain pattern at a different respective operating frequency, said antennas having different shapes to define different gain patterns at a given operating frequency; and
a frequency/pattern diversity controller (26) for controlling said wireless transceiver to preferentially operate with said plurality of antennas.

2. The wireless communications device (20) of Claim 1 wherein said frequency/pattern diversity controller (26) controls said wireless transceiver (22) to preferentially switch at least one antenna (23, 24) on and at least one antenna off for receiving signals.

3. The wireless communications device (20) of Claim 1 wherein said frequency/pattern diversity controller (26) controls said wireless transceiver (22) to preferentially weight received signals.

4. The wireless communications device (20) of Claim 1 wherein said frequency/pattern diversity controller (26) controls said wireless transceiver (22) to preferentially switch at least one antenna (23, 24) on and at least one antenna off for transmitting signals.

5. The wireless communications device (20) of Claim 1 wherein each antenna (23, 24) is designated for transmitting signals at different respective operating frequencies, and wherein said frequency/pattern diversity controller (26) controls said wireless transceiver (22) to preferentially switch said antennas on and off for transmitting signals based upon a given operating frequency.

6. The mobile wireless communications device (20) of Claim 1 where the different gain patterns comprise

different gain patterns for different polarizations.

7. The mobile wireless communications device (20) of Claim 1 wherein each antenna (23, 24) has a respective boresight (28, 29) aligned in a common direction. 5

8. The mobile wireless communications device (20) of Claim 1 wherein at least one of said antennas (23, 24) is carried within said portable housing (21). 10

9. The mobile wireless communications device (20) of Claim 1 further comprising a circuit board (25) carried by said portable housing (21) and carrying said wireless transceiver (22). 15

10. The mobile wireless communications device (20) of Claim 1 wherein said wireless transceiver (22) comprises a wireless local area network (LAN) transceiver. 20

11. A method of operating a mobile wireless communications device (20) comprising a portable housing (21), a wireless transceiver (22) carried by the portable housing, and a plurality of antennas (23, 24) carried by the portable housing, the method comprising: 25

controlling the wireless transceiver to preferentially operate with the plurality of antennas to provide frequency/pattern diversity (26), each antenna having a different gain pattern at a different respective operating frequency, and the antennas having different shapes to define different gain patterns at a given operating frequency. 30 35

12. The method of Claim 11 wherein controlling comprises controlling the wireless transceiver (22) to preferentially switch at least one antenna (23, 24) on and at least one antenna off for receiving signals. 40

13. The method of Claim 11 wherein controlling comprises controlling the wireless transceiver (22) to preferentially weight received signals. 45

14. The method of Claim 11 wherein controlling comprises controlling the wireless transceiver (22) to preferentially switch at least one antenna on and at least one antenna off for transmitting signals. 50

15. The method of Claim 11 wherein each antenna is designated for transmitting signals at different respective operating frequencies, and wherein controlling comprises controlling the wireless transceiver (22) to preferentially switch the antennas (23, 24) on and off for transmitting signals based upon a given operating frequency. 55

16. The method of Claim 11 where the different gain patterns comprise different gain patterns for different polarizations.

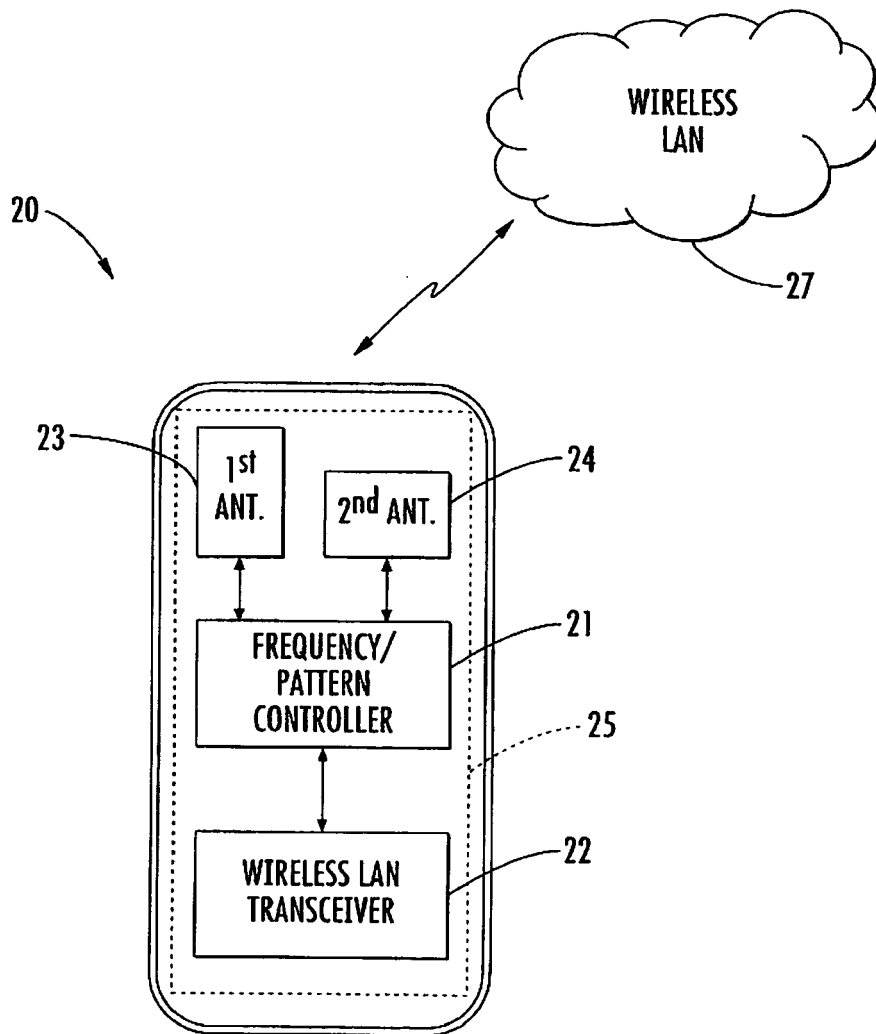


FIG. 1

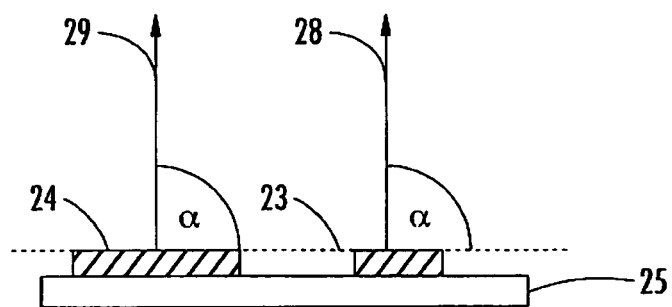


FIG. 2

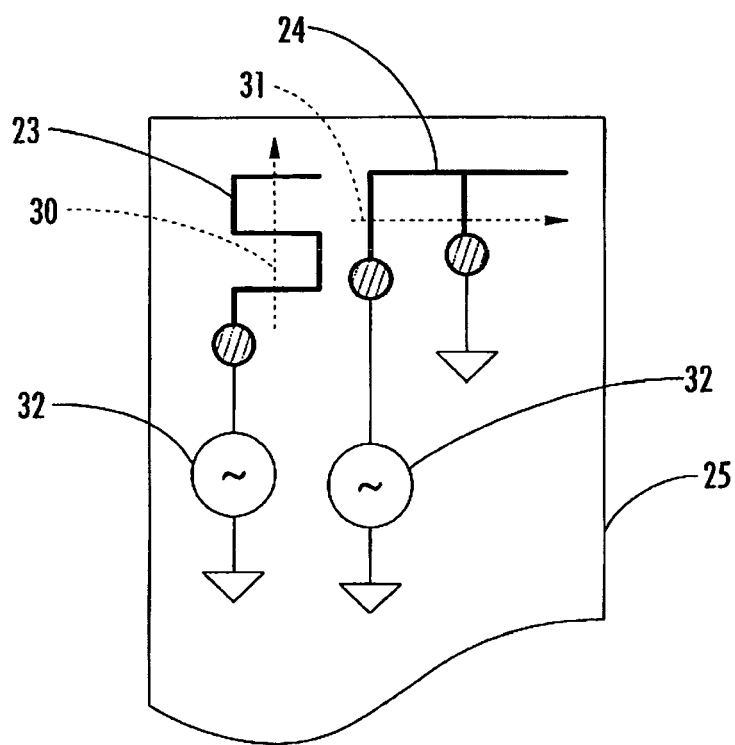


FIG. 3

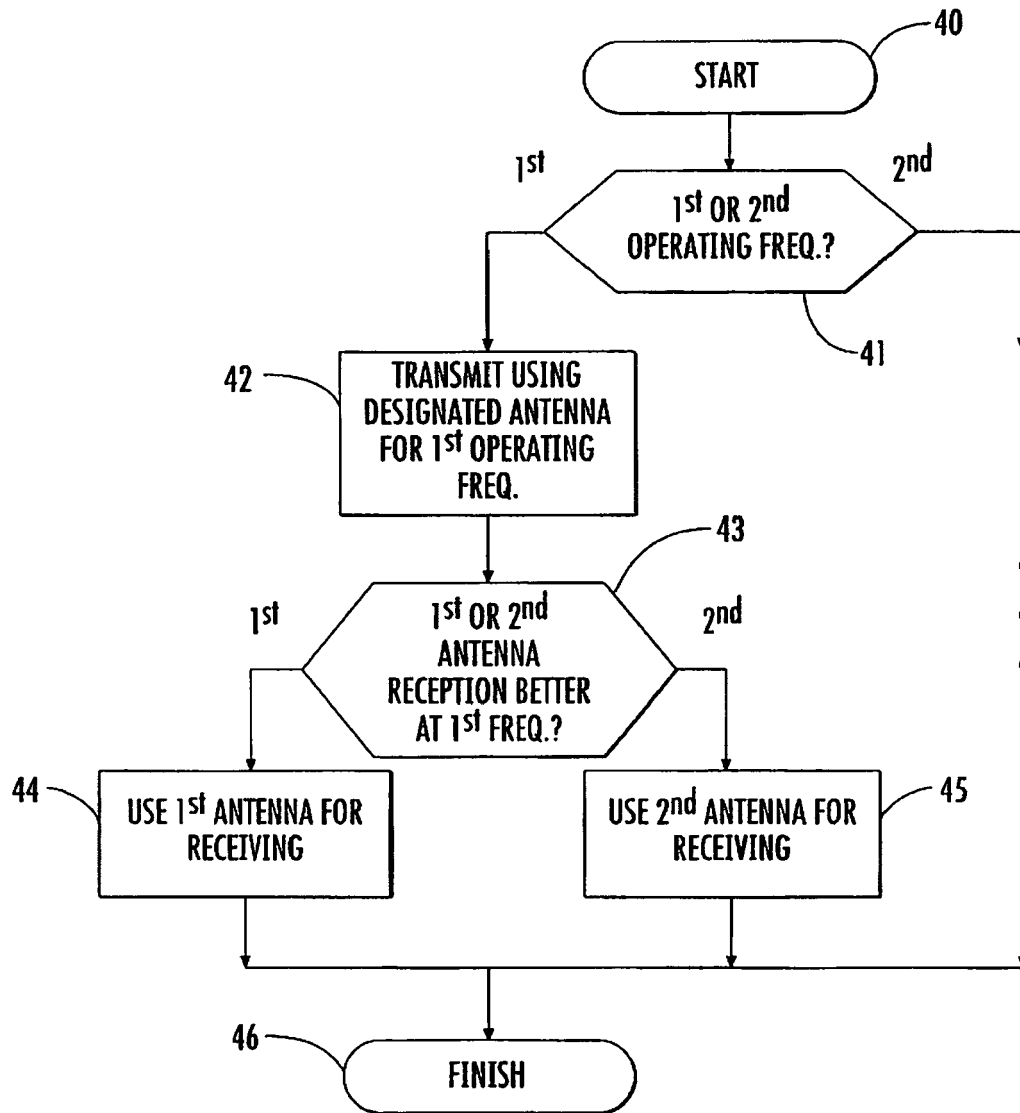


FIG. 4

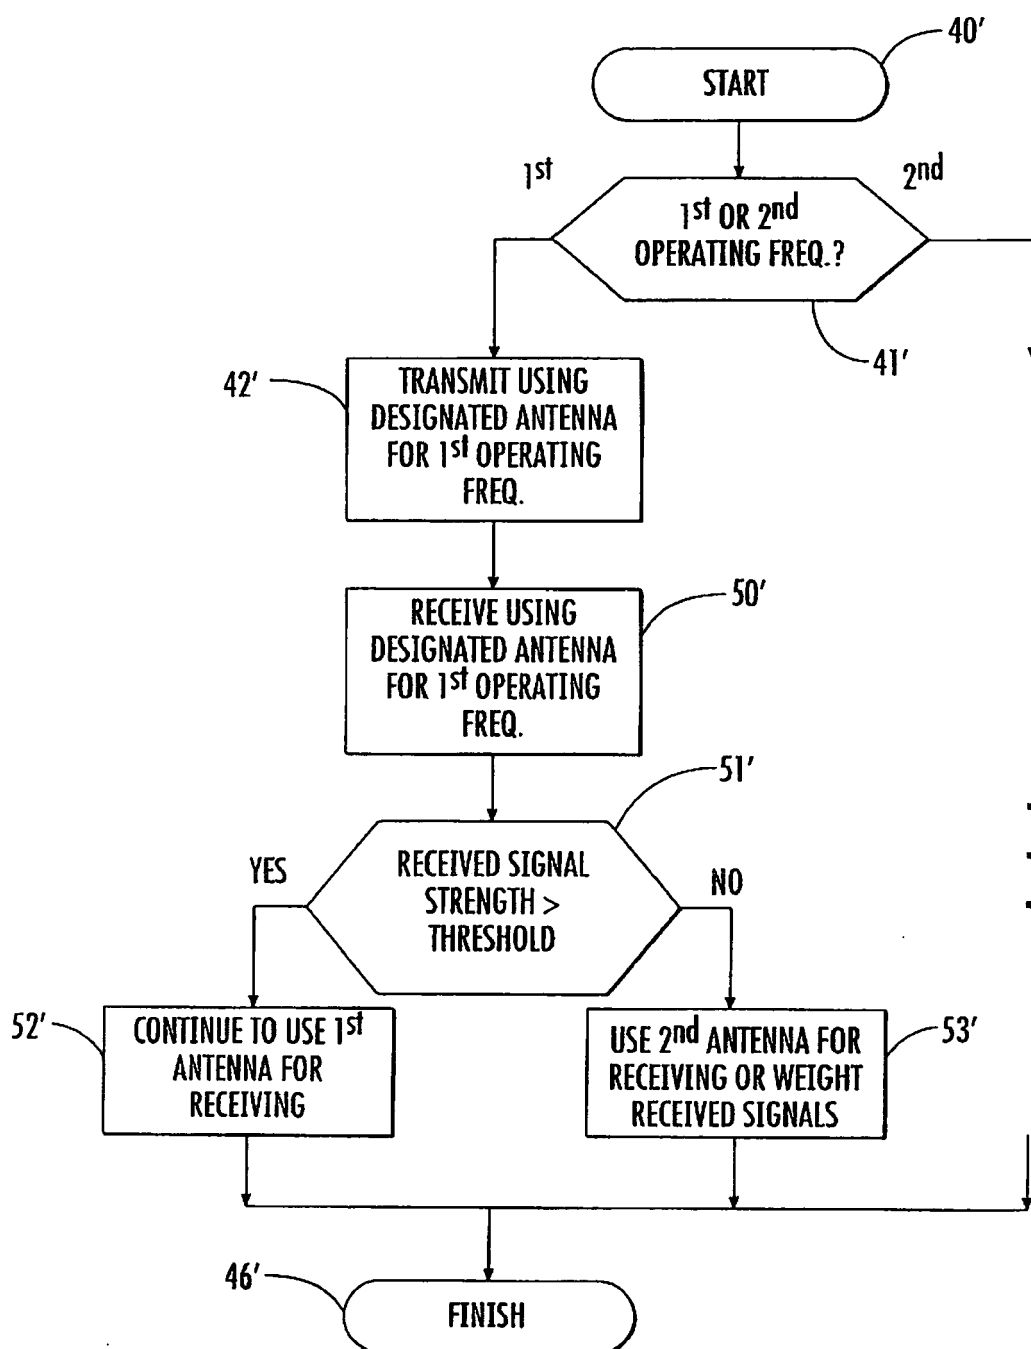


FIG. 5

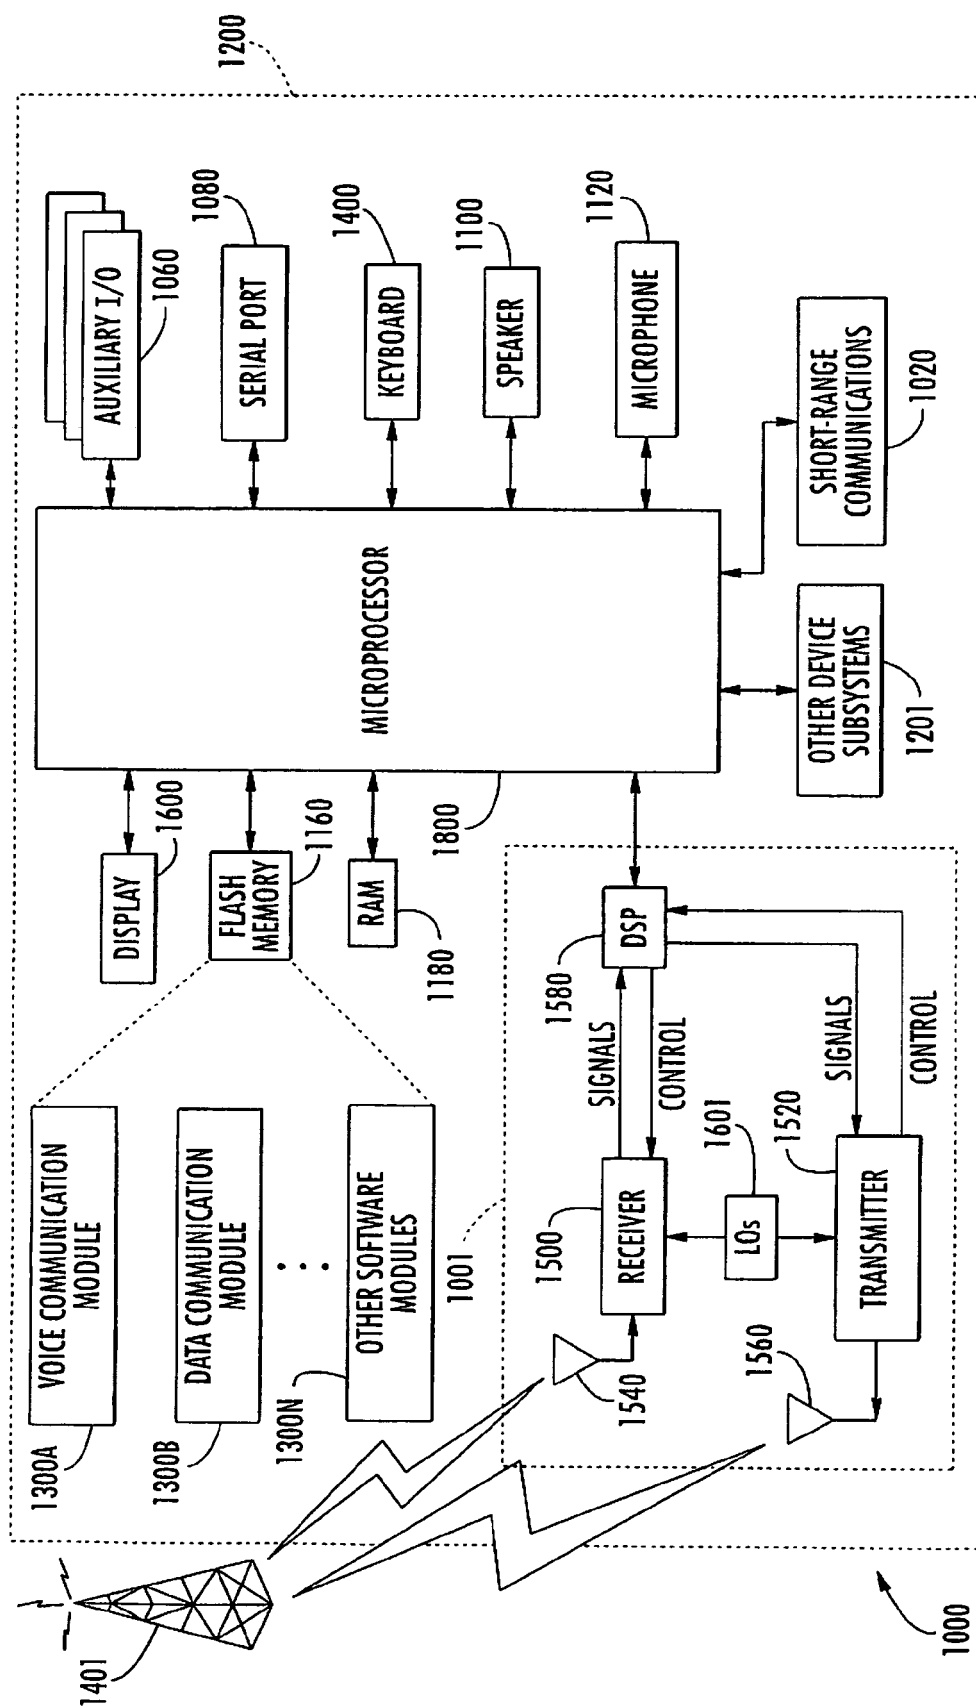


FIG. 6



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 05 25 0740

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	US 2004/198473 A1 (TRAN ALLEN) 7 October 2004 (2004-10-07) * abstract * * paragraph [0053]; figures 1-8 *	1-16	H01Q21/28 H01Q3/24 H01Q1/24 H04B7/08
Y	US 2004/130496 A1 (IIJIMA HIROSHI ET AL) 8 July 2004 (2004-07-08) * abstract; figures 1-9 *	1-16	
A	US 6 476 769 B1 (LEHTOLA ANTERO) 5 November 2002 (2002-11-05) * abstract; figures 1,3a,b *	1-16	
A	US 2002/101377 A1 (CRAWFORD JAMES A) 1 August 2002 (2002-08-01) * abstract; figures 5A,6A,7,11 *	1-16	
A	EP 1 052 785 A (ICO SERVICES LTD) 15 November 2000 (2000-11-15) * abstract; figures 7-14 *	1-16	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			H01Q H04B
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 5 July 2005	Examiner Angrabeit, F
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

2

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 05 25 0740

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-07-2005

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2004198473 A1	07-10-2004	WO 2004091115 A1	21-10-2004
US 2004130496 A1	08-07-2004	EP 1397844 A1	17-03-2004
		WO 02099926 A1	12-12-2002
		JP 2004529589 T	24-09-2004
US 6476769 B1	05-11-2002	CN 1409437 A	09-04-2003
		DE 60200508 D1	24-06-2004
		DE 60200508 T2	30-06-2005
		EP 1296410 A1	26-03-2003
		JP 2003124730 A	25-04-2003
US 2002101377 A1	01-08-2002	AU 3650602 A	24-06-2002
		WO 0249153 A1	20-06-2002
EP 1052785 A	15-11-2000	EP 1052785 A1	15-11-2000
		WO 0069092 A1	16-11-2000