(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) **EP 1 709 369 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
04.04.2012 Bulletin 2012/14

(21) Application number: **03818342.2**

(22) Date of filing: **15.08.2003**

(51) Int Cl.:
F26B 13/10 *(2006.01)*

(86) International application number:
PCT/US2003/025557

(87) International publication number:
WO 2005/019741 (03.03.2005 Gazette 2005/09)

(54) **COMPACT INTEGRATED FORCED AIR DRYING SYSTEM**

KOMPAKTES INTEGRIERTES ZWANGSLUFTTROCKNUNGSSYSTEM

SYSTÈME DE SÉCHAGE INTÉGRÉ À AIR FORCÉ

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU MC NL PT RO SE SI SK TR

(43) Date of publication of application:
11.10.2006 Bulletin 2006/41

(73) Proprietor: **FlexAir, Inc.**
Wasco, IL 60183 (US)

(72) Inventor: **ATKINS, Mark R.,**
c/o Inkwell products, Inc.
St. Charles, Il 60175 (US)

(74) Representative: **Beier, Ralph**
v. Bezold & Partner
Akademiestrasse 7
80799 München (DE)

(56) References cited:

EP-A1- 0 320 966	**EP-A1- 0 456 173**
EP-A1- 0 647 524	**WO-A1-93/05352**
DE-U1- 29 910 122	**GB-A- 358 342**
US-A- 1 737 174	**US-A- 2 658 798**
US-A- 2 683 939	**US-A- 2 797 297**
US-A- 2 917 617	**US-A- 3 846 616**
US-A- 3 970 822	**US-A- 4 756 091**
US-A- 5 249 255	**US-A- 5 303 325**
US-A- 5 502 788	**US-A- 5 937 535**
US-A1- 2004 033 069	**US-B1- 6 176 184**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 709 369 B1

Description

BACKGROUND OF THE INVENTION

[0001] This invention relates to evaporative drying systems, hereinafter called dryers, more particularly to dryers that are used to dry-solvent based or water-based inks, paints or coatings.

[0002] Traditional dryers dry by projecting heated air and/or radiating heat energy. The most common form of a projected air dryer delivers lightly pressurized preheated air into a distribution plenum, which is then dispersed through a series of slots or circular orifices to the medium being dried. These types of dryers typically rely on large volumes of air to adequately dry, thus consuming substantial amounts of energy and requiring extensive air handling equipment.

[0003] In some of the more recent forced hot air dryers, compressed air is preheated prior to entering the distribution plenum(s). The preheating is typically accomplished by the use of a separate heat plant device such as the common triple pass or inline air heater. Using a heat plant that is separated from the air distribution system introduces inefficiencies of operation; additional equipment and manufacturing costs; and additional equipment. The added equipment can also make the dryer prohibitively large in size for some applications that have limited available space.

[0004] Current dryer systems have their operating controls located remotely from the distribution plenum(s), which increases the complexity of the controls system and the associated costs for the manufacturing and installation of the entire system.

[0005] EP 0 647 524 A1 discloses an air distribution system according to the preamble of claim 1.

[0006] Further, reference is made to US 3 970 822 A and US 5 249 255 A, US 2 917 617 A, US 3 846 616 A, US 2 797 297 A and EP 0456 173 A1.

[0007] Finally, EP 0 320 966 A1 discloses an air distribution system for a forced hot air drying unit, comprising: (a) a housing with an air inlet to allow air to enter said housing; (b) a heat exchanger inside the housing, the heat exchanger being designed with an internal cavity; (c) an outlet to allow air to pass to the exterior of said housing; (d) an electric heater mounted within said internal cavity of said heat exchanger; (e) the heat exchanger having multiple heat fins that extend outwardly from the internal cavity, and (f) air passages are formed between the multiple heat fins and the housing.

BRIEF SUMMARY OF THE INVENTION

[0008] The invention provides a forced hot air dryer for the printing, painting and coating industries that fully integrates the air handling equipment, heat plant, air flow control and air temperature control into a single compact package. The preferred embodiment utilizes a solid cartridge heater within a specially designed air distribution system to raise the temperature of the forced air just before it discharges. The invention greatly simplifies the complexity, reduces space requirements, and maximizes the energy efficiencies over current drying systems.

[0009] Further, the air distribution system according to the invention as defined in claim 1 comprises a heat exchanger having multiple heat fins that extend outwardly, so that air passages are formed between the multiple heat fins and the housing of the air distribution system.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

[0010] The invention will be explained in conjunction with illustrative embodiments shown in the accompanying drawings, in which:

FIG. 1 is a schematic illustration of a narrow web in-line printing press with multiple color stations.
FIG 2 is a schematic illustration detailing a single color station of the narrow web in-line printing press of Fig. 1.
FIG 3 is an end view of the air distribution system.
FIG 4 is a side view of the air distribution system and solid cartridge heater.
FIG 5 is a cross-sectional view of Fig. 4 with the solid cartridge heater partially removed.
FIG 6 is a side view of the manifold connected to multiple air distribution systems.
FIG 7 is a cross-sectional front view of Fig. 6.
FIG 8 is a schematic illustration of the air flow control system for the dryer.
FIG 9 is a schematic illustration of a variable transformer electrical control system for the dryer.
FIG 10 is a schematic illustration of an electronic control system for the dryer.
FIG 11 is a side view of the assembled control box enclosure.
FIG 12 is a front view of Fig. 11.
FIG 13 is a side view of the assembled dryer.
FIG 14 is a front view of Fig. 13.
FIG 15 is a sectional view of the temperature monitoring means for the dryer.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0011] Printing, coating, and painting lines have various configurations and methods of operation. Configurations vary in the number of printing decks, method of conveying the product, line speeds, etc., which will all depend on the type of product, process, and application. Products can be conveyed in several different ways such as in the form of a continuous web, sheet, or simply moving the product through via a conveyor.

[0012] More particularly, the flexographic press, illustrated in Figure 1 is a conventional and well-known type of narrow web printing and/or coating press, hereinafter called narrow web press (11). The narrow web press (11)

typically prints and/or applies coating on a continuous web (1), hereinafter called web, whereupon the freshly applied inks or coating need to be dried. The web (1) enters the narrow web press from the unwind station (2) and then travels through a series of idler rollers (3) in a serpentine path while passing through multiple print stations (4).

[0013] Figure 2 details an individual printing station of Figure 1. A print station (4) consists of a transfer roll (5) and plate roll (6) that apply a printed image (37) or coating onto the web as it passes through the print station (4). After being applied to the web, the printed image (37) or coating moves past the transfer roll and plate roll area, and subsequently enters a drying zone (7) where it will be partially or completely dried before entering the next printing station.

[0014] As the printed or coated web exits the last printing station (8), depending on the product, process, and application, a final drying stage (9) may be required. The final drying stage (9) may be comprised of a single or multiple dryers. The final drying stage will evaporate the residual traces of ink solvents from the ink, and/or cure the already substantially dried inks prior to being rewound in the narrow web press rewinder (10).

[0015] The practice of configuring the combination of the web, unwind, print stations, dryers, and rewind is well known. The particular configuration of these fundamental elements of a printing press can vary greatly between printing technologies and process applications.

[0016] The nature of this invention includes the novel method of simplifying and making compact a heated forced air dryer system. This is specifically accomplished by the integration of a dedicated solid cartridge heater into a specially designed air distribution system.

[0017] The preferred embodiment of the invention creates a means of efficiently transferring heat energy from the solid cartridge heater to the air as the air passes through the air distribution system. The preferred embodiment of the invention substantially equalizes the temperature of the heated air that is projected out of the dryer, across the dryer width.

[0018] A solid cartridge heater is used to heat the air in the drying system. The solid cartridge heater is a commercially available device that is typically used to heat solid metal structures for plastic or metal manufacturing processes, and to heat liquids in tanks or pipes. The heating element is an electrical resistance heater that is ultimately powered by a voltage source. Various size solid cartridge heaters can be used that may vary in diameter, length, power level and mounting depending on the process and application. The preferred solid cartridge heater is of cylindrical geometry of approximately ½ inch cylindrical diameter with the cylindrical length of the solid cartridge heater approximately equal to the dryer width. The solid cartridge heater is well described in U.S. Patent 3,970,822.

[0019] To simply pass air over a solid cartridge heater that is housed within a simple shell plenum such as a common cylindrical or square tube may result in non-optimal operating conditions, including inefficient and uneven transfer of heat energy to the air. The inefficiencies originate from the limited surface area of the solid cartridge heater that is exposed to the passing air as well as unrestricted airflow patterns within the simple shell. The inefficient and uneven heat transfer results in localized hot spots within the solid cartridge heater that can severely reduce the operable life of the solid cartridge heater and can produce greatly varying forced air temperatures across the width of the dryer.

[0020] The preferred embodiment of this invention incorporates a specially designed air distribution system (13) that is fundamentally comprised of two separate metallic extrusions including the cartridge heat exchanger (14) and air distribution plenum (15) as shown in Figure 3.

[0021] In the preferred embodiment, the cartridge heat exchanger (14) is designed with a cylindrical cavity (16) to accept the solid cartridge heater (12) (See Figures 4 and 5). The cylindrical diameter of the cylindrical cavity (16) is carefully controlled to minimize the clearance between the outside surface of the solid cartridge heater (17) (See Figure 5) and the internal surface of the cylindrical cavity (38) in the cartridge heat exchanger (14) to provide better heat transfer and power density of the solid cartridge heater (12).

[0022] The cartridge heat exchanger (14) has multiple heat fins (18) that extend outwardly from the cylindrical cavity (16). The outer geometrical profile of the cartridge heat exchanger (14) compliments the internal geometry of the air distribution plenum (15) to create air passages (19). During operation, the solid cartridge heater (12) is energized by a voltage source. Heat that is generated by the solid cartridge heater is transferred into the cartridge heat exchanger (14) and will migrate outwardly into the heat fins (18). The heat energy is then transferred to the air moving along the heat fin surfaces (24) as the air moves through the air passages (19).

[0023] Pressurized air enters the air distribution system (13) through a port that leads into the inlet cavity (20) of the air distribution plenum. Located at the bottom of the inlet cavity (20), a baffle plate (21) is used to redistribute the air in order to provide a uniform and even air flow along the dryer width as the air exits the inlet cavity (20) through the baffle plate (21). The baffle plate (21) is fabricated with a pattern of baffle plate orifices (22) that may vary in diameter, spacing, and arrangement across the width and length of the baffle plate (21) to facilitate the desired even and uniform flow. The baffle plate is located and captured by the baffle plate recesses (23) that are incorporated into the inner geometry of the air distribution plenum (15).

[0024] Once the air passes through the baffle plate (21), the air moves along the heat fin surfaces (24) as shown in Figure 3. As the air passes over the surface of the heat fins (18), the air absorbs the heat energy from the heat fins (18) of the cartridge heat exchanger (14) through thermal convection. The circuitous air passages

(19) increase the dwell time that the air is in contact with the heat fins (18) thus increasing the convective heat transfer efficiency.

[0025] Engineering thermodynamics states that heat energy output, Q, is directly proportional to the convective heat transfer coefficient, h, the surface area, A, and the temperature differential, ΔT, where $Q = h*A*\Delta T$. By increasing the heat transfer surface area, the temperature differential between the heater and air can be lowered inversely while maintaining a substantially equivalent heat energy output to the air. The lowered temperature differential allows the solid cartridge heater to operate at lower temperatures, thereby increasing the expected life of the solid cartridge heater.

[0026] At the end of the circuitous air passages (19) the heated air enters one of two orifice chambers (25) located near the bottom of the air distribution plenum (15). The air distribution plenum walls (26) in the area of the orifice chambers (25) are fashioned to provide a simplified means of manufacturing a series of air release orifices (27) that connect the orifice chamber (25) with the outside of the air distribution system (13). The air release orifices (27) can be manufactured to project the air either directly away (28) from the air distribution system, canted towards the middle (29) of the air distribution system or outwardly from the middle (30) of the air distribution system. In the preferred embodiment shown in Figure 3, the canted surfaces are constructed at 45 degrees to the central axis of the air distribution system (13).

[0027] The air release orifices (27) may vary in diameter, spacing, and arrangement across the width and length of the air distribution system (13), depending on the process or application. The air release orifices (27) are typically 1 millimeter in diameter or less.

[0028] Solid cartridge heaters are commercially available with variable power densities along the axial length of the solid cartridge heater as well described in U.S. Patent 3,970,822. The variable power densities can be used to counteract hot or cold spots resulting from uneven flow patterns past the solid cartridge heater. The variable power densities can also be used to deliberately create heated and unheated regions along the length of the solid cartridge heater. This allows the dryer system to be very versatile in meeting certain process or application requirements where more or less drying capacity is required in specific intervals or in specific areas along the width of the dryer.

[0029] In the preferred embodiment shown in Figure 3, two isolated elongated thin recesses (31) are located towards the outside wall of the air distribution plenum (15) to function as thermal insulators between the air passages (19) and the outside of the air distribution plenum (15). By creating a barrier for heat transfer from the air passages (19) to the outside walls of the air distribution system, the elongated thin recesses (31) improve the overall efficiency of the invention and maintain a reduced external surface temperature of the air distribution system (13).

[0030] In the preferred embodiment shown in Figure 4 and 5, the air distribution system (13) is manufactured with end plates (32) and (33), and gaskets (34) and (35) to effectively seal off the inlet cavity (20), air passages (19) and orifice chambers (25) from the outside of the air distribution system (13). One of the end plates, the heater bulkhead end plate (32) is manufactured with a threaded port (36) to fasten the solid cartridge heater (12), and to effectively prevent pressurized air from escaping at the juncture of the solid cartridge heater (12) and the heater bulkhead end plate (32). The threaded port (36) also provides a convenient means of assembling and/or replacing the solid cartridge heater (12).

[0031] By the means described above, the heat source for the dryer unit has been completely integrated within the air distribution system to result in a very compact package. In this preferred embodiment, the end profile of the air distribution system (13) as shown in Figure 3 is approximately 2" by 2".

[0032] The preferred embodiment described herein is capable of operating the solid cartridge heater at high temperatures while simultaneously maintaining substantially lower external surface temperatures given that air is flowing adequately through the air distribution system. This is an important aspect of the invention necessary to reduce risks of operation in solvent laden atmospheres that can spontaneously ignite in the presence of exceedingly high temperatures, and where human interaction can cause bodily injury upon skin contact with the hot surfaces.

[0033] The process of evaporative drying of inks, coatings, and paints is not instantaneous. In many cases the maximum narrow web press line speed is limited by the drying capacity of the dryer system. In prior art, it is standard dryer design practice to increase drying capacity by adding additional length to the dryer, thus increasing the residence time of the product being dried within the dryer.

[0034] The invention increases drying capacity by: the incremental addition of air distribution systems; redistributing a given number of air distribution systems over a greater dryer length; or a combination of both. It is to be understood that the addition of an air distribution system will also, but not necessarily always, include the addition of an integrated solid cartridge heater.

[0035] Figures 6 and 7 illustrate the means by which the invention incorporates a manifold (39) to accommodate multiple air distribution systems (13). The manifold (39) used to couple the air distribution systems has a central cavity (40) in the major axis of the manifold that is sized sufficiently to provide adequate air flow to all coupled air distribution systems (13). The coupling of the air distribution system to the manifold can be achieved through a variety of means including threading, sealant, liquid gasket, crushed-gasket sealing, etc. The preferred arrangement of the preferred embodiment is an o-ring face seal (41) held at the joining surfaces of the manifold (39) and the air distribution system(s) (13). A series of fasteners (43) are used to pre-load the o-ring (41) and

to prevent the air distribution system (13) from moving relative to the manifold (39).

[0036] The control of the invention involves control of air flow and control of electrical power to the solid cartridge heater. The preferred embodiment of the invention provides a means for operators of the invention to vary both the temperature of the air and flow of the air to dry the product. This variability is necessary because products that can be processed on the narrow web press have broad ranges of thermal yield characteristics, and excessive temperature and airflow conditions can detrimentally affected fragile product structures.

[0037] The preferred embodiment of the invention utilizes a simple and inexpensive control system for the dryer system.

[0038] The volume of air moving through an air conveying medium such as tubing or piping, hereinafter referred to as pipe, is dependent on the geometry of the pipe and the inlet pressure of air moving into the pipe. Variations in inlet pressure, pipe diameter, or pipe length can have a significant affect on the volume of air flowing through the pipe. It is difficult to reliably control the air flow through a pipe system by controlling the pipe system's inlet pressure if the characteristic of the downstream pipe system are unknown or if the pipe geometry can change arbitrarily. This is the inherent difficulty of utilizing a centralized or remotely located flow control system to control flow in a widely distributed air distribution system. Such systems will typically rely on remote sensing of pressure and/or flow and therefore adjust the pipe system's inlet pressure accordingly. It is one advantage of the invention to overcome the undesirable effects noted above.

[0039] It is foreseen that multiple drying systems will be integrated into a narrow web press; therefore, it is an advantage of the invention that a repeatable control of air flow is possible by using a common air flow setting for each respective dryer system. According to the preferred embodiment of the invention, by maintaining consistent pipe geometry in each dryer system, air flow through the air distribution system can be reasonably predicted and adequately controlled by controlling the inlet pressure into the dryer system.

[0040] As illustrated in Figure 8, the air flow control system is achieved by the use of an air flow regulator (42) which is a relatively inexpensive, minimally complicated, and commercially available device. Pressurized air (44) is supplied to the air flow regulator (42) which controls the output pressure of the air flow discharging from the air flow regulator (42). The air flow regulator pressure is substantially equivalent to the inlet pressure of the pipe. The volume of air flowing out of the air flow regulator (42), and thus through the dryer system, can be modified by changing the settings of the air flow regulator (42).

[0041] The solid cartridge heater is an electrical device with an electrical resistance, R, that generates thermal power, P, from electrical current, *I*, by Ohm's Law ($P=I^2R$). Note the electrical current is also related to the electrical voltage, *V*, by Ohm's Law ($I=V/R$) therefore ($P=V^2/R$). The electrical resistance of the solid cartridge heater is dependent on the operating temperature of the solid cartridge heater typically varying the electrical resistance of the solid cartridge heater by a margin of approximately 10%. The electrical resistance increases with the operating temperature of the solid cartridge heater. For the purpose of the following description, the electrical resistance of the solid cartridge heater will be treated as a constant value, R.

[0042] The amount of electrical power consumed by the solid cartridge heater is directly related to the thermal power delivered to the heated air flow that is discharging from the air distribution system. By controlling the electrical power and volume of air flow, the temperature of the air flow can be controlled.

[0043] A relatively simple scheme for controlling the power to the solid cartridge heater is to control the voltage to the solid cartridge heater. Figure 9 illustrates a voltage controller based on a mechanically adjustable variable transformer, hereinafter referred to as the variable transformer (45). The variable transformer (45) is a commercially available device.

[0044] The variable transformer (45) allows simple adjustment of the output coil of the variable transformer (45) thus effecting the voltage output ratio of the variable transformer (45). The variable transformer (45) is typically manually adjusted to supply a constant output voltage at the desired voltage amplitude. The output voltage from the variable transformer (45) serves as the supply voltage for the solid cartridge heater (12). In this fashion a constant supply voltage is applied to the solid cartridge heater (12). Also as shown in Figure 9 multiple solid cartridge heaters (12) can be connected in parallel across the supply voltage.

[0045] Adjusting the output voltage to one-half of the maximum output voltage will produce one-fourth the power produced at the maximum output voltage as can be determined from Ohm's Law ($1/4*P_{max} = ((1/2)*V_{max})^2/R$). The variable transformer is an elegant means of adjusting the output power of the heater and the respective drying capacity of the dryer.

[0046] One advantage of using the variable transformer control system is the low cost and low complexity.

[0047] A further advantage of using the variable transformer control system is the ability to energize the solid cartridge heater(s) at a fraction of their rated power continuously, even without air flow through the air distribution system. This provides a convenient and more economical means of pre-heating the dryers by avoiding the consumption of pressurized air.

[0048] In using the variable transformer control system as the primary electrical control system, the variable transformer control system lacks a closed-loop temperature control. At a constant output voltage setting a change in the air flow volume will affect the air flow discharge temperature. Thus without an independent tem-

perature sensor monitoring the dryer operating temperature, the operator of this dryer will not have an accurate measure of the effective drying temperature. Furthermore, even with a temperature sensor feedback, a mechanically adjusted variable transformer would be very complex to configure to automatically control to a desired dryer operating temperature.

[0049] In practical operation, depending on the product, process, and application, the air flow settings and the variable transformer settings can be determined through trial and error, and subsequently used as reference settings to reliably reproduce the same dryer conditions in the future on any of the variable transformer controlled dryers on the narrow web press.

[0050] The variable transformer control system provides an effective means for operating the dryer, however the preferred dryer system includes a means to control to a desired dryer operating temperature since an acceptable level of drying is more readily correlated to a dryer temperature.

[0051] The preferred electrical control system illustrated in Figure 10 uses an electronic controller (47) to modulate the supply voltage (49) to the solid cartridge heater (s) (12) between an energized and de-energized state. In this scheme, the supply voltage (49) to the solid cartridge heater(s) (12) is modulated at either the maximum supply voltage setting or none at all. The amount of thermal power delivered by the dryer system is related to the percentage of time the dryer is energized.

[0052] The electronic controller (47) is a commercially available device that can be obtained in a variety of configurations and with a variety of features. In this preferred embodiment the controller output signal (46) from the electronic controller is a low voltage, low power signal incapable of energizing the solid cartridge heater(s) (12) directly. However, this low voltage, low power controller output signal (46) can be used to activate a secondary device such as a mechanical relay or solid state relay to energize the supply voltage to the solid cartridge heater (12). In this preferred embodiment as shown in Figure 10 a solid state relay (48) is used to energize the supply voltage (49) to the solid cartridge heater(s) (12) when the solid state relay (48) is commanded by the electronic controller (47) via the controller output signal (46).

[0053] The electronic controller (47) utilizes an external temperature measurement and compares it to a preset temperature as established by the operator of the narrow web press. The pre-set temperature settings depend on the product, process, and application. If the external temperature measurement is lower than the preset temperature, the electronic controller (47) commands the solid state relay (48) to energize the supply voltage (49) to the solid cartridge heater(s) (12). If the external temperature measurement is higher than the pre-set temperature, the electronic controller (47) commands the solid state relay (48) to de-energize the supply voltage (49) to the solid cartridge heater(s) (12).

[0054] A potential problem of this scheme is that the electronic controller continues to command an energized state of the supply voltage whenever the external temperature measurement is below the pre-set temperature. This condition can exist when the air flow to the dryer system is shut-off either intentionally or mistakenly. Since this control scheme will only supply the maximum supply voltage when energized, the above condition can place the solid cartridge heater(s) at a severe risk of failure from reaching excessive temperatures.

[0055] A solution to this problem is the integration of an electro-mechanical pressure switch or pressure transducer to monitor the pressure and thus flow of air through the air distribution system. The electro-mechanical pressure switches and pressure transducers are commercially available devices. In this preferred embodiment, an electro-mechanical pressure switch (50) monitors the air pressure of the air distribution system and allows the controller output signal (46) to activate the solid state relay (48) as long as the system is operating with adequate air pressure. Without adequate air pressure the electro-mechanical pressure switch (50) will electrically ground the solid state relay (48) and insure the supply voltage (49) is not energized to the solid cartridge heater(s) (12).

[0056] A temperature sensor (51) is located to monitor the effective temperature of the dryer system, and to provide the external temperature measurement signal to the electronic controller (47). The temperature sensor (51) can monitor the temperature of: the air distribution system's component; the air within the air distribution system; the air discharging from the air distribution system; a component that is in contact with the product being dried; etc. Depending on the location of the measurement point, the control response of the system and the maximum achievable temperature can vary greatly. To overcome this, the operational control gains of an electronic temperature controller can be adjusted to establish acceptable system controllability.

[0057] A circuit breaker (52) is incorporated as a switch and safety device for the control system of either the variable transformer control system or the electronic control system as shown in Figure 9 and 10 respectively.

[0058] The above text has described in detail the three basic subsystems of the forced air dryer including the air heating and distribution system, the air flow control system, and the electrical power control system. According to the preferred embodiment of the invention the three subsystems are combined into a singular compact unit for ease of integration with the web and into the narrow web press.

[0059] An advantage of the preferred embodiment of the invention is that by housing all of the air flow and electrical controlling components of the dryer into a control box enclosure the components from the environment. These components include the electronic temperature controller, air flow regulator, pressure switch, solid state relay, and circuit breaker, all of which have already been described above.

[0060] Enclosing the air flow and electrical control

components is an advantage of the invention since dryers will typically reside in hazardous environments caused by flammable solvent vapors evaporated from the inks. When the dryer system is operated in a hazardous environment, the control box enclosure can be gasket sealed and lightly pressurized to achieve a purged environment within the control box enclosure allowing the safe operation of the electrical components. The lightly pressurized air is provided as a natural by-product of the relieving pressure regulator under normal operating conditions.

[0061] Enclosing the air flow and electrical control components is also an advantage of the invention in that all of the controlling components are substantially shielded from incidental debris generated by normal operation of the printing press. The debris includes ink spills, cleaning solvent, lubrication, etc.

[0062] It is also an advantage of this invention that the air flow lines and electrical lines to and from the control box enclosure are connected and sealed such that the control box enclosure is sealed and capable of being lightly pressurized. ,

[0063] It is an advantage of the invention that the operational controls are located such that they are accessible to operators of the narrow web press.

[0064] It is an advantage of this invention that the solid heater cartridge is enclosed within the air distribution system such as to result in acceptably low external surface temperatures of the air distribution system. This combined with the proper accommodation of air flow lines and electrical lines permits the dryer to reside in a hazardous environment.

[0065] The air distribution system is advantageously designed to accommodate the maximum web width of the printing press and to provide the desired residence time of the dryer. This is accomplished by appropriate layout of the manifold and air distribution system(s) within the dryer as described in detail earlier in the patent.

[0066] It is well known that drying capacity decreases as the distance between the web and the discharge orifices of the dryer increase. It is also well known that uniform drying will result when the web is held uniformly and at a constant distance from the dryer across both the length and width of the dryer, given that the discharging air flow and temperature are uniform across the same. It is an advantage of the invention that the web is held in the dryer at a close and even distance from the discharging air to achieve proper drying.

[0067] In consideration of retrofitting the dryer onto a narrow web press, the integration of the web support into the dryer will minimize press modifications and dryer design variations with respect to web handling as the web passes through the dryer. The web support that is incorporated into the dryer must provide an even support across both the width and the length of the dryer, such that the web is prevented from being deflected when subjected to the discharging air from the air distribution system(s). It is also an advantage of the invention that the web support is a simple device in that it provides the operator easy access for web threading and dryer cleaning

[0068] It is an advantage of this invention that all components and subsystems of the dryer can be housed into a single compact unit that can be mounted in an area where space is limited.

[0069] It is also an advantage of the invention that the installation time of the dryer unit is minimized. By including provisions into the dryer design, only mounting the dryer to the press and connecting to the electrical power and compressed air sources to the dryer will be required for installation.

[0070] The air flow regulator (42), pressure switch (50), electronic controller (47), solid state relay (48), and circuit breaker (52) are housed in a dedicated control box enclosure (53). It is also an advantage of this invention to include the control box enclosure (53), manifold (39), air distribution systems (13), and all interconnecting components inside the dryer enclosure (62).

[0071] As illustrated in Figures 11 and 12, an external compressed air supply line is connected to the dryer through a single air supply port (54) on the control box enclosure (53). The air supply port (54) can be achieved by a number of means including a quick air disconnect, a push-to-connect fitting, a hose barb fitting, threaded pipe fitting, etc. The preferred means is to use a push-to-connect fitting, which provides a convenient and toolless means of connecting and disconnecting the dryer from the external pressurized air supply line.

[0072] The air supply port (54), which is rigidly joined to the air flow regulator (42), passes the supply air through the wall of the control box enclosure (53) and into the inlet port of the air flow regulator (42).

[0073] The air flow regulator (42) must be accessible for manual adjustment by the press operator during normal operation of the dryer. The air flow regulator (42) is mounted inside the control box enclosure (53) such that the control dial (55) of the air flow regulator (42) passes through an opening in the control box enclosure (53) thus allowing convenient manual adjustment of the air flow in the dryer.

[0074] Air flow exiting the outlet port of the air flow regulator (42) passes through a specially designed air flow block (56) which is then connected to an air outlet port (57) mounted to the wall of the control box enclosure (53). The air flow block (56) is connected to the air outlet port (57) by tubing. Outside of the control box enclosure, the air outlet port (57) is connected to the inlet port on the manifold (39) by tubing.

[0075] The air flow block (56) also provides an air pressure sensing port for the electro-mechanical pressure switch (50). The air flow block (56) also provides holes (58) for mounting the solid state relay (48) firmly against the air flow block (56). This firm surface contact between the solid state relay (48) and the air flow block (56) provides a means for heat generated by the solid state relay (48) to be transferred to air passing through the air flow

block (56). The solid state relay (48) must shed this heat in order to operate safely and reliably, and the transfer of thermal energy to the air is an efficient use of the available thermal energy for the purpose of drying.

[0076] The electronic controller (47) is accessible for manual adjustment by the press operator during normal operation of the dryer. The electronic controller (47) is mounted inside the control box enclosure (53) such that the temperature display and temperature controller keys are presented outside the control box enclosure (53) thus allowing convenient manual adjustment of the dryer temperature setting.

[0077] The circuit breaker (52) operates as an electrical safety device and as a switch for energizing the control system of the dryer. The circuit breaker (52) is mounted such that the switch can be manually switched from outside the dryer.

[0078] The electrical power supply to the dryer is provided by an electrical cable that penetrates the wall of the control box enclosure (53) utilizing a sealed electrical bushing (59). The sealed electrical. bushing (59) is used to have the capability to lightly pressurize the internal volume of the control box enclosure (53).

[0079] The electrical power supply is connected to the circuit breaker (52) and then distributed internally to the electronic controller (47) and the solid state relay (48). The control signal from the electronic controller (47) is connected through the pressure switch (50) and then to the solid state relay (48). The pressure switch (50) is mounted to the pressure sensing port of the air flow block (56). When air flows through the air flow block (56), air pressure activates the pressure switch (50) and closes the electrical signal path between the electronic controller (47) and the solid state relay (48).

[0080] The electrical power is switched on by the solid state relay (48) and then made available for connection to the solid cartridge heaters (12). The controlled electrical power output to each of the solid cartridge heaters (12) is achieved by utilizing a sealed electrical bushing (60) for each of the solid cartridge heater power cables (61). The heater manufacturer seals the power cables (61) to the end of the solid cartridge heaters (12) as part of the standard design.

[0081] The temperature sensor feedback signal cable also passes through the control box enclosure wall utilizing a sealed electrical bushing (not shown). The temperature sensor feedback signal is connected to the electronic controller (47).

[0082] As illustrated in Figure 13 and 14, the control box enclosure (53) is mounted to the dryer enclosure (62). The manifold (39) and air distribution system(s) assembly is mounted to the dryer enclosure (62)

[0083] As shown in Figure 15, the solution for supporting the web is accomplished with a slide plate (63). The slide plate (63) is of a sheet metal construction, and is attached to back side of the dryer enclosure (62) by use of a hinge allowing the slide plate (63) to function as a door. Mechanical latches (65) are located towards the front-side of the dryer enclosure providing a convenient means for the press operator to open the slide plate for manual threading of the web through the dryer during machine set up, or for maintenance access to clean the air distribution systems (13). The slide plate (63), hinge, latches (65) and supporting structure of the enclosure are designed to ensure that when closed, the slide plate (63) provides a firm web support that is positioned approximately %" from the discharge orifices of the air distribution system. The mechanisms described above also ensure that the location of the slide plate (63) relative to the air distribution systems (13) is held evenly across the length and width of the dryer.

[0084] Normal operation of the dryer discharges significant volumes of air into the area where the product is being dried. As the product dries, significant volumes of solvent vapor are evaporated into the area where the product is being dried. It is an advantage of the invention that the mixture of discharged air and evaporated solvent vapors are removed. This is achieved by enclosing the area where the product is being dried by a plenum (66) and then exhausting the internal volume of the plenum (66).

[0085] The dryer enclosure (62) and control box enclosure (53) form five of the six sides of the box type construction of said plenum. The slide plate (63) and web provide the sixth side of the plenum (66). It is an advantage of the invention that minimal slot openings (67) and (68) are provided for the web to enter and exit the plenum (66) respectively. An external exhaust system provides the light suction necessary to draw the air and solvent vapors from inside the plenum, and is connected to an exhaust port (69) located on the dryer enclosure to remove air and solvent vapors from inside the plenum (66).

[0086] Mounting holes (70) for attaching the dryer to the narrow web press structure are provided in the back plate (71) of the dryer enclosure (62) of the dryer.

[0087] As briefly discussed earlier, dryer systems monitor and control a temperature of an element of the dryer system. It is most desirable to measure the actual product temperature of the product being dried since the product temperature is indicative of the level of drying that has been achieved. Historically, the means of measuring the actual product temperature has been very difficult to implement.

[0088] In lieu of measuring the temperature of the product being dried, a common practice has been to measure the temperature of the forced air of the dryer with the general assumption that the product achieves the substantially equivalent temperature of the forced air. Depending on the product, process, and application this assumption may be invalid.

[0089] It is an advantage of the invention that a means is provided that will more accurately represent the actual temperature of the product being dried. Figure 15 illustrates the preferred embodiment of this means.

[0090] A commercially available temperature sensor (51) is mounted onto the backside of the metallic slide

plate (63), near the end of the metallic slide plate (63) where the web (1) exits the dryer (72). The temperature of the metallic slide plate (63) in this area will essentially stabilize at the temperature of the web due to the close and constant proximity with the heated web (1).

[0091] Additional heat loads in the slide plate (63) may be generated due to the friction of the web (1) sliding over the slide plate (63). The additional heat loads from friction are considered negligible due to the low contact force of the web (1) against the slide plate (63). To minimize any other interference from the environment to the temperature sensor (51), insulation (64) is added onto the backside of the slide plate (63) and the temperature sensor (51). The thermocouple wire leads are then routed back to the input of the dryer's temperature controller.

[0092] The foregoing dryer system includes the following features:

1. All components and subsystems of the dryer are combined into a single unit that can be mounted in an area where space is limited.
2. Provisions have been made to minimize the installation time of the dryer unit so that only mounting the dryer to the press and connecting the dryer to the electrical power and compressed air sources will be required for installation.
3. An air distribution system that maintains cool external surface temperatures while simultaneously integrating the heat source directly into the air distribution system at the immediate vicinity of the discharging forced air. The external surface temperature of the air distribution system is maintained at sufficiently low temperatures such that the air distribution system can operate in solvent laden environments without the risk of spontaneously igniting the flammable air and solvent vapor mixture.
4. A control system for both air flow and air temperature that is integrated directly with the dryer system so as to provide a convenient means for the operator to make adjustments to either the air flow setting or temperature setting or both at the dryer location. The integration of the control system into the dryer eliminates the need for the operator to make said adjustment(s) from an inconvenient remote location.
5. The heat source is mounted within the air distribution plenum providing the most efficient means of utilizing the power from the heat source for the purpose of drying. The air is heated just before it is dispersed through the air release orifices onto the web. By combining the heat plant into the air distribution plenum, the unit is very compact, requires fewer parts, and is less expensive to manufacture.
6. When the dryer system is operated in a hazardous environment, the control box enclosure can be gasket sealed and lightly pressurized to achieve a purged environment within the control box enclosure allowing the safe operation of the electrical components. The lightly pressurized air is provided as a natural by-product of the relieving pressure regulator under normal operating conditions.
7. A slide plate is used to provide even support to the web as the web passes through the dryer. The slide plate has a hinge and latch configuration that allows the press operator a convenient means to rock the slide plate back out of the way for manual threading of the web through the dryer during machine set up, or for maintenance access to clean the air distribution assemblies.
8. Solid cartridge heaters are available with various power levels in the same cylindrical geometry. A conveniently located bulkhead plate with a threaded port is used to mount the solid cartridge heater in the air distribution system. This provides the press operator with a means to readily change out solid cartridge heaters with different power levels for different processes and application.
9. The effective drying temperature of the dryer is measured using a temperature sensor that is mounted to a metallic slide plate that is in contact with the web. The temperature of the metallic slide plate essentially stabilizes at the temperature of the web, due to the contact with the web, and will provide the operator with a more accurate measurement of the effective drying temperature of the process. This can greatly reduce set up time and maintain quality on repeat jobs.
10. Solid cartridge heaters are available with variable power densities along the axial length of the solid cartridge heater. The variable power densities can be used to create hot or cold spots in specific intervals or in specific areas along the width of the dryer to counteract uneven flow patterns past the solid cartridge heater or to meet specific process or application requirements.

Claims

1. An air distribution system (13) for a forced hot air drying unit (7, 9), comprising:

a) a housing (15) forming an air distribution plenum with an air inlet (20) to allow air to enter said housing (15);
b) a heat exchanger (14) being placed inside said housing and being designed with an internal cavity (16, 38), the heat exchanger having multiple heat fins (18) that extend outwardly from the internal cavity (16, 38);
c) an air outlet (25, 27) to allow air to pass to the exterior of said housing (15); and
d) an electrical heater (12) mounted within said internal cavity (16, 38) of said heat exchanger (14),
characterized in that
e) the outer geometrical profile of the heat ex-

changer compliments the internal geometry of the air distribution plenum so as to form circuitous air passages (19) between the multiple heat fins (18) and inner wall of the housing (15).

2. The system (13) according to claim 1, wherein said outlet (25, 27) comprises a plurality of orifices (27).

3. The system (13) of claim 1, in which said heater (12) comprises of a solid cartridge type heater (12) that may vary in material composition, diameter, length and wattage.

4. The system (13) according to claim 1, wherein said housing (15) comprises:

a) an inlet cavity (20),
b) a baffle (21),
c) said air passages (19),
d) a single or multiple orifice chamber(s) (25), and
e) a series of orifices (27) allowing air to pass from said orifice chamber(s) (25) to the exterior of said housing (15) of said air distribution system (13), and
f) an internal construction capable of accepting said heater (12) which allows heat to be efficiently conveyed from said heater (12) through said internal construction to the air as the air passes from said baffle (21) to said orifices (27);
g) said electrical heater (12) mounted within said internal construction of said housing (15) of said air distribution system (15).

5. The system (13) of claim 1, in which said heater (12) is constructed with variable power density to provide an equal temperature profile along the axial length of said housing (15).

6. The system (13) of claim 1, further comprising:

a) a means (44) for receiving pressurized air;
b) a means (49) for generating heat receiving electrical power;
c) single or multiple air distribution system(s) (13) that receive, heat, and disperse said pressurized air (44);
d) a means (42) of controlling the flow of said pressurized air (44) passing through said air distribution system (13), said controlling means (42) includes an air flow regulator (42); and
e) a means (47) of controlling the temperature of the air passing through said air distribution system (13), said means (47) includes a modulating power electronic temperature controller, wherein said air distribution system (13), said means (42) of controlling the flow, and said means (47) of controlling the temperature are located in a single enclosure (53).

7. The system (13) of claim 1, further comprising of:

a) a thermocouple (51) mounted to a thermal conducting slide plate (63) in contact or supporting the materials being dried,
b) the thermocouple (51) mounted in a location where the material being dried has already been exposed to the majority of the resident time of the drying unit (7, 9); and
c) the thermocouple (51) being capable of attaining the temperature of the material being dried.

8. The system (13) of claim 1, further comprising:

a) an enclosure (62);
b) one or more housings (15), each housing (15) forming an air distribution plenum and having

b1) an air inlet (20) to allow air to enter said housing (15),
b2) an internal cavity (16, 38), and
b3) an air outlet (25, 27) to allow air to pass to the exterior of said housing (15);

c) an electrical heater (12) mounted within said internal cavity (16, 38) of each said housing (15);
d) at least one control (42, 47) for influencing the amount of forced air drying; and
e) wherein said one or more housings (15) and said control (42, 47) are contained within said enclosure (62).

9. The system (13) according to claim 8, wherein said control (42, 47) comprises a heater control (47) for controlling air temperature.

10. The system (13) according to claim 8, wherein said control (42, 47) comprises an air flow control (42).

11. The system (13) of claim 1, further comprising:

a) a plurality of housings (15), each housing (15) forming an air distribution plenum and having

a1) an air inlet (20) to allow air to enter said housing (15),
a2) an internal cavity (16, 38),
a3) an air outlet (25, 27) to allow air to pass to the exterior of said housing (15); and

b) an electrical heater (12) mounted within said internal cavity (16, 38) of each said housing (15); and
c) an air distribution path (19) connected to said housings (15).

Patentansprüche

1. Luftverteilungssystem (13) für eine Zwangsheißlufttrocknungseinheit (7, 9) aufweisend:

a) ein Gehäuse (15), das eine Luftverteilungskammer mit einem Lufteinlass (20) bildet, um es Luft zu ermöglichen, in das Gehäuse (15) einzutreten;
b) einen Wärmetauscher (14), der innerhalb des Gehäuses angeordnet und mit einem inneren Hohlraum (16, 38) ausgeführt ist, wobei der Wärmetauscher mehrere Wärmerippen (18) aufweist, die sich von dem inneren Hohlraum (16, 38) nach Außen erstrekken;
c) einen Luftauslass (25, 27), um es Luft zu ermöglichen, in das Äußere des Gehäuses (15) durchzudringen; und
d) eine elektrische Heizung (12), die innerhalb des inneren Hohlraums (16, 38) des Wärmetauschers (14) montiert ist,
gekennzeichnet, dass
e) das äußere geometrische Profil des Wärmetauschers die innere Geometrie der Luftverteilungskammer komplimentiert, um Umweglluftpassagen (19) zuwischen den mehreren Wärmerippen (18) und der Innenwand des Gehäuses (15) zu bilden.

2. System (13) gemäß Anspruch 1, wobei der Auslass (25, 27) eine Vielzahl von Öffnungen (27) aufweist.

3. System (13) gemäß Anspruch 1, bei dem die Heizung (12) durch eine Heizung (12) vom Festkartuschentyp gebildet wird, die in Materialzusammensetzung, Durchmesser, Länge und Wattzahl schwanken kann.

4. System (13) gemäß Anspruch 1, wobei das Gehäuse (15) aufweist:

a) einen Einlasshohlraum (20),
b) eine Blende (21),
c) die Luftpassagen (19),
d) eine oder mehrere Öffnungskammern (25), und
e) eine Reihe von Öffnungen (27), die es Luft ermöglichen, von der oder den Öffnungskammer(n) (25) in das Äußere des Gehäuses (15) des Luftverteilungssystems (13) überzutreten, und
f) eine interne Konstruktion, die in der Lage ist, die Heizung (12) aufzunehmen, was es der Wärme ermöglicht, effizient von der Heizung (12) durch die interne Konstruktion auf die Luft überzugehen, wenn die Luft von der Blende (21) auf die Öffnungen (27) übergeht;
g) wobei die elektrische Heizung (12) innerhalb der inneren Konstruktion und des Gehäuses (15) des Luftverteilungssystems (15) angebracht ist.

5. System (13) gemäß Anspruch 1, bei dem die Heizung (12) mit einer variablen Leistungsdichte konstruiert ist, um ein gleiches Temperaturprofil entlang der axialen Länge des Gehäuses (15) zu liefern.

6. System (13) gemäß Anspruch 1, weiterhin aufweisend:

a) ein Mittel (44) zum Aufnehmen von Druckluft;
b) ein Mittel (49) zum Erzeugen von wärmeaufnehmender elektrischer Leistung;
c) ein oder mehrere Luftverteilungssysteme (13), die Wärme aufnehmen und die Druckluft (44) verteilen;
d) ein Mittel (42) zur Steuerung der Strömung der Druckluft (44), die durch das Luftverteilungssystem (13) durchtritt, wobei das Steuermittel (42) einen Luftströmungsregler (42) enthält; und
e) ein Mittel (47) zum Steuern der Temperatur der durch das Luftverteilungssystem (13) durchtretenden Luft, wobei das Mittel (47) einen leistungsmodulierenden elektronischen Temperaturcontroller enthält, wobei das Luftverteilungssystem (13), das Mittel (42) zur Steuerung der Strömung und das Mittel (47) zur Steuerung der Temperatur in einem einzigen Gehäuse (53) angeordnet sind.

7. System (13) gemäß Anspruch 1, weiterhin aufweisend:

a) einen Wärmefühler (51), der an einer wärmeleitenden Schiebeplatte (63) in Kontakt mit oder die zu trocknenden Materialien abstützend montiert ist,
b) wobei der Wärmefühler (51) an einer Stelle montiert ist, wo das zu trocknende Material bereits dem Großteil der Aufenthaltszeit der Trocknungseinheit (7, 9) ausgesetzt ist; und
c) wobei der Wärmefühler (51) in der Lage ist, die Temperatur des zu trocknenden Materials zu erlangen.

8. System (13) gemäß Anspruch 1, weiterhin aufweisend:

a) ein Gehäuse (62);
b) eines oder mehrere Gehäuse (15) wobei jedes Gehäuse (15) eine Luftverteilungskammer bildet und aufweist:

b1) einen Lufteinlass (20) um es Luft zu ermöglichen, in das Gehäuse (15) einzutreten,

b2) einen inneren Hohlraum (16, 38) und
b3) einen Luftauslass (25, 27), um es Luft zu ermöglichen, in das Äußere des Gehäuses (15) überzutreten;

c) eine elektrische Heizung (12), die innerhalb des Inneren Hohlraums (16, 38) des Gehäuses (15) montiert ist;
d) mindestens eine Steuerung (42, 47) zum Beeinflussen der Menge der Zwangslufttrocknung; und
e) wobei das eine oder mehrere Gehäuse (15) und die Steuerung (42, 47) innerhalb des Gehäuses (62) eingeschlossen sind.

9. System (13) gemäß Anspruch 8, wobei die Steuerung (42, 47) eine Heizungssteuerung (47) aufweist zum Steuern der Lufttemperatur.

10. System (13) gemäß Anspruch 8, wobei die Steuerung (42, 47) eine Luftströmungssteuerung (42) aufweist.

11. System (13) gemäß Anspruch 1, weiterhin aufweisend:

a) eine Vielzahl von Gehäusen (15), wobei jedes Gehäuse (15) eine Luftverteilungskammer bildet und aufweist:

a1) einen Lufteinlass (20), um es Luft zu ermöglichen, in das Gehäuse (15) einzutreten,
a2) einen inneren Hohlraum (16, 38),
a3) einen Luftauslass (25, 27), um es Luft zu ermöglichen, in das Äußere des Gehäuses (15) überzutreten; und

b) eine elektrische Heizung (12), die innerhalb des inneren Hohlraums (16, 38) des Gehäuses (15) montiert ist; und
c) einen Luftverteilungspfad (19), der mit den Gehäusen (15) verbunden ist.

Revendications

1. Système de distribution d'air (13) pour une unité de séchage à air chaud forcé (7, 9), comprenant :

a) un boîtier (15) formant un plénum de distribution d'air avec une entrée d'air (20) pour permettre à l'air d'entrer dans ledit boîtier (15) ;
b) un échangeur d'air (14) qui est placé à l'intérieur dudit boîtier et étant conçu avec une cavité interne (16, 38), l'échangeur de chaleur ayant plusieurs ailettes thermiques (18) qui s'étendent vers l'extérieur à partir de la cavité interne (16, 38) ;
c) une sortie d'air (25, 27) pour permettre à l'air de passer à l'extérieur dudit boîtier (15) ; et
d) un dispositif de chauffage électrique (12) monté à l'intérieur de ladite cavité interne (16, 38) dudit échangeur de chaleur (14),
caractérisé en ce que :
e) le profil géométrique externe de l'échangeur de chaleur complète la géométrie interne du plénum de distribution d'air afin de former des passages d'air indirects (19) entre la pluralité d'ailettes thermiques (18) et une paroi interne du boîtier (15).

2. Système (13) selon la revendication 1, dans lequel ladite sortie (25, 27) comprend une pluralité d'orifices (27).

3. Système (13) selon la revendication 1, dans lequel ledit dispositif de chauffage (12) comprend un dispositif de chauffage de type à cartouche solide (12) qui peut varier du point de vue de la composition du matériau, du diamètre, de la longueur et du wattage.

4. Système (13) selon la revendication 1, dans lequel ledit boîtier (15) comprend :

a) une cavité d'entrée (20),
b) un déflecteur (21),
c) lesdits passages d'air (19),
d) une chambre (des chambres) à orifice unique ou à plusieurs orifices (25), et
e) une série d'orifices (27) permettant à l'air de passer de ladite (desdites) chambre(s) à orifice (s) (25) à l'extérieur dudit boîtier (15) dudit système de distribution d'air (13), et
f) une construction interne capable d'accepter ledit dispositif de chauffage (12) qui permet à la chaleur d'être efficacement transportée à partir dudit dispositif de chauffage (12) en passant par ladite construction interne jusqu'à l'air lorsque l'air passe dudit déflecteur (21) auxdits orifices (27) ;
g) ledit dispositif de chauffage électrique (12) monté à l'intérieur de ladite construction interne dudit boîtier (15) dudit système de distribution d'air (15).

5. Système (13) selon la revendication 1, dans lequel ledit dispositif de chauffage (12) est construit avec une densité de puissance variable afin de fournir un profil de température identique le long de la longueur axiale dudit boîtier (15).

6. Système (13) selon la revendication 1, comprenant en outre :

a) des moyens (44) pour recevoir de l'air sous

pression ;
b) des moyens (49) pour générer de la chaleur recevant la puissance électrique ;
c) un seul ou plusieurs systèmes de distribution d'air (13) qui reçoivent, chauffent et dispersent ledit air sous pression (44) ;
d) des moyens (42) pour contrôler l'écoulement dudit air sous pression (44) passant par ledit système de distribution d'air (13), lesdits moyens de contrôle (42) comprennent un régulateur d'écoulement d'air (42) ; et
e) des moyens (47) pour contrôler la température de l'air passant par ledit système de distribution d'air (13), lesdits moyens (47) comprennent un contrôleur de température électronique à modulation de puissance, dans lequel ledit système de distribution d'air (13), lesdits moyens (42) pour contrôler l'écoulement, et lesdits moyens (47) pour contrôler la température sont positionnés dans une seule enceinte (53).

7. Système (13) selon la revendication 1, comprenant en outre :

a) un thermocouple (51) monté sur une plaque coulissante à conduction thermique (63) en contact ou supportant les matériaux qui sont séchés,
b) le thermocouple (51) étant monté à un emplacement où le matériau qui est séché a déjà été exposé pendant la majeure partie du temps de séjour de l'unité de séchage (7, 9) ; et
c) le thermocouple (51) étant capable d'atteindre la température du matériau qui est séché.

8. Système (13) selon la revendication 1, comprenant en outre :

a) une enceinte (62) ;
b) un ou plusieurs boîtiers (15), chaque boîtier (15) formant un plénum de distribution d'air et ayant :

b1) une entrée d'air (20) pour permettre à l'air d'entrer dans ledit boîtier (15),
b2) une cavité interne (16, 38), et
b3) une sortie d'air (25, 27) pour permettre à l'air de passer à l'extérieur dudit boîtier (15) ;

c) un dispositif de chauffage électrique (12) monté à l'intérieur de ladite cavité interne (16, 38) de chacun desdits boîtiers (15) ;
d) au moins une commande (42, 47) pour influencer la quantité de séchage à air forcé ; et
e) dans lequel lesdits un ou plusieurs boîtiers (15) et ladite commande (42, 47) sont contenus à l'intérieur de ladite enceinte (62).

9. Système (13) selon la revendication 8, dans lequel ladite commande (42, 47) comprend une commande de dispositif de chauffage (47) pour contrôler la température de l'air.

10. Système (13) selon la revendication 8, dans lequel ladite commande (42, 47) comprend une commande d'écoulement d'air (42).

11. Système (13) selon la revendication 1, comprenant en outre :

a) une pluralité de boîtiers (15), chaque boîtier (15) formant un plénum de distribution d'air et ayant :

a1) une entrée d'air (20) pour permettre à l'air d'entrer dans ledit boîtier (15),
a2) une cavité interne (16, 38),
a3) une sortie d'air (25, 27) pour permettre à l'air de passer à l'extérieur dudit boîtier (15) ; et

b) un dispositif de chauffage électrique (12) monté à l'intérieur de ladite cavité interne (16, 38) de chacun desdits boîtiers (15) ; et
c) une trajectoire de distribution d'air (19) raccordée auxdits boîtiers (15).

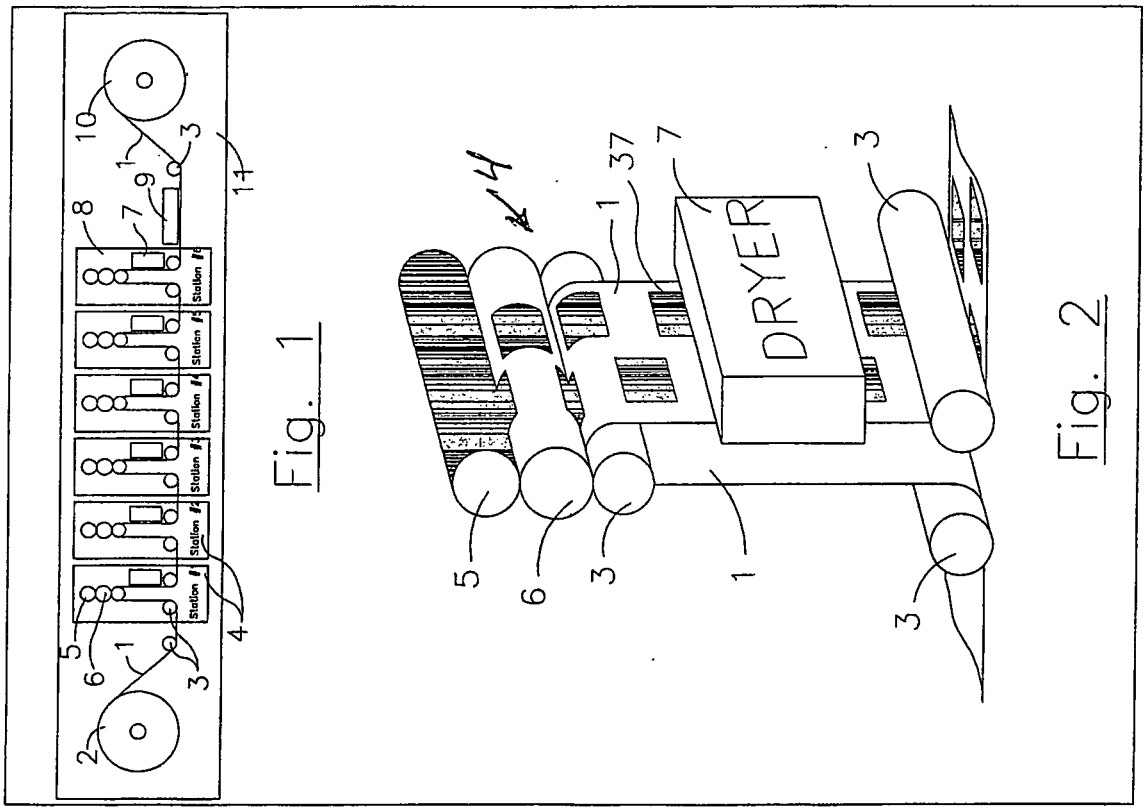

Station #1
Station #2
Station #3
Station #4
Station #5
Station #6
1
2
3
4
5
6
7
8
9
10
11
DRYER
37

Fig. 1

Fig. 2

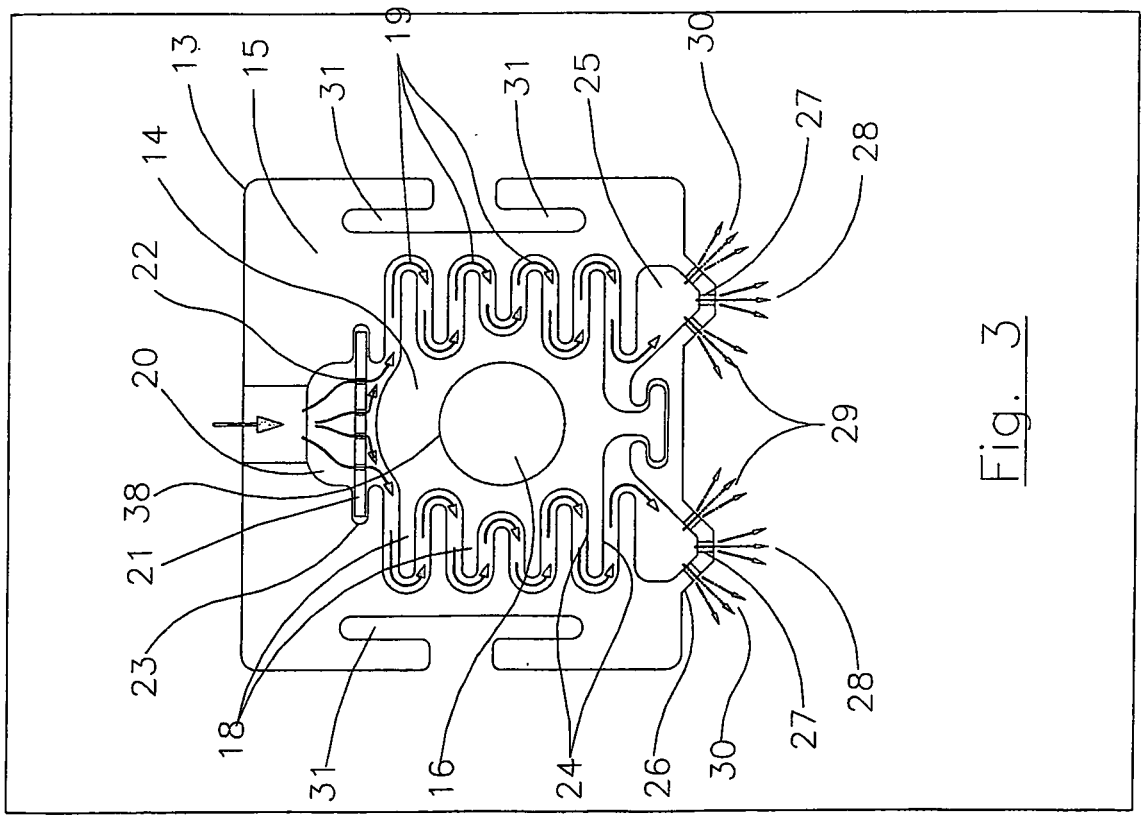


Fig. 3

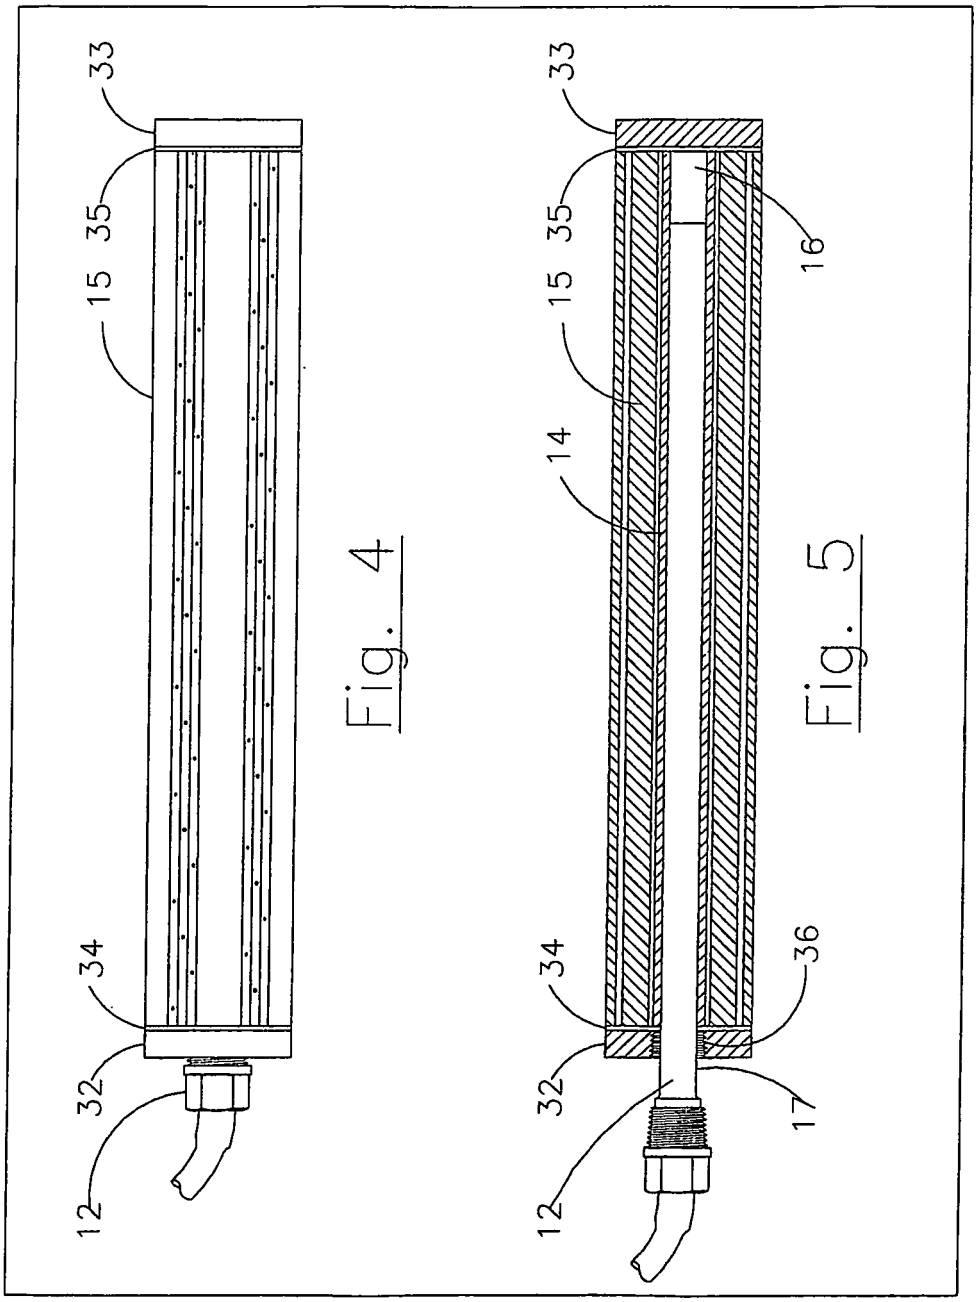


Fig. 4

Fig. 5

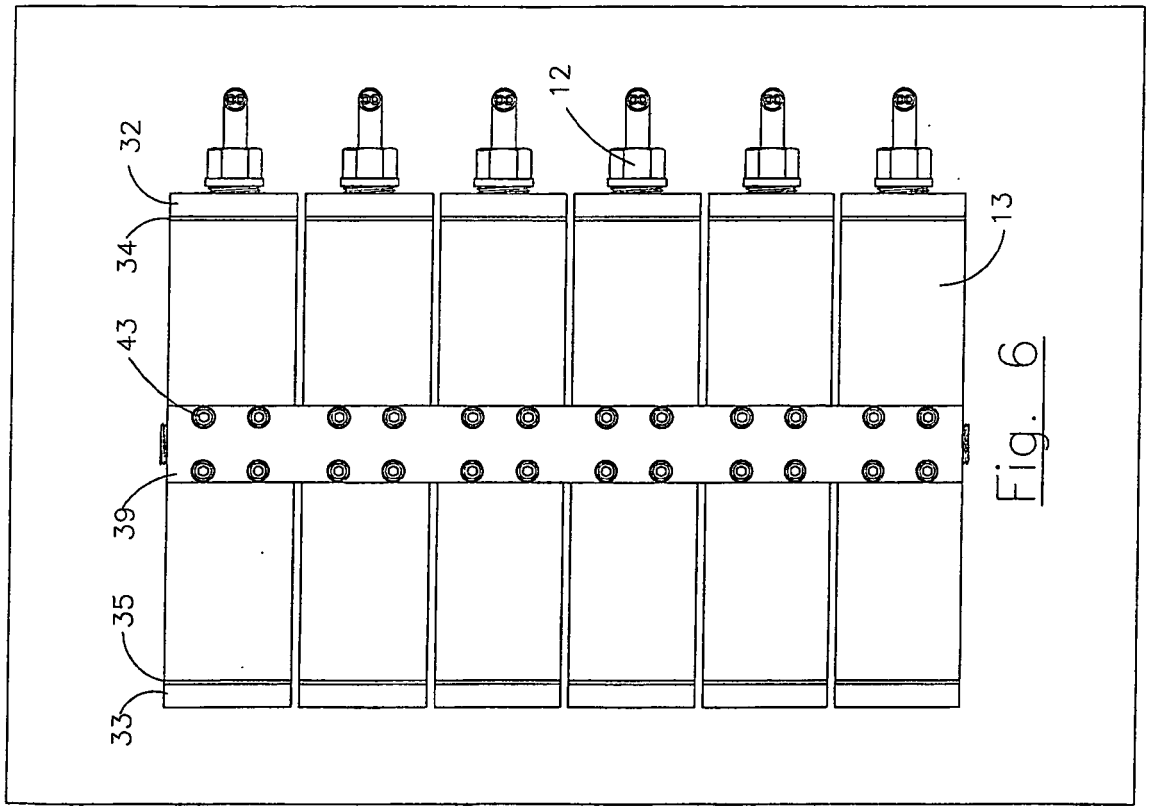


Fig. 6

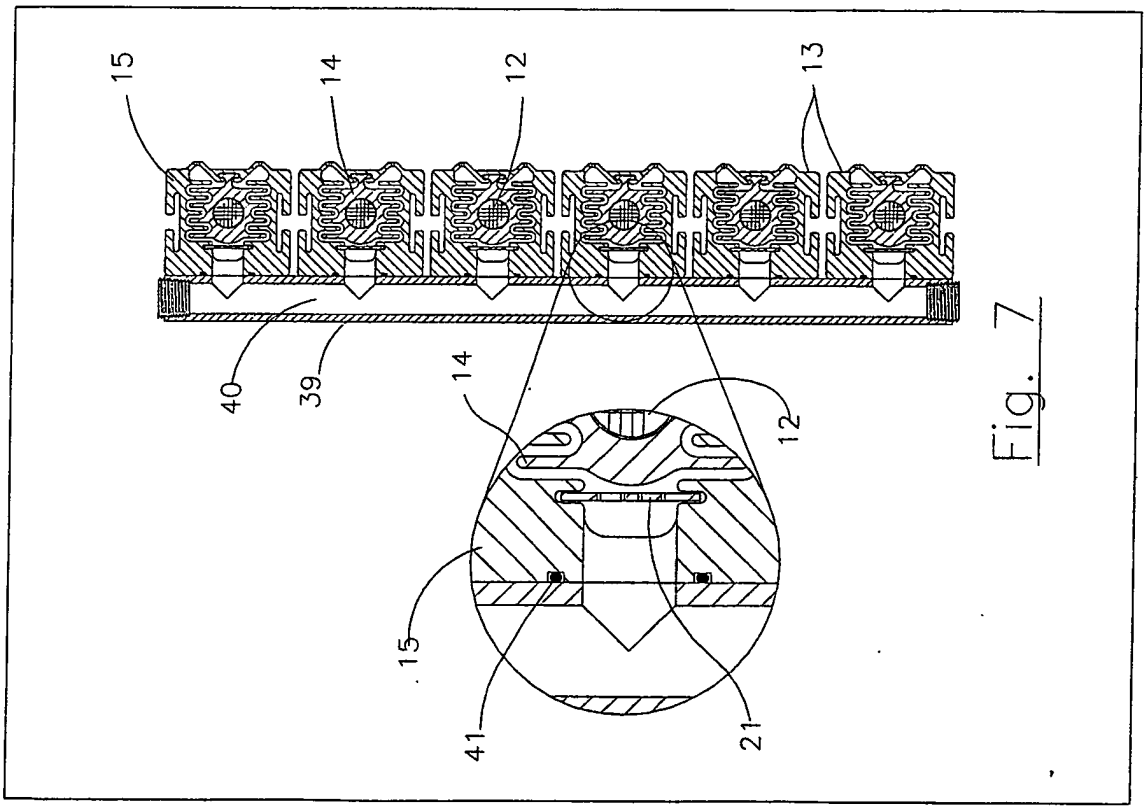


Fig. 7

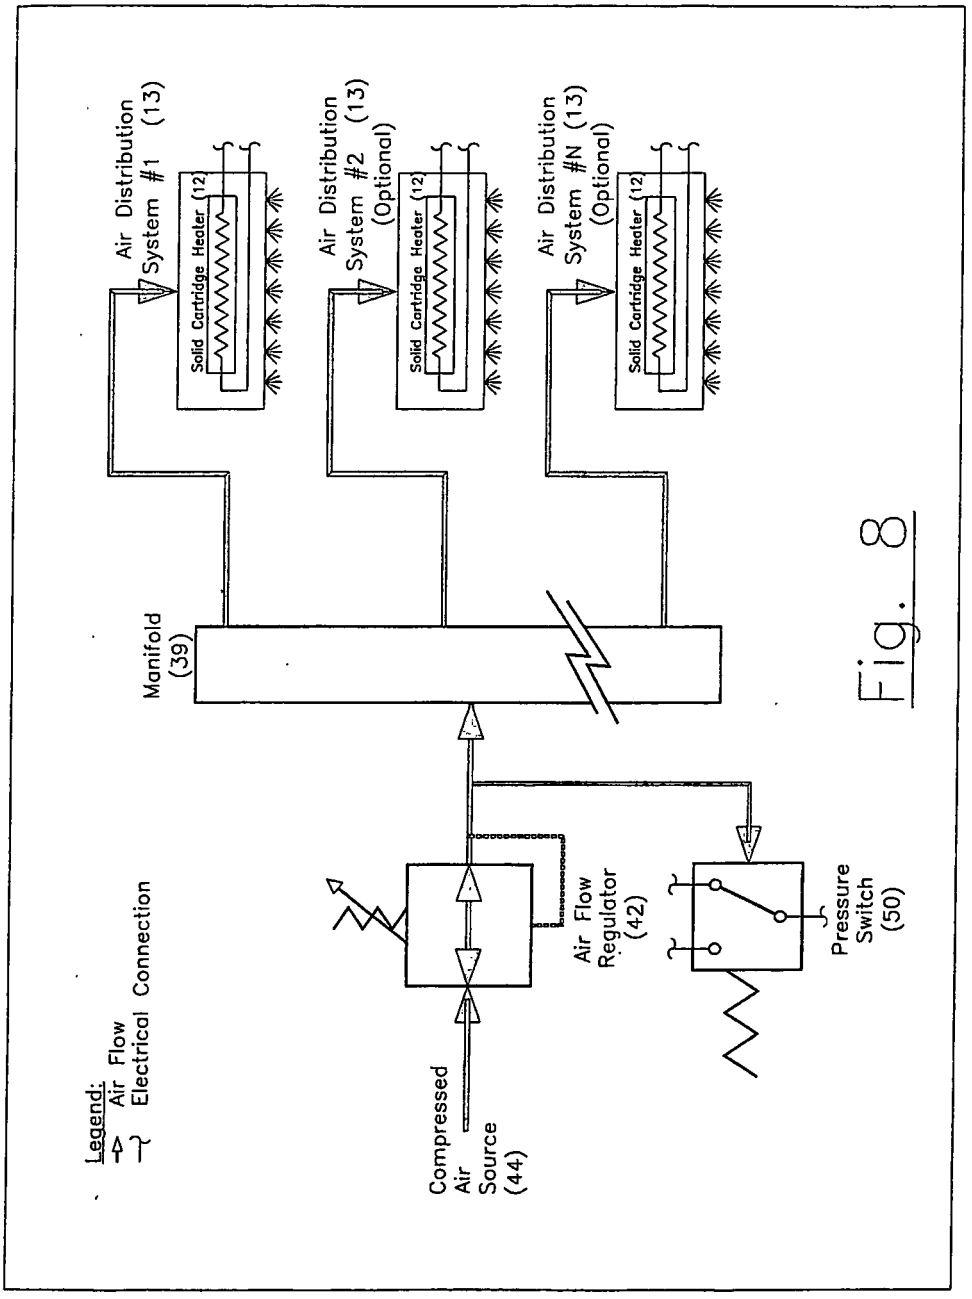
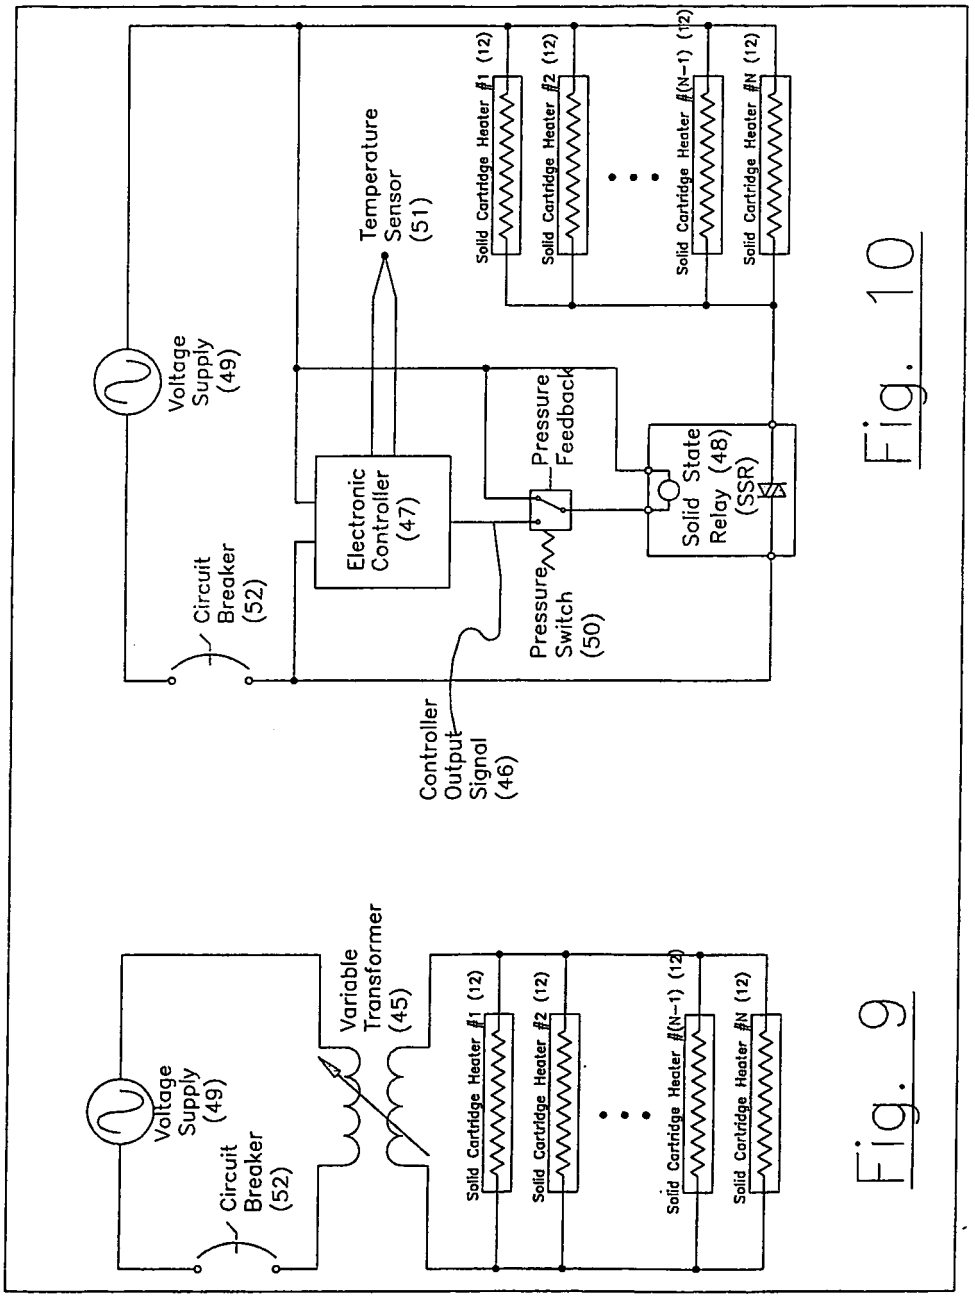

Air Distribution System #1 (13)
Air Distribution System #2 (13) (Optional)
Air Distribution System #N (13) (Optional)
Solid Cartridge Heater (12)
Manifold (39)
Compressed Air Source (44)
Air Flow Regulator (42)
Pressure Switch (50)
Legend:
Air Flow
Electrical Connection

Fig. 8


Voltage Supply (49)
Circuit Breaker (52)
Variable Transformer (45)
Solid Cartridge Heater #1 (12)
Solid Cartridge Heater #2 (12)
Solid Cartridge Heater #(N-1) (12)
Solid Cartridge Heater #N (12)
Fig. 9
Voltage Supply (49)
Circuit Breaker (52)
Electronic Controller (47)
Temperature Sensor (51)
Pressure Feedback
Pressure Switch (50)
Solid State Relay (48) (SSR)
Controller Output Signal (46)
Solid Cartridge Heater #1 (12)
Solid Cartridge Heater #2 (12)
Solid Cartridge Heater #(N-1) (12)
Solid Cartridge Heater #N (12)
Fig. 10

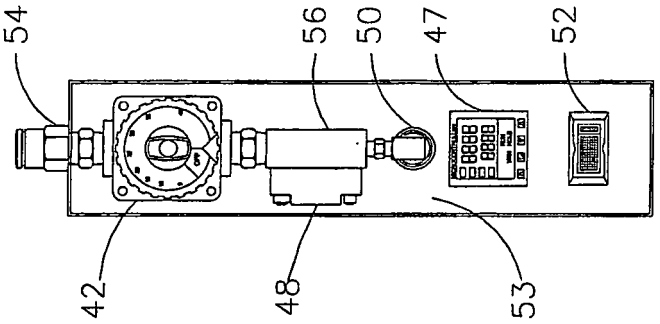


Fig. 12

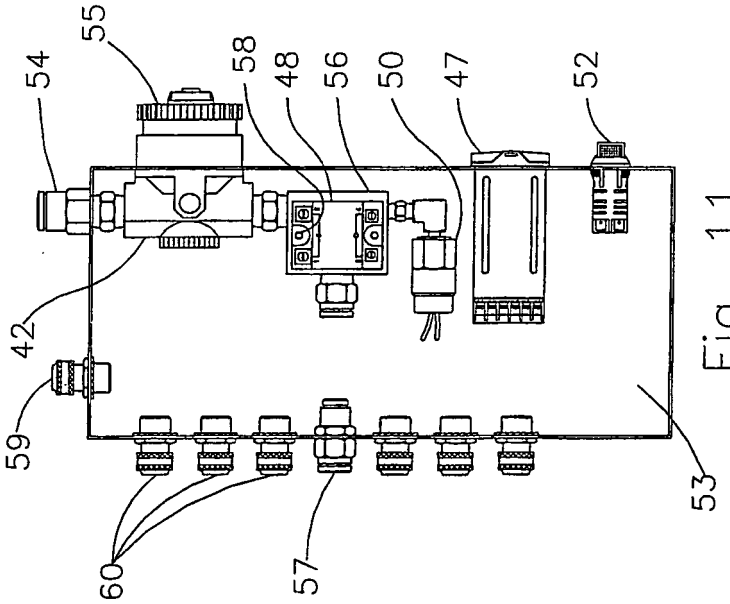


Fig. 11

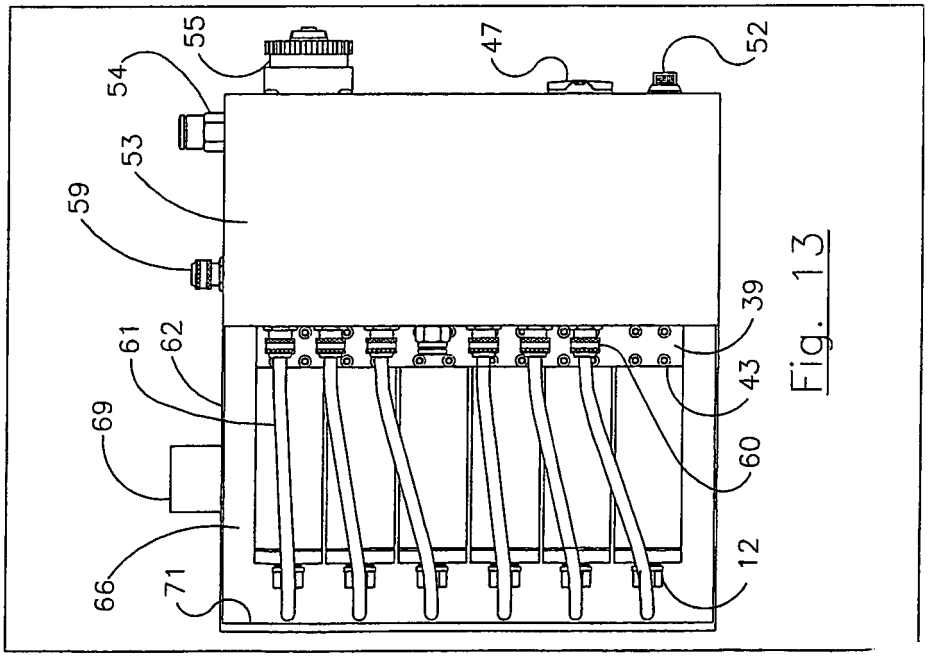


Fig. 13

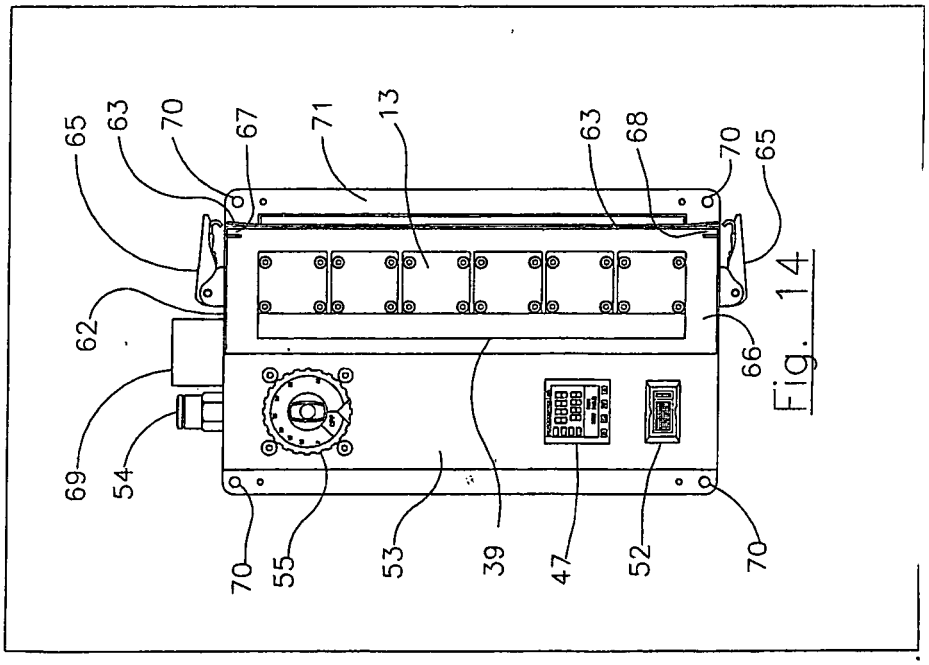


Fig. 14

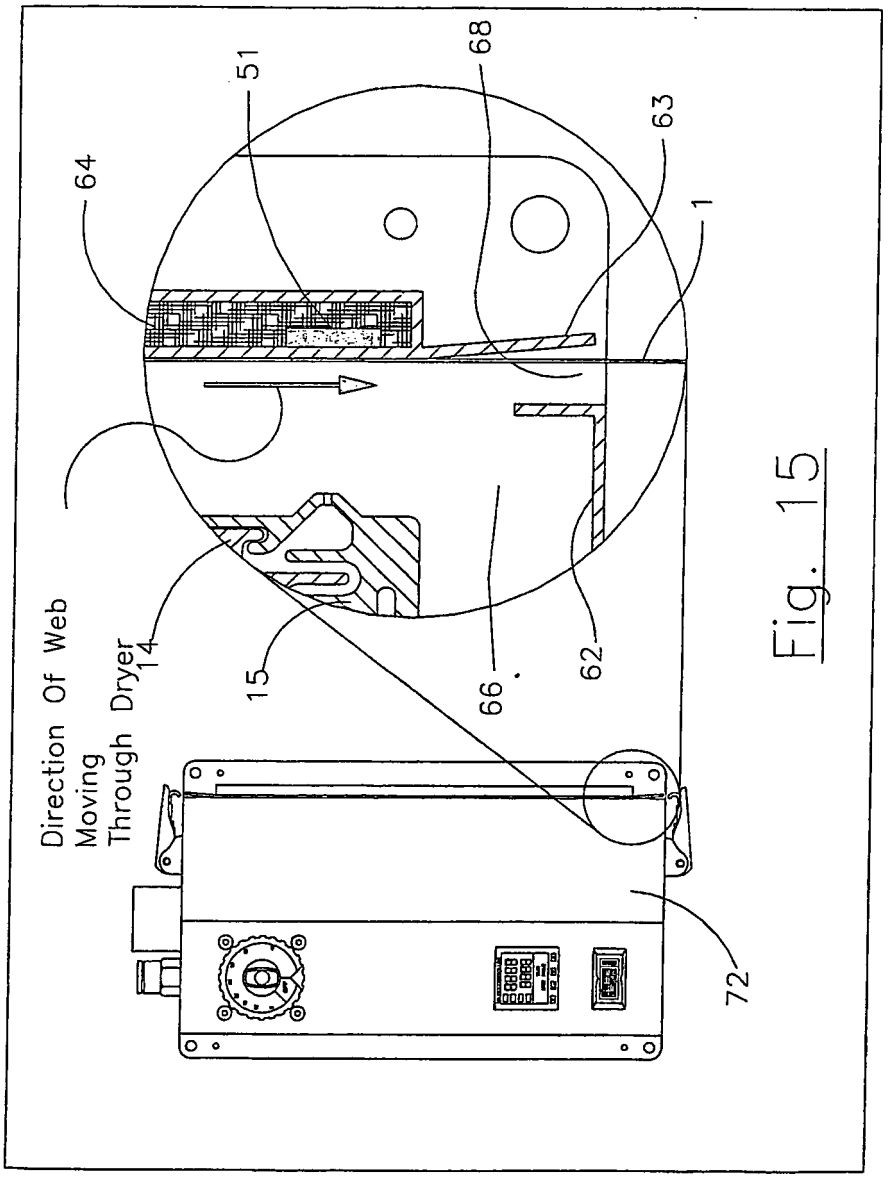

Direction Of Web
Moving
Through Dryer
14
15
66
62
72
64
51
68
63
1

Fig. 15

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 0647524 A1 **[0005]**
- US 3970822 A **[0006] [0018] [0028]**
- US 5249255 A **[0006]**
- US 2917617 A **[0006]**
- US 3846616 A **[0006]**
- US 2797297 A **[0006]**
- EP 0456173 A1 **[0006]**
- EP 0320966 A1 **[0007]**