



(11) **EP 1 722 482 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

(15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see
Claims EN 8

(51) Int Cl.:
H04N 5/00 (2011.01) **H04N 5/445** (2011.01)
H04B 1/10 (2006.01) **H04K 3/00** (2006.01)
H04N 5/44 (2011.01)

(48) Corrigendum issued on:
14.11.2012 Bulletin 2012/46

(86) International application number:
PCT/JP2005/002057

(45) Date of publication and mention
of the grant of the patent:
15.08.2012 Bulletin 2012/33

(87) International publication number:
WO 2005/078944 (25.08.2005 Gazette 2005/34)

(21) Application number: **05710109.9**

(22) Date of filing: **10.02.2005**

(54) **DISPLAY APPARATUS, WIRELESS TRANSMITTING/RECEIVING SYSTEM, DISPLAY METHOD, DISPLAY CONTROL PROGRAM, AND RECORDING MEDIUM**

ANZEIGEVORRICHTUNG, DRAHTLOSES SENDE-/EMPFANGSSYSTEM, ANZEIGEVERFAHREN, ANZEIGESTEUERPROGRAMM UND AUFZEICHNUNGSMEDIUM

APPAREIL D’AFFICHAGE, SYSTÈME D’ÉMISSION/RÉCEPTION SANS FIL, PROCÉDÉ D’AFFICHAGE, PROGRAMME DE COMMANDE D’AFFICHAGE ET SUPPORT D’ENREGISTREMENT

(84) Designated Contracting States:
DE ES FR GB

(74) Representative: **Müller - Hoffmann & Partner**
Patentanwälte
Innere Wiener Strasse 17
81667 München (DE)

(30) Priority: **13.02.2004 JP 2004037182**

(43) Date of publication of application:
15.11.2006 Bulletin 2006/46

(56) References cited:
WO-A-02/23819 GB-A- 1 393 556
GB-A- 2 343 334 GB-A- 2 352 589
JP-A- 2001 189 947 JP-A- 2002 135 745
JP-A- 2002 320 165 JP-A- 2002 344 843
JP-A- 2003 304 412 US-A1- 2002 018 057
US-A1- 2002 021 685 US-A1- 2002 071 401
US-A1- 2002 181 417 US-A1- 2003 120 742
US-B1- 6 366 792

(73) Proprietor: **Sharp Kabushiki Kaisha**
Osaka-shi, Osaka 545-8522 (JP)

(72) Inventors:
• **NISHIDA, Shinichi**
Tochigi 329-2141 (JP)
• **IWAMOTO, Yuhstake**
Tochigi 329-2162 (JP)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 722 482 B9

Description

TECHNICAL FIELD

[0001] The present invention relates to a display apparatus, a wireless transmitting and receiving system, a display method, a display control program, and a recording medium, in which or by which a video signal is transmitted and received by using wireless communications such as a wireless LAN.

BACKGROUND ART

[0002] Recently, a display apparatus and a transmitting and receiving system have been developed each of which receives a wirelessly transmitted video signal and which displays an image that is based on the video signal. However, in cases where a radio wave is not normally received, an image may deteriorate in quality or may not be displayed at all. Such an image causes a viewer to feel uncomfortable. In light of this, a display apparatus is known which does not display an image whose quality is significantly deteriorated but which displays an image containing information indicating that the image is not receivable (Patent Document 1: Japanese Unexamined Patent Publication No. 352519/1992 (Tokukaihei 4-352519)).

[0003] However, the display apparatus described in Patent Document 1 is arranged as follows. That is, the display apparatus compares a signal level of a received video signal with a predetermined level. When the signal level is less than the predetermined level, the display apparatus does not display the image that is based on the received video signal, but displays the image containing the information indicating that the image is not receivable. Incidentally, there are various reasons why the video signal cannot be normally received. The video signal cannot be normally received, for example, when a jamming radio wave or a different wireless communication device is present, or when the display apparatus is out of a communication range. In any case, the display apparatus of Patent Document 1 invariably displays the image containing the information indicating that the image is not receivable. This allows the viewer to know that the image is not receivable. However, the viewer does not know a reason why the image is not receivable. This made it impossible for a viewer to consider and find a way of dealing with a case where the image is not receivable the the term "jamming" does not refer to intentional interference with respect to a certain device, but refers to radio interference with another device using the same frequency.

[0004] US 2003/0120742 A1 describes a system having a home server that collectively receives and demodulates signals of satellite broadcasts, TV broadcasts. CATV broadcasts and telecommunication data by its receiving and demodulating portion, and upon receipt of a request from a user display device, selects a broadcast-

ing channel and converts the channel signal into a common data signal by its digital signal processing portion. The home server decides an address of the display device and a transmission means, modulates the common data signal by its radio control portion and, then, transmits the signal through an aerial portion thereof to the display device.

[0005] GB 2 343 334 A describes a terminal and method to display the probability of attaining successful communication in a mobile radio terminal, preferably a mobile radio telephone. The terminal has interference level detector means to detect a data error rate of a received signal and display means to display information concerning the detected data error rate, e.g. received signal interference level B. Preferably, the display means may simultaneously display information concerning other detected parameters affecting a probability of attaining successful communication, such as a received signal strength indicator (RSSI) A. Thus the display is able to provide a clear indication of the probability of successful communication method and the individual factors involved. The information may show low, medium or high probability of success and be displayed using a variable indicator such as a digit, icon, graph or bar or similar means.

DISCLOSURE OF INVENTION

[0006] The above-identified object is achieved by a display apparatus according to claim 1, a wireless transmitting and receiving system according to claim 8, a display method according to claim 19, a display control program according to claim 20, and a computer-readable recording medium according to claim 21.

[0007] The present invention has been made in view of the foregoing problems, and it is an object of the present invention to provide a display apparatus, a wireless transmitting and receiving system, a display method, a display control program, and a recording medium, each of which allows a display by which one can recognize whether or not a jamming electric wave in an operation frequency band used for wireless communication makes it impossible to normally receive a video signal.

[0008] That is, the display apparatus of the present invention is a display apparatus for receiving at least a video signal by wireless communication, the display apparatus, including: wireless receiving means for receiving the video signal that is wirelessly transmitted; jamming signal detecting means for detecting, in an operating frequency band used for the wireless communication, a jamming signal other than the video signal; and jamming signal information outputting means for, in response to the detection of the jamming signal, outputting jamming signal information indicating presence of the jamming signal.

[0009] According to the above structure, it is possible to recognize whether or not the jamming electric wave in the operation frequency band used for the wireless com-

munication makes it impossible to receive the video signal normally. With this, a reason why the signal cannot be received can be recognized with ease.

BRIEF DESCRIPTION OF DRAWINGS

[0010]

Fig. 1 is a block diagram schematically showing a microcomputer provided in a display apparatus according to an embodiment of the present invention.

Fig. 2 is a block diagram showing a wireless transmitting and receiving system according to the embodiment of the present invention.

Fig. 3 is a flowchart concerning display control carried out in cases where a signal cannot be received in the wireless transmitting and receiving system according to the embodiment of the present invention.

Fig. 4 is a diagram showing a manner of jamming signal information displayed on a screen.

Fig. 5 is a diagram showing a manner of the jamming signal information displayed on the screen.

Fig. 6 is a flow chart concerning another display control process carried out in cases where a video signal cannot be received in the wireless transmitting and receiving system according to the embodiment of the present invention.

Fig. 7 is a block diagram showing a wireless transmitting and receiving system according to another embodiment of the present invention.

BEST MODE FOR CARRYING OUT THE INVENTION

[0011] The following explains an embodiment of the present invention. Note that the present invention is not limited to the embodiment.

[0012] Fig. 2 is a block diagram showing a wireless transmitting and receiving system according to the embodiment of the present invention. That is, as shown in Fig. 2, the wireless transmitting and receiving system includes a wireless transmitting apparatus A and a display apparatus B.

[0013] The wireless transmitting apparatus A includes: receiving means 1, which receives a broadcast signal; image processing means 2, which processes a video signal contained in the broadcast signal received by the receiving means 1; sound processing means 3, which processes an audio signal contained in the broadcast signal received by the receiving means 1; an encoder 4, which compresses the audio and video signals respectively processed by the image processing means 2 and the sound processing means 3; wireless transmitting and receiving means 5, which superimposes, onto a signal having a predetermined carrier frequency, the video and audio signals compressed by the encoder 4, and which transmits the signal thus superimposed to the display apparatus B; a microcomputer 6 for carrying out these processes appropriately; and a ROM 7 for storing various

set values and the like. The wireless transmitting apparatus A may further include light-receiving means 8 for receiving a predetermined signal from a remote controller (remote-control apparatus) 17. The light-receiving means 8 serves as means for changing, via the microcomputer 6, the set values stored in the ROM 7. Note that the receiving means 1 can receive not only a broadcast signal but also a video signal externally supplied or the like (not shown).

[0014] The display apparatus B includes: wireless transmitting and receiving means 9, which receives a signal transmitted from the wireless transmitting and receiving means 5 of the wireless transmitting apparatus A; a decoder 10, which decodes the signals contained in the superimposed signal received by the wireless transmitting and receiving means 9; image processing means 11, which processes the video signal decoded by the decoder 10; display means 12, which displays an image processed by the image processing means 11; sound processing means 13, which processes the audio signal decoded by the decoder 10; a speaker 14, which outputs a sound processed by the sound processing means 13; a microcomputer 15 for carrying out these processes appropriately; and a ROM 16 for storing various set values and the like. The display apparatus B further includes light-receiving means 18 for receiving a predetermined signal from the remote controller 17. The light-receiving means 18 serves as means for changing, via the microcomputer 15, the set values stored in the ROM 16. With this, various control operations can be carried out.

[0015] According to the above arrangement, the wireless transmitting apparatus A is provided with the light-receiving means 8. Alternatively, the following arrangement may be possible. Specifically, in the arrangement, the signal transmitted from the remote controller 17 is wirelessly transmitted from the wireless transmitting and receiving means 9 to the wireless transmitting apparatus A, via the light-receiving means 18 and microcomputer 15 of the display apparatus B, so as to be transmitted to the microcomputer 6. This arrangement can make it unnecessary for the wireless transmitting apparatus A to be provided with the light-receiving means 8.

[0016] In the present invention, the wireless communication can adopt a communication method defined, for example, by the IEEE 802.11b, which is an international wireless LAN standard. The IEEE 802.11b uses a 2.4 GHz frequency band (ranging approximately from 2.4 GHz to 2.5 GHz), and it is possible to use a recognition information signal for enabling connection to a specific destination. Such a recognition information signal is called an SSID. According to the SSID, the same recognition information signal is set between a transmitting section and a receiving section. This allows the receiving section to receive a signal from the transmitting section which transmits the recognition information signal thus set.

[0017] Note that: in the present invention, not only the IEEE 802.11b but also other wireless communication

methods can be adopted.

[0018] Examples of such other wireless communication method include the IEEE 802.11g (up to 50 Mbps), which uses the same 2.4 GHz band as the IEEE 802.11b (up to 11 Mbps) and which allows faster communication than does the IEEE 802.11b. Examples of a wireless communication method using another frequency band include the IEEE 802.11a, which uses a 5.2 GHz band as a communication frequency band. Examples of a further wireless communication methods includes: the HiSWAN, which uses the 5.2 GHz band; and the Bluetooth, in commercial products such as a PC, which uses a 2.45 GHz band, and a communication speed of 1 Mbps to 2 Mbps. The present invention can be applied to each of these communication standards. In this case, it is possible to achieve the same effects when a jamming radio wave transmitted from a different electronic device using the same communication band is detected.

[0019] In the display apparatus B, for example, the microcomputer 15 detects a level, disorder, or the like of the received video signal, and determines whether or not the display apparatus B is in a poor signal reception state in which normal reception is not carried out. Furthermore, the microcomputer 15 detects a received recognition information signal, and determines whether or not the detected recognition information signal is identical to a recognition information signal set in the ROM 16 or the like. Therefore, in cases where the microcomputer 15 determines that the detected recognition information signal is different from the set recognition information signal, it is possible to recognize that a jamming radio wave is generated due to the presence of a different communication device transmitting the different recognition information signal. Further, the microcomputer 15 detects whether or not a jamming signal other than the received video signal exists in an operating frequency band used for the wireless communication. For example, in the 2.4 GHz band, the display apparatus B is likely to receive such a jamming electric wave from a device such as a microwave oven.

[0020] That is, as shown in Fig. 1, the microcomputer 15 includes display control means 31 for generating an output signal for carrying out display control with respect to the image processing means 11. The display control means 31 outputs various display control signals in accordance with signals transmitted from (i) determination means 32 for determining whether it is not possible to receive any signal, (ii) recognition information detecting means 33, and (iii) jamming signal detecting means 34, which means 32, 33, and 34 are provided in the microcomputer 15.

[0021] The determination means 32 detects the level, disorder, or the like of the received video signal, and determines whether or not the display apparatus B is in the poor signal reception state in which normal reception is not carried out. The determination is carried out using a threshold value of the signal level prestored in the ROM 16, for example. That is, the determination means 32

determines whether or not a received signal has a signal level greater than the threshold value of the signal level stored in the ROM 16. In cases where the signal level of the received video signal is not greater than the signal level threshold value, the determination means 32 determines that it is not possible to receive any signal. Then, the determination means 32 sends, to the display control means 31, a signal indicating that it is not possible to receive any signal.

[0022] Further, the recognition information detecting means 33 detects the recognition information signal from the received signal, and determines whether or not the recognition information signal is identical to the recognition information signal set in the ROM 16 or the like. Then, in cases where the detected recognition information signal is different from the set recognition information signal, the recognition information detecting means 33 sends, to the display control means 31, a signal indicating that other communication device, which transmits a different recognition information signal, is present near here.

[0023] Furthermore, the jamming signal detecting means 34 detects whether or not a signal other than the received video signal exists in the operating frequency band used for the wireless communication. Note that: the signal other than the received video signal refers to a signal from which no recognition information signal is detected, and will be hereinafter referred to as "jamming signal". For example, in the 2.4 GHz band, the display apparatus B is likely to receive such a jamming electric wave, i.e., a jamming signal from a device such as a microwave oven. Moreover, in cases where the jamming signal detecting means 34 has detected the jamming signal, the jamming signal detecting means 34 sends, to the display control means 31, a signal indicating that the jamming signal detecting means 34 has detected the jamming signal.

[0024] Thus, the display control means 31 prepares a display screen image in accordance with each of the signals respectively transmitted from the determination means 32, the recognition information detecting means 33, and the jamming signal detecting means 34. The display screen image will be specifically described later.

[0025] The display control, carried out when it is not possible to receive any signal, of the present invention will be described with reference to (i) a block diagram shown in Fig. 1, (ii) a block diagram shown in Fig. 2, and (iii) a flow chart shown in Fig. 3.

[0026] First, in cases where a video signal transmitted from the wireless transmitting apparatus A cannot be normally received by the display apparatus B (S1), the display apparatus B stops displaying that is based on the received video signal (S2). On this occasion, the determination means 32 shown in Fig. 1 determines whether it is not possible to receive any signal. In accordance with the determination, the display control means 31 sends, to the image processing means 11, a control signal for stopping the display.

[0027] Next, the microcomputer 15 detects whether

other recognition information signal than the set recognition information signal exists (S3). On this occasion, the recognition information detecting means 33 shown in Fig. 1 detects whether other recognition information signal exists, under the state in which it is not possible to receive any signal.

[0028] In cases where the other recognition information signal is detected in S3, it is determined that any signal cannot be received due to the jamming electric wave transmitted from the communication device transmitting the other recognition information signal. Then, the display apparatus B displays so as to inform that "other SS wireless transmitter exists" (S4). Here, when the recognition information detecting means 33 has detected the other recognition information signal, the recognition information detecting means 33 sends, to the display control means 31, a signal indicating that the recognition information detecting means 33 has detected the other recognition information signal. Then, the display control means 31 sends, to the image processing means 11, a signal for displaying "other SS wireless transmitter exists".

[0029] On the other hand, in cases where any other recognition information signal is not detected in S3, the microcomputer 15 detects whether or not a jamming signal other than the received video signal exists in the operating frequency band used for the wireless communication (S5). In this case, the jamming signal detecting means 34 checks for presence/absence of the jamming signal.

[0030] In cases where the jamming signal is detected in S5, it is determined that any signal cannot be received due to the jamming signal transmitted from the device such as the microwave oven. Then, the display apparatus B displays jamming signal information (S6). That is, when the jamming signal detecting means 34 detects the jamming signal, the jamming signal detecting means 34 sends, to the display control means 31, the signal indicating that the jamming signal detecting means 34 has detected the jamming signal. Then, the display control means 31 sends, to the image processing means 11, a signal for carrying out a display to indicate the "jamming signal information". Figs. 4 and 5 show examples of how the "jamming signal information" is displayed, respectively. These examples will be fully described later.

[0031] On the other hand, in cases where no jamming signal is detected in S5, it is determined that a reason why any signal cannot be received is not due to the influence of the other device. Then, the display apparatus B displays information indicating that "it is not possible to receive any signal" (S7). Here, when the jamming signal detecting means 34 does not detect the jamming signal, the jamming signal detecting means 34 sends, to the display control means 31, a signal indicating that the jamming signal detecting means 34 has not detected the jamming signal. Then, the display control means 31 sends, to the image processing means 11, a signal for displaying that "it is not possible to receive any signal".

[0032] The following explains the jamming signal information.

[0033] The jamming signal information may be displayed so as to indicate "there is other device transmitting a jamming electric wave". However, when the jamming signal information is displayed in such a manner as described below, the jamming signal information becomes more useful and easily understandable.

[0034] The wireless communication can use a plurality of communication channels. For example, the IEEE 802.11b communication method can use 1 to 14 communication channels. Therefore, the display apparatus B can be arranged so as to (i) detect the jamming signal for each of the communication channels and (ii) display presence/absence of the jamming signal for each of the communication channels. Such an arrangement makes it possible to distinctively differentiate between (a) a communication channel that is being affected by the jamming signal and (b) a communication channel that is not being affected by the jamming signal. This makes it possible to easily switch from (i) the communication channel that is being affected by the jamming signal, to (ii) the communication channel that is not being affected by the jamming signal.

[0035] Further, the display apparatus B can be arranged so as to (i) compare levels of jamming signals with a plurality of predetermined levels, (ii) classify the levels of the jamming signals into a plurality of levels respectively corresponding to the predetermined levels, and (iii) display the levels of the jamming signals on respective scales of the plurality of levels. Thus, the levels of the jamming signals are classified into the plurality of levels, and then are displayed. This allows visual and sensory recognition of the level of each of the jamming signals. This allows the jamming signal information to be very easily understandable.

[0036] Fig. 4 shows an example of the jamming signal information. In this example, the levels of the jamming signals are displayed for the communication channels and on the scale of the plurality of levels corresponding to the predetermined levels, respectively. The jamming signal information thus exemplified and displayed herein is the "jamming signal information" shown in S6 of the flowchart shown in Fig. 3. In the example shown in Fig. 4, the level of each of the jamming signals is compared with three predetermined levels "-60 dB", "-80 dB", and "-100 dB" serving as the plurality of predetermined levels, and is displayed numerically on a four-level scale, i.e., in one of the following four three-digit numerical values: "850", "500", "300", and "000". Specifically, in cases where there is a jamming signal having a level exceeding "-60 dB", the three-digit numerical value of "850" is displayed. In cases where there is a jamming signal having a level falling within the range of "-60 dB" to "-80 dB", the three-digit numerical value of "500" is displayed. In cases where there is a jamming signal having a level falling within the range of "-80 dB" to "-100 dB", the three-digit numerical value of "300" is displayed. In cases where

there is no jamming signal having a level exceeding -100 dB, the three-digit numerical value of "000" is displayed. The larger numerical value indicates the stronger influence of the jamming signal. Fig. 4 shows that each of the communication channels "10", "11", and "12" is being affected by the jamming signal. Therefore, the jamming signal information shown in Fig. 4 indicates that: the influence of the jamming signal can be avoided by using a communication channel having the three-digit numerical value of "000". In addition, when the numerical values are displayed in different formats (e.g., colors, color densities, character styles, and sizes) in accordance with the levels, the jamming signal information becomes very easily understandable.

[0037] Thus, the levels of the jamming signals are respectively displayed for the communication channels, so that it is possible to instantly and easily recognize the respective influences of the jamming signals for the communication channels. This makes it very easy to find a communication channel which is not being affected by the jamming signal, and to which the communication channel is switched. Further, the levels of the jamming signals are respectively displayed on the scale of the plurality of levels corresponding the predetermined levels, so that it is possible to instantly and easily recognize the extent of the respective influences of the jamming signals for the communication channels. Therefore, such an arrangement makes it possible to provide very easily understandable and simple jamming signal information made up of minimal information necessary for a user, a service person, or the like.

[0038] In cases where more detailed information concerning the jamming electric wave is necessary, the number of the predetermined levels may be increased. Further, the display content of the jamming signal information is not limited to the above example. For example, instead of displaying the respective strengths of the jamming signals, the display apparatus B may be arranged so as to (i) measure levels of jamming signals more than once within a predetermined period and (ii) display the number of jamming signals whose levels exceed predetermined levels.

[0039] Fig. 5 shows another example of the jamming signal information. The jamming signal thus exemplified and displayed herein is the "jamming signal information" shown in S6 of the flow chart shown in Fig. 3. Fig. 5 illustrates an example in which detection results identical to those shown in Fig. 4 are displayed graphically, instead of being displayed numerically, for respective the communication channels. The graphical representation of the jamming signal information facilitates sensory recognition. Also in Fig. 5, when the graphs are displayed in different formats (e.g., colors and color densities) in accordance with the four levels, respectively, the jamming signal information becomes much easier to understand.

[0040] Each of Figs. 4 and 5 shows a mere example of displaying the jamming signal information, and the jamming signal information may be displayed in a different

manner.

[0041] Further, for example, the display apparatus B becomes more useful when the display apparatus B is arranged such that: the plurality of predetermined levels with which the levels of the jamming signals are compared are able to be arbitrarily set and changed, for example, by controlling the setting of the determination thresholds with the use of the microcomputer 15.

[0042] Further, such jamming signal information serves as information based on which an operation such as a communication channel switching operation is carried out, and therefore is considered to be information necessary for a service person rather than a normal user. Therefore, the display apparatus B can also be arranged such that: the jamming signal information is not displayed in a normal setting, but is displayed when the service person changes the setting. For example, the display apparatus B can be arranged such that: when any other recognition information signal is not detected in the normal setting in S3 of the flowchart shown in Fig. 3, the process always proceeds to S7 so that the information indicating that "it is not possible to receive any signal" is displayed.

[0043] Note that the display apparatus B can also be arranged so as to automatically switch to, in accordance with the jamming signal information, a communication channel that is not being affected by the jamming signal.

[0044] In the flowchart shown in Fig. 3, when the video signal becomes unable to be received, the display apparatus B stops displaying the image that is based on the video signal, and displays a reason why the video signal cannot be received. As such, TV viewing users are given the reason why the video signal cannot be received. In cases where the users are thus notified of the reason why the video signal cannot be received, most of the users do not know a way of dealing with the situation. This may cause confusion for each of the users.

[0045] For the purpose of minimizing the risk of causing confusion for the user, the following process is carried out. See a flow chart shown in Fig. 6. In this process, the user is only notified that the video signal has become unable to be received, and the reason why the video signal cannot be received is notified to the service person.

[0046] That is, in cases where the video signal transmitted from the wireless transmitting apparatus A cannot be normally received by the display apparatus B (S11), the display apparatus B stops displaying the image that is based on the received video signal (S12).

[0047] Then, the display apparatus B displays the information indicating that "the video signal cannot be received" (S13). At this point, the user calls the service person.

[0048] Then, detection of an inspection signal is carried out by the called service person (S14). In this case, the service person operates an inspection signal key provided in the remote controller or the like, so as to send the inspection signal to the microcomputer 15. It is preferable that the inspection signal key be unnoticed by the user.

For example, the inspection signal key may be a hidden key provided in the remote controller. Alternatively, the inspection signal may be inputted by using operation means other than the remote controller.

[0049] In response to the reception of the inspection signal, the microcomputer 15 detects whether or not the microcomputer 15 has received a recognition information signal other than the recognition information signal set therein (S15). In cases where the other recognition information signal is detected, it is determined that any signal cannot be received due to a jamming electric wave transmitted from a communication device transmitting the other recognition information signal. Then, the display apparatus B displays "other SS wireless transmitter exists" (S16).

[0050] On the other hand, in cases where the microcomputer 15 does not detect any other recognition information signal, the microcomputer 15 detects whether or not a jamming signal other than the received video signal exists in the operating frequency band used for the wireless communication (S17). In cases where such a jamming signal is detected, it is determined that any signal cannot be detected due to the jamming signal transmitted from other device such as a microwave oven. Then, the display apparatus B displays the jamming signal information (S18).

[0051] On the other hand, in cases where the jamming signal is not detected in S17, it is determined that a reason why any signal cannot be received is not due to influence of the other device. Then, the display apparatus B displays that the display apparatus B is in a general signal unreceivable state. (S 19).

[0052] As described above, the information to be shown to the user is separated from the information to be shown to the service person. This allows reduction of the risk of causing confusion for the user.

[0053] In the foregoing process, the display in each of S16, S18, and S19 is carried out by the display means 12 of the display apparatus B. Also in the display control shown in the flowchart of Fig. 3, the display is carried out by the display means 12 of the display apparatus B.

[0054] As described above, the present embodiment uses the display means 12 to display the information to show at the time when the video signal has become unable to be received. However, the information, to show at the time when the video signal has become unable to be received, may be displayed by the display means different from the display means 12 for displaying an image.

[0055] That is, the display means 12 is not the only means for displaying (i) the jamming signal information and/or (ii) the information which informs the presence of a different SS wireless communication device. Alternative means is, for example, means for informing the user of (i) the jamming signal information or (ii) the information indicative of the presence of a different SS wireless communication device by carrying out an output controlling at an output terminal which ordinarily outputs received image information to an externally connected display de-

vice, such that those information are outputted to and displayed on a screen of other display device.

[0056] Such an arrangement will be specifically described below with reference to a block diagram shown in Fig. 7.

[0057] Fig. 7 is the block diagram showing a wireless transmitting and receiving system including a display unit 200 which has an image output terminal 20 separately from the display means 12. An image transmission unit 100 is arranged in the same manner as the wireless transmitting apparatus A of the wireless transmitting and receiving section shown in Fig. 2, and therefore detail description will be omitted. Further, the display unit 200 is arranged in the same manner as the display apparatus B of the wireless transmitting and receiving system of Fig. 2, except that the display unit 200 is provided with the output terminal 20, and therefore detail description will be omitted.

[0058] The wireless transmitting and receiving system shown in Fig. 7 is arranged as follows. Specifically, in cases where either the wireless transmitting and receiving means 5 of the image transmission unit 100 or the wireless transmitting and receiving means 9 of the display unit 200 detects either the presence of a different SS wireless device or a jamming radio wave, the microcomputer 15 of the display unit 200 (i) reads out, from the ROM 16, either the jamming signal information or the information informing the presence of a different SS wireless communication device, and (ii) carries out such a control at the image output terminal 20 of the display unit 200 that an information display process is carried out with respect to the information thus read out. In the information display process, the above information is superimposed onto another image signal (e.g., a single uniform pattern signal such as a black screen which is outputted instead of a received video signal that is not accurately displayed).

[0059] That is, the display control means 31 (see Fig. 1) provided in the microcomputer 15 of the display unit 200 is arranged so as to serve as jamming signal information outputting means for outputting the control signal to the output terminal 20 instead of the image processing means 11 for the purpose of causing the display means 12 to display the poor signal reception information.

[0060] With this arrangement, it is possible to prevent an unviewable image from being provided to the user. Moreover, with this arrangement, by switching between the display means, it is possible to adequately inform the user and a service person of whether it is not possible to receive any signal by either the presence of the jamming electric wave or the presence of the different SS wireless device.

[0061] As described above, in cases where the video signal cannot be normally received, the display apparatus of the foregoing arrangement can display information which makes it possible to recognize whether or not the poor reception is caused by a jamming electric wave hav-

ing a frequency falling within the operating frequency band used for the wireless communication. This makes it possible to easily find out how to deal with the poor reception.

[0062] The present invention is not limited to the description of the embodiments above, but may be altered by a skilled person within the scope of the claims. An embodiment based on a proper combination of technical means disclosed in different embodiments is encompassed in the technical scope of the present invention.

[0063] Operating means such as a CPU executes a program stored in storage means such as a ROM (read only memory) and a RAM (random access memory) so as to control input means (e.g., a keyboard), output means (e.g., a display), or communication means (e.g., an interface circuit). In this way, the members and processes of the display apparatus of the foregoing embodiment are achieved and executed. Therefore, the foregoing various functions and processes of the display apparatus of the present embodiment can be achieved by simply causing a computer having these means to read and execute the program stored in a storage medium. Further, by storing the program in a removable storage medium, the various functions and processes can be achieved on any computer.

[0064] Such a computer program storage medium may be a memory (not shown), such as a ROM, so that the process is executable on a microcomputer. Alternatively, a program medium may be used which can be read by inserting the storage medium in an external storage device (program reader device; not shown).

[0065] In addition, in either of the cases, it is preferable if the contained program is accessible to a microprocessor which will execute the program. Further, it is preferable if the program is read, and the program is then downloaded to a program storage area of a microcomputer where the program is executed. Assume that the program for download is stored in a main body device in advance.

[0066] In addition, the program medium is a storage medium arranged so that it can be separated from the main body. Examples of such a program medium include a tape, such as a magnetic tape and a cassette tape; a magnetic disk, such as a flexible disk and a hard disk; a disc, such as a CD/MO/MD/DVD; a card, such as an IC card (inclusive of a memory card); and a semiconductor memory, such as a mask ROM, an EPROM (erasable programmable read only memory), an EEPROM (electrically erasable programmable read only memory), or a flash ROM. All these storage media hold a program in a fixed manner.

[0067] Alternatively, if a system can be constructed which can connect to the Internet or other communications network, it is preferable if the program medium is a storage medium carrying the program in a flowing manner as in the downloading of a program over the communications network.

[0068] Further, when the program is downloaded over a communications network in this manner, it is preferable

if the program for download is stored in a main body device in advance or installed from another storage medium.

5 INDUSTRIAL APPLICABILITY

[0069] The present invention makes it possible to determine why it is not possible to receive a signal in a wireless transmitting and receiving system, and therefore can be applied in general to a device capable of transmitting and receiving a radio signal.

Claims

1. A display apparatus (B, 200) for receiving at least a video signal by wireless communication, the display apparatus (B, 200), comprising:

wireless receiving means (9) for receiving the video signal that is wirelessly transmitted;
display means (12) for displaying an image in accordance with at least the video signal;
determination means (32) configured to determine if a signal level for the video signal is greater than a threshold value;
recognition information detecting means (33) for detecting recognition information configured to detect whether another recognition information signal than a recognition information signal associated with the video signal is detected; and
jamming signal detecting means (34) for detecting, in an operating frequency band used for the wireless communication, a jamming signal other than the video signal; and
display control means (31) for causing the display means (12) to display, in response to the detection of the jamming signal, jamming signal information indicating presence of the jamming signal; wherein
the recognition detecting means (33) is configured to initiate detecting of the other recognition information signal, if the signal level is not greater than the threshold value; and
the jamming signal detecting means (34) is configured to initiate detecting of the jamming signal, if no other recognition information signal is detected.

2. The display apparatus (B, 200) as set forth in claim 1, wherein:

the jamming signal detecting means (34) detects the jamming signal for each communication channel available in the operating frequency band; and
the display control means (31) causes the display means (12) to display, as the jamming sig-

nal information, information indicating the presence of the jamming signal for said each communication channel.

3. The display apparatus (B, 200) as set forth in claim 1 or 2, wherein:

the jamming signal detecting means (34) compares a level of the jamming signal with a plurality of predetermined levels so as to detect a jamming signal level:

and

the display control means (31) causes the display means (12) to display the jamming signal information in accordance with the jamming signal level.

4. The display apparatus (B, 200) as set forth in claim 3, wherein:

the display control means (31) causes the display means (12) to display the jamming signal information numerically in accordance with the jamming signal level.

5. The display apparatus (B, 200) as set forth in claim 3, wherein:

the display control means (31) causes the display means (12) to display the jamming signal information graphically in accordance with the jamming signal level.

6. The display apparatus (B, 200) as set forth in any one of claims 3 to 5. wherein:

the display control means (31) changes a display format, such as a color, of the jamming signal information in accordance with the jamming signal level, and causes the display means (12) to display the jamming signal information in the display format.

7. The display apparatus (B, 200) as set forth in any one of claims 3 to 6, wherein:

the plurality of predetermined levels are able to be arbitrarily set and changed.

8. A wireless transmitting and receiving system for transmitting and receiving at least a video signal by wireless communication, the wireless transmitting and receiving system, comprising:

a wireless transmitting apparatus (A, 200) for

wirelessly transmitting the video signal and a recognition information signal; and a display apparatus (B, 200), which includes:

wireless receiving means (9) for receiving the video signal and the recognition information signal;

display means (12) for displaying an image in accordance with at least the video signal; determination means (32) configured to determine if a signal level for the video signal is greater than a threshold value;

recognition information detecting means (33) for detecting the recognition information signal and configured to detect whether another recognition information signal different than the recognition information transmitted from the wireless transmitting apparatus (A, 200) is detected;

jamming signal detecting means (34) for detecting, in an operating frequency band used for the wireless communication, a jamming signal other than the video signal; and display control means (31) for, when the video signal is not normally received causing the display means (12) to display abnormality information indicating an abnormal state, when the jamming signal detecting means (34) detects the jamming signal, the display control means (31) causing the display means (12) to display, as the abnormality information, jamming signal information indicating presence of the Jamming signal; wherein

the recognition detecting means (33) is configured to initiate detecting of the other recognition information signal, if the signal level is not greater than the threshold value; and the jamming signal detecting means (34) is configured to initiate detecting of the jamming signal, if no other recognition information signal is detected.

9. The wireless transmitting and receiving system as set forth in claim 8, wherein :

the jamming signal detecting means (34) detects the jamming signal for each communication channel available in the operating frequency band; and

the display control means (31) causes the display means (12) to display, as the jamming signal information, information indicating the presence of the jamming signal for said each channel.

10. The wireless transmitting and receiving system as set forth in claim 8 or 9. wherein:

- the jamming signal detecting means (34) compares a level of the jamming signal with a plurality of predetermined levels so as to detect a jamming signal level; and
the display control means (31) causes the display means (12) to display the jamming signal information in accordance with the jamming signal level.
11. The wireless transmitting and receiving system as set forth in claim 10, wherein:
the display control means (31) causes the display means (12) to display the jamming signal information numerically in accordance with the jamming signal level.
12. The wireless transmitting and receiving system as set forth in claim 10, wherein:
the display control means (31) causes the display means (12) to display the jamming signal information graphically in accordance with the jamming signal level.
13. The wireless transmitting and receiving system as set forth in claim any one of claims 10 to 12, wherein:
the display control means (31) changes a display format, such as a color, of the jamming signal information in accordance with the jamming signal level, and causes the display means (12) to display the jamming signal information in the display format.
14. The wireless transmitting and receiving system as set forth in any one of claims 10 to 13, wherein:
the plurality of predetermined levels are able to be arbitrarily set and changed.
15. The wireless transmitting and receiving system as set forth in any one of claims 8 to 14, wherein:
when the recognition information detecting means (33) detects another recognition information signal different from the recognition information signal transmitted from the wireless transmitting apparatus, the display control means (31) causes the display means (12) to display, as the abnormality information, information indicating that there is another wireless transmitting apparatus transmitting said another recognition information signal.
16. The wireless transmitting and receiving system as set forth in any one of claims 8 to 15, wherein:
when the jamming signal detecting means (34) does not detect the jamming signal, the display control means (31) causes the display means (12) to display, as the abnormality information, information indicating that it is not possible to receive any signal.
17. The display apparatus (B, 200) as set forth in claim 1, wherein the display control means (31) serves as a jamming signal information outputting means for, in response to the detection of the jamming signal, outputting jamming signal information indicating presence of the jamming signal.
18. The display apparatus as set forth in claim 17, wherein:
the jamming signal information outputting means sends the jamming signal information to superimposition display means for displaying the jamming signal information superimposed onto the image displayed by the display means (12).
19. A display method for (i) receiving at least a video signal by wireless communication and (ii) displaying an image, the display method comprising:
a first step (S 1, S 11) of determining if a signal level of the video signal is greater than a threshold value;
a second step (S3, S15) of initiating, if it is determined in the first step that the signal level of the video signal is not greater than the threshold value, determining whether another recognition information signal than are cognition information signal associated with the video signal is detected
a third step (S5, S17) of initiating detecting of a jamming signal other than the video signal in an operating frequency band used for the wireless communication, if no other recognition information signal is detected and
a fourth step (S4, S6, S7, S16, S18, S19) of carrying out a display in accordance with a result of the determination made in the second and third step, so as to inform that it is not possible to receive any signal.
20. A control program for a display apparatus according to claim 1 causing as computer to carry out the steps of the method of claim 19.
21. A computer-readable recording medium storing the display control program as set forth in claim 20.

Patentansprüche

1. Anzeigevorrichtung (B, 200) zum Empfangen wenigstens eines Videosignals mittels drahtloser Kommunikation, die Anzeigevorrichtung (B, 200) aufweisend:

Drahtlos-Empfangsmittel (9) zum Empfangen des Videosignals, das drahtlos übermittelt wird; Anzeigemittel (12) zum Anzeigen eines Bildes gemäß wenigstens dem Videosignal; Feststellungsmittel (32), eingerichtet festzustellen, ob ein Signalniveau für das Videosignal größer als ein Schwellwert ist; Erkennungsinformationsdetektiermittel (33) zum Detektieren von Erkennungsinformation, eingerichtet zu erkennen, ob ein anderes Erkennungsinformationssignal als ein Erkennungsinformationssignal, das mit dem Videosignal verbunden ist, detektiert wird; und Störsignaldetektiermittel (34) zum Detektieren, in einem für die drahtlose Kommunikation verwendeten Betriebsfrequenzband, eines Störsignals, das verschieden ist von dem Videosignal; und Anzeigesteuermittel (31) zum Veranlassen des Anzeigemittels (12), als Reaktion auf das Detektieren des Störsignals, eine Störsignalinformation, auf ein Vorliegen des Störsignals hinweisend, anzuzeigen; wobei das Erkennungsinformationsdetektiermittel (33) eingerichtet ist, ein Detektieren des anderen Erkennungsinformationssignals zu veranlassen, wenn das Signalniveau nicht größer als der Schwellwert ist; und das Störsignaldetektiermittel (34) eingerichtet ist, ein Detektieren des Störsignals zu veranlassen, wenn keine andere Erkennungsinformation detektiert wird.

2. Die Anzeigevorrichtung (B, 200) gemäß Anspruch 1, wobei:

das Störsignaldetektiermittel (34) das Störsignal für jeden in dem Betriebsfrequenzband verfügbaren Kommunikationskanal detektiert; und das Anzeigesteuermittel (31) das Anzeigemittel (12) veranlasst, als Störsignalinformation, Information, auf das Vorliegen des Störsignals hinweisend, für jeden der Kommunikationskanäle anzuzeigen.

3. Die Anzeigevorrichtung (B, 200) gemäß Anspruch 1 oder 2, wobei:

das Störsignaldetektiermittel (34) ein Niveau des Störsignals mit mehreren vorbestimmten Niveaus vergleicht, um dadurch ein Störsignal-

niveau festzustellen; und das Anzeigesteuermittel (31) das Anzeigemittel (12) veranlasst, die Störsignalinformation gemäß dem Störsignalniveau anzuzeigen.

4. Die Anzeigevorrichtung (B, 200) gemäß Anspruch 3, wobei:

das Anzeigesteuermittel (31) das Anzeigemittel (12) veranlasst, die Störsignalinformation numerisch gemäß dem Störsignalniveau anzuzeigen.

5. Die Anzeigevorrichtung (B, 200) gemäß Anspruch 3, wobei:

das Anzeigesteuermittel (31) das Anzeigemittel (12) veranlasst, die Störsignalinformation graphisch gemäß dem Störsignalniveau anzuzeigen.

6. Die Anzeigevorrichtung (B, 200) gemäß einem der Ansprüche 3 bis 5, wobei:

das Anzeigesteuermittel (31) das Anzeigeformat, wie eine Farbe, der Störsignalinformation gemäß dem Störsignalniveau ändert, und das Anzeigemittel (12) veranlasst, die Störsignalinformation in dem Anzeigeformat anzuzeigen.

7. Die Anzeigevorrichtung (B, 200) gemäß einem der Ansprüche 3 bis 6, wobei:

die mehreren vorbestimmten Niveaus beliebig festgesetzt und geändert werden können.

8. Ein Drahtlos-Übertragungs-und-Empfangssystem zum Übertragen und Empfangen wenigstens eines Videosignals mittels drahtloser Kommunikation, das Drahtlos-Übertragungs-und-Empfangssystem aufweisend:

eine Drahtlos-Übertragungsvorrichtung (A, 200) zum drahtlosen Übertragen des Videosignals und eines Erkennungsinformationssignals; und eine Anzeigevorrichtung (B, 200), die beinhaltet:

Drahtlos-Empfangsmittel (9) zum Empfangen des Videosignals und des Erkennungsinformationssignals; Anzeigemittel (12) zum Anzeigen eines Bildes gemäß wenigstens dem Videosignal; Feststellungsmittel (32), eingerichtet festzustellen, ob ein Signalniveau für das Videosignal größer als ein Schwellwert ist; Erkennungsinformationsdetektiermittel (33) zum Detektieren der Erkennungsinformation, und eingerichtet zu erkennen, ob

- ein anderes Erkennungsinformationssignal als das Erkennungsinformationssignal, übertragen von der Drahtlos-Übertragungsvorrichtung (A, 200), detektiert wird; und Störsignaldetektiermittel (34) zum Detektieren, in einem für die drahtlose Kommunikation verwendeten Betriebsfrequenzband, eines Störsignals, das verschieden ist von dem Videosignal; und
- Anzeigesteuermittel (31) zum, wenn das Videosignal nicht normal empfangen wird, Veranlassen des Anzeigemittels (12), Abnormalitätsinformation, auf einen anormalen Zustand hinweisend, anzuzeigen, wenn das Störsignaldetektiermittel (34) das Störsignal detektiert, das Anzeigesteuermittel (31) das Anzeigemittel (12) veranlasst, als Abnormalitätsinformation, Störsignalinformation, auf ein Vorliegen des Störsignals hinweisend, anzuzeigen; wobei
- das Erkennungsdetektiermittel (33) eingerichtet ist, ein Detektieren des anderen Erkennungsinformationssignals zu veranlassen, wenn das Signalniveau nicht größer als der Schwellwert ist; und
- das Störsignaldetektiermittel (34) eingerichtet ist, ein Detektieren des Störsignals zu veranlassen, wenn keine andere Erkennungsinformation detektiert wird.
9. Das Drahtlos-Übertragungs-und-Empfangssystem gemäß Anspruch 8, wobei:
- das Störsignaldetektiermittel (34) das Störsignal für jeden in dem Betriebsfrequenzband verfügbaren Kommunikationskanal detektiert; und das Anzeigesteuermittel (31) das Anzeigemittel (12) veranlasst, als Störsignalinformation, Information, auf das Vorliegen des Störsignals hinweisend, für jeden der Kommunikationskanäle anzuzeigen.
10. Das Drahtlos-Übertragungs-und-Empfangssystem gemäß Anspruch 8 oder 9, wobei:
- das Störsignaldetektiermittel (34) ein Niveau des Störsignals mit mehreren vorbestimmten Niveaus vergleicht, um dadurch ein Störsignalniveau festzustellen; und das Anzeigesteuermittel (31) das Anzeigemittel (12) veranlasst, die Störsignalinformation gemäß dem Störsignalniveau anzuzeigen.
11. Das Drahtlos-Übertragungs-und-Empfangssystem gemäß Anspruch 10, wobei:
- das Anzeigesteuermittel (31) das Anzeigemittel (12) veranlasst, die Störsignalinformation numerisch gemäß dem Störsignalniveau anzuzeigen.
12. Das Drahtlos-Übertragungs-und-Empfangssystem gemäß Anspruch 10, wobei:
- das Anzeigesteuermittel (31) das Anzeigemittel (12) veranlasst, die Störsignalinformation graphisch gemäß dem Störsignalniveau anzuzeigen.
13. Das Drahtlos-Übertragungs-und-Empfangssystem gemäß einem der Ansprüche 10 bis 12, wobei:
- das Anzeigesteuermittel (31) das Anzeigeformat, wie eine Farbe, der Störsignalinformation gemäß dem Störsignalniveau ändert, und das Anzeigemittel (12) veranlasst, die Störsignalinformation in dem Anzeigeformat anzuzeigen.
14. Das Drahtlos-Übertragungs-und-Empfangssystem gemäß einem der Ansprüche 10 bis 13, wobei:
- die mehreren vorbestimmten Niveaus beliebig festgesetzt und geändert werden können.
15. Das Drahtlos-Übertragungs-und-Empfangssystem gemäß einem der Ansprüche 10 bis 14, wobei:
- wenn das Erkennungsinformationssignaldetektiermittel (33) ein anderes Erkennungsinformationssignal, verschieden von dem Erkennungsinformationssignal, übertragen von der Drahtlos-Übertragungsvorrichtung, detektiert, veranlasst das Anzeigesteuermittel (31) das Anzeigemittel (12), als Abnormalitätsinformation, Information anzuzeigen, darauf hinweisend, dass eine andere drahtlos übertragende Vorrichtung, das andere Erkennungsinformationssignal übertragend, existiert.
16. Das Drahtlos-Übertragungs-und-Empfangssystem gemäß einem der Ansprüche 10 bis 15, wobei:
- wenn das Störsignaldetektiermittel (34) das Störsignal nicht detektiert, veranlasst das Anzeigesteuermittel (31) das Anzeigemittel (12), als Abnormalitätsinformation, Information anzuzeigen, darauf hinweisend, dass es nicht möglich ist, irgendein Signal zu empfangen.
17. Die Anzeigevorrichtung (B, 200) gemäß Anspruch 1, wobei die Anzeigesteuereinrichtung (31) als ein Störsignalinformationsausgabemittel dient zum Ausgeben, in Antwort auf die Detektion eines Störsignals, von Störsignalinformation, auf ein Vorliegen des Störsignals hinweisend.

18. Die Anzeigevorrichtung (B, 200) gemäß Anspruch 17, wobei:

das Störsignalinformationsausgabemittel die Störsignalinformation zu einem Überlagerungs-
anzeigemittel sendet zum Anzeigen der Störsi-
gnalinformation, auf das Bild, das durch das An-
zeigemittel (12) angezeigt wird, überlagert.

19. Ein Anzeigeverfahren zum (i) Empfangen wenig-
stens eines Videosignals durch drahtlose Kommu-
nikation und (ii) Anzeigen eines Bildes,
das Anzeigeverfahren aufweisend:

einen ersten Schritt (S1, S11) eines Feststel-
lens, ob ein Signalebene des Videosignals grö-
ßer ist als ein Schwellwert;
einen zweiten Schritt (S3, S15) eines Veranlas-
sens, wenn in dem ersten Schritt festgestellt
wurde, dass das Signalebene des Videosignals
nicht größer als der Schwellwert ist, eines Fest-
stellens, ob ein anderes Erkennungsinformati-
onssignal als ein mit dem Videosignal verbun-
denen Erkennungsinformationssignal detektiert
wird;
einen dritten Schritt (S5, S17) eines Veranlas-
sens eines Detektierens eines von dem Video-
signal verschiedenen Störsignals, in einem für
die drahtlose Kommunikation verwendeten Be-
triebsfrequenzband, wenn kein anderes Erken-
nungsinformationssignal detektiert wird; und
einen vierten Schritt (S4, S6, S7, S16, S18, S19)
eines Ausführens einer Anzeige gemäß dem Er-
gebnis der in dem zweiten und dritten Schritt
gemachten Feststellung, derart, dass darüber
informiert wird, dass es nicht möglich ist, irgend-
ein Signal zu empfangen.

20. Ein Steuerprogramm für eine Anzeigevorrichtung
gemäß Anspruch 1, einen Computer veranlassend,
die Schritte des Verfahrens gemäß Anspruch 19
auszuführen.

21. Ein Computer-lesbares Speichermedium, das Steu-
erprogramm gemäß Anspruch 20 speichernd.

Revendications

1. Dispositif d'affichage (B, 200) destiné à recevoir au
moins un signal vidéo par le biais d'une communi-
cation sans fil,
le dispositif d'affichage (B, 200) comprenant :

un moyen de réception sans fil (9) pour recevoir
le signal vidéo transmis par voie hertzienne ;
un moyen d'affichage (12) pour afficher une ima-
ge selon au moins le signal vidéo ;

un moyen de détermination (32) configuré de
manière à déterminer si un niveau de signal du
signal vidéo est supérieur à une valeur seuil ;
un moyen de détection d'informations de recon-
naissance (33) pour détecter des informations
de reconnaissance, configuré de manière à dé-
tecter si un signal d'informations de reconnais-
sance distinct d'un signal d'informations de re-
connaissance associé au signal vidéo est
détecté ; et
un moyen de détection de signal de brouillage
(34) pour détecter, dans une bande de fréquen-
ce d'exploitation utilisée pour la communication
sans fil, un signal de brouillage distinct du signal
vidéo ; et
un moyen de commande d'affichage (31) pour
amener le moyen d'affichage (12) à afficher, en
réponse à la détection du signal de brouillage,
des informations de signal de brouillage indi-
quant la présence du signal de brouillage ; dans
lequel
le moyen de détection d'informations de recon-
naissance (33) est configuré de manière à initier
la détection du signal d'informations de recon-
naissance distinct lorsque le niveau de signal
n'est pas supérieur à la valeur seuil ; et
le moyen de détection de signal de brouillage
(34) est configuré de manière à initier la détec-
tion du signal de brouillage lorsqu'aucun autre
signal d'informations de reconnaissance n'est
détecté.

2. Dispositif d'affichage (B, 200) selon la revendication
1, dans lequel :

le moyen de détection de signal de brouillage
(34) détecte le signal de brouillage pour chaque
canal de communication disponible dans la ban-
de de fréquence d'exploitation ; et
le moyen de commande d'affichage (31) amène
le moyen d'affichage (12) à afficher, en tant
qu'informations de signal de brouillage, des in-
formations indiquant la présence du signal de
brouillage pour chaque dit canal de communi-
cation.

3. Dispositif d'affichage (B, 200) selon la revendication
1 ou 2, dans lequel :

le moyen de détection de signal de brouillage
(34) compare un niveau du signal de brouillage
à une pluralité de niveaux prédéterminés, de
manière à détecter un niveau de signal de
brouillage ; et
le moyen de commande d'affichage (31) amène
le moyen d'affichage (12) à afficher les informa-
tions de signal de brouillage selon le niveau de
signal de brouillage.

4. Dispositif d'affichage (B, 200) selon la revendication 3, dans lequel :

le moyen de commande d'affichage (31) amène le moyen d'affichage (12) à afficher les informations de signal de brouillage numériquement, selon le niveau de signal de brouillage. 5

5. Dispositif d'affichage (B, 200) selon la revendication 3, dans lequel : 10

le moyen de commande d'affichage (31) amène le moyen d'affichage (12) à afficher les informations de signal de brouillage graphiquement, selon le niveau de signal de brouillage. 15

6. Dispositif d'affichage (B, 200) selon l'une quelconque des revendications 3 à 5, dans lequel :

le moyen de commande d'affichage (31) modifie un format d'affichage, par exemple une couleur, des informations de signal de brouillage selon le niveau de signal de brouillage, et amène le moyen d'affichage (12) à afficher les informations de signal de brouillage dans le format d'affichage. 20 25

7. Dispositif d'affichage (B, 200) selon l'une quelconque des revendications 3 à 6, dans lequel : 30

la pluralité de niveaux prédéterminés est apte à être définie et modifiée arbitrairement.

8. Système de transmission et de réception sans fil destiné à émettre et à recevoir au moins un signal vidéo par le biais d'une communication sans fil ; le système de transmission et de réception sans fil comprenant : 35

un dispositif de transmission sans fil (A, 200) pour transmettre par voie hertzienne le signal vidéo et un signal d'informations de reconnaissance ; et un dispositif d'affichage (B, 200), lequel comporte : 40 45

un moyen de réception sans fil (9) pour recevoir le signal vidéo et le signal d'informations de reconnaissance ; un moyen d'affichage (12) pour afficher une image selon au moins le signal vidéo ; un moyen de détermination (32) configuré de manière à déterminer si un niveau de signal pour le signal vidéo est supérieur à une valeur seuil ; 50 55
un moyen de détection d'informations de reconnaissance (33) pour détecter le signal d'informations de reconnaissance, et confi-

guré de manière à détecter si un autre signal d'informations de reconnaissance est distinct des informations de reconnaissance transmises à partir du dispositif de transmission sans fil (A, 200) ;

un moyen de détection de signal de brouillage (34) pour détecter, dans une bande de fréquence d'exploitation utilisée pour la communication sans fil, un signal de brouillage distinct du signal vidéo ; et un moyen de commande d'affichage (31) pour, lorsque le signal vidéo n'est pas reçu de manière conventionnelle, amener le moyen d'affichage (12) à afficher des informations d'anomalie indiquant un état anormal ;

lorsque le moyen de détection de signal de brouillage (34) détecte le signal de brouillage, le moyen de commande d'affichage (31) amène le moyen d'affichage (12) à afficher, en tant qu'informations d'anomalie, des informations de signal de brouillage indiquant la présence du signal de brouillage ; dans lequel

le moyen de détection de reconnaissance (33) est configuré de manière à initier la détection de l'autre signal d'informations de reconnaissance lorsque le niveau de signal n'est pas supérieur à la valeur seuil ; et le moyen de détection de signal de brouillage (34) est configuré de manière à initier la détection du signal de brouillage lorsqu'aucun autre signal d'informations de reconnaissance n'est détecté.

9. Système de transmission et de réception sans fil selon la revendication 8, dans lequel :

le moyen de détection de signal de brouillage (34) détecte le signal de brouillage pour chaque canal de communication disponible dans la bande de fréquence d'exploitation ; et le moyen de commande d'affichage (31) amène le moyen d'affichage (12) à afficher, en tant qu'informations de signal de brouillage, des informations indiquant la présence du signal de brouillage pour chaque dit canal.

10. Système de transmission et de réception sans fil selon la revendication 8 ou 9, dans lequel :

le moyen de détection de signal de brouillage (34) compare un niveau du signal de brouillage à une pluralité de niveaux prédéterminés, de manière à détecter un niveau de signal de brouillage ; et le moyen de commande d'affichage (31) amène le moyen d'affichage (12) à afficher les informa-

- tions de signal de brouillage selon le niveau de signal de brouillage.
- 11.** Système de transmission et de réception sans fil selon la revendication 10, dans lequel :
- le moyen de commande d'affichage (31) amène le moyen d'affichage (12) à afficher les informations de signal de brouillage numériquement, selon niveau de signal de brouillage,
- 12.** Système de transmission et de réception sans fil selon la revendication 10, dans lequel :
- le moyen de commande d'affichage (31) amène le moyen d'affichage (12) à afficher les informations de signal de brouillage graphiquement, selon le niveau de signal de brouillage.
- 13.** Système de transmission et de réception sans fil selon l'une quelconque des revendications 10 à 12, dans lequel :
- le moyen de commande d'affichage (31) modifie un format d'affichage, par exemple une couleur, des informations de signal de brouillage, selon le niveau de signal de brouillage, et amène le moyen d'affichage (12) à afficher les informations de signal de brouillage dans le format d'affichage.
- 14.** Système de transmission et de réception sans fil selon l'une quelconque des revendications 10 à 13, dans lequel :
- la pluralité de niveaux prédéterminés est apte à être modifiée et définie arbitrairement.
- 15.** Système de transmission et de réception sans fil selon l'une quelconque des revendications 8 à 14, dans lequel :
- lorsque le moyen de détection d'informations de reconnaissance (33) détecte un autre signal d'informations de reconnaissance, distinct du signal d'informations de reconnaissance transmis à partir du dispositif de transmission sans fil, le moyen de commande d'affichage (31) amène le moyen d'affichage (12) à afficher, en tant qu'informations d'anomalie, des informations indiquant qu'il existe un autre dispositif de transmission sans fil transmettant ledit autre signal d'informations de reconnaissance.
- 16.** Système de transmission et de réception sans fil selon l'une quelconque des revendications 8 à 15, dans lequel :
- lorsque le moyen de détection de signal de brouillage (34) ne détecte pas le signal de brouillage, le moyen de commande d'affichage (31) amène le moyen d'affichage (12) à afficher, en tant qu'informations d'anomalie, des informations indiquant qu'il n'est pas possible de recevoir un quelconque signal.
- 17.** Dispositif d'affichage (B, 200) selon la revendication 1, dans lequel :
- le moyen de commande d'affichage (31) sert de moyen de génération en sortie d'informations de signal de brouillage pour, en réponse à la détection du signal de brouillage, générer en sortie des informations de signal de brouillage indiquant la présence du signal de brouillage.
- 18.** Dispositif d'affichage selon la revendication 17, dans lequel :
- le moyen de génération en sortie d'informations de signal de brouillage envoie les informations de signal de brouillage à un moyen d'affichage par superposition destiné à afficher les informations de signal de brouillage superposées sur l'image affichée par le moyen d'affichage (12).
- 19.** Procédé d'affichage destiné à (i) recevoir au moins un signal vidéo par le biais d'une communication sans fil et à (ii) afficher une image ; le procédé d'affichage comprenant :
- une première étape (S1, S11) consistant à déterminer si un niveau de signal du signal vidéo est supérieur à une valeur seuil ;
- une deuxième étape (S3, S15) consistant à, s'il est établi au cours de la première étape que le niveau de signal du signal vidéo n'est pas supérieur à la valeur seuil, déterminer si un signal d'informations de reconnaissance distinct d'un signal d'informations de reconnaissance associé au signal vidéo est détecté ;
- une troisième étape (S5, S17) consistant à initier la détection d'un signal de brouillage distinct du signal vidéo dans une bande de fréquence d'exploitation utilisée pour la communication sans fil, lorsqu'aucun autre signal d'informations de reconnaissance n'est détecté ; et
- une quatrième étape (S4, S6, S7, S 16, S 18, S19) consistant à mettre en oeuvre un affichage selon un résultat de la détermination exécutée au cours des deuxième et troisième étapes, en vue de signaler qu'il n'est pas possible de recevoir un quelconque signal.
- 20.** Programme de commande d'un dispositif d'affichage selon la revendication 1, amenant un ordinateur

à mettre en oeuvre les étapes du procédé selon la revendication 19.

21. Support d'enregistrement lisible par un ordinateur stockant le programme de commande d'affichage selon la revendication 20. 5

10

15

20

25

30

35

40

45

50

55

FIG. 1

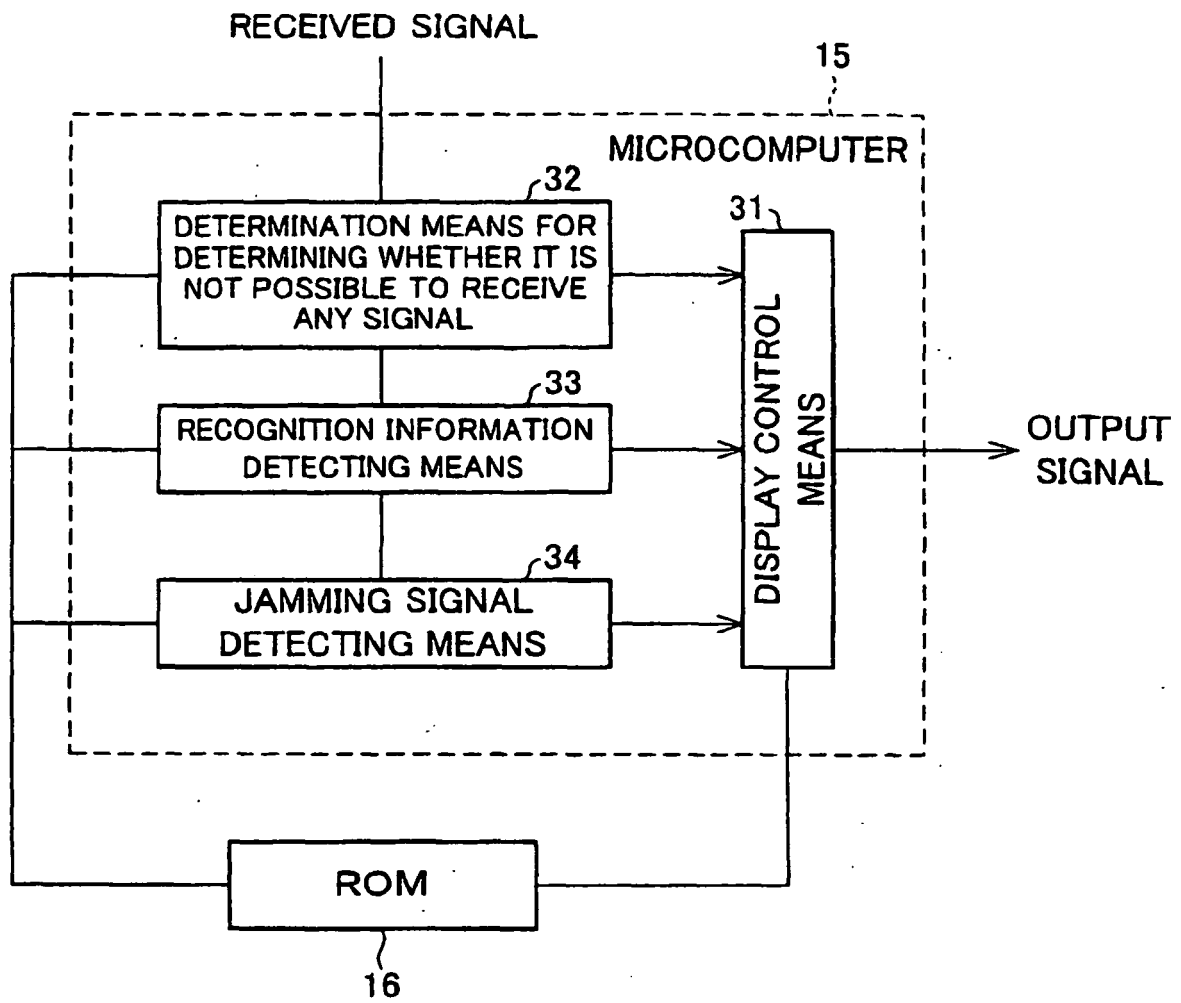


FIG. 2

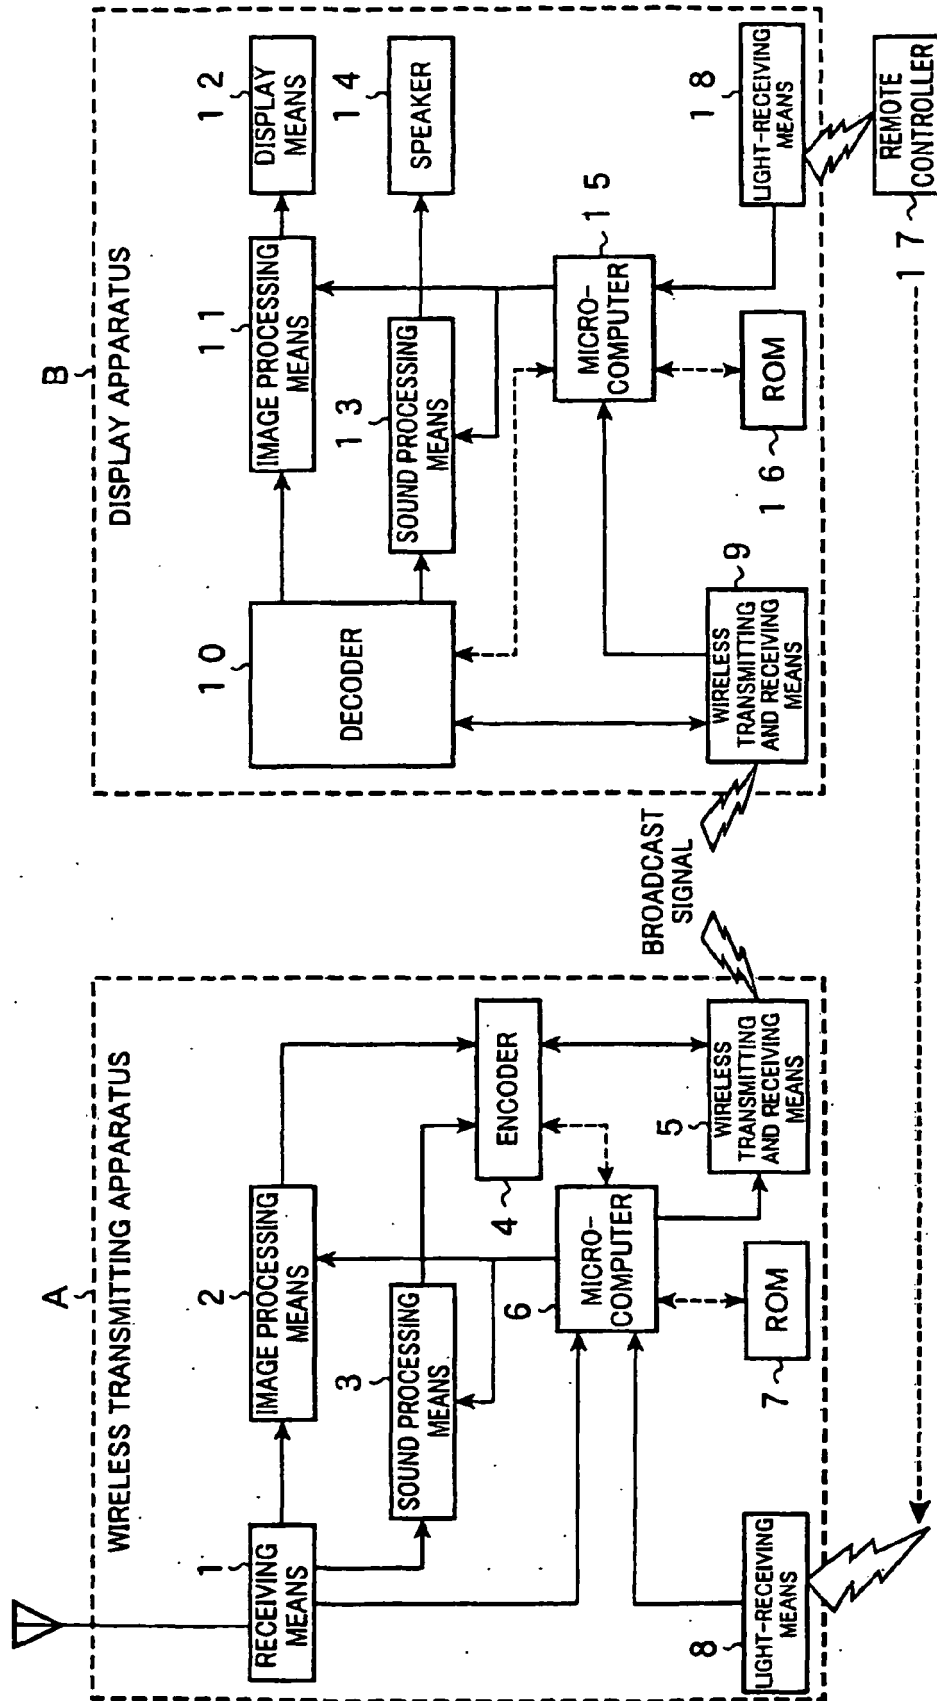


FIG. 3

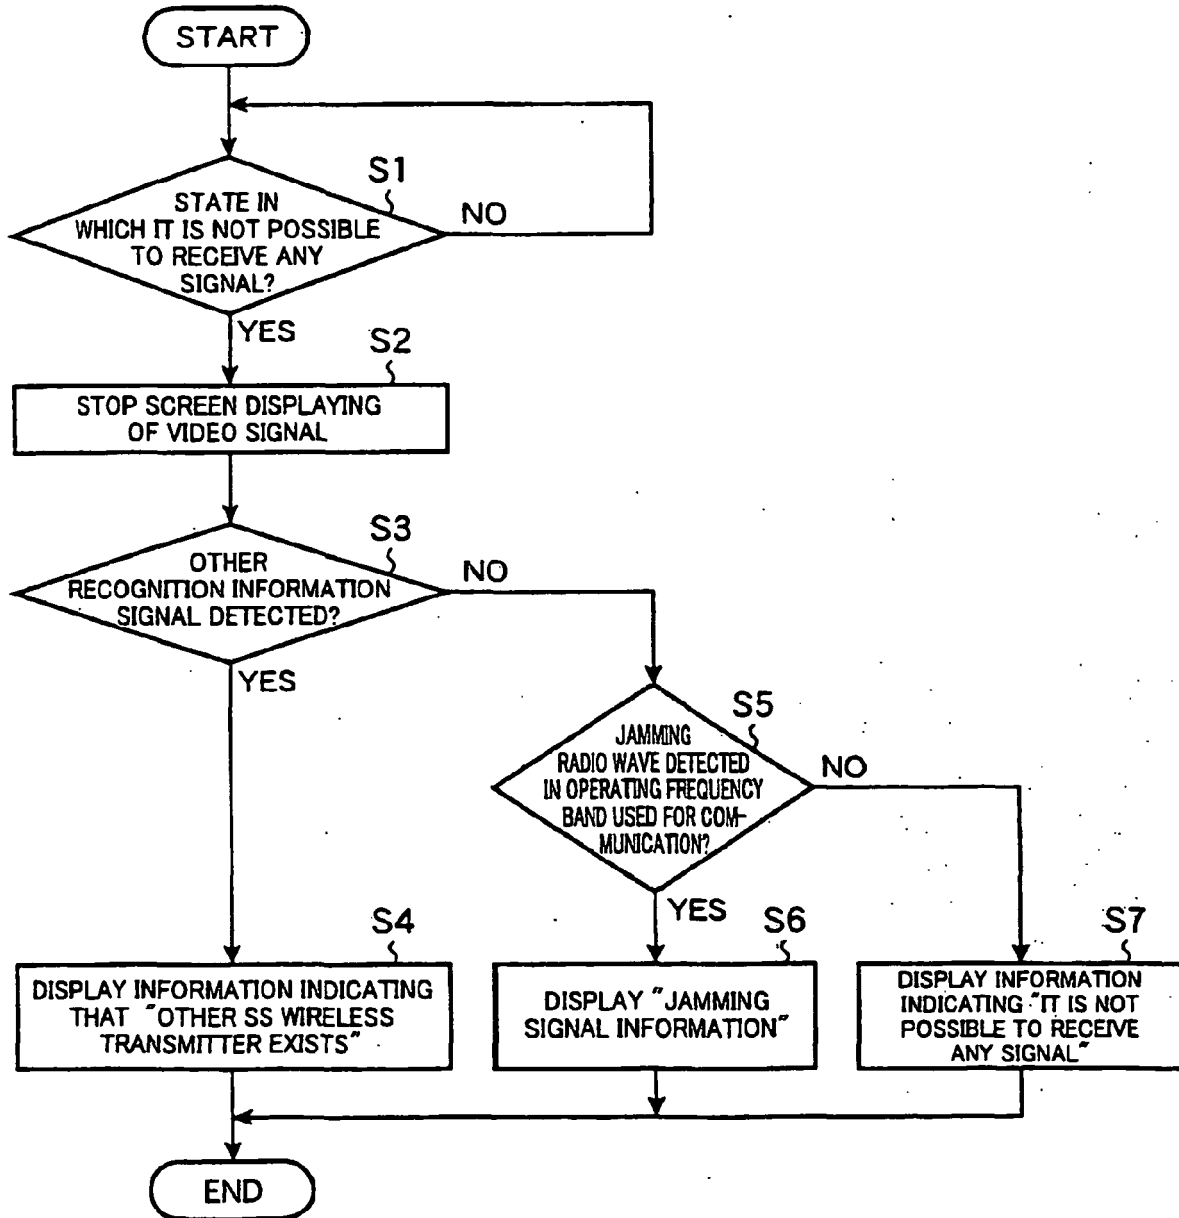


FIG. 4

1.	000	8.	000
2.	000	9.	000
3.	000	10.	500
4.	000	11.	850
5.	000	12.	300
6.	000	13.	000
7.	000	14.	000

FIG. 5

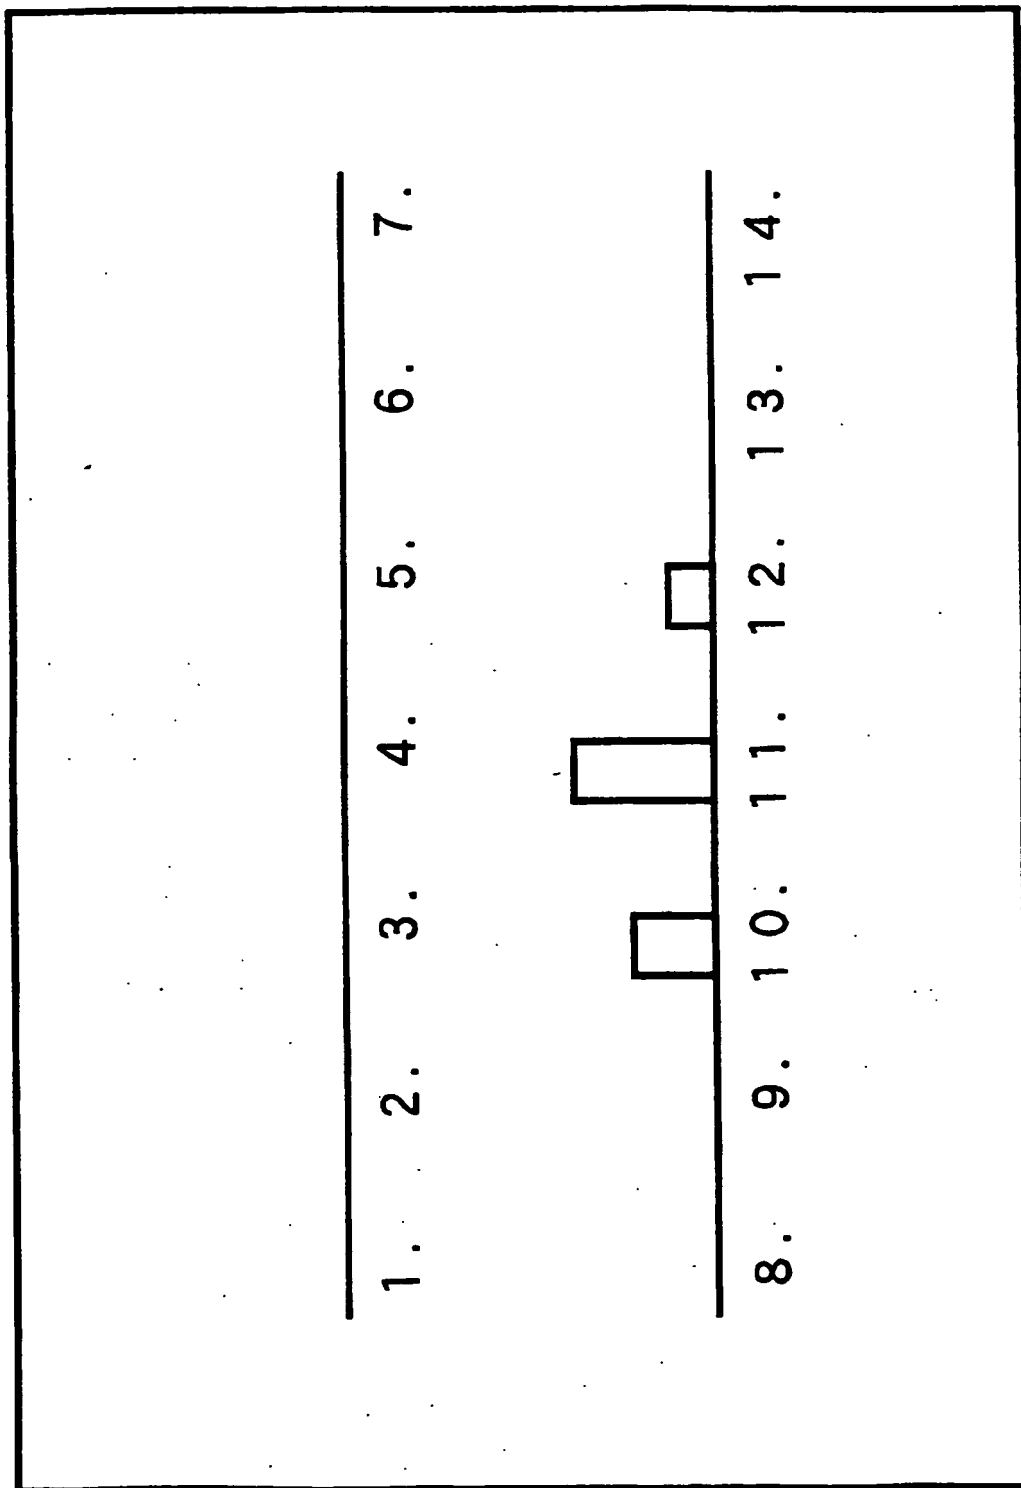


FIG. 6


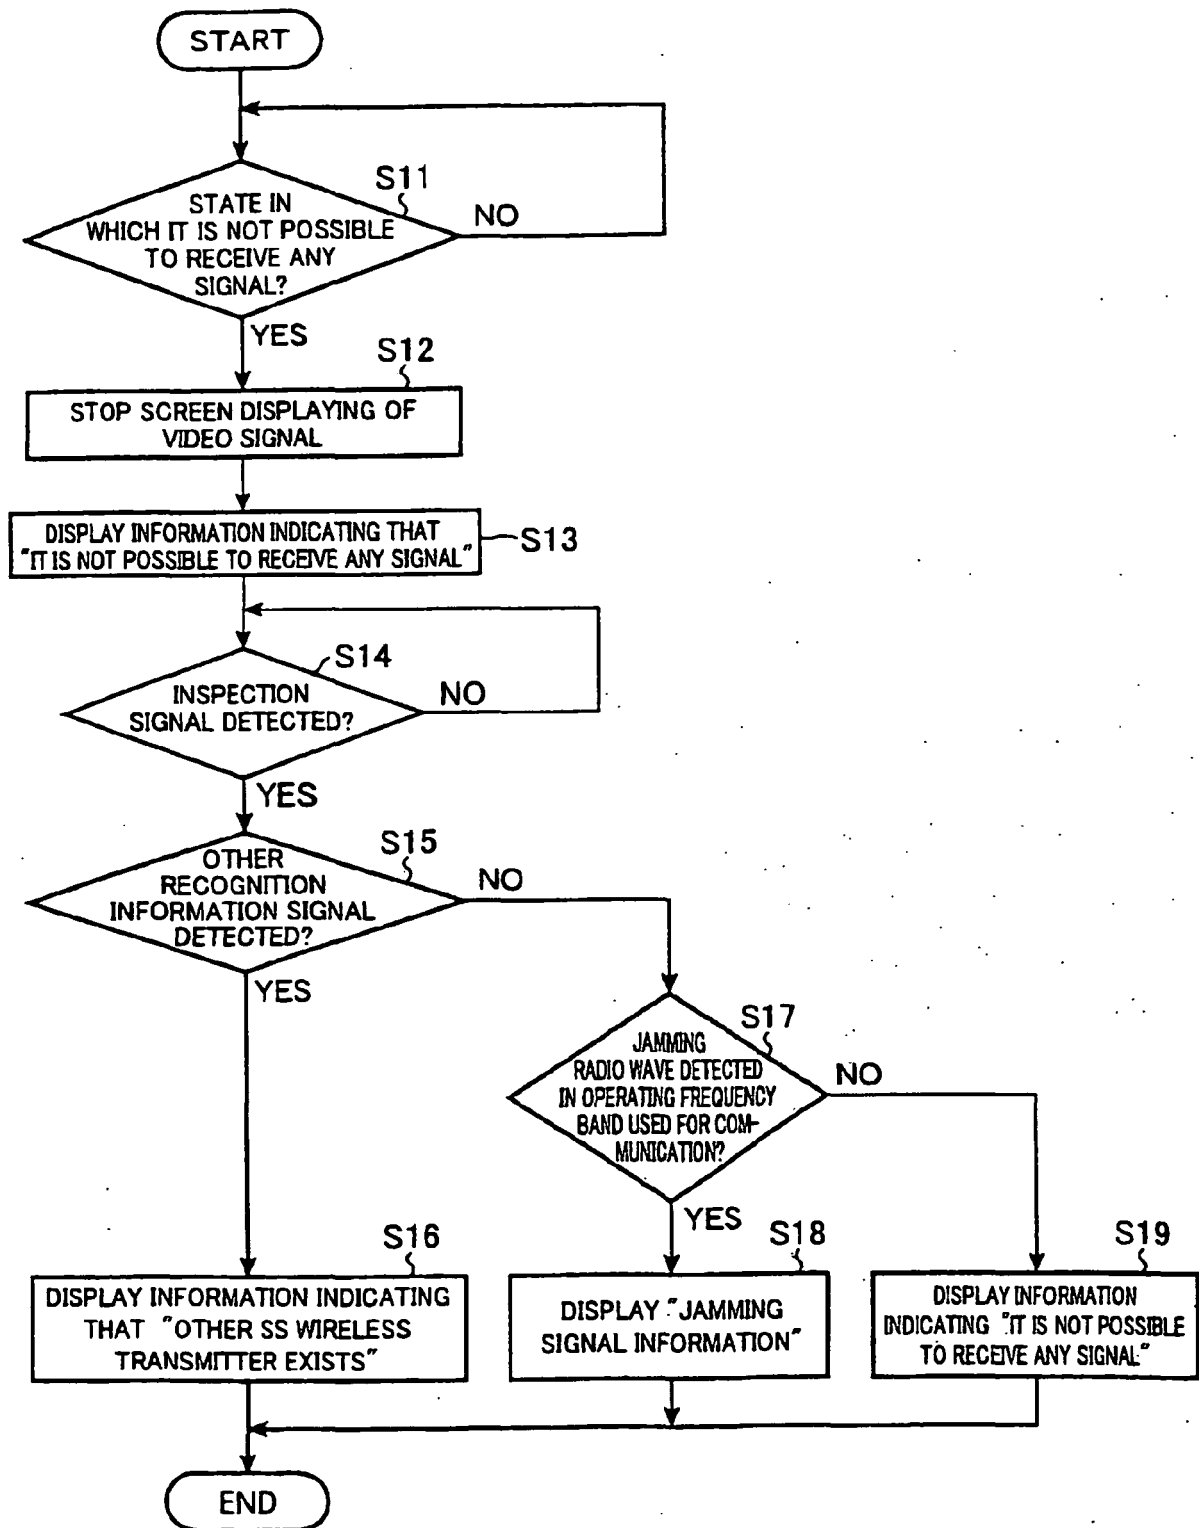


FIG. 7

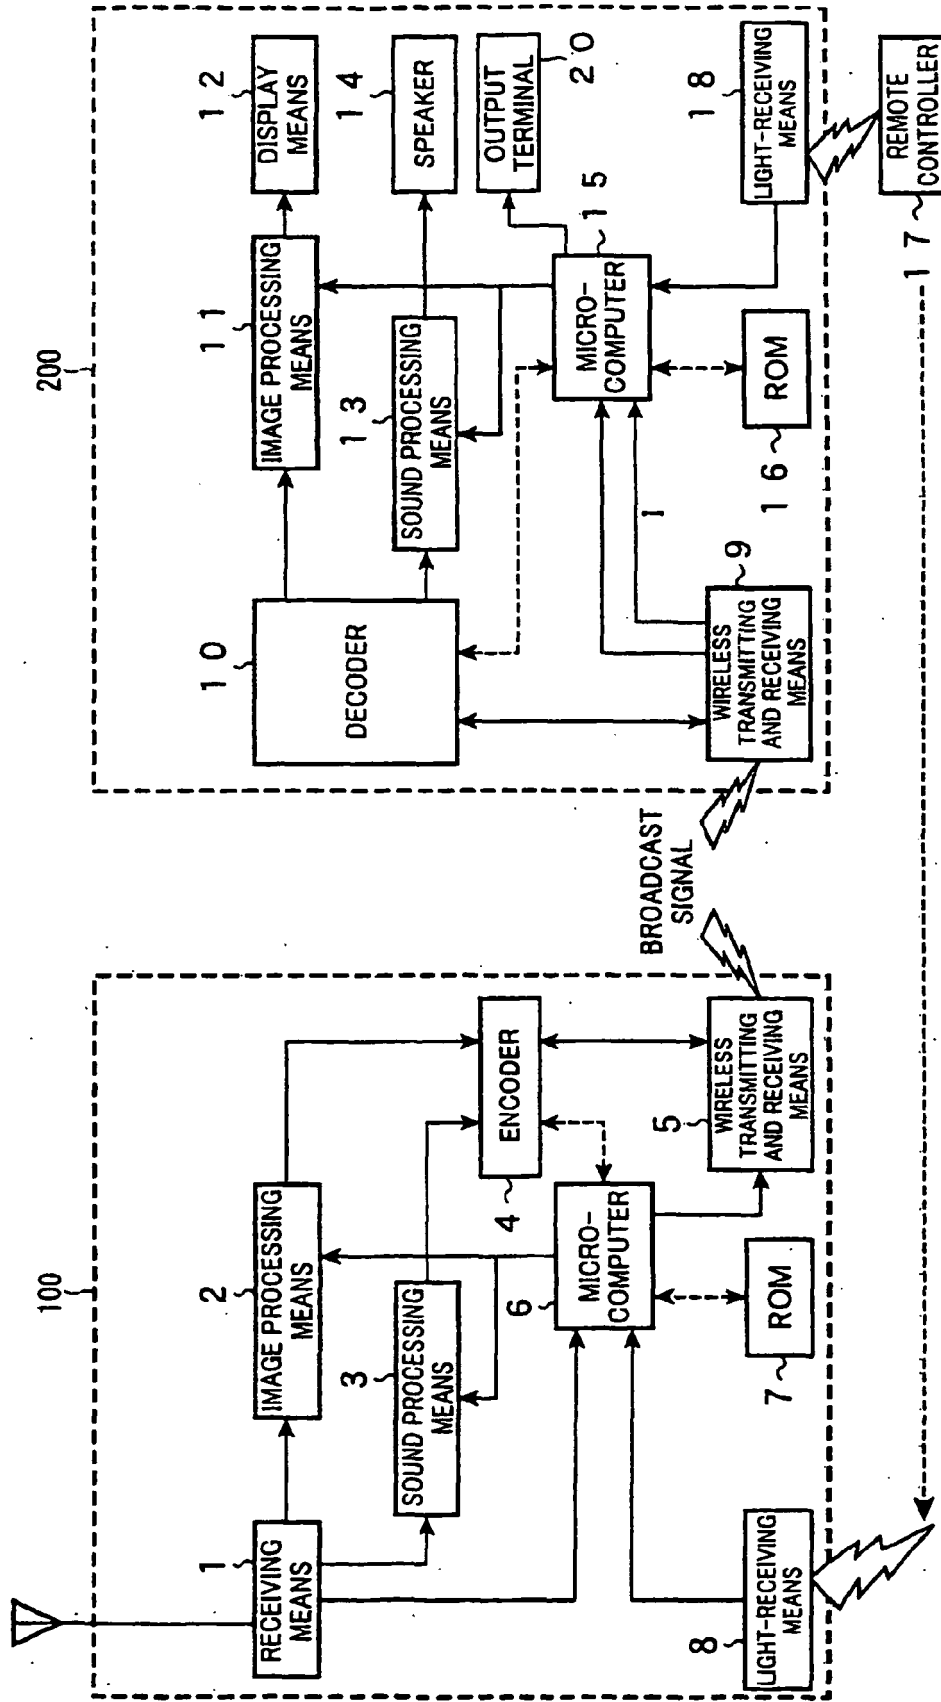

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 4352519 A [0002]
- JP TOKUKAIHEI4352519 B [0002]
- US 20030120742 A1 [0004]
- GB 2343334 A [0005]