

(19)



(11)

EP 1 736 611 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
31.03.2010 Bulletin 2010/13

(51) Int Cl.:
E04D 3/361 (2006.01)

(21) Application number: **06445046.3**

(22) Date of filing: **15.06.2006**

(54) **A bracket for roofing sheet**

Ein Befestigungshalter für eine Dachplatte

Une patte de fixation pour un panneau de toiture

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**

(30) Priority: **22.06.2005 SE 0501456**

(43) Date of publication of application:
27.12.2006 Bulletin 2006/52

(73) Proprietor: **Bjarnes System AB
151 02 Södertälje (SE)**

(72) Inventor: **Svanberg, Bjarne
152 57 Södertälje (SE)**

(74) Representative: **Janson, Ronny et al
Ehrner & Delmar Patentbyrå AB
P.O. Box 10316
100 55 Stockholm (SE)**

(56) References cited:
**WO-A-84/00393 GB-A- 2 287 044
JP-A- 11 193 603**

EP 1 736 611 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a bracket for roofing sheet of the type described in the preamble to the appended independent claim 1.

[0002] The side edges of long roofing sheets are turned up and shaped to a large flange or a low flange. A bracket is fitted close to the low flange. The low flange comprises a flange bent substantially perpendicularly from the main surface of the sheet, the outermost edge portion being folded in about 90° over the main surface of the sheet. The bracket has a base plate designed to rest on a roofing-sheet underlay and having one or more openings for attachment elements, such as screws, with which the base plate is secured to a load-bearing part of the roof structure. The base plate has a connecting that extends substantially perpendicularly from the extension plane of the base plate and has an upper portion bent round approximately 90° to extend over and close to the end portion of the low flange. The upper flange of the connecting tongue also comprises an end portion bent approximately 90° therefrom so that the connecting tongue acquires a channel profile, the concave side of which faces the plane of the base plate.

[0003] Such a bracket is hooked over the low flange of the roofing sheet and secured with attachment elements (which may be pre-mounted on the base plate) to the load-bearing structure.

[0004] The base plate has a relatively large surface area and rests on the heat-insulating layer which, in turn, is carried by the load-bearing structure, and the base plate therefore has teeth that engage in the thermal insulation to prevent the base plate from being displaced in relation to the surface of the thermal insulation. It is therefore usually necessary to linearly place the bracket on the low flange in a direction perpendicular to the roof surface. The end portion of the connection is then directed approximately perpendicularly to the surface of the roof. It is desirable to be able to fold in the end portion of the connecting tongue underneath the end flange of the low flange in order to temporarily retain the bracket in the correct position on the low flange until the attachment elements of the bracket can be fitted. The problem is that the end portion of the connecting tongue should have a length along the bending line that gives the end portion appropriate bending resistance as regards the folding operation or bending in of the end portion, so that the connecting tongue acquires a stable connection to the roofing sheets. The bending resistance necessary in practice means that the sheet-metal worker cannot in practice bend in the end portion with his hand/fingers but must use a folding tool for the operation.

[0005] This entails a relatively time-consuming work operation. The sheet-metal worker may also omit this operation, thereby risking the bracket being incorrectly fitted or coming loose from its correct placing before the attachment elements have been fitted.

[0006] JP 11193603 A describes a bracket (2A) for

roofing sheet, according to the preamble of claim 1, comprising a base plate (20) designed to rest on a roofing sheet underlay and having one or more openings (21) for attachment elements (9) with which the base plate shall be secured to a load-bearing structure, and a connecting tongue (7) supported by the base plate (20).

[0007] One object of the invention is therefore to provide a bracket of the type mentioned which makes it possible to partially or entirely eliminate said inconveniences.

[0008] This object is achieved by means of the invention.

[0009] The invention is defined in the appended claim 1.

[0010] Basically the invention entails the end portion of the flange tongue having a cut from its end edge to the bending region of the end portion, the cut being located between the side edges of the end portion. A manually bendable flap is thus established from the end portion and this flap can relatively easily be bent with the fingers under the end portion to temporarily secure it to the edge portion, parallel to the flange, of a low flange.

[0011] The position of the cut can be chosen in order to produce a flap where the length of the bending line offers suitably low bending resistance for the temporary manual bending of the flap.

[0012] According to the invention the cut is inclined towards the bending line of the end portion so that the flap has relatively large breadth along the end edge of the end portion and relatively slight breadth along its bending line so that the operator's finger has a relatively large contact surface with the flap whereas the flap acquires a relatively short bending line.

[0013] The bracket may be in the form of a fixed bracket or a sliding bracket. In the latter case the connecting tongue is connected to the base plate with a sliding joint that permits the tongue to be displaced in a direction substantially parallel to the final plane of the base plate. The bending lines are substantially parallel to each other and parallel to the main surface of the base plate of the bracket so as to be parallel with the main surface of the roofing sheets and with the longitudinal direction of the roofing sheets.

[0014] The invention will be described in the following by way of example, with reference to the accompanying drawings.

Figure 1 shows schematically a side view of a bracket as fitted in a roof construction.

Figure 2 shows a view the bracket along the line II-II in Figure 1.

Figure 3 shows a horizontal projection of the bracket taken along the line III-III in Figure 2.

Figure 4 shows schematically a view corresponding to Figure 1 with the flap of the end portion of the connecting tongue bent in under an end

flange of a low flange pertaining to a roofing sheet.

Figure 5 shows how a large flange on an equivalent roofing sheet has been applied over the construction shown in Figure 4.

Figure 6 illustrates completed simple folding of the unit shown in Figure 5.

Figure 7 shows a variation of the object of Figure 2 not falling within the scope of the invention.

[0015] Figures 1-3 illustrate a bracket 1 comprising a base plate 2 resting on the upper surface of a layer 3 of heat-insulating material 3 of mineral wool, for instance. The layer 3 rests in turn on a load-bearing roof structure 4 of plywood, wood, corrugated sheet-metal or the like. The base plate 2 is shown to have downwardly directed teeth 5 in the form of triangular flaps, for instance, which have been cut and folded out of the sheet-metal forming the base plate 2. The plate 2 is also provided with recessed openings 6 for assembly screws 7 which are secured in the load-bearing roof structure, e.g. the layer 4. The teeth may have a height of 1-2 cm, for instance, and serve to prevent the plate 2 from slipping in its plane in relation to the insulation 3. Close to a straight side edge the plate 2 has a connecting tongue 10 that is preferably made out of a metallic sheet material. The tongue is directed substantially perpendicularly to the plate 2 and extends along the side edge near by. The tongue 10 is provided with an upper end section 11 that is folded out 90° away from the base plate 2. The section 11 has an outer edge portion 12 that is folded down approximately 90°. A cross section is also shown through an elongate roofing sheet 20, both side edges of which are folded up and shaped to a low flange 21 and a large flange 25, respectively. The low flange 21 comprises a flange 22 folded substantially perpendicularly up from the main surface of the plate, the upper end portion of the flange being folded in approximately 90° over the plate 20. The section 23 is received under the section 11 of the tongue 10, as shown. The large flange comprises a side edge flange 26 of the plate 20, folded up approximately 90°. The flange 26 has a portion 27 bent outwardly approximately 90°, the end portion 28 being turned down approximately 90°.

[0016] The tongue 10 is shown connected to the base plate 2 by a sliding joint 30. Alternatively, if the tongue 10 does not need to be displaceable in the longitudinal direction of the plate 20, the tongue 10 may be connected to the plate 2.

[0017] The sliding joint 30 is shown with a turned-up edge flange 31 of the base plate 2, the upper end portion of the flange 31 being folded around approximately 180°. The lower end portion 34 of the tongue 10 is also shown folded 180° in order to engage in the folded part 32 of the edge portion 31 and the ends of the flange 31 may

possibly be clamped together to prevent the tongue 10 from sliding off the sliding joint part of the roof tile.

[0018] Figure 2 shows the end section 12 with a cut 124 from its free end edge 120 to the vicinity of the bending line 40 of the section 12. The section 12 is thus divided into two tongues 121, 122. In accordance with Figure 1, therefore, one flap 121 can be manually folded in under the low flange 21, so that the bracket 1 is temporarily joined to the low flange 21 of the sheet 20 after the bracket 1 has been placed on its underlay 3 in a normal alignment to the underlay surface. The screws 7 can then be inserted through the openings 6 and fitted in the load-bearing structure 4.

[0019] Figure 4 shows schematically a detail corresponding to Figure 1, of the low flange 21 with a bracket tongue 10 temporarily connected to it, the flap 121 being shown folded in under the end section 23 of the low flange whereas the remaining flap 122 is still perpendicular to the main surface of the sheet 20. Figure 5 illustrates the large flange 25 of another sheet 20 having been applied over the temporary joint according to Figure 4. The joined adjacent roofing sheets are then folded in conventional manner by means of flange rods or flanging tools. The finished single flanging shown schematically in Figure 6 is thus obtained.

[0020] As illustrated by the arrow 50, the single flange can then be folded around 90° if a double flange is desired, to ensure tightness.

[0021] From Figure 2 it can be seen that the slit 24 is placed to give the temporary securing tongue 21 a suitably short connecting stretch to the tongue along a line parallel to the bending line 40 and is located close to this so that it can be manually bent by an operator to produce the temporary connection to the low flange of the roofing sheet. Furthermore, the cut 24 is shown inclined towards the bending line 40 so that the tongue 21 has a relatively large breadth near the outer end edges of the tongue to allow a comfortable grip for the fingers, while the bending line of the flap 121 has suitably slight length.

[0022] The remaining flap 122 is folded in under the end section 23 of the low flange, together with the end section 28 of the large flange, using conventional folding tools/machines.

[0023] The bracket in accordance with the invention has been shown in connection with a special bracket design in which the base plate 2 and securing screws 7 are adapted for assembly on a heat-insulating layer 3. However, it should be obvious that the plate 2 may have considerably less area and may also lack teeth 5 when it is to be mounted directly on a stable underlay, such as planks, plywood or corrugated sheet-metal.

[0024] In an embodiment not according to the invention, if the end portion 12 of the sliding tongue is relatively short along the bending line 40 the problem may arise that the end portion 12 offers a troublesome bending resistance along the line 40 during the folding operation, i.e. bending in the end portion 12 under the end section of the low flange. In that case it may be desirable to widen

the slit 124, at least in the proximity of the bending line 40 and possibly all the way out to the end edge 120 so that the end portion 12 is in the shape of separate tongues 121, 122 along the bending line. Naturally the end portion 12 may be provided with several separate slits 124 along the bending line 40 which may thus be widened to form several separate tongues along the bending line 40, thereby offering suitable resistance to the folding operation if the end portion shall be of considerable length.

Claims

1. A bracket for roofing sheet comprising a base plate (2) designed to rest on a roofing-sheet underlay (3) and having one or more openings (6) for attachment elements (7) with which the base plate shall be secured to a load-bearing structure, and a connecting tongue (10) supported by the base plate (2), said tongue extending substantially perpendicularly from the extension plane of the base plate (2) and having an upper portion (11) bent out approximately 90° from the tongue and an end portion bent down approximately 90° from the upper portion (11), wherein the end portion (12) has a cut (124) from its free end (120) to the region of the bend (40) between the end portion (12) and the upper portion (11) to form a flap (121) that is manually bendable in under the upper portion (11) of the tongue for temporary securing of the bracket to an edge portion (23), parallel to the base plate, of a low flange (21) located therebetween on a roofing sheet (20), **characterised in that** the cut (124) is inclined towards the bending line (40) so that the manually bendable flap (121) has relatively large breadth along the free end edge (120) of the end portion and relatively short length at the inner end of the cut, in a direction parallel to the bending line (40).
2. A bracket as claimed in claim 1, **characterised in that** the bracket has a sliding joint (30) between the connecting tongue (10) and the base plate (2).
3. A bracket as claimed claim 1 or 2, **characterised in that** the base plate (2) is provided with downwardly protruding teeth (5) designed to be received in a surface layer of a soft underlay (3) such as a heat-insulating layer like mineral wool.
4. A bracket as claimed in any one of the preceding claims, **characterised in that** said first bending line (40) belonging to the end portion (12) of the connecting tongue, and a second bending line (50) between the connecting tongue (10) and its upper part (11) are parallel to each other and the space between them corresponds substantially to the length of the edge portion (23) of the low flange, and **in that** the height of the low flange corresponds substantially to

the height of the connecting tongue (10) from the base plate (2).

5. A bracket as claimed in any one of the preceding claims, **characterised in that** the cut is widened to form flaps (121, 122) that are separated close to the bending line (40).

10 Patentansprüche

1. Halterung für eine Dachplatte, die umfasst: eine Grundplatte (2), welche ausgestaltet ist, um auf einer Dachplattenunterlage (3) aufzuliegen, und eine oder mehrere Öffnungen (6) für Befestigungselemente (7) aufweist, mit welchen die Grundplatte an einer lasttragenden Struktur zu befestigen ist, und eine Verbindungszunge (10), die von der Grundplatte (2) getragen wird, wobei die Zunge sich im Wesentlichen senkrecht von der Erstreckungsebene der Grundplatte (2) erstreckt und einen oberen Abschnitt (11), der ungefähr um 90° von der Zunge nach außen gebogen ist, und einen Endabschnitt, der ungefähr um 90° von dem oberen Abschnitt (11) nach unten gebogen ist, aufweist, wobei der Endabschnitt (12) einen Einschnitt (124) von seinem freien Ende (120) zum Bereich der Biegung (40) zwischen dem Endabschnitt (12) und dem oberen Abschnitt (11) aufweist, um eine Lasche (121) zu bilden, die manuell unter den oberen Abschnitt (11) der Zunge biegsam ist, um die Halterung vorübergehend an einem zur Grundplatte parallelen Randabschnitt (23) eines niedrigen Flansches (21) zu befestigen, der dazwischen auf einer Dachplatte (20) angeordnet ist, **dadurch gekennzeichnet, dass** der Einschnitt (124) in Richtung der Biegelinie (40) geneigt ist, so dass die manuell biegbare Lasche (121) eine relativ große Breite entlang des Rands des freien Endes (120) des Endabschnitts und eine relativ kurze Länge am inneren Ende des Einschnitts in einer Richtung parallel zur Biegelinie (40) aufweist.
2. Halterung gemäß Anspruch 1, **dadurch gekennzeichnet, dass** die Halterung ein Gleitgelenk (30) zwischen der Verbindungszunge (10) und der Grundplatte (2) aufweist.
3. Halterung gemäß Anspruch 1 oder 2, **dadurch gekennzeichnet, dass** die Grundplatte (2) mit nach unten vorstehenden Zähnen (5) versehen ist, die ausgestaltet sind, um in einer Oberflächenschicht einer weichen Untertage (3), beispielsweise einer wärmeisolierenden Schicht wie Mineralwolle, aufgenommen zu werden.
4. Halterung gemäß, einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** die erste Biegelinie (40), die zum Endabschnitt (12) der Ver-

bindungszunge gehört, und eine zweite Biegelinie (50) zwischen der Verbindungszunge (10) und ihrem oberen Teil (11) parallel zueinander sind und der Abstand zwischen ihnen im Wesentlichen der Länge des Randabschnitts (23) des niedrigen Flansches entspricht, und dass die Höhe des niedrigen Flansches im Wesentlichen der Höhe der Verbindungszunge (10) von der Grundplatte (2) aus entspricht.

5. Halterung gemäß, einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** der Einschnitt verbreitert ist, um Laschen (121, 122) zu bilden, die nahe der Biegelinie (40) getrennt sind.

Revendications

1. Équerre de fixation pour panneau de toiture comprenant une plaque de base (à) conçue pour reposer sur une sous-couche de panneau de toiture (3) est ayant une ou plusieurs ouvertures (6) pour des éléments de fixation (7) avec lesquels la plaque de base est fixée sur une structure de support de charge, et une languette de raccordement (10) supportée par la plaque de base (2), ladite languette s'étendant de manière sensiblement perpendiculaire à partir du plan d'extension de la plaque de base (2) et ayant une partie supérieure (11) courbée vers l'extérieur approximativement à 90° par rapport à la languette et une partie d'extrémité courbée vers le bas approximativement à 90° par rapport à la partie supérieure (11), dans laquelle la partie d'extrémité (12) a une découpe (124) à partir de son extrémité libre (120) jusque à la région de la courbure (40) entre la partie d'extrémité (12) et la partie supérieure (11) pour former un rabat (121) qui peut être courbé manuellement sous la partie supérieure (11) de la languette pour fixer temporairement l'équerre de fixation sur une partie de bord (23) parallèle à la plaque de base, d'un rebord inférieur (21) positionné entre eux sur un panneau de toiture (20), **caractérisée en ce que** la découpe (124) est inclinée vers la ligne de courbure (40) de sorte que le rabat (121) pouvant être courbé manuellement a une largeur relativement importante le long du bord d'extrémité libre (120) de la partie d'extrémité est une longueur relativement courte au niveau de l'extrémité interne de la découpe, dans une direction parallèle à la ligne de courbure (40).
2. Équerre de fixation selon la revendication 1, **caractérisée en ce que** l'équerre de fixation a un joint coulissant (30) entre la languette de raccordement (10) et la plaque de base (2).
3. Équerre de fixation selon la revendication 1 ou 2, **caractérisée en ce que** la plaque de base (2) est prévue avec des dents (5) faisant saillie vers le bas,

conçues pour être reçues dans une couche de surface d'une sous-couche souple (3) telle qu'une couche d'isolation thermique comme de la laine minérale.

4. Équerre de fixation selon l'une quelconque des revendications précédentes, **caractérisée en ce que** ladite première ligne de courbure (40) appartenant à la partie d'extrémité (12) de la languette de raccordement, est une seconde ligne de courbure (50) entre la languette de raccordement (10) et sa partie supérieure (11) sont parallèles entre elles et l'espace entre elles correspond sensiblement à la longueur de la partie de bord (23) du rebord inférieur, et **en ce que** la hauteur du rebord inférieur correspond sensiblement à la hauteur de la languette de raccordement (10) à partir de la plaque de base (2).
5. Équerre de fixation selon l'une quelconque des revendications précédentes, **caractérisée en ce que** la découpe est élargie pour former les rabats (121, 122) qui sont séparés à proximité de la ligne de courbure (40).

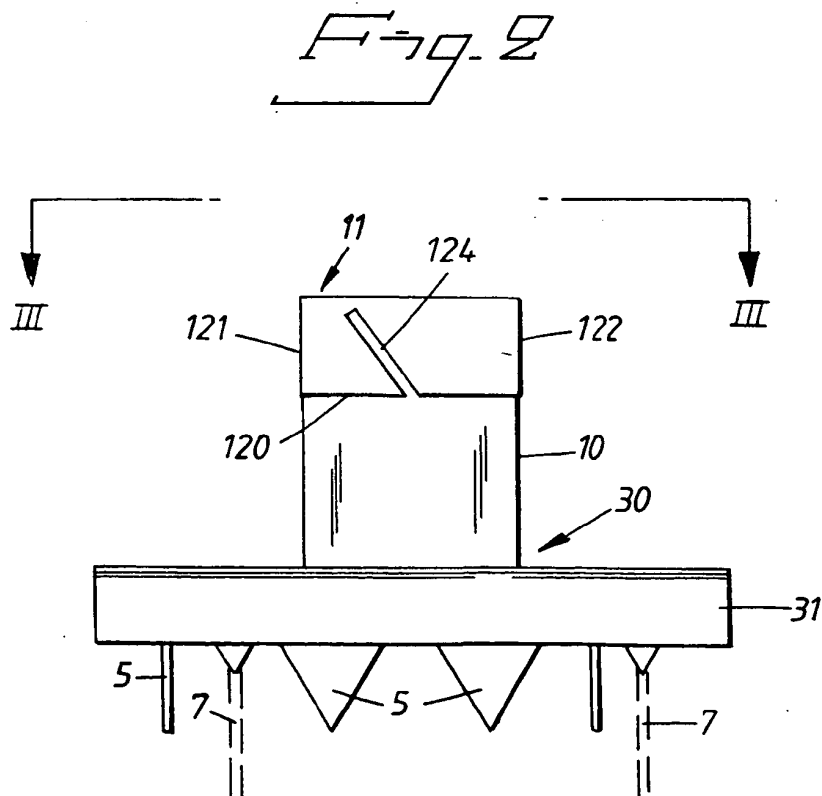
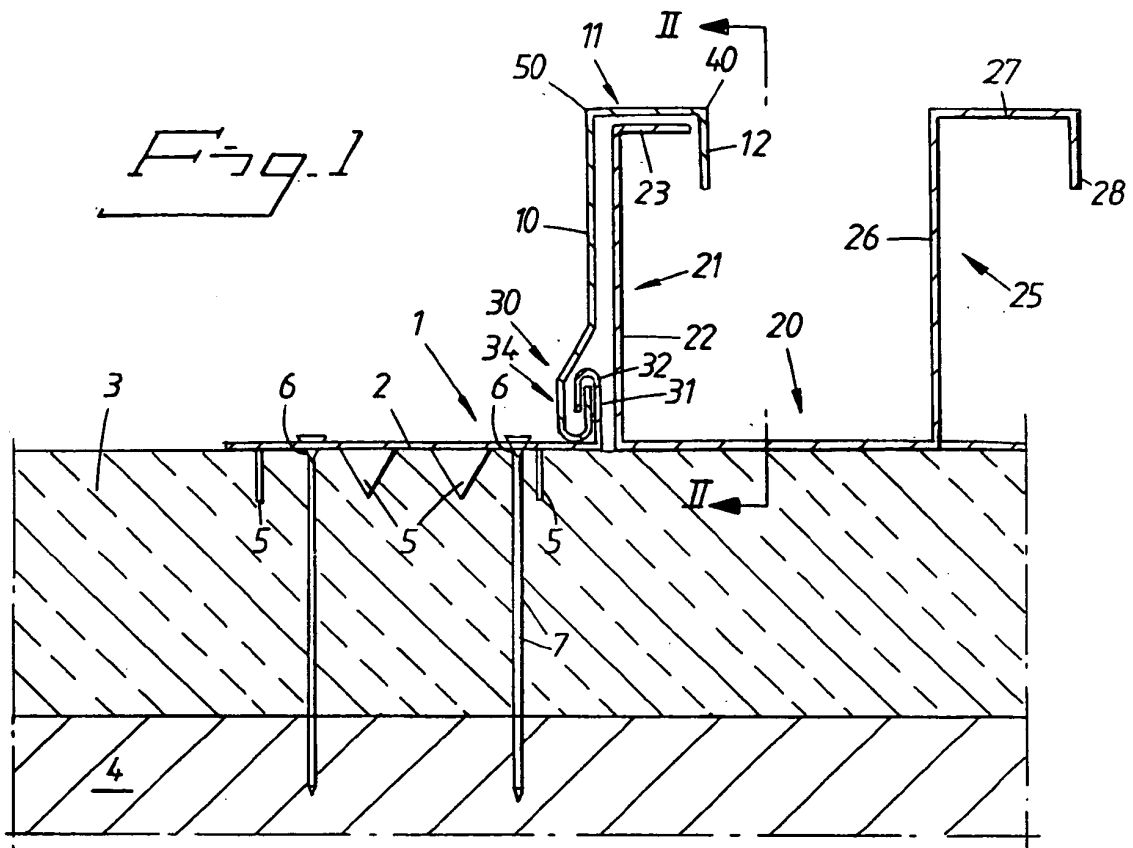


Fig. 3

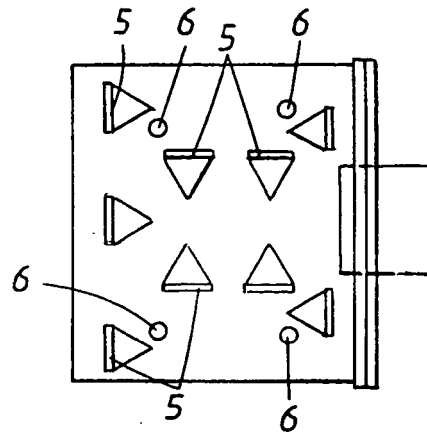


Fig. 4




Fig. 5




Fig. 6





Fig. 7

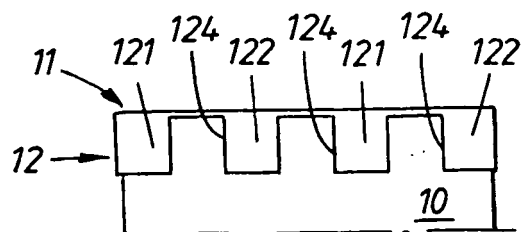

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 11193603 A [0006]