



(11) **EP 1 736 709 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
25.08.2010 Bulletin 2010/34

(51) Int Cl.:
F24D 19/02 (2006.01)

(21) Application number: **06076227.5**

(22) Date of filing: **14.06.2006**

(54) **Improved device for fixing a radiator to a wall or the like**

Vorrichtung zur Halterung eines Heizkörpers an einer Wand o.dgl.

Dispositif pour monter un radiateur sur un mur

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**

(30) Priority: **22.06.2005 BE 200500317**

(43) Date of publication of application:
27.12.2006 Bulletin 2006/52

(73) Proprietor: **Rofix N.V.
3650 Dilsen-Stokkem (BE)**

(72) Inventor: **Vaessen, Rob
3650 Dilsen-Stokkem (BE)**

(74) Representative: **Donné, Eddy
Bureau M.F.J. Bockstael nv
Arenbergstraat 13
2000 Antwerpen (BE)**

(56) References cited:
**EP-A- 1 209 422 DE-C1- 19 853 061
DE-U1-202005 005 565**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 736 709 B1

Description

[0001] The present invention concerns an improved device for fixing a radiator to a wall or the like.

[0002] Such a device is already known which mainly consists of one or several brackets in which the radiator can be clamped and which are each formed of a strut designed to be fixed to a wall on the one hand, one far end of which is bent at right angles so as to support the radiator to be fixed, and of a hook-shaped element which is provided with a leg which can be axially shifted in the other far end of the above-mentioned strut on the other hand, and which is provided with detachable locking means.

[0003] Such a device makes it possible to fix a radiator in a fast and simple manner to a wall or the like by first fixing one or several brackets to the wall at a distance from each other and to make the radiator subsequently rest on the bent far ends of the brackets, after which the hook-shaped elements are pushed on the free end of the strut so as to be able to clamp the radiator and to lock it between the bent far ends and the hook-shaped elements.

[0004] However, a disadvantage of the known devices is that the detachable locking means can only be detached from the hook-shaped elements, such as in order to dismount the radiator, from the top of the radiator, for example with the use of a screwdriver.

[0005] A disadvantage linked thereto is that in situations whereby the top of the radiator is hardly or not at all accessible, for example in situations whereby a tablet or a protruding part of the wall is provided above the radiator, it will be difficult to dismount the radiator or to do so without damaging the radiator or the wall.

[0006] Devices are already known whereby the radiator can be dismounted from the top or from the side, but whereby these devices have a relatively complex construction. Such devices are known for example from DE-A-20 2005 005565, EP-A- 1,209,422 and DE-A-198,53,061.

[0007] An additional disadvantage is that the look of and/or the accessibility of the detachable locking means is not ideal from all sides, which may form a hindrance to safely dismount a radiator without causing any damages.

[0008] Another disadvantage is that the hook-shaped element and the locking means consist of different components.

[0009] This implies that when mounting the radiator, these components need to be assembled and provided in the bracket, which may be relatively complex for the do-it-yourselfer who is not so dextrous, and which may consequently also lead to wrong assemblies or the loss of certain components.

[0010] That is why such devices are usually pre-assembled in the factory, which is in turn disadvantageous in that these devices cannot be packed in the radiator in a space-saving manner when delivering the radiator.

[0011] The present invention aims to remedy one or several of the above-mentioned and other disadvantages.

[0012] To this end, the invention concerns a device with a bracket of the above-mentioned type for fixing a radiator, whereby the locking means of this bracket are such that they can be detached from a mounted radiator, from the top or the bottom of the radiator as well as from a side of the radiator and whereby these locking means are made as an elastic, bendable lip of the above-mentioned leg, which lip is provided with a tothing on one side which can work in conjunction with a tothing of the strut directed towards the inside of the strut, whereby the above-mentioned lip is provided with a groove or a protrusion which is accessible to a screwdriver or another tool from the side and from the top and/or bottom of a mounted radiator, and whereby the above-mentioned groove (26) or the above-mentioned protrusion (25) is formed of a hook-shaped part (25) of the lip (19) provided on the side opposite the toothed side of the lip (19)..

[0013] Such a device offers the advantage that the radiator can always be easily dismounted, even in situations whereby the top and/or bottom of the radiator is covered or whereby the sides of the radiator are difficult to access.

[0014] According to a preferred characteristic, the groove or the hook-shaped part has an inner wall which is directed slantingly in relation to the axial direction of the strut.

[0015] In this manner, by providing a simple tool between the above-mentioned inner wall and the strut, the lip of the hook-shaped element can be easily locked by moving said tool in the axial direction of the strut, in other words to the top or to the bottom.

[0016] Additionally, the bending lip can be provided, on its toothed side which is turned towards the back of the strut, with a bevelled part forming an angle with the axial direction of the strut, such that the radiator can also be dismounted by pushing a tool in the opening between the above-mentioned bevelled part and the back of the strut so as to unlock the lip from the hook-shaped element.

[0017] Preferably, the hook-shaped element is designed such that it can only be dismounted by means of a tool, which is better in view of the safety.

[0018] The hook-shaped element is preferably formed in one piece with the strut and dismountable from the latter, whereby the strut and the hook-shaped element are made such, according to a preferred embodiment, that they fit in the radiator or can be pushed in the latter in a space-saving manner in view of their delivery and transport, together with a radiator as a radiator kit.

[0019] Also, the invention concerns such a radiator kit, consisting of an actual radiator and one or several devices according to the invention, the bracket and hook-shaped element of which are separately pushed in the radiator in view of the delivery and transport of the radiator kit.

[0020] In order to better explain the characteristics of the invention, the following preferred embodiments of an improved device according to the invention for fixing a radiator to a wall or the like are given as an example only without being limitative in any way, with reference to the accompanying drawings, in which:

figure 1 schematically represents a radiator in perspective, provided with an improved device according to the invention for fixing the radiator to a wall or the like;
figure 2 is a side view according to arrow F2 in figure 1 with partial omissions and sections;
figure 3 is an exploded view in perspective of the part indicated by F3 in figure 1;
figure 4 represents the part indicated by F4 in figure 2 to a larger scale;
figure 5 represents a view as that in figure 4, but for another position;
figure 6 represents a variant of figure 2.

[0021] Figures 1 and 2 represent a radiator 1 which is clamped in an improved device 2 according to the invention, which is in this case formed of two brackets 3.

[0022] Each bracket 3 comprises a strut 4 with a U-shaped section with two legs 5 and 6 which are connected to each other by a back 7, designed to be mounted against a wall or the like.

[0023] The lower end 8 of the strut 4 is bent at right angles and is provided with notches 9 provided one opposite the other at the legs 5 and 6.

[0024] In the back 7 of the strut 4 are provided two passages 10 for fixing the strut 4 to a wall or the like, for example by means of screws, and at the bent far end 8 is provided a slot 11 in the given example.

[0025] In the bent far end 8 is provided a supporting block 12 which can be fixed in the above-mentioned slot 11 by means of a rib 13 and which is provided with a continuous groove 14 in line with the above-mentioned notches 9.

[0026] At the top end 15 of the strut 4, the free edges 16 of the legs 5 and 6 are bent inward at right angles so as to form an axial guide for a hook-shaped element 17 which is provided with a leg 18 which can be axially shifted in the above-mentioned guide which is confined by the U-shaped strut 4 and the above-mentioned bent edges 16.

[0027] The hook-shaped element 17 is in this case made in one piece and is provided with detachable locking means made in the form of an elastic bendable lip 19 of the above-mentioned leg 18, whereby this lip 19 is provided with a toothing 20 on one side in the form of a series of teeth 21 having a saw tooth section, which toothing 20 can work in conjunction with a toothing 22 of the strut 4 directed towards the inside of the strut 4 which, in this case, is formed of a lip-shaped, inwardly bent cut 23.

[0028] The bendable lip 19 is provided with a bevelled part 24 on its toothed side forming an angle A with the

axial direction of the strut 4, and it is provided with a hook-shaped protruding part 25 of the lip 19 on its opposite side, defining a groove or slot 26 together with the body of the lip 19.

[0029] The hook-shaped part 25 protrudes from the strut 4 through a slot 28 which is defined by the bent edges 16 of the strut 4.

[0030] An S-shaped bracket 27 is provided, which can be fit in a slot 29 of the hook-shaped element 17 with one free end, and which can be provided over an edge of the radiator 1 with the other free end.

[0031] The strut 4 is preferably made of a metal, whereas the hook-shaped element 17 is preferably a synthetic element.

[0032] The use of an improved device according to the invention is very simple and as follows.

[0033] In order to fix a radiator 1 to a wall or the like, two or more brackets 3 are first fixed to the wall by means of screws or the like which are screwed through the passages 10 in the wall.

[0034] The S-shaped brackets 27 are mounted on the radiator and hooked over the top edge of the radiator with one free end, under the sheeting if present.

[0035] Next, the radiator 1 is placed on the bent far ends 8, resting in the notches 9 and in the groove 14 of the supporting block 12 with a lower edge 30.

[0036] Afterwards, the radiator 1 is clamped by providing a hook-shaped element 17 in each bracket 3 and by pushing each hook-shaped element 17 axially in the guide at the top end 15 of the bracket 4 with a leg 18 until the hook-shaped element 17 is hooked with the slot 29 over the loose free end of the S-shaped bracket so as to tightly clamp the radiator.

[0037] The leg 18 of every hook-shaped element 17 is hereby automatically locked as the toothing 22 of the strut 4 hooks behind the toothing 20 of the elastic bendable lip 19, as represented in figure 4.

[0038] Thanks to the saw tooth section of the toothing 20, the hook-shaped elements 17 cannot be removed without moving the elastic bendable lip 19 in the direction of the radiator 1 so as to thus pull the toothings 20 and 22 of the locking means between the lip 19 and the strut 4 out of each other.

[0039] In order to be able to loosen the above-mentioned locking means, one only has to push, as represented in figure 5, a screwdriver 32, which is schematically represented by means of a chain line in figure 5, or another sharp tool over the top of the radiator 1 in the opening 33 which is formed between the back 7 of the strut 4 and the bevelled part 24 of the lip 19 so as to thus bend the elastic bendable lip 19 towards the radiator 1 and to disengage the toothings 20 and 22 from each other so as to be able to axially remove the hook-shaped element 17 from the strut 4 and to subsequently dismount the radiator 1.

[0040] An alternative possibility for removing the hook-shaped element 17 so as to be able to dismount the radiator 1, as is also represented in figure 5, consists in

bending the lip 19 inward from the side or the top of the radiator 1 by putting a tool such as a squared hexagonal key 34 in the groove 26 of the hook-shaped part 25, so as to disengage the toothings 20 and 22 from each other.

[0041] The groove 26 or the hook-shaped part 25 are preferably provided with an inner wall 35 which is directed towards the strut 4 and which is slantingly directed at an angle B in relation to the axial direction of the strut 4.

[0042] This offers the advantage that, when the tool 34 is pushed upward in the axial direction of the strut 4, the lip 19 is automatically pulled away towards the radiator 1, so that it becomes possible to move or dismount the hook-shaped element.

[0043] From what precedes it is clear that the radiator 1 can be easily dismounted, both from the top of the radiator 1 as from a side of the radiator 1.

[0044] The opening 33 as well as the opening 36 which is formed between the above-mentioned inner wall 35 and the strut 4 are preferably narrower than a finger.

[0045] Thus is prevented that the hook-shaped element 17 might be accidentally unlocked by a child or the like, since an appropriate tool is required to do so.

[0046] Although in the figures, the hook-shaped element 17 is provided at the top end of the bracket 3, it is not excluded to provide such an element 17 at the bottom of the radiator 1, either or not in combination with a hook-shaped element 17 at the top, such that it may also be possible to dismount the radiator 1 via the bottom of the radiator 1.

[0047] It is clear that the radiator 1 can be fixed in the brackets 3 in different ways, and that the radiator 1 can be fixed for example to the bent lower end 8 by means of a bolt 33 or the like, as is represented for example in figure 6, in which the slot 11 is omitted by the way.

[0048] Also the locking means can be realised in other ways than by means of the toothings 20 and 22.

[0049] If necessary, the S-clamps can be omitted or they can be integrated in the hook-shaped elements.

Claims

1. Improved device for fixing a radiator (1) to a wall or the like, which mainly consists of at least one bracket (3) in which the radiator (1) can be clamped, and which is formed of a strut (4) designed to be fixed to a wall on the one hand, one far end (8) of which is bent at right angles so as to support the radiator (1) to be fixed, and of a hook-shaped element (17) which is provided with a leg (18) which can be axially shifted in the other far end (15) of the above-mentioned strut (4) on the other hand and which is provided with detachable locking means, whereby these locking means are such that they can be detached from a mounted radiator (1), from the top or the bottom of the radiator (1), as well as from a side of the radiator (1), whereby the above-mentioned locking means are made as an elastic, bendable lip (19) of the

above-mentioned leg (18), which lip (19) is provided with a tothing (20) on one side which can work in conjunction with a tothing (22) of the strut (4) directed towards the inside of the strut (4), and whereby the above-mentioned lip (19) is provided with a groove (26) or with a protrusion (25) which is accessible to a screwdriver or any other tool from the top and/or bottom of a dismounted radiator (1), **characterised in that** the above-mentioned groove (26) or the above-mentioned protrusion (25) is formed of a hook-shaped part (25) of the lip (19) provided on the side opposite the toothed side of the lip (19).

2. Improved device according to claim 1, **characterised in that** the tothing (20) of the bendable lip (19) has a saw tooth section.

3. Improved device according to claim 1 or 2, **characterised in that** the tothing (22) of the strut (4) is formed of a lip-shaped, inwardly bent cut (23) of the strut (4).

4. Improved device according to any one of the preceding claims, **characterised in that** the tothing (22) of the strut (4) is situated on the back (7) of the strut (4), in particular on the back with which the strut (4) is to be mounted against a wall or the like.

5. Improved device according to claim 1, **characterised in that** the hook-shaped part (25) protrudes from the strut (4) via a slot (28) in the strut (4).

6. Improved device according to any one of the preceding claims, **characterised in that** the groove (26) or the hook-shaped part (25) are provided with an inner wall (35) which is slantingly directed in relation to the axial direction of the strut (4).

7. Improved device according to any one of the preceding claims, **characterised in that** the opening (36) which is formed between the above-mentioned inner wall (35) and the strut (4) is narrower than a finger.

8. Improved device according to any one of the preceding claims, **characterised in that** the bendable lip (19) is provide, on its toothed side which is directed to the back (7) of the strut (4), with a bevelled part (24) which forms an angle with the axial direction of the strut (4).

9. Improved device according to claim 8, **characterised in that** the opening which is formed between the back (7) of the strut (4) and the above-mentioned bevelled part (24) of the hook-shaped element (17) is narrower than a finger when mounted.

10. Improved device according to any one of the preceding claims, **characterised in that** the hook-shaped

element (17), after it has been mounted, can only be dismounted with an appropriate tool.

11. Improved device according to any one of the preceding claims, **characterised in that** the strut (4) is made of metal and **in that** the hook-shaped element (17) is a synthetic element.
12. Improved device according to any one of the preceding claims, **characterised in that** the hook-shaped element (17) is made in one piece and can be dismounted from the strut (4).
13. Radiator kit consisting of an actual radiator and one or several devices according to any one of the preceding claims, the bracket (3) and the hook-shaped element (17) of which are pushed separately in the radiator (1) in view of the delivery and transport of the radiator kit.

Patentansprüche

1. Verbesserte Vorrichtung zur Befestigung eines Heizkörpers (1) an einer Wand oder dergleichen, welche Vorrichtung im Wesentlichen aus mindestens einem Bügel (3) besteht, worin der Heizkörper (1) festgeklemmt werden kann, und die einerseits durch ein Profil (4) gebildet wird, das zur Befestigung an einer Wand eingerichtet ist und wovon ein Ende (8) rechtwinklig umgebogen ist, um den zu befestigenden Heizkörper (1) zu unterstützen, und andererseits durch ein hakenförmiges Element (17), das mit einem Schenkel (18) versehen ist, der in dem anderen Ende (15) des vorgenannten Profils (4) axial verschiebbar ist und der mit lösbaren Blockiermitteln versehen ist, wobei diese Blockiermittel derart sind, dass sie von einem montierten Heizkörper (1) abgenommen werden können, sowohl von der Oberseite oder Unterseite des Heizkörpers (1) als auch von einer Seite des Heizkörpers (1) her, wobei die vorgenannten Blockiermittel als eine elastische, verbiegbare Lippe (19) des vorgenannten Schenkels (18) ausgeführt sind, welche Lippe (19) an einer Seite mit einer Verzahnung (20) versehen ist, die mit einer zur Innenseite des Profils (4) gerichteten Verzahnung (22) des Profils (4) zusammenwirken kann, und wobei die vorgenannte Lippe (19) mit einer Nut (26) oder mit einem Vorsprung (25) versehen ist, die bzw. der für einen Schraubendreher oder gleich welches andere Werkzeug von der Oberseite und/oder Unterseite eines demontierten Heizkörpers (1) her zugänglich ist, **dadurch gekennzeichnet, dass** die vorgenannte Nut (26) oder der vorgenannte Vorsprung (25) durch einen hakenförmigen Teil (25) der Lippe (19) gebildet wird, der an der Seite angebracht ist, die der gezahnten Seite der Lippe (19) gegenüberliegt.
2. Verbesserte Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** die Verzahnung (20) der verbiegbaren Lippe (19) einen Sägezahnschnitt besitzt.
3. Verbesserte Vorrichtung nach Anspruch 1 oder 2, **dadurch gekennzeichnet, dass** die Verzahnung (22) des Profils (4) durch eine lippenförmige, einwärts gebogene Ausschnidung (23) des Profils (4) gebildet wird.
4. Verbesserte Vorrichtung nach einem der vorgenannten Ansprüche, **dadurch gekennzeichnet, dass** sich die Verzahnung (22) des Profils (4) an dem Rücken (7) des Profils (4) befindet, insbesondere an dem Rücken, womit das Profil (4) an einer Wand oder dergleichen montiert werden soll.
5. Verbesserte Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** der hakenförmige Teil (25) durch einen Schlitz (28) in dem Profil (4) aus dem Profil (4) herausragt.
6. Verbesserte Vorrichtung nach einem der vorgenannten Ansprüche, **dadurch gekennzeichnet, dass** die Nut (26) oder der hakenförmige Teil (25) mit einer Innenwand (35) versehen sind, die bezüglich der axialen Richtung des Profils (4) schräg gerichtet ist.
7. Verbesserte Vorrichtung nach einem der vorgenannten Ansprüche, **dadurch gekennzeichnet, dass** die Öffnung (36), die zwischen der vorgenannten Innenwand (35) und dem Profil (4) gebildet ist, schmaler als ein Finger ist.
8. Verbesserte Vorrichtung nach einem der vorgenannten Ansprüche, **dadurch gekennzeichnet, dass** die verbiegbare Lippe (19) an ihrer zu dem Rücken (7) des Profils (4) gerichteten gezahnten Seite mit einem abgefasten Teil (24) versehen ist, das einen Winkel mit der axialen Richtung des Profils (4) bildet.
9. Verbesserte Vorrichtung nach Anspruch 8, **dadurch gekennzeichnet, dass** die zwischen dem Rücken (7) des Profils (4) und dem vorgenannten abgefasten Teil (24) des hakenförmigen Elements (17) gebildete Öffnung in montiertem Zustand schmaler als ein Finger ist.
10. Verbesserte Vorrichtung nach einem der vorgenannten Ansprüche, **dadurch gekennzeichnet, dass** das hakenförmige Element (17), nachdem es montiert ist, nur mit einem geeigneten Werkzeug abmontiert werden kann.
11. Verbesserte Vorrichtung nach einem der vorge-

nannten Ansprüche, **dadurch gekennzeichnet, dass** das Profil (4) aus Metall besteht und dass das hakenförmige Element (17) ein Kunststoffelement ist.

12. Verbesserte Vorrichtung nach einem der vorgenannten Ansprüche, **dadurch gekennzeichnet, dass** das hakenförmige Element (17) einstückig gefertigt ist und von dem Profil (4) abmontiert werden kann.
13. Heizkörperset, bestehend aus einem eigentlichen Heizkörper und einer oder mehreren Vorrichtungen gemäß gleich welchem der vorgenannten Ansprüche, wobei der Bügel (3) und das hakenförmige Element (17) davon in Hinblick auf Lieferung und Transport des Heizkörpersets getrennt in den Heizkörper (1) geschoben werden.

Revendications

1. Dispositif amélioré permettant de fixer un radiateur (1) sur un mur ou similaire, qui se compose principalement d'au moins un support (3) dans lequel le radiateur (1) peut être serré et qui est formé d'un montant (4) conçu pour être fixé sur un mur d'un côté, une de ses extrémités distales (8) est pliée à angles droits de sorte à supporter le radiateur (1) à fixer, et d'un élément en forme de crochet (17) qui est doté d'une patte (18) pouvant être déplacée axialement à l'autre extrémité distale (15) du montant (4) susmentionné de l'autre côté et qui est doté de moyens de verrouillage amovibles, dans lequel ces moyens de verrouillage sont tels qu'ils peuvent être détachés d'un radiateur (1) monté, de la partie supérieure ou inférieure du radiateur (1) ainsi que d'un côté du radiateur (1), dans lequel les moyens de verrouillage susmentionnés sont réalisés sous la forme d'un talon (19) élastique pliable de la patte (18) susmentionnée, lequel talon (19) est doté d'une denture (20) d'un côté qui peut fonctionner conjointement avec une denture (22) du montant (4) dirigée vers l'intérieur du montant (4), et dans lequel le talon (19) susmentionné est doté d'une rainure (26) ou d'une saillie (25) qui est accessible à un tournevis ou à tout autre outil depuis la partie supérieure et/ou inférieure d'un radiateur (1) démonté, **caractérisé en ce que** la rainure (26) susmentionnée ou la saillie (25) susmentionnée est formée d'une partie en forme de crochet (25) du talon (19) agencée du côté opposé au côté denté du talon (19).
2. Dispositif amélioré selon la revendication 1, **caractérisé en ce que** la denture (20) du talon (19) pliable a une section en dent de scie.
3. Dispositif amélioré selon la revendication 1 ou 2, **ca-**

ractérisé en ce que la denture (22) du montant (4) est formée d'une entaille (23) pliée vers l'intérieur en forme de lèvre du montant (4).

4. Dispositif amélioré selon l'une quelconque des revendications précédentes, **caractérisé en ce que** la denture (22) du montant (4) est située sur la partie arrière (7) du montant (4), en particulier sur la partie arrière avec laquelle le montant (4) doit être monté sur un mur ou similaire.
5. Dispositif amélioré selon la revendication 1, **caractérisé en ce que** la partie en forme de crochet (25) fait saillie du montant (4) via une fente (28) dans le montant (4).
6. Dispositif amélioré selon l'une quelconque des revendications précédentes, **caractérisé en ce que** la rainure (26) ou la partie en forme de crochet (25) sont dotées d'une paroi intérieure (35) qui est dirigée de façon inclinée par rapport à la direction axiale du montant (4).
7. Dispositif amélioré selon l'une quelconque des revendications précédentes, **caractérisé en ce que** l'ouverture (36) qui est formée entre la paroi intérieure (35) susmentionnée et le montant (4) est plus étroite qu'un doigt.
8. Dispositif amélioré selon l'une quelconque des revendications précédentes, **caractérisé en ce que** le talon (19) pliable est doté, sur son côté denté qui est dirigé vers la partie arrière (7) du montant (4), d'une partie en biseau (24) qui forme un angle avec la direction axiale du montant (4).
9. Dispositif amélioré selon la revendication 8, **caractérisé en ce que** l'ouverture qui est formée entre la partie arrière (7) du montant (4) et la partie en biseau (24) susmentionnée de l'élément en forme de crochet (17) est plus étroite qu'un doigt lorsqu'il est monté.
10. Dispositif amélioré selon l'une quelconque des revendications précédentes, **caractérisé en ce que** l'élément en forme de crochet (17), après avoir été monté, peut uniquement être démonté avec un outil approprié.
11. Dispositif amélioré selon l'une quelconque des revendications précédentes, **caractérisé en ce que** le montant (4) est réalisé en métal et **en ce que** l'élément en forme de crochet (17) est un élément synthétique.
12. Dispositif amélioré selon l'une quelconque des revendications précédentes, **caractérisé en ce que** l'élément en forme de crochet (17) est réalisé d'un

seul tenant et peut être démonté du montant (4).

- 13.** Kit radiateur composé d'un radiateur actuel et d'un ou de plusieurs dispositifs selon l'une quelconque des revendications précédentes, le support (3) et son élément en forme de crochet (17) sont poussés séparément dans le radiateur (1) en vue de la livraison et du transport du kit radiateur.

10

15

20

25

30


35


40


45

50

55

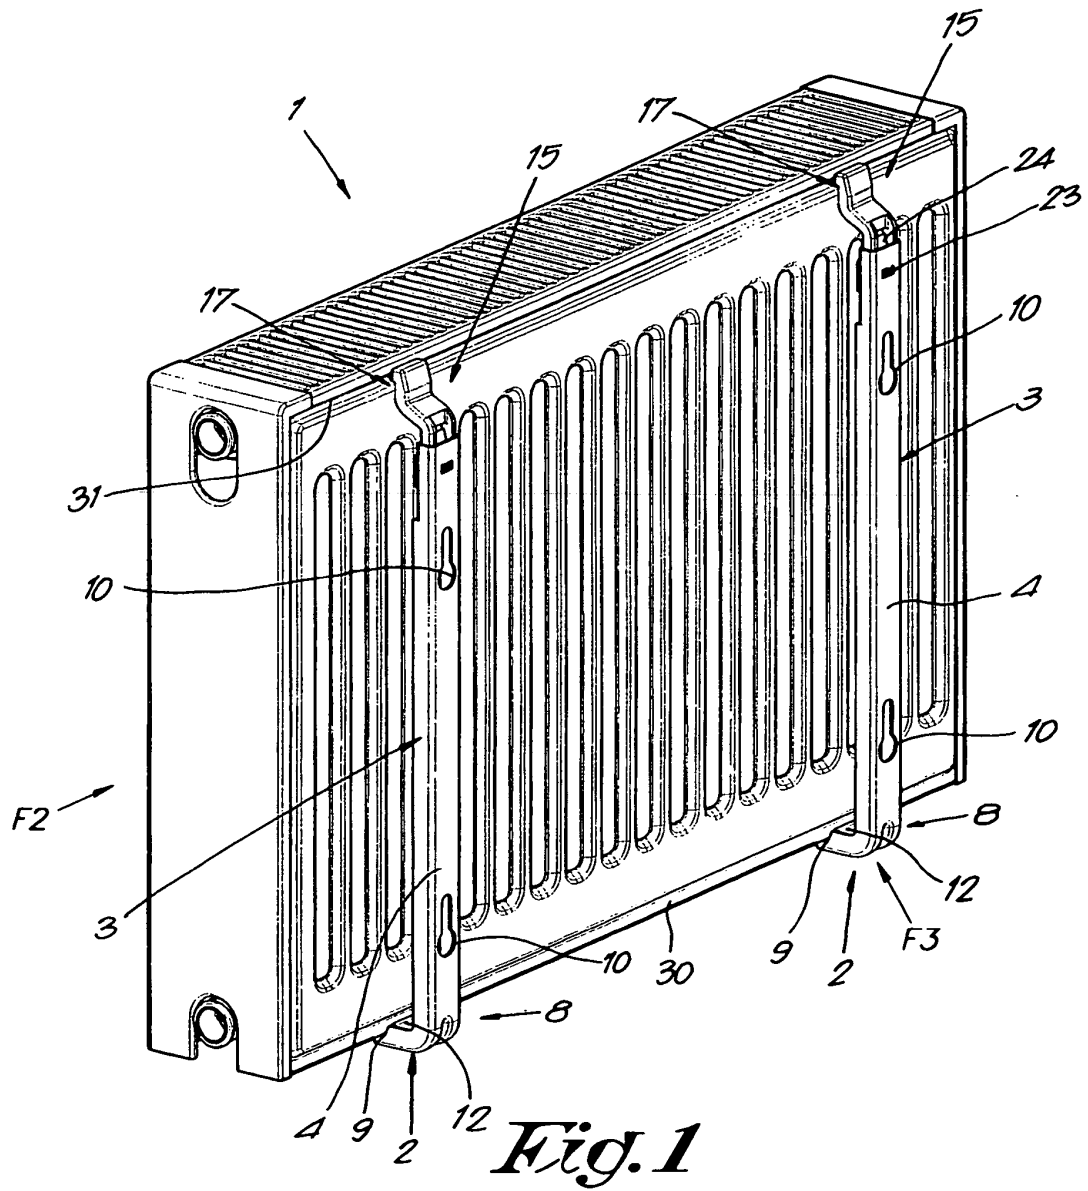

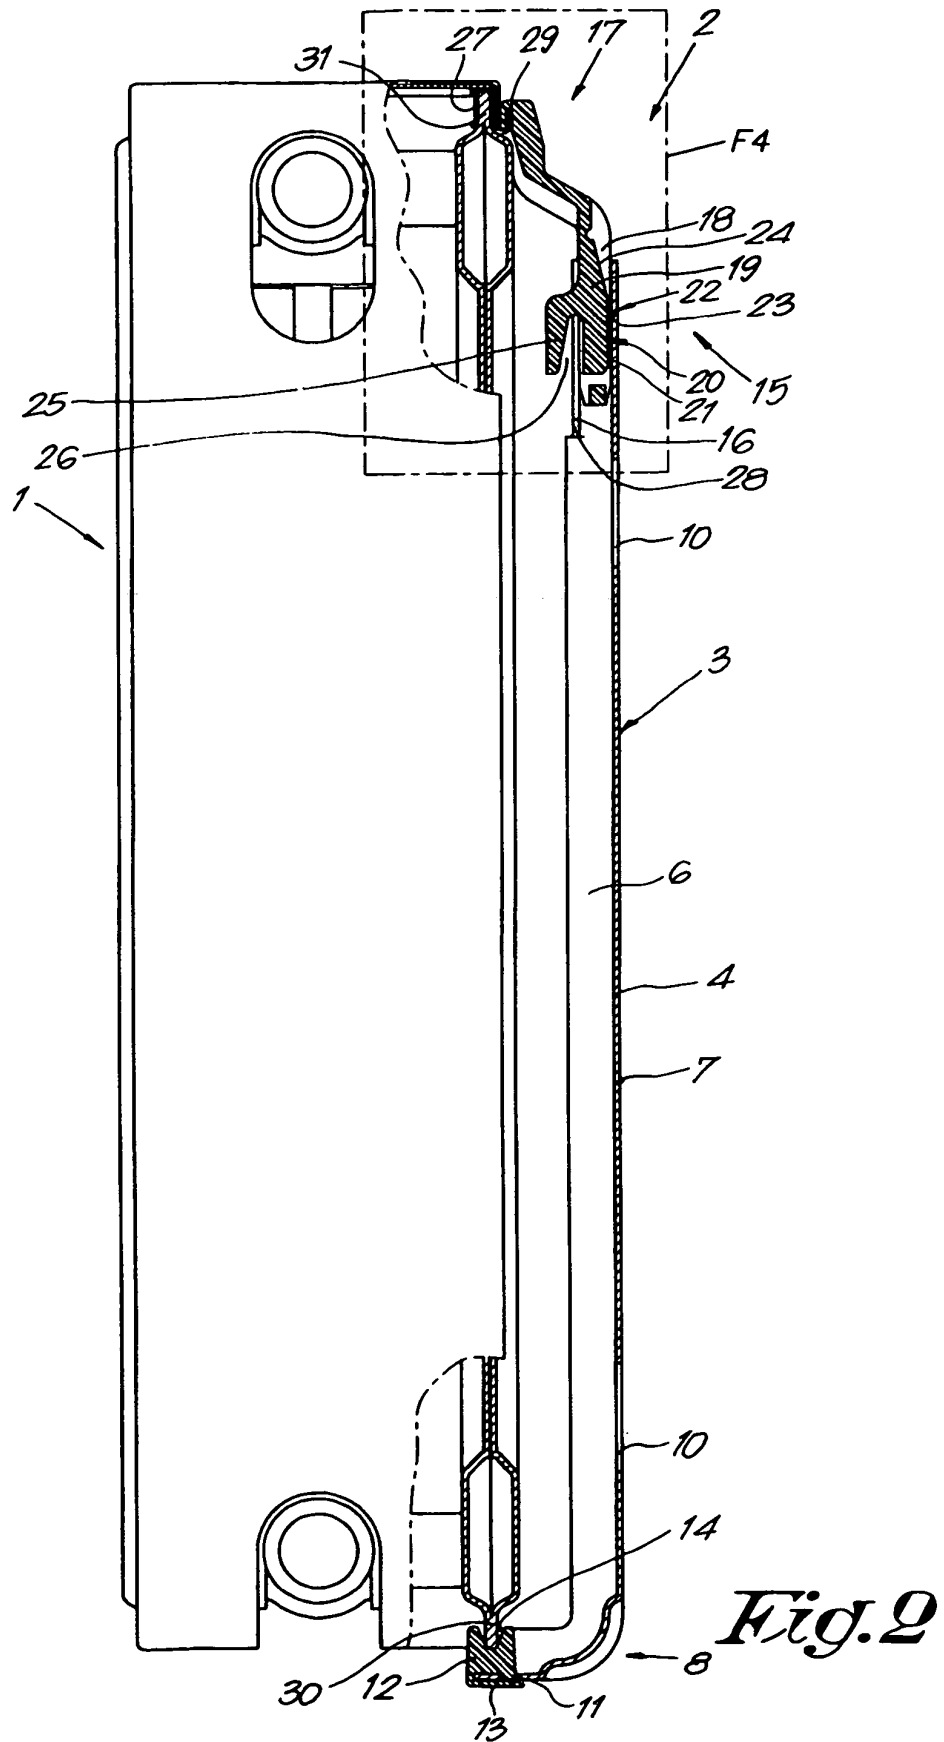

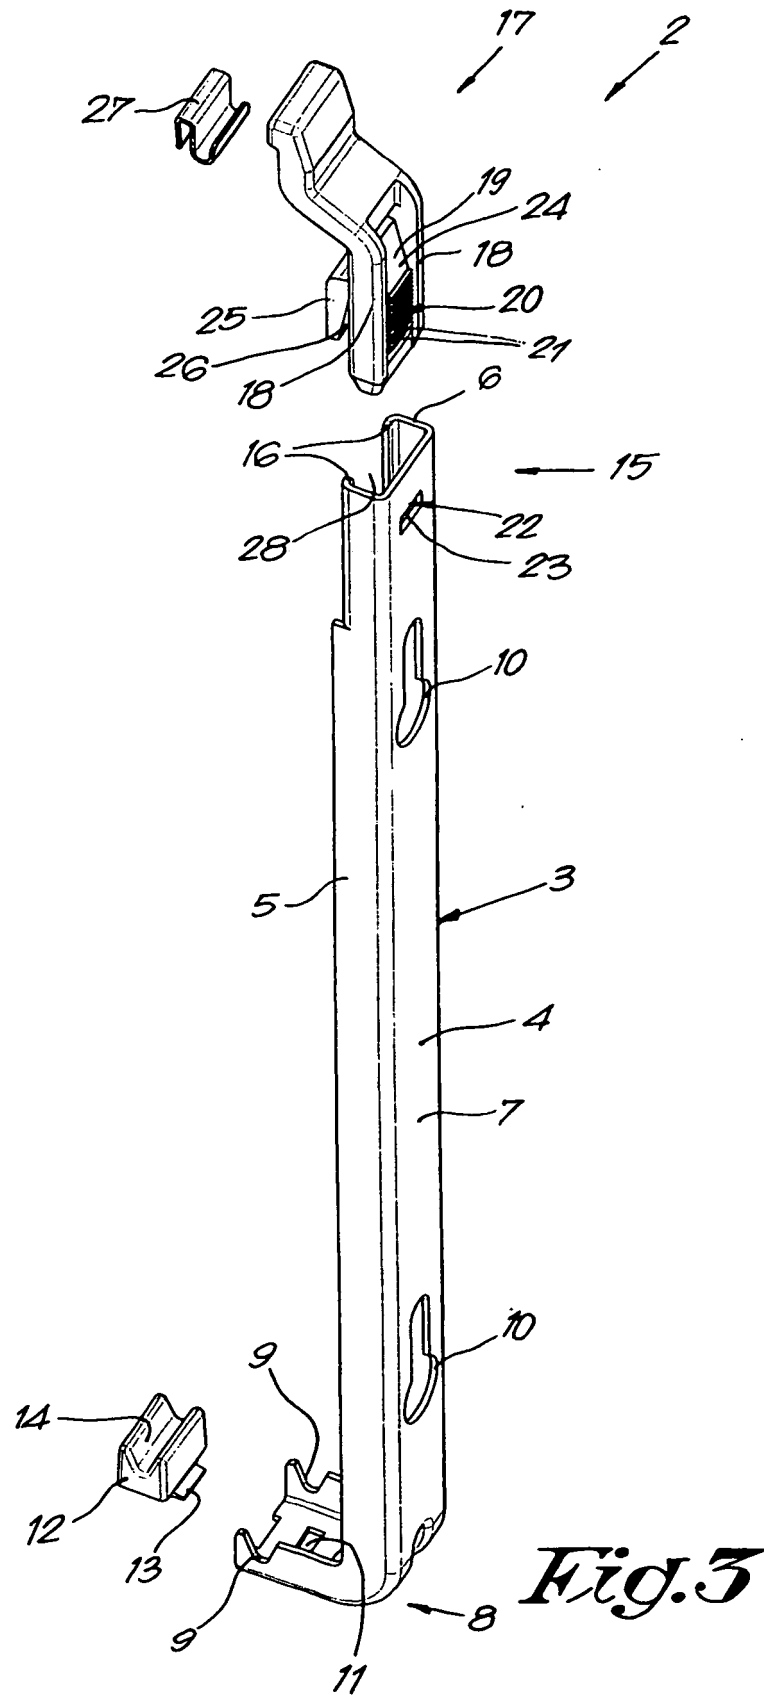

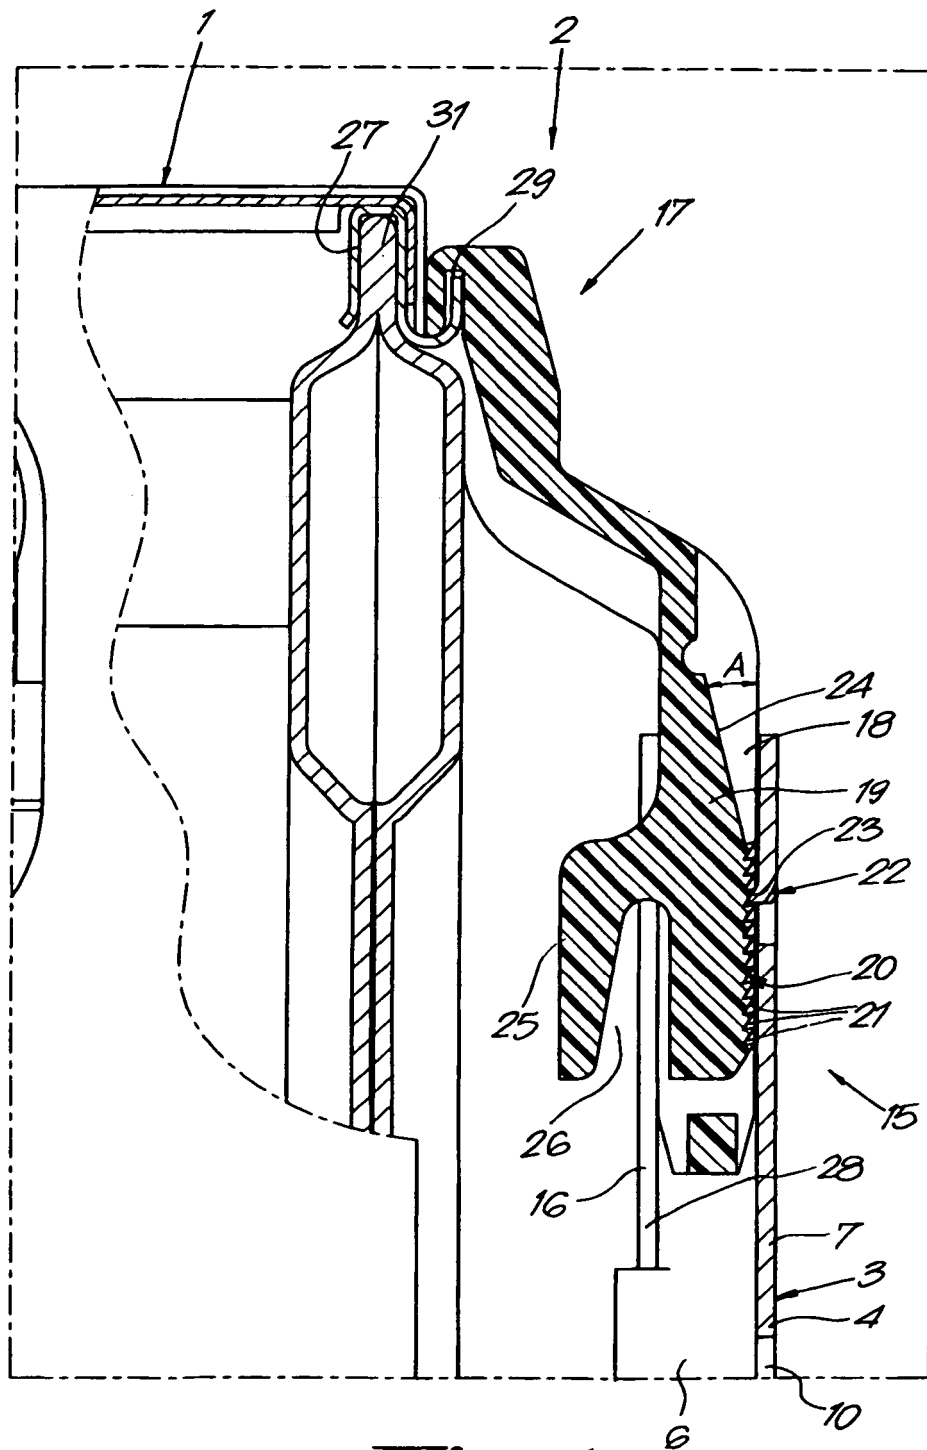


Fig. 4


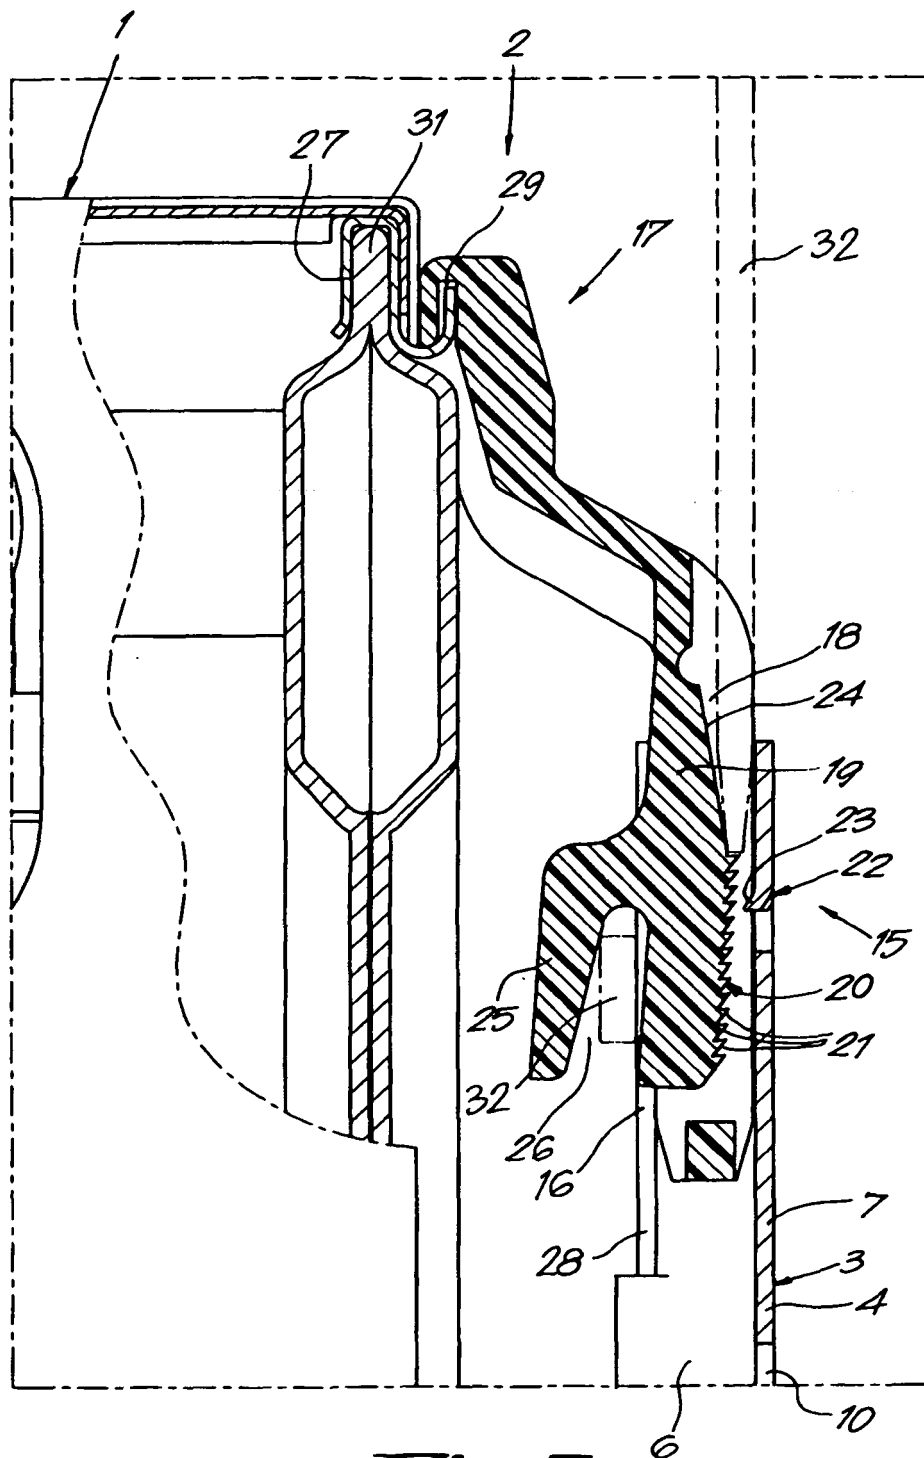


Fig.5

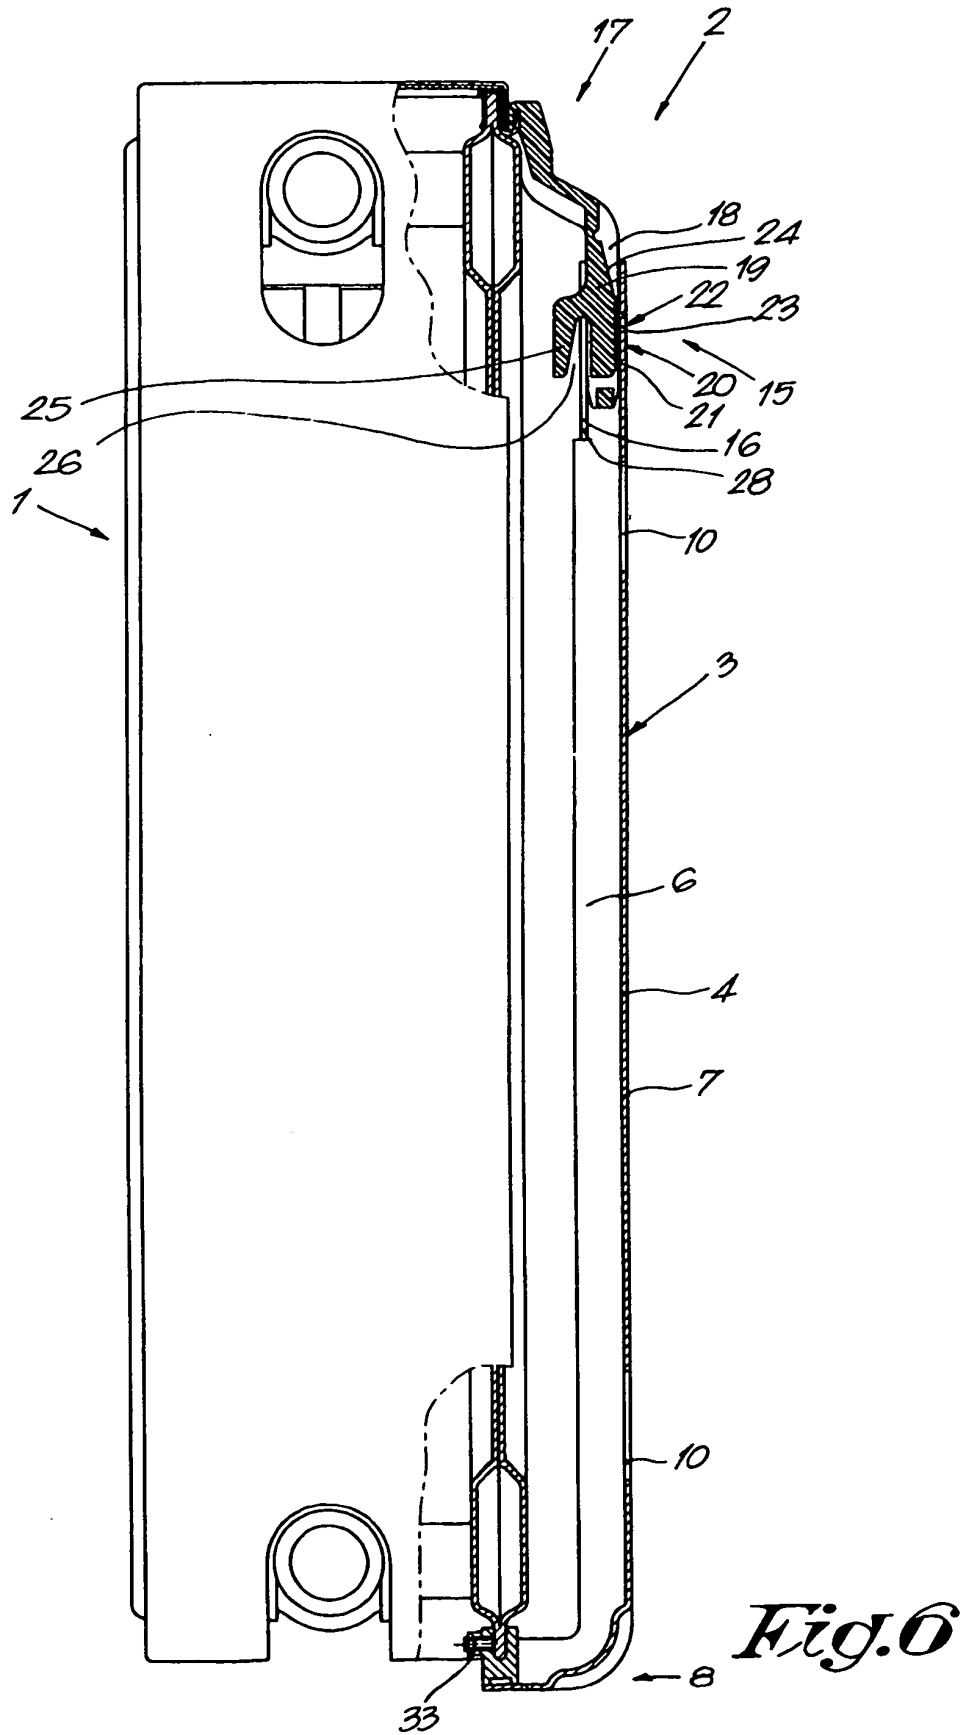

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 202005005565 A [0006]
- EP 1209422 A [0006]
- DE 19853061 A [0006]