

(19)



(11)

EP 1 752 574 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

14.02.2007 Bulletin 2007/07(21) Application number: **06017538.7**(22) Date of filing: **31.05.2001**

(51) Int Cl.:

D04H 1/00 (2006.01) **D04H 1/06** (2006.01)
D04H 13/00 (2006.01) **D04H 3/00** (2006.01)
D04H 5/00 (2006.01) **B32B 3/10** (2006.01)
B32B 5/26 (2006.01) **B32B 7/08** (2006.01)
B24D 13/14 (2006.01)

(84) Designated Contracting States:

DE FR GB IT NL SE(30) Priority: **01.06.2000 US 209398 P**

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:

01939787.6 / 1 294 968(71) Applicant: **Polymer Group, Inc.****Charlotte, NC 28269 (US)**

(72) Inventors:

- **Hartgrove, Herbert P.**
Angier, NC 27501 (US)
- **Rabon, Robert Gregory**
Clayton, NC 27520 (US)


• **Browne, Edwin Gregory****Charlotte, NC 28226 (US)**• **Carlson, Cheryl L.****Willow Springs, NC 27592 (US)**• **Carter, Nick Mark****Mooreville, NC 28115 (US)**(74) Representative: **Altenburg, Udo et al****Patent- und Rechtsanwälte****Bardehle . Pagenberg . Dost .****Altenburg - Geissler****Galileiplatz 1****81679 München (DE)**Remarks:

This application was filed on 23 - 08 - 2006 as a divisional application to the application mentioned under INID code 62.

(54) **A nonwoven fabric for buffing applications**

(57) A method of forming a nonwoven fabric suitable for metal-finishing buffing operations includes providing a precursor web comprising polyester, staple length fibers, with hydroentanglement of the web effected to impart desired physical characteristics. Hydroentanglement is effected on a three-dimensional, image transfer device

having an array of three-dimensional surface elements for patterning the fabric which is formed. Application of a binder composition lends desired durability to the fabric, with the binder composition preferably including a melamine polymeric composition to achieve the desired strength and abrasion resistance

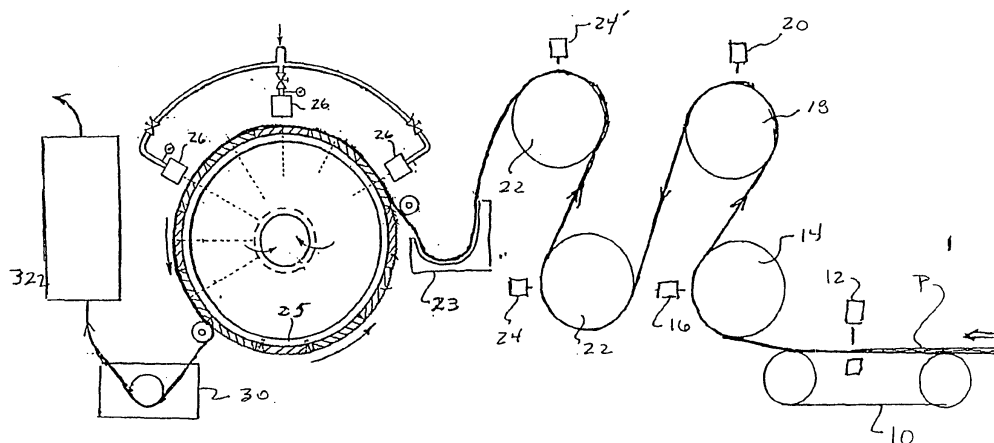FIG. 1**EP 1 752 574 A1**

Description

Technical Field

5 **[0001]** The present invention relates generally to a method of making a nonwoven fabric through hydroentanglement of a staple fiber precursor web, and more particularly to a method of making a nonwoven fabric through hydroentanglement and by treatment with a binder composition which facilitates use of the fabric for buffing applications for finishing metals, marble, plastics, and other materials.

10 Background Of The Invention

15 **[0002]** The production of conventional textile fabrics is known to be a complex, multistep process. The production of fabrics from staple fibers begins with the carding process where the fibers are opened and aligned into a feed stock known as sliver. Several strands of sliver are then drawn multiple times on drawing frames to further align the fibers, blend, improve uniformity as well as reduce the diameter of the sliver. The drawn sliver is then fed into a roving frame to produce roving by further reducing its diameter as well as imparting a slight false twist. The roving is then fed into the spinning frame where it is spun into yarn. The yarns are next placed onto a winder where they are transferred into larger packages. The yarn is then ready to be used to create a fabric.

20 **[0003]** For a woven fabric, the yarns are designated for specific use as warp or fill yarns. The fill yarn packages (which run in the cross direction and are known as picks) are taken straight to the loom for weaving. The warp yarns (which run on in the machine direction and are known as ends) must be further processed. The packages of warp yarns are used to build a warp beam. Here the packages are placed onto a warper which feeds multiple yarn ends onto the beam in a parallel array. The warp beam yarns are then run through a slasher where a water soluble sizing is applied to the yarns to stiffen them and improve abrasion resistance during the remainder of the weaving or knitting process. The yarns are wound onto a loom beam as they exit the slasher, which is then mounted onto the back of the loom. Here the warp and fill yarns are interwoven or knitted in a complex process to produce yardages of cloth. Once the fabric has been manufactured, a scouring process is necessary to remove the size from the warp yarns before it can be dyed or finished. Currently, commercial high speed looms operate at a speed of 1000 to 1500 picks per minute, where a pick is the insertion of the filling yarn across the entire width of the fabric. Commercial woven fabrics used in the intended application of the instant invention range from 40 x 40 to 80 x 80 picks per inch. Therefore, these fabrics would be produced at commercial speeds of about 25 to 40 inches of fabric per minute.

30 **[0004]** In contrast, the production of nonwoven fabrics from staple fibers is known to be more efficient than traditional textile processes as the fabrics are produced directly from the carding process. Nonwoven fabrics are suitable for use in a wide variety of applications where the efficiency with which the fabrics can be manufactured provides a significant economic advantage for these fabrics versus traditional textiles. However, nonwoven fabrics have commonly been disadvantaged when fabric properties are compared, particularly in terms of surface abrasion, pilling and durability in multiple-use applications. Hydroentangled fabrics have been developed with improved properties which are a result of the entanglement of the fibers or filaments in the fabric providing improved fabric integrity. Subsequent to entanglement, fabric durability can be further enhanced by the application of binder compositions and/or by thermal stabilization of the entangled fibrous matrix.

40 **[0005]** U. S. Patent No. 3,485,706, to Evans, hereby incorporated by reference, discloses processes for effecting hydroentanglement of nonwoven fabrics. More recently, hydroentanglement techniques have been developed which impart images or patterns to the entangled fabric by effecting hydroentanglement on three-dimensional image transfer devices. Such three-dimensional image transfer devices are disclosed in U. S. Patent No. 5,098,764, hereby incorporated by reference, with the use of such image transfer devices being desirable for providing a fabric with enhanced physical properties as well as an aesthetically pleasing appearance.

50 **[0006]** For specific applications, a nonwoven fabric must exhibit a combination of specific physical characteristics. Many material finishing operations require the use of power-driven buffing wheels or belts for buffing and polishing metal, rubber, marble, and plastic surfaces. Buffing wheels typically comprise a hub component to which one or more woven textile elements are secured for contact with the surface to be treated. Woven cotton and polyester/cotton materials have typically been employed since such materials can exhibit the necessary nonabrasiveness, absorbency, heat resistance, low elongation, and dimensional stability. By virtue of the absorbency of such materials, the typical water-based buffing and polishing compounds are absorbed and retained by the fabric, with abrasive grit in the compounds sized to achieve the desired buffing or polishing effect.

55 **[0007]** Certain disadvantages are associated with the typical use of woven fabrics for buffing applications. In order to employ woven fabrics in buffing applications it is necessary to orient the fabric at a 45 degree angle to minimize fraying during use. This application of "bias slitting" requires additional processing by specialized equipment, further complicating buffing wheel manufacture. Furthermore, woven fabrics tend to exhibit poor localized dimensional stability as the strength

imparted by the woven structure degrades as a consequence of the repetitive impact and resultant fracturing of the supporting yarns during the stresses imposed by buffing. Additionally, price fluctuations in textile commodities can detract from economical use of such woven fabrics.

[0008] Heretofore, attempts to employ nonwoven fabrics for buffing applications have met with limited commercial success. U. S. Patent No. 5,989,113, hereby incorporated by reference, discloses a buffing tool comprising a spunlaced (hydroentangled) nonwoven fabric. The material contemplated by the referenced patent does not exhibit the desired levels of durability, absorbency or improved buffing properties that can be obtained by the imaged nonwoven fabric of the present invention.

[0009] The present invention is directed to a method of making a nonwoven fabric for buffing applications, which fabric exhibits excellent durability as well as absorbency to facilitate economical and efficient use.

Summary Of The Invention

[0010] A method of making a nonwoven fabric embodying the principles of the present invention contemplates use of staple length polyester fibers to facilitate economical fabric formation. Formation of the fabric on a three-dimensional, image transfer device by hydroentangling imparts desired physical properties to the fabric to facilitate its use in buffing applications. Additionally, treatment of the fabric with a binder composition provides the necessary durability for the fabric for buffing surfaces, including metal, rubber, marble, and plastic.

[0011] A method of making a nonwoven fabric in accordance with the present invention includes providing a precursor web comprising polyester staple length fibers. The precursor web is preferably pre-entangled on a foraminous forming surface, preferably through the use of high-pressure water jets.

[0012] The present method further entails the provision of a three-dimensional, image transfer device having an array of three-dimensional surface elements thereon. The precursor web is positioned on the image transfer device, and hydroentangled to form an imaged nonwoven fabric having a pattern of apertures therein.

[0013] The present invention further contemplates application of a polymeric binder composition to the imaged fabric. Notably, the binder composition comprises a melamine polymeric compound in the range of 0.2% to 0.5% weight to volume, and an acrylic/copolymer compound in the range of 10 to 25% weight to volume, which desirably acts to impart the necessary durability to the imaged fabric. In accordance with the present invention, the resultant fabric has a Combined Tensile Strength of at least about 800 grams per ounce of fabric, and further, has a Taber Abrasion of at least 1000 cycles.

[0014] In accordance with one illustrated embodiment, the three-dimensional image transfer device has an array of three-dimensional surface elements having an octagon-and-square configuration. An alternative image transfer device has an array of three-dimensional surface elements having a herringbone configuration. These presently preferred image transfer devices act, through hydroentanglement, to impart a high degree of strength and durability to the nonwoven fabric. Additionally, the forming surface can be configured to form apertures in the nonwoven fabric which desirably act to facilitate thermal dispersion during use of the fabric for buffing applications. It is contemplated that the fabric can be selectively apertured, whereby apertures can be provided at the inner portion of a rotary buffing tool to provide thermal dispersion, while avoiding occlusion of apertures at a peripheral portion of the tool.

[0015] In the preferred form, the binder composition not only includes a melamine polymeric compound, but further preferably includes an acrylic/copolymer composition. The polymers of the binder composition cooperate to provide the desired durability for buffing applications. Additionally, this binder composition desirably acts to abate deposition of any polyester residue, which can result from degradation of the polyester fibers from heat generated during buffing.

[0016] Other features and advantages of the present invention will become readily apparent from the following detailed description, the accompanying drawings, and the appended claims.

Brief Description Of The Drawings

[0017]

FIGURE 1 is a diagrammatic view of an apparatus for manufacturing a nonwoven fabric embodying the principles of the present invention;

FIGURE 2 is a fragmentary, isometric view of the forming surface of a three-dimensional image transfer device, having an octagon-and-square configuration, of the type used for practicing the present invention;

FIGURE 3 is a fragmentary plan view of the forming surface shown in FIGURE 2;

FIGURE 4 is a sectional view taken along lines A-A of FIGURE 3;

FIGURE 5 is a sectional view taken along lines B-B of FIGURE 3 ;

FIGURE 6 is a fragmentary plan view of the forming surface of a three-dimensional image transfer device, having a herringbone configuration, of the type used for practicing the present invention; and

FIGURE 7 is a sectional view taken along lines A-A of FIGURE 6.

Detailed Description

[0018] While the present invention is susceptible of embodiment in various forms, there is shown in the drawings, and will hereinafter be described, a presently preferred embodiment of the invention, with the understanding that the present disclosure is to be considered as an exemplification of the invention, and is not intended to limit the invention to the specific embodiment illustrated.

[0019] The present invention is directed to a method of forming nonwoven fabrics by hydroentanglement, wherein imaging and patterning of the fabrics is enhanced by hydroentanglement on a three-dimensional image transfer device. By use of an image transfer device configured in accordance with the present invention, together with application of a binder composition particularly formulated for enhancing fabric durability, fabrics formed in accordance with the present invention are particularly suited for material-finishing buffing applications, including finishing of metal, rubber, marble, and plastic surfaces. The fabrics exhibit the desired level of absorbency for "wet out" of water-based buffing and polishing compounds, with the preferred formation from staple length polyester fibers facilitating economical manufacture and use.

[0020] With reference to FIGURE 1, therein is illustrated an apparatus for practicing the present method for forming a nonwoven fabric. The fabric is formed from a fibrous matrix preferably comprising polyester staple length fibers, but it is within the purview of the present invention that different types of fibers, or fiber blends, can be employed. The fibrous matrix is preferably carded and cross-lapped to form a precursor web, designated P. In a current embodiment, the precursor web comprises 100% staple length polyester fibers.

[0021] FIGURE 1 illustrates a hydroentangling apparatus for forming nonwoven fabrics in accordance with the present invention. The apparatus includes a foraminous forming surface in the form of belt 10 upon which the precursor web P is positioned for pre-entangling by entangling manifold 12. Pre-entangling of the precursor web, prior to imaging and patterning, is subsequently effected by movement of the web P sequentially over a drum 14 having a foraminous forming surface, with entangling manifold 16 effecting entanglement of the web. Further entanglement of the web is effected on the foraminous forming surface of a drum 18 by entanglement manifold 20, with the web subsequently passed over successive foraminous drums 20, for successive entangling treatment by entangling manifolds 24, 24'.

[0022] The entangling apparatus of FIGURE 1 further includes an imaging and patterning drum 24 comprising a three-dimensional image transfer device for effecting imaging and patterning of the now-entangled precursor web. The image transfer device includes a moveable imaging surface which moves relative to a plurality of entangling manifolds 26 which act in cooperation with threedimensional elements defined by the imaging surface of the image transfer device to effect imaging and patterning of the fabric being formed.

[0023] The present invention contemplates that the precursor web P be advanced onto the moveable imaging surface of the image transfer device at a rate which is substantially equal to the rate of movement of the imaging surface. As illustrated in FIGURE 1, a J-box or scray 23 can be employed for supporting the precursor web P as it is advanced onto the image transfer device to thereby minimize tension within the precursor web. By controlling the rate of advancement of the precursor web onto the imaging surface to minimize, or substantially eliminate, tension within the web, enhanced hydroentanglement of the precursor web is desirably effected. Hydroentanglement results in portions of the precursor web being displaced from on top of the three-dimensional surface elements of the imaging surface to form an imaged and patterned nonwoven fabric. Enhanced Z-direction entanglement is desirably achieved, thus providing improved imaging and patterning, and enhanced physical properties for the resultant fabric.

[0024] The accompanying Table 1 sets forth comparative test data for various known fabrics and fabrics formed in accordance with the present invention. Manufacture of a durable nonwoven fabric embodying the principles of the present invention is initiated by providing the precursor nonwoven web preferably in the form of a fibrous matrix comprising 100% polyester, staple length fibers, the use of which promotes economical practice of the present invention. In the examples which follow, DuPont 54W polyester fiber was employed, but Wellman T472 polyester fiber could alternatively be used.

Example 1

[0025] Using a forming apparatus as illustrated in FIGURE 1, a nonwoven fabric was made in accordance with the present invention (designated Example 1 in Table 1) by providing a precursor web comprising polyester fibers. The web had a basis weight of 3.5 ounces per square yard (plus or minus 7%). The precursor web was 100% carded and cross-lapped, with a draft ratio of 2.5 to 1.

[0026] The fabric comprised DuPont 54W polyester (1.2 denier, 1.5 inch staple length). Prior to patterning and imaging of the precursor web, the web was entangled by a series of entangling manifolds such as diagrammatically illustrated in FIGURE 1.

[0027] FIGURE 1 illustrates disposition of precursor web P on a foraminous forming surface in the form of belt 10, with the web acted upon by an entangling manifold 12. The web then passes sequentially over a drum 14 having a foraminous forming surface, for entangling by entangling manifold 16, with the web thereafter directed about the foraminous forming surface of a drum 18 for entangling by entanglement manifold 20. The web is thereafter passed over

successive foraminous drums 22, with successive entangling treatment by entangling manifolds 24,24'. In the present examples, each of the entangling manifolds included 120 micron orifices spaced at 42.3 per inch, with the manifolds successively operated at 70,90,120,120, and 120 bar, with a line speed of 50 yards per minute. A web having a width of 75 inches was employed.

[0028] The entangling apparatus of FIGURE 1 further includes an imaging and patterning drum 25 comprising a three-dimensional image transfer device for effecting imaging and patterning of the now-entangled precursor web. The entangling apparatus includes a plurality of entangling manifolds 26 which act in cooperation with the three-dimensional image transfer device of drum 25 to effect patterning of the fabric. In the present example, the entangling manifolds 26 were successively operated at 130,165, and 165 bar, at a line speed which was the same as that used during pre-entanglement.

[0029] The three-dimensional image transfer device of drum 25 was configured as a so-called octagon and square, as illustrated in FIGURES 2,3,4, and 5.

[0030] Subsequent to patterned hydroentanglement, the fabric receives a substantially uniform application of polymeric binder composition at application station 30. The web is then directed through a tenter apparatus 32, operated at temperatures as specified, with manufacture of the nonwoven fabric of the present invention thus completed.

[0031] In the present example, the polymeric binder composition was applied at a line speed of 25 yards per minute, with a nip pressure of 50 psi, mixed solids were believed to be approximately 14%, and percent wet pick up of approximately 150-160%. The composition was applied via dip and nip saturation on a tenter frame No. 4. Tenter oven temperature was set at 450 F.

[0032] The polymeric binder composition formulation, by weight percent of bath, was as follows:

Water	83.14%
DeFoam	525 0.1%
<i>(DeFoam is a surface tension reducer)</i>	
Wet Aid Special	0.5%
<i>(WetAid is a surface energy reducer)</i>	
Rhoplex. RTM TR407	15.0%
<i>(Rhoplex is an acrylic/copolymer emulsion)</i>	
<i>Registered to Rhom & HaasCo. of Delaware Cymel.</i>	
RTM 303 Resin	0.24%
<i>(Cymel is a melamine cross-linking resin)</i>	
<i>Registered to American Cyanamid Co. of New York</i>	
Freecat. RTM 187	0.02%
<i>(Freecat is a chemical catalyst)</i>	
<i>Registered to Freedom Textile Chemicals Co. of North Carolina</i>	
MilSoft.RTM N23	1.0%
<i>(MilSoft is an anti-static coating)</i>	
<i>Registered to Atlas Chemical Industries of Delaware</i>	

Example 2

[0033] Using the process set forth above in connection with Example 1, another fabric was formed, designated Example 2 in Table 1. The process conditions were different in that the image transfer device of drum 25 was configured as a so-called herringbone pattern, as illustrated in FIGURES 6 and 7. For binder application, the line speed was 20 yards per minute, with a nip pressure of 32 psi, and a wet-pickup of 130%. In the binder composition, Rhoplex K3 was substituted for the Rhoplex TR407, at the same percentage; the binder composition had 7.72% mixed solids. Tenter oven temperature was set at 300 F.

[0034] For practice of the present invention, the specific binder composition formulation can be varied. For example, the acrylic binder may comprise approximately 10-25% of the formulation, the pigments 1-3%, the melamine cross-linker 0.2-0.5%, and the various wetting agents and antimigrants less than 1%.

[0035] The data tabulated in Table 1 shows the highly desirable durability characteristics obtained through practice of the present invention, including nonwoven fabrics having a high Combined Tensile Strength (machine direction tensile + cross-direction tensile per fabric basis weight, and high Taber Abrasion. Comparison with a fabric formed in accordance with U. S. Patent No. 5,989,113 shows significantly improved physical properties.

[0036] A further benefit of nonwoven fabrics formed in accordance with the present invention for buffing application

is derived from the surface irregularities which can be formed in the fabric attendant to fabric imaging and patterning on three-dimensional image transfer devices.

[0037] The performance of surface irregularities as a means for retaining compounds or agents applied temporarily thereto was examined by the simple application of buffing compound by a doctor blade. Specifically, one inch x seven inch strips were cut from a greige fabrics having the same 100% PET fiber composition as described above. The first fabric was imaged by the use of an Image Transfer Device 25 having an "herringbone" pattern imparted thereto (equivalent to the greige fabric of Example 2). The second fabric was imparted with a pattern in accordance with "octagon and square" (equivalent to the greige fabric of Example 1). A final fabric was not imparted with a pattern, and represents the nonwoven fabric of conventional practice. The three fabric samples were initially weighed and the results recorded.

[0038] The three fabric samples were placed in side-by-side juxtaposition with their respective long dimensions adjoining. A beveled edge, six inch polymeric broad knife was then loaded on the beveled side within an excess of thoroughly homogenized, commercially available polishing compound as available from TurtleWax Inc., of Chicago. The loaded broad knife was then placed bevel side down on the positioned fabric samples, approximately one inch from the terminal end of the samples, with an overhang of 1.5 inches off of each side of the sample collection. The broad knife was then brought on the loaded beveled side to an incident angle of approximately 45 degrees, a force of about 0.5 pounds per linear inch was then applied to the knife as it was drawn at a constant rate of about 1 inch per second and until such time the broad knife moved completely beyond the termination of the fabric samples. The three loaded fabric samples were then removed and re-weighed. The results of this evaluation are provided in Table 2.

[0039] As can be seen in the results of Table 2, such surface irregularities desirably act to retain buffing and polishing compounds during use, thus benefitting and enhancing efficiency. The lack of patterning in prior art nonwoven fabrics, such as disclosed in the above-referenced patent, does not facilitate retention of buffing compounds in this fashion. Furthermore, the depth of the image may be varied such that the quantity of buffing compound retained may be adjusted. While formation of apertures in an imaged pattern fabric formed in accordance with the present invention is contemplated to facilitate thermal dispersion during buffing operations, it is within the purview of the present invention that fabrics be selectively apertured, through appropriate configuration of the image transfer device employed during formation, so that apertures can be provided a portions of a buffing wheel spaced from its periphery, thus avoiding occlusion of apertures with buffing compounds.

[0040] From the foregoing, numerous modifications and variations can be effected without departing from the true spirit and scope of the novel concept of the present invention. It is to be understood that no limitation with respect to the specific embodiments disclosed herein are intended or should be inferred. The disclosure is intended to cover, by the appended claims, all such modifications as fall within the scope of the claims.

TABLE 1

Name	Test Method	Comparative Textile	Example 1	Example 2	Prior Art 5,989,113
Composition		100% Cotton	100% PET	100% PET	
Image		no image	Oct/Sq	herringbone	
Basis Weight (oz/y ²)		4.48	3.5	3.8	1.48 to 14.8
Bulk (mils)		28.5	21.5	36	12 to 197
Grab Tensile (N/50 mm, EN 29 073)	EN 29 073				
MD		not performed	1539	1947	150 to 500
CD		not performed	1312	1625	150 to 500
Elongation (% , EN 27 073)	EN 29 073				
MD		not performed	38.8	76.0	50 to 150
CD		not performed	65.4	108.7	50 to 150
Grab Tensile (lbs.)	TM 7012				
MD		31.15	95.4	98.5	
CD		31.05	4.2	90.0	
Elongation (% , 4x6)					

EP 1 752 574 A1

(continued)

Name	Test Method	Comparative Textile	Example 1	Example 2	Prior Art 5,989,113
MD		50.1	37.0	72.2	
CD		50.1	67.0	94.6	
Elmendorf Tear (grams)					
MD		1516	1393	2191	
CD		>1600	1213	2620	
Absorbent Capacity (grams)		543.5	497	b49	
Mullen Burst (psi)		68	134	135	
Air Permeability (cfm/in)		not performed	199	>278	
Taber Abrasion (cycles)		157	>1100	>4000	
Absorbency per oz/y ² Fabric Weight		121.3	142.0	170.8	
Combined Tensile per Ounce Fabric Weight			814	940	20 to 676

TABLE 2

	Bulk	Weight Before Loading	Weight After Loading
Herringbone	0.048	0.56	3.2
Octagon and Square	0.034	0.56	2.2
No Image	0.022	0.57	1.1

1. A method of making a nonwoven fabric for buffing applications, comprising the steps of: providing a precursor web comprising polyester staple length fibers; providing a foraminous, three-dimensional image transfer device having an array of three-dimensional surface elements; positioning said precursor web on said image transfer device, and hydroentangling said precursor web to form an imaged nonwoven fabric, and applying a polymeric binder composition to said imaged nonwoven fabric to provide said fabric with a Combined Tensile Strength of at least about 800grams/ounce of fabric.

2. A method of making a nonwoven fabric in accordance with embodiment 1, including: pre-entangling said precursor web on a foraminous forming surface prior to said step of hydroentangling said precursor web on said image transfer device.

3. A method of making a nonwoven fabric in accordance with embodiment 1, wherein: said imaged nonwoven fabric has a Taber Abrasion of at least about 1000 cycles after application of said binder composition.

4. A method of making a nonwoven fabric in accordance with embodiment 1, wherein: said binder composition comprises a melamine polymeric compound.

5. A method of making a nonwoven fabric in accordance with embodiment 1, wherein: said step of hydroentangling said precursor web on said image transfer device includes forming a pattern of surface irregularities in the nonwoven fabric formed thereby.

6. A method of making a nonwoven fabric in accordance with embodiment 5, wherein: said pattern of surface irregularities include apertures.

7. A method of making a nonwoven fabric in accordance with embodiment 5, wherein: said pattern of surface irregularities include raised portions.

8. A method of making a nonwoven fabric for buffing applications, comprising the steps of: providing a precursor web comprising polyester staple length fibers; pre-entangling said precursor web on a foraminous forming surface; providing a three-dimensional image transfer device having an array of three-dimensional surface elements; positioning said precursor web on said image transfer device, and hydroentangling said precursor web to form an imaged nonwoven fabric having a pattern of apertures therein; and applying a polymeric binder composition to said imaged fabric, said binder composition comprising a melamine polymeric compound, said resultant fabric having combined tensile strength of at least about 800 grams/ounce of fabric.

9. A method of making a nonwoven fabric in accordance with embodiment 8, wherein: said nonwoven fabric has a Taber Abrasion of at least about 1000 cycles after application of said binder composition.

10. A method of making a nonwoven fabric in accordance with embodiment 8, wherein: said step of providing said three-dimensional image transfer device includes providing said image transfer device with an array of three-dimensional surface elements having an octagon-and-square configuration.

11. A method of making a nonwoven fabric in accordance with embodiment 8, wherein: said step of providing said three-dimensional image transfer device includes providing said image transfer device with an array of three-dimensional surface elements having a herringbone configuration.

12. A method of making a nonwoven fabric in accordance with embodiment 8, wherein: said step of applying said binder composition includes applying a binder composition further comprising an acrylic/copolymer composition.

13. A nonwoven fabric for buffing applications formed in accordance with the method of embodiment 8.

14. A nonwoven fabric for buffing applications comprising: an imaged, apertured fibrous matrix comprising polyester staple length fibers, and a polymeric binder, said nonwoven fabric having a combined tensile strength of at least about 800 grams/ounce of fabric, and a Taber Abrasion of at least about 1000 cycles.

15. A nonwoven fabric in accordance with embodiment 14, wherein: said binder composition comprises a melamine composition.

16. A nonwoven fabric in accordance with embodiment 15, wherein: said binder composition further comprises an acrylic/copolymer composition.

17. A nonwoven fabric in accordance with embodiment 14, wherein: said fabric has an image imparted thereto by a three-dimensional image transfer device having an array of three-dimensional surface elements having an octagon-and-square configuration.

18. A nonwoven fabric in accordance with embodiment 14, wherein: said fabric has an image imparted thereto by a three-dimensional image transfer device having an array of three-dimensional surface elements having a herringbone configuration.

19. A nonwoven fabric for buffing applications comprising: a fibrous matrix comprising staple length fibers, said fibrous matrix being hydroentangled into a nonwoven fabric, said nonwoven fabric has an image imparted thereto by a three-dimensional image transfer device having an array of three-dimensional surface elements, said image imparting the ability of the nonwoven fabric to retain compounds applied thereto.

Claims

1. A nonwoven fabric for buffing applications with a polymeric binder composition, **characterized by:**

a hydroentangled, imaged, apertured fibrous matrix comprising polyester staple length fibers, and a polymeric binder composition comprising a melamine polymeric compound in the range of 0.2% to 0.5% by weight, and an acrylic/copolymer composition in the range of 10% to 25% by weight based on the polymeric binder com-

position,

said nonwoven fabric having a basis weight of at least 3.5 ounces per square yard, a combined tensile strength of at least about 900 grams/ounce of fabric, and a Taber Abrasion of at least about 1,000 cycles,
said nowoven fabric having a three-dimensional image imparted thereto to facilitate retention of an associated
buffing compound.

2. A nonwoven fabric in accordance with claim 1, wherein:

said fabric has an image imparted thereto by a three-dimensional image transfer device having an array of
three-dimensional surface elements having an octagon-and-square configuration.

3. A nonwoven fabric in accordance with claim 1, wherein:

said fabric has an image imparted thereto by a three-dimensional image transfer device having an array of
three-dimensional surface elements having a herringbone configuration.

FIG. 1

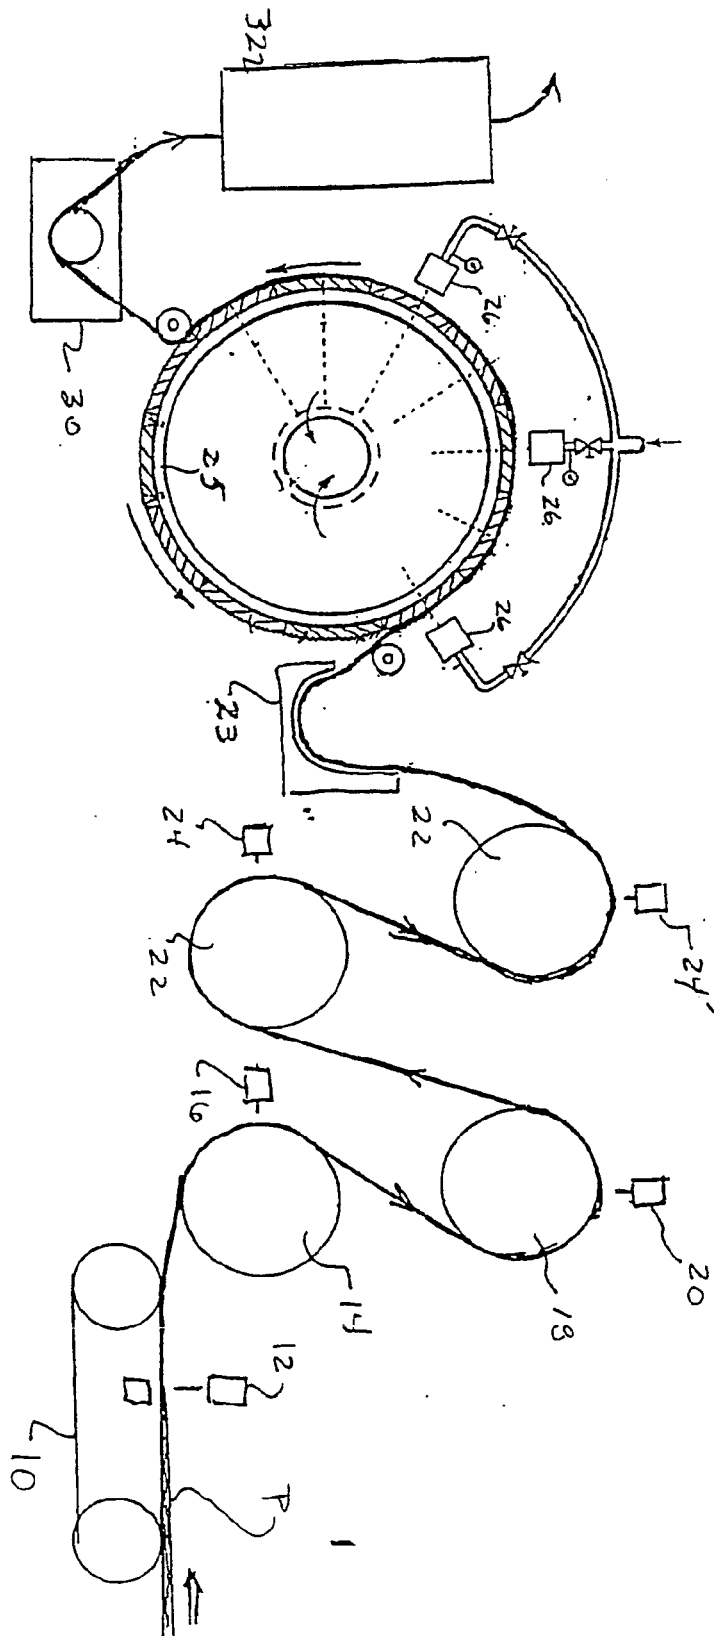


FIG. 2

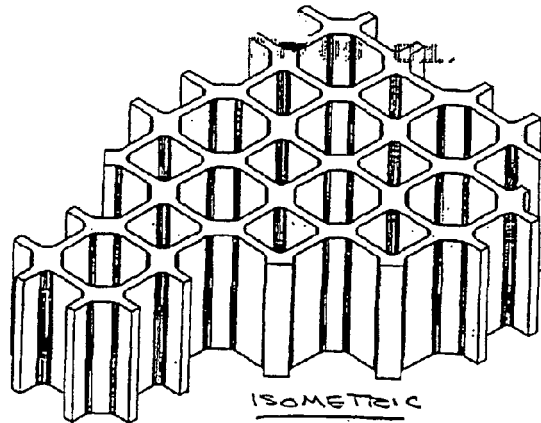


FIG. 3

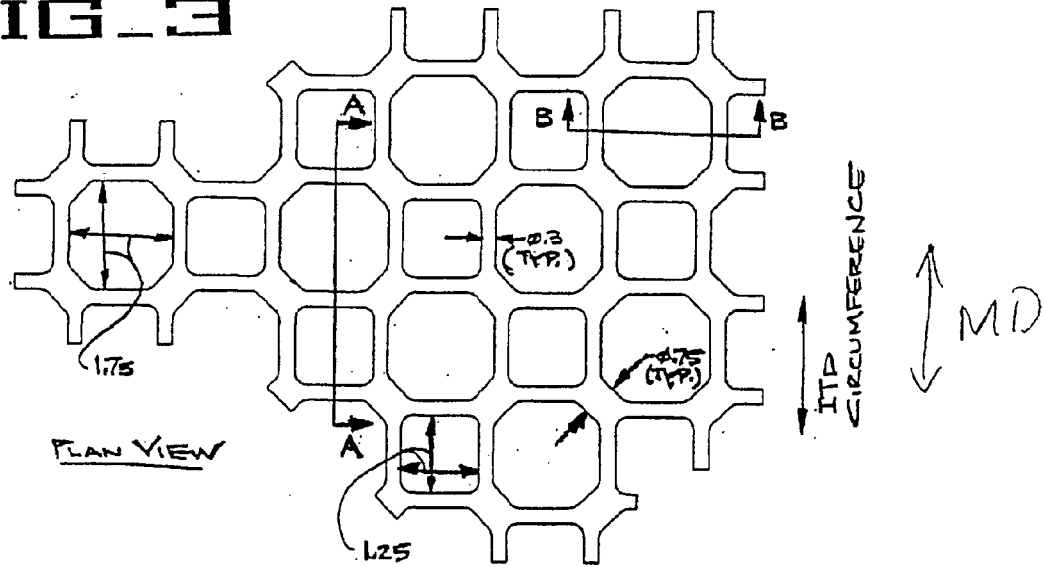


FIG. 4

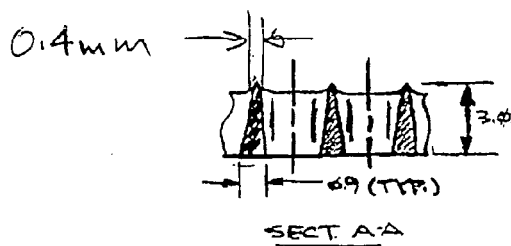


FIG. 5


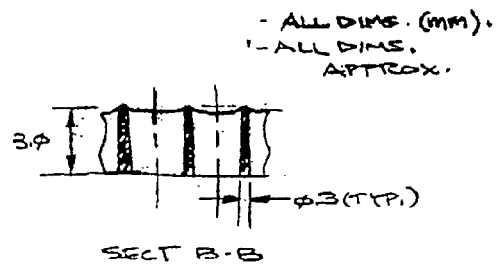



FIG. 6

HERRINGBONE

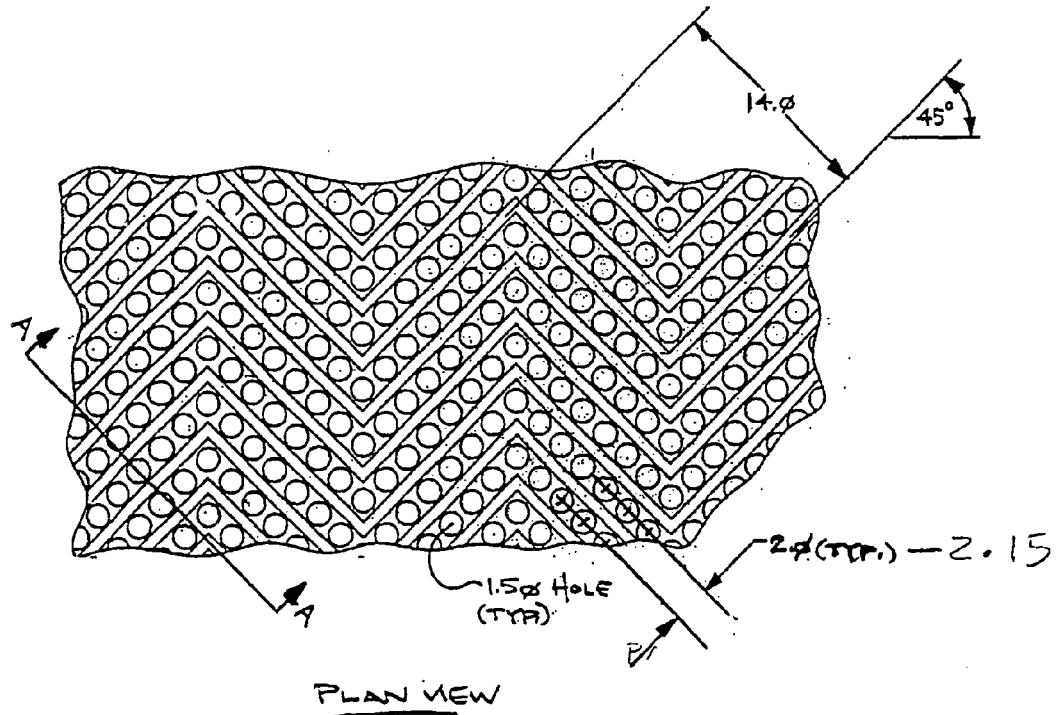

- ALL DIMS. (mm).
- ALL DIMS. APPROX.

FIG. 7

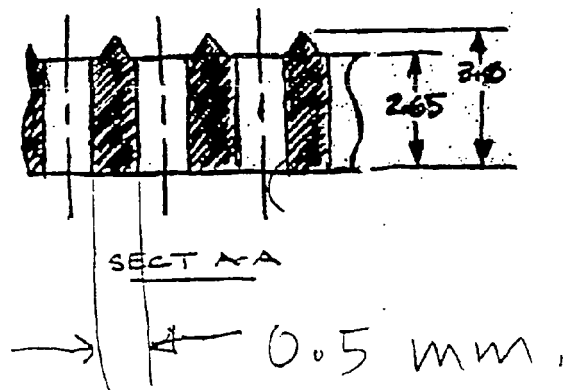



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 06 01 7538

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
D,A	US 5 098 764 A (JAMES WILLIAM ET AL) 24 March 1992 (1992-03-24) * the whole document *	1-3	INV. D04H1/00 D04H1/06 D04H13/00
A	EP 0 333 228 A (KIMBERLY CLARK CO) 20 September 1989 (1989-09-20) * page 3, line 34 - page 15, line 43; figure 1 *	1-3	D04H3/00 D04H5/00 B32B3/10 B32B5/26 B32B7/08
D,A	US 3 485 706 A (EVANS FRANKLIN JAMES) 23 December 1969 (1969-12-23) * the whole document *	1-3	B24D13/14
			TECHNICAL FIELDS SEARCHED (IPC)
			B24D D04H
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 11 December 2006	Examiner Koller, Stefan
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

3

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 06 01 7538

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

11-12-2006

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5098764	A	24-03-1992	AU 680399 B2	31-07-1997
			BG 61879 B1	31-08-1998
			BG 98980 A	28-07-1995
			BR 9207081 A	24-10-1995
			CA 2130177 A1	19-08-1993
			FI 943781 A	17-08-1994
			GR 3029566 T3	30-06-1999
			JP 8502100 T	05-03-1996
			SG 89225 A1	18-06-2002
			SK 95194 A3	07-02-1996
			ZA 9201174 A	18-08-1993

EP 0333228	A	20-09-1989	AU 3147489 A	21-09-1989
			CA 1315082 C	30-03-1993
			DE 68913057 D1	24-03-1994
			DE 68913057 T2	09-06-1994
			ES 2049268 T3	16-04-1994
			JP 2026972 A	29-01-1990
			MX 167630 B	31-03-1993
			US 4931355 A	05-06-1990

US 3485706	A	23-12-1969	NONE	

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 3485706 A, Evans [0005]
- US 5098764 A [0005]
- US 5989113 A [0008] [0035]