



(11) **EP 1 753 083 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
14.02.2007 Bulletin 2007/07

(51) Int Cl.:
H01Q 9/36 (2006.01) **H01Q 1/36** (2006.01)
H01Q 1/10 (2006.01) **H01Q 5/00** (2006.01)

(21) Application number: **06007138.8**

(22) Date of filing: **04.04.2006**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI SK TR
Designated Extension States:
AL BA HR MK YU

(71) Applicant: **Wistron NeWeb Corp.**
221 Hsichih Taipei Hsien (TW)

(72) Inventor: **Chen, Chih-Lung**
Hsichih Taipei Hsien 221 (TW)

(74) Representative: **TER MEER - STEINMEISTER & PARTNER GbR**
Artur-Ladebeck-Strasse 51
33617 Bielefeld (DE)

(30) Priority: **10.08.2005 CN 200510089485**

(54) **Monopole antennas**

(57) Monopole antennas are provided. A monopole antenna transmitting radio signals within a specific frequency range includes a substrate, a ground, a first sleeve portion, a second sleeve portion, a first conductive element, a second conductive element and a cable. The first conductive element and the ground are formed on the substrate. The first and second sleeves electrically connect the ground and project from a side of the ground in a first direction. The first conductive element comprises a feed end and a connection portion adjacent to an edge of the substrate. The second conductive element connects the connection portion and projects from the edge of the substrate substantially in the first direction. The cable connects the ground and the feed end to transmit the radio signal.

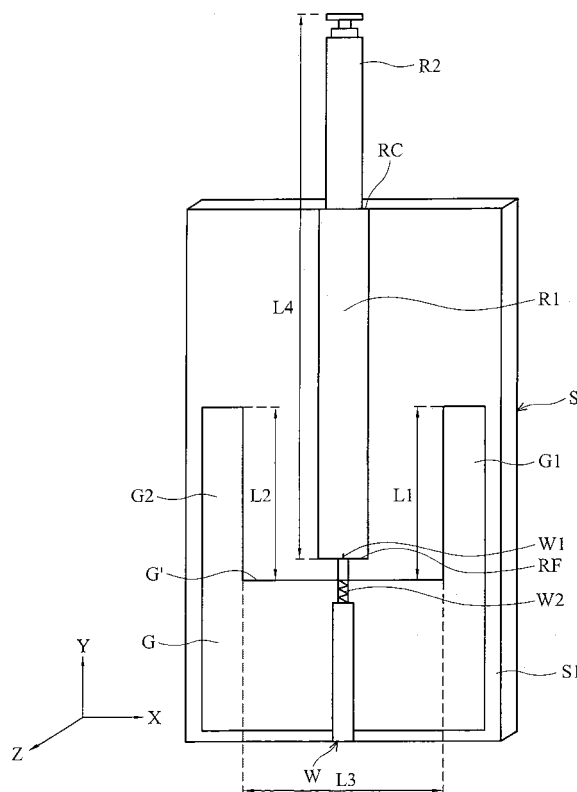


FIG. 2A

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The invention relates in general to monopole antennas and in particular to monopole antennas for UHF/VHF radio signals.

Description of the Related Art

[0002] Embedded antennas, such as chip antennas and planar antennas, are widely applied in wireless communication devices. A conventional type is a ceramic chip antenna produced by LTCC (Low Temperature Co-fired Ceramic) technology. Conventional planar antennas such as microstrip antennas, printed antennas and planar Inverted F Antennas (PIFAs), are generally applied in GSM, DCS, UMTS, WLAN, and Bluetooth wireless equipment such as mobile phones and wireless LAN adapters.

[0003] Referring to FIG. 1, a conventional planar monopole antenna primarily comprises a substrate S, a ground G, a conductive element R and a cable W. The ground G and the conductive element R are formed on a surface S1 of the substrate S with the conductive element R longitudinal in direction Y.

[0004] The cable W, such as a coaxial cable, comprises a signal wire W1 enclosed by a ground wire W2. As shown in FIG. 1, the conductive element R comprises a feed end RF adjacent to the ground G. The feed end RF is connected to the signal wire W1, and the ground G is connected to the ground wire W2, respectively.

[0005] With regard to typical frequency range of Digital Video Broadcasting, the frequency coverage ratio of a conventional planar monopole antenna is usually less than 30%, adversely affecting communication efficiency. Moreover, it is not convenient to switch between VHF and UHF during usage due to bandwidth limitations of conventional planar monopole antennas.

BRIEF SUMMARY OF THE INVENTION

[0006] Monopole antennas are provided. An embodiment of a monopole antenna transmitting radio signals within a specific frequency range includes a substrate, a ground, a first sleeve portion, a second sleeve portion, a first conductive element, a second conductive element and a cable. The first conductive element and the ground are formed on the substrate. The first and second sleeves electrically connect the ground and project from a side of the ground in a first direction. The first conductive element comprises a feed end and a connection portion adjacent to an edge of the substrate. The second conductive element connects the connection portion and projects from the edge of the substrate substantially in the first direction. The cable connects the ground and the

feed end to transmit the radio signal.

BRIEF DESCRIPTION OF THE DRAWINGS

- 5 [0007] The invention can be more fully understood by reading the subsequent detailed description and examples with references made to the accompanying drawings, wherein:
- 10 [0008] FIG. 1 is a perspective diagram of a conventional monopole antenna;
- [0009] FIGS. 2A and 2B are perspective diagrams of an embodiment of a monopole antenna;
- [0010] FIG. 3A is a perspective diagram illustrating VSWR between 100-900MHz of the monopole antenna in FIG. 2A;
- 15 [0011] FIG. 3B is a perspective diagram illustrating VSWR between 100-900MHz of the monopole antenna in FIG. 2B;
- [0012] FIG. 4 is a perspective diagram of another embodiment of a monopole antenna;
- 20 [0013] FIG. 5 is a perspective diagram of another embodiment of a monopole antenna;
- [0014] FIG. 6 is a perspective diagram of another embodiment of a monopole antenna;
- 25 [0015] FIG. 7 is a perspective diagram of another embodiment of a monopole antenna;
- [0016] FIG. 8 is a perspective diagram of another embodiment of a monopole antenna;
- [0017] FIG. 9 is a perspective diagram of another embodiment of a monopole antenna; and
- 30 [0018] FIG. 10 is a perspective diagram of another embodiment of a monopole antenna.

DETAILED DESCRIPTION OF THE INVENTION

- 35 [0019] Referring to FIGS. 2A and 2B, an exemplary embodiment of a monopole antenna transmitting radio signals within a specific frequency range includes a substrate S, a ground G, a first sleeve G1, a second sleeve G2, a first conductive element R1, a second conductive element R2 and a cable W. The ground G and the conductive element R1 are formed on a surface S1 of the substrate S. The second conductive element R2 is retractable along Y axis and connected to a connection portion RC of the first conductive element R1, wherein the connection portion RC is adjacent to an edge of the substrate S. Specifically, the second conductive element R2 projects from the edge of the substrate S.
- 40 [0020] As shown in FIG. 2A, the first conductive element R1 is longitudinal in direction Y and comprises a feed end RF at an end thereof. The feed end RF is adjacent to a side G' of the ground G, substantially parallel to the X axis. The cable W, such as a coaxial cable, comprises a signal wire W1 and enclosed by a ground wire W2. The signal wire W1 is connected to the feed end RF, and the ground wire W2 is connected to the ground G, respectively.
- 50 [0021] The first and second sleeves G1 and G2 are

parallel and formed on the surface S1 with the first conductive element R disposed therebetween. As shown in FIG. 2A, the first sleeve G1 has a first length L1, and the second sleeve G2 has a second length L2, both projecting from the side G' of the ground G in direction Y, wherein the first length L1 is substantially equal to the second length L2. In some embodiments, the substrate S is FR4 (Flame Retardant Type 4), and the ground G, the first and second sleeves G1 and G2 are metal, integrally formed on the surface S 1 by PCB fabrication.

[0022] When the second conductive element R2 is retracted, as shown in FIG. 2A, total length L4 of the first and second conductive elements R1 and R2 is substantially equal to 1/4 of a specific UHF radio signal wavelength. Further, the length L4 is also substantially equal to the sum of the first, second and third lengths L1, L2 and L3 ($L4=L1+L2+L3$), wherein the third length L3 indicates the length of the side G' (the distance between the sleeves G1 and G2). Thus, the first conductive element R1, the first and second sleeves G1 and G2 can exhibit capacitive effect and facilitate broader bandwidth for wireless communication.

[0023] Referring to FIG. 2B, when the monopole antenna is applied for VHF radio signal communications, the second conductive element R2 is extended from length L4 to L4' ($L4'>L4$) in a first direction (direction Y), wherein length L4' is substantially equal to 1/4 of a specific VHF radio signal wavelength. In some embodiments, total length of the first and second conductive elements R1 and R2 can also be adjusted substantially to 1/4 of a GSM radio signal wavelength for wireless communication.

[0024] As shown in FIG. 2B, the second conductive element R2 is retractable and comprises a first section R21, a second section R22 and a third section R23 telescopically connected along Y axis. When the second conductive element R2 is extended, total length of the first and second conductive elements R1 and R2 is increased along Y axis, facilitating wireless communication efficiency of VHP radio signals. In some embodiments, the second conductive element R2 comprises two or more sections telescopically connected along Y axis, such that the length of the second conductive element R2 is adjustable.

[0025] FIGS. 3A and 3B illustrate Voltage Standing Wave Ratio (VSWR) between 100-900MHz of the monopole antenna in FIGS. 2A and 2B, respectively. In general, a standard antenna requires an available VSWR less than 3. With respect to FIG. 3A, when the second conductive element R2 is retracted as shown in FIG. 2A, available frequency range under $VSWR<3$ is between 400-860MHZ, substantially covering the bandwidth of UHF (460-860MHZ). Referring to FIG. 3B, when the second conductive element R2 is extended as shown in FIG. 2B, available frequency range under $VSWR<3$ substantially covers two bandwidths of UHF (460-860MHZ) and VHF (170-2300MHZ).

[0026] With extension of the second conductive ele-

ment R2 in FIG. 2B, communication efficiency of UHF (460-860MHZ) may decrease slightly, however, it can still meet the requirement of $VSWR<3$. Since both bandwidths of UHF (460-860MHZ) and VHF (170-2300MHZ) can be substantially covered by extension of the second conductive element R2, it is not necessary to provide antennas for UHF and VHF individually, reducing production cost and facilitating convenience.

[0027] FIG. 4 shows another embodiment of a monopole antenna. Unlike the monopole antenna in FIGS. 2A and 2B, here, the second conductive element R2' is a spiral conductor, substituted for the telescopic conductive element R2 in FIGS. 2A and 2B. In FIG. 4, the second conductive element R2' connects a connection portion RC at an end of the first conductive element R1 and projects from an edge of the substrate S in the first direction (direction Y). In this embodiment, the length L5 of the first conductive element R1 is substantially equal to 1/4 of a specific UHF radio signal wavelength. Further, the length L5 is also substantially equal to the sum of the lengths of the first sleeve G1, the second sleeve G2 and the side G' (the distance between the sleeves G1 and G2).

[0028] Referring to FIG. 4, total length L5' of the first and second conductive elements R1 and R2' in direction Y exceeds the length L5 of the first conductive element R1, providing analogous functions such as the extendable conductive element R2 in FIG. 2B, capable of wireless communications for UHF (460-860MHZ) and VHF (170-2300MHZ). In this embodiment, the length L5' of the first and second conductive elements R1 and R2' is configured corresponding to 1/4 of a specific VHF radio signal wavelength, and the length of the second conductive element R2' in direction Y is configured according to its spiral radius and actual extended length. As the length of the spiral-shaped conductive element R2' along Y axis is less than its actual extended length, the extent of the antenna is reduced.

[0029] FIG. 5 shows another embodiment of a monopole antenna. In FIG. 5, the first conductive element R1 comprises a main body R11 and a pair of L-shaped angle portions R12 and R13 symmetrically disposed with respect to the main body R11. Specifically, the angle portions R12 and R13 connect an end of the main body R11 and extend opposite to direction Y. In this embodiment, total length L6 of the main body R11 and each of the angle portions R12 and R13 is substantially equal to 1/4 of a specific UHF radio signal wavelength. Further, total length L6' of the first and second conductive elements R1 and R2' in direction Y is configured corresponding to a specific VHF radio signal wavelength, and the length of the second conductive element R2' in direction Y is configured according to its spiral radius and actual extended length. Owing to the configuration of the first conductive elements R1 with the angle portions R2 and R3 extended opposite to direction Y, the extent of substrate S and the first conductive element R1 of the antenna is reduced in direction Y.

[0030] FIG. 6 shows another embodiment of a monopole antenna. As shown in FIG. 6, a substrate S comprises a slot H, and the main body R11 of the first conductive element R1 comprises a depression h corresponding to the slot H. In this embodiment, total length L7 of the main body R11 and each of the angle portions R2 and R3 is substantially equal to 1/4 of a specific UHF radio signal wavelength. Further, total length L7' of the first and second conductive elements R1 and R2' along Y axis is configured corresponding to a specific VHF radio signal wavelength, and the length of the second conductive element R2' in direction Y is configured according to its spiral radius and actual extended length. Since the second conductive element R2' is received in the slot H and connected to the connection portion RC, the extent of the antenna in direction Y is reduced.

[0031] FIG. 7 shows another embodiment of a monopole antenna. As shown in FIG. 7, the L-shaped angle portions R12 and R13 are symmetrically disposed on opposite sides of the main body R11 of the first conductive element R1. Unlike the monopole antenna in FIG. 5, here, the two angle portions R12 and R13 connect to the middle of the main body R11 and extend in the first direction (direction Y), however, the angle portions R12 and R13 can also connect to other portions of the main body R11. In some embodiments, total length L8 of the main body R11 and each of the angle portions R12 and R13 is substantially equal to 1/4 of a specific UHF radio signal wavelength. Further, total length L8' of the first and second conductive elements R1 and R2' in direction Y is configured corresponding to a specific VHF radio signal wavelength, and the length of the second conductive element R2' in direction Y is configured according to its spiral radius and actual extended length.

[0032] FIG. 8 shows another embodiment of a monopole antenna combined with FIGS. 6 and 7. As shown in FIG. 8, the substrate S comprises a slot H, and the main body R11 of the first conductive element R1 comprises a depression h corresponding to the slot H. The second conductive element R2' is received in the slot H and connected to a connection portion RC of the first conductive element R1, wherein the connection portion RC is located at the bottom of the depression h. The two angle portions R12 and R13 symmetrically connect the main body R11 and extend in the first direction (direction Y).

[0033] In this embodiment, total length L9 of the main body R11 and each of the angle portions R12 and R13 is substantially equal to 1/4 of a specific UHF radio signal wavelength. Further, total length L9' of the first and second conductive elements R1 and R2' in direction Y is configured corresponding to a specific VHF radio signal wavelength, and the length of the second conductive element R2' in direction Y is configured according to its spiral radius and actual extended length. Since the second conductive element R2' is received in the slot H, the extent of substrate S and the first conductive element R1 of the antenna is reduced in direction Y.

[0034] FIG. 9 shows another embodiment of a monopole antenna. The monopole antenna, such as a microstrip antenna, comprises two angle portions R12 and R13 with zigzag structures symmetrically disposed on both sides of the main body R11. As shown in FIG. 9, the first sleeve G1, the second sleeve G2 and the ground G are formed on a different surface from the first conductive element R1. In this embodiment, the first sleeve G1, the second sleeve G2 and the ground G are formed on a surface of the substrate S different opposite to the first conductive element R1. A signal wire of a cable (not shown) is connected to the feed end RF at the bottom of the first conductive element R1, and a ground wire of the cable (not shown) is connected to the ground G on the opposite surface different from the feed end RF.

[0035] FIG. 10 shows another embodiment of a monopole antenna. As shown in FIG. 10, the monopole antenna has a Coplanar Waveguide (CPW) feed configuration with the first conductive element R1 and parts of the ground G disposed on the same surface S1 of the substrate S. In this embodiment, the first and second sleeves G1, G2 and parts of the ground G are disposed on a surface of the substrate S opposite to the first conductive element R1, wherein the ground G, and the first and second sleeves G1 and G2 are electrically connected. A signal wire of a cable (not shown) is connected to the feed end RF at the bottom of the first conductive element R1, and a ground wire of the cable (not shown) is connected to the ground G on the same surface as the feed end RF.

[0036] With respect to the two embodiments in FIGS. 9 and 10, total length of the main body R11 and each actual extended length of the angle portions R12 and R13 is substantially equal to 1/4 of a specific UHF radio signal wavelength. Further, total length of the first and second conductive elements R1 and R2' in direction Y is configured corresponding to a specific VHF radio signal wavelength, and the length of the second conductive element R2' in direction Y is configured according to its spiral radius and actual extended length.

[0037] Monopole antennas with symmetrical sleeve structures are provided according to the embodiments. The sleeve structures, ground and a first conductive element can be formed on a substrate by PCB fabrication, exhibiting capacitive effect and facilitating broader bandwidth for wireless communication. In some embodiments, the first conductive element is configured in different formations to facilitate miniaturization of the antenna. The second conductive element, such as the retractable conductor R2' in FIG. 2B or the spiral-shaped conductor R2' in FIGS. 4-10, connects the first conductive element and projects from an edge of the substrate, to facilitate wireless communication efficiency for VHF radio signals and provide a multifunctional monopole antenna for UHF/VF radio signals. In some embodiments, the monopole antenna can also be used for GSM signal communications. As the monopole antenna provides better communication efficiency for UHF/VHF radio signals, it can be widely applied for UHF/VHF and DVB

broadcast devices, such as digital TVs.

[0038] While the invention has been described by way of example and in terms of the preferred embodiment, it is to be understood that the invention is not limited thereto. To the contrary, it is intended to cover various modifications and similar arrangements (as would be apparent to those skilled in the art). Therefore, the scope of the appended claims should be accorded the broadest interpretation so as to encompass all such modifications and similar arrangements.

Claims

1. A monopole antenna transmitting a radio signal, comprising:
 - a substrate;
 - a ground formed on the substrate;
 - a first sleeve portion, formed on the substrate and electrically connected to the ground, wherein the first sleeve portion projects from a side of the ground in a first direction;
 - a second sleeve portion, formed on the substrate and electrically connected to the ground, wherein the second sleeve portion projects from the side of the ground in the first direction;
 - a first conductive element, formed on the substrate, comprising a feed end and a connection portion adjacent to an edge of the substrate;
 - a second conductive element, connecting the connection portion and projecting from the edge of the substrate in substantially the first direction; and
 - a cable, connecting the ground and the feed end to transmit the radio signal.
2. The monopole antenna as claimed in claim 1, wherein the second conductive element is retractable.
3. The monopole antenna as claimed in claim 2, wherein the second conductive element comprises a plurality of sections telescopically connected along the first direction.
4. The monopole antenna as claimed in claim 2, wherein the second conductive element comprises two sections.
5. The monopole antenna as claimed in claim 1, wherein the second conductive element is spiral and projects from the edge of the substrate substantially in the first direction.
6. The monopole antenna as claimed in claim 1, wherein total length of the first and second conductive elements in the first direction is substantially 1/4 of the radio signal wavelength.
7. The monopole antenna as claimed in claim 1, wherein the length of the first conductive element in the first direction is substantially 1/4 of the radio signal wavelength.
8. The monopole antenna as claimed in claim 1, wherein the substrate comprises a slot with the second conductive element disposed therein, and the connection portion is located at the bottom of the slot and connected to the second conductive element.
9. The monopole antenna as claimed in claim 1, wherein the first conductive element comprises a longitudinal main body extending in the first direction and two angle portions connected to the main body, symmetrically disposed on opposite sides of the main body.
10. The monopole antenna as claimed in claim 9, wherein the angle portions are L-shaped.
11. The monopole antenna as claimed in claim 9, wherein the angle portions substantially extend along the first direction.
12. The monopole antenna as claimed in claim 9, wherein the angle portions substantially extend opposite to the first direction.
13. The monopole antenna as claimed in claim 9, wherein the angle portions connect the middle of the main body.
14. The monopole antenna as claimed in claim 9, wherein each of the angle portions comprises a zigzag structure symmetrically disposed with respect to the main body.
15. The monopole antenna as claimed in claim 9, wherein total length of the main body and each of the angle portions is substantially 1/4 of the radio signal wavelength.
16. The monopole antenna as claimed in claim 9, wherein the substrate comprises a slot with the second conductive element disposed therein.
17. The monopole antenna as claimed in claim 16, wherein the main body comprises a depression corresponding to the slot; and the connection portion is located at the bottom of the depression and connected to the second conductive element.
18. The monopole antenna as claimed in claim 1, wherein the cable comprises a signal wire connecting the feed end and a ground wire connecting the ground, and the signal wire is enclosed by the ground wire.

19. The monopole antenna as claimed in claim 18, wherein the ground wire connects the ground at a first point, the signal wire connects the ground at a second point, and the first and second points are situated on different planes.
20. The monopole antenna as claimed in claim 18, wherein the first and second sleeve portions are situated on different planes from the first conductive element.
21. A monopole antenna transmitting a radio signal, comprising:
- a substrate;
 - a ground, formed on the substrate;
 - a first conductive element, formed on the substrate, comprising a feed end and a connection portion adjacent to an edge of the substrate;
 - a second conductive element, connecting the connection portion and projecting from the edge of the substrate substantially in a first direction; and
 - a cable, connecting the ground and the feed end to transmit the radio signal.
22. The monopole antenna as claimed in claim 21, wherein the second conductive element is retractable.
23. The monopole antenna as claimed in claim 22, wherein the second conductive element comprises a plurality of sections telescopically connected along the first direction.
24. The monopole antenna as claimed in claim 21, wherein the second conductive element is spiral and projects from the edge of the substrate substantially in the first direction.
25. The monopole antenna as claimed in claim 21, wherein total length of the first and second conductive elements in the first direction is substantially 1/4 of the radio signal wavelength.
26. The monopole antenna as claimed in claim 25, wherein the radio signal is a VHF radio signal.
27. The monopole antenna as claimed in claim 21, wherein the length of the first conductive element in the first direction is substantially 1/4 of the radio signal wavelength.
28. The monopole antenna as claimed in claim 27, wherein the radio signal is a UHF radio signal.
29. The monopole antenna as claimed in claim 21, wherein the substrate comprises a slot with the second conductive element disposed therein, and the connection portion is located at the bottom of the slot and connected to the second conductive element.
30. The monopole antenna as claimed in claim 21, wherein the first conductive element comprises a longitudinal main body extending in the first direction and two angle portions connected to the main body, symmetrically disposed on opposite sides of the main body.
31. The monopole antenna as claimed in claim 30, wherein the angle portions are L-shaped.
32. The monopole antenna as claimed in claim 31, wherein each of the angle portions comprises a zig-zag structure symmetrically disposed with respect to the main body.
33. The monopole antenna as claimed in claim 30, wherein total length of the main body and each of the angle portions is substantially 1/4 of the radio signal wavelength.

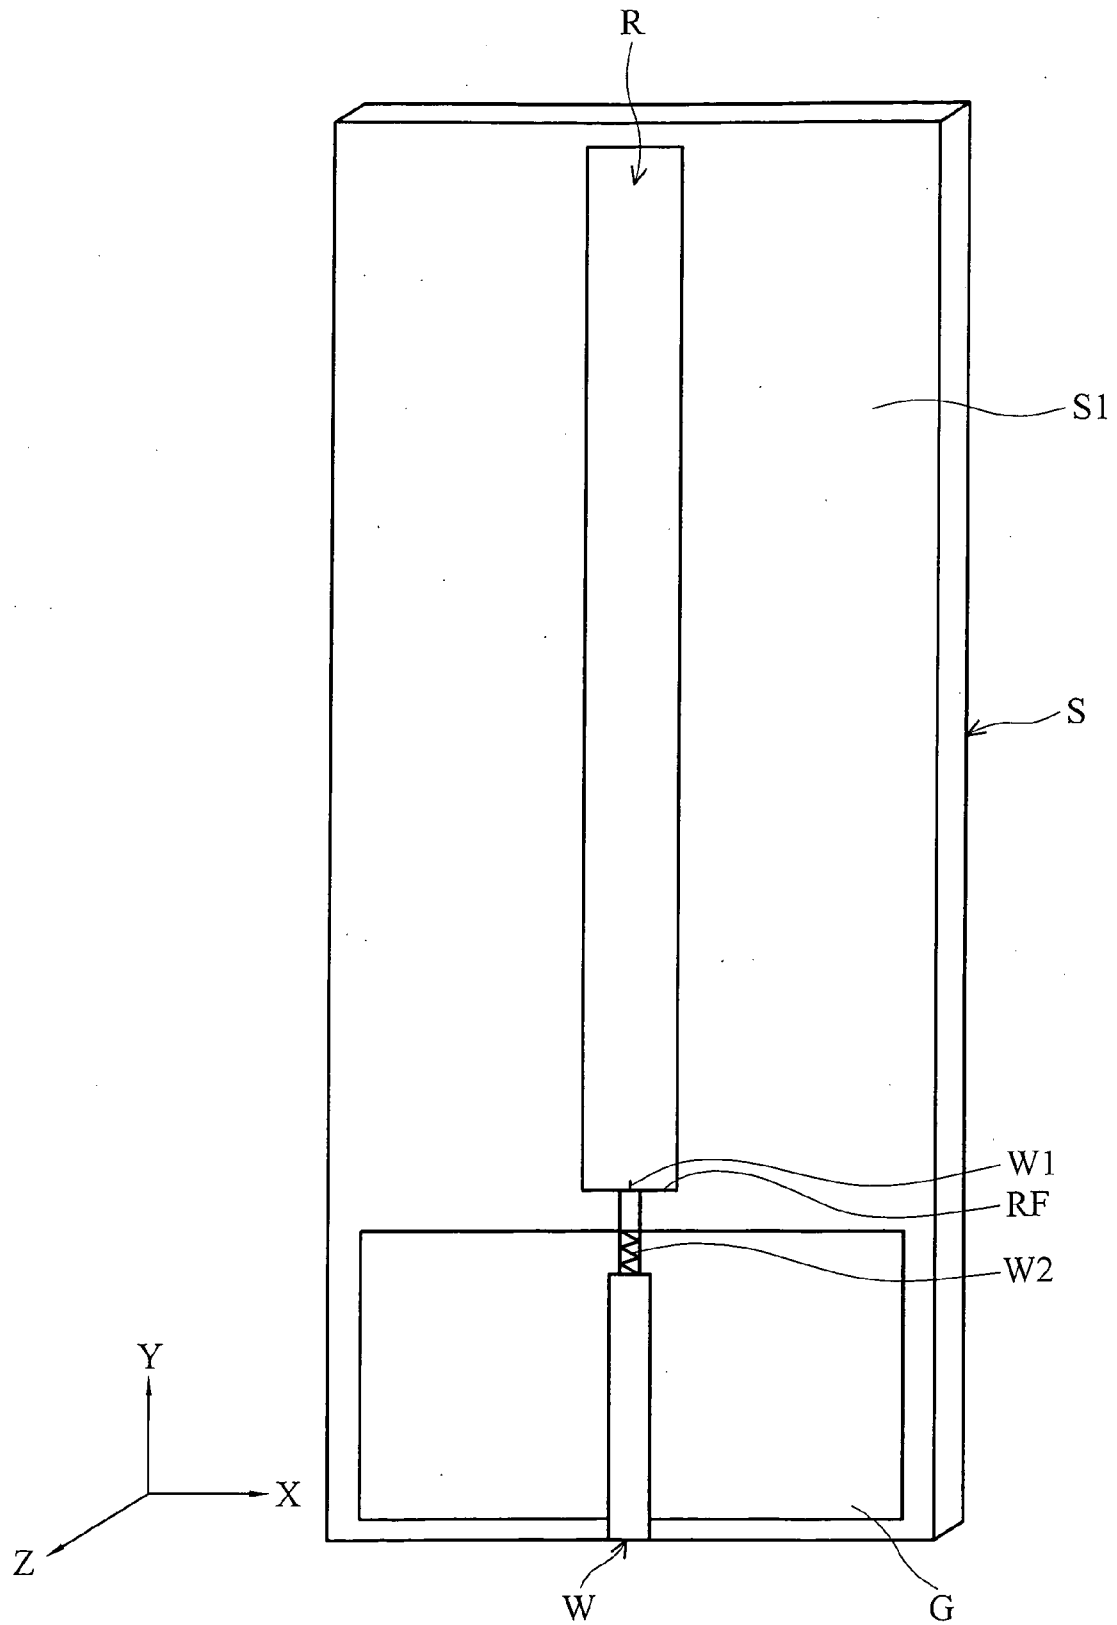


FIG. 1 (RELATED ART)

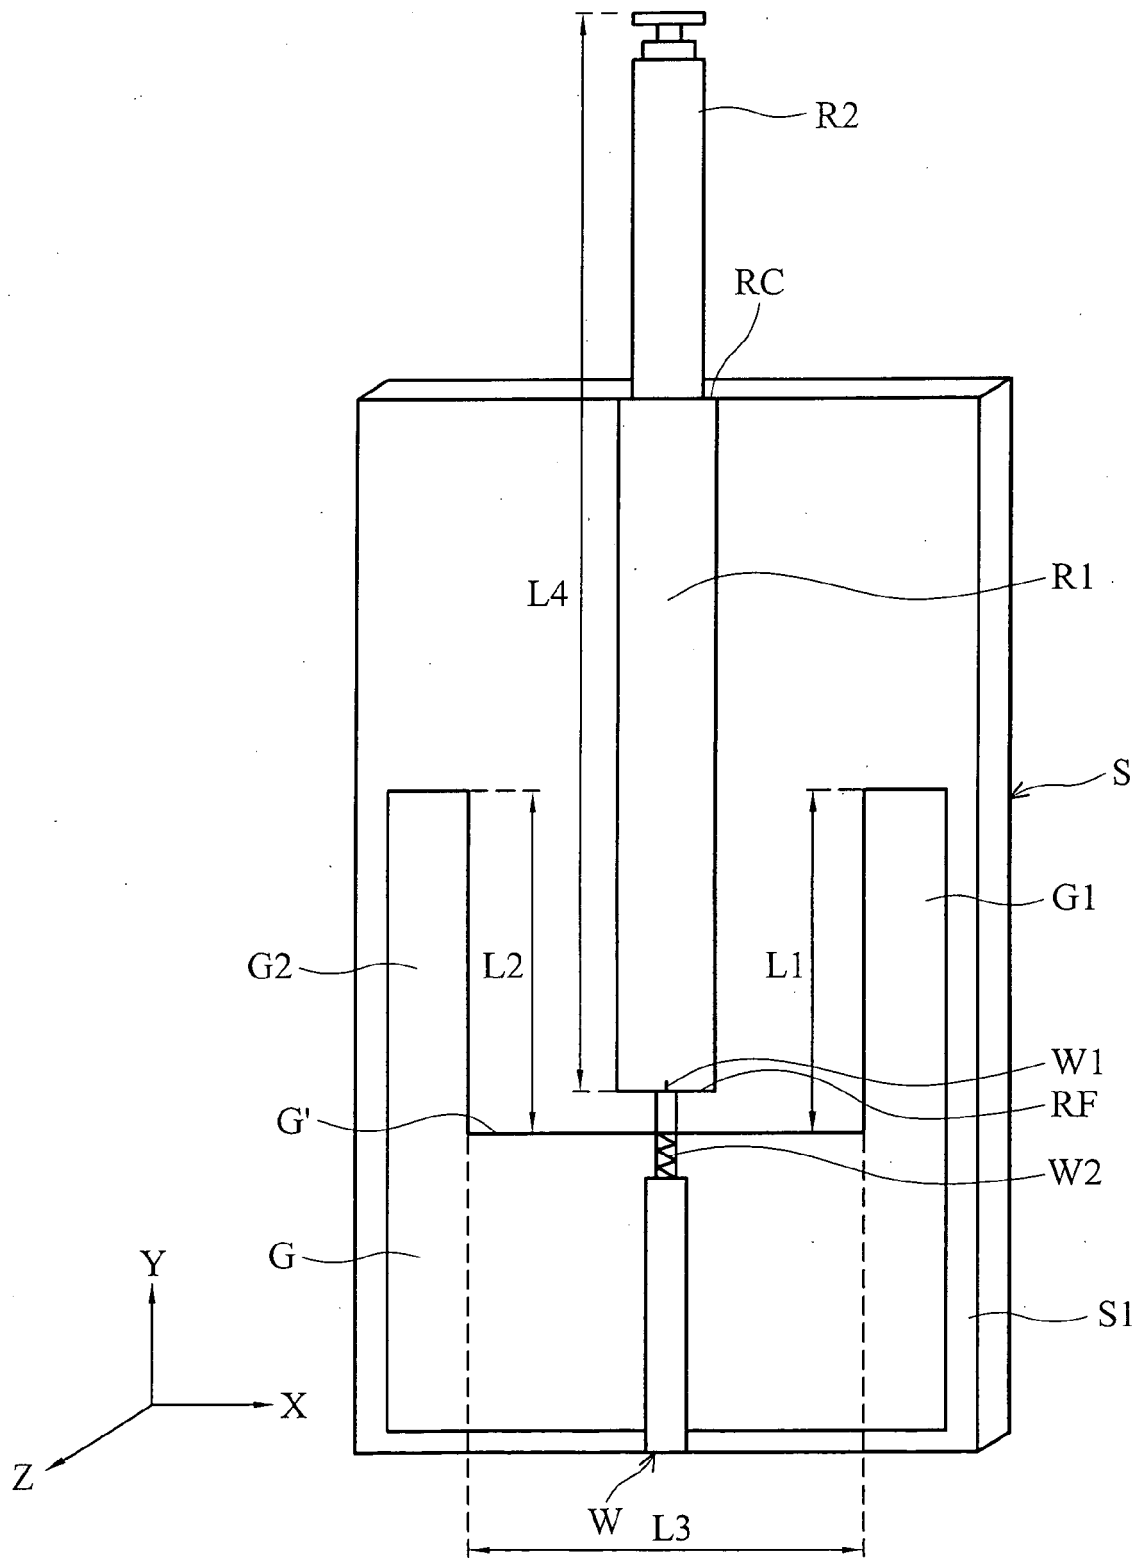


FIG. 2A

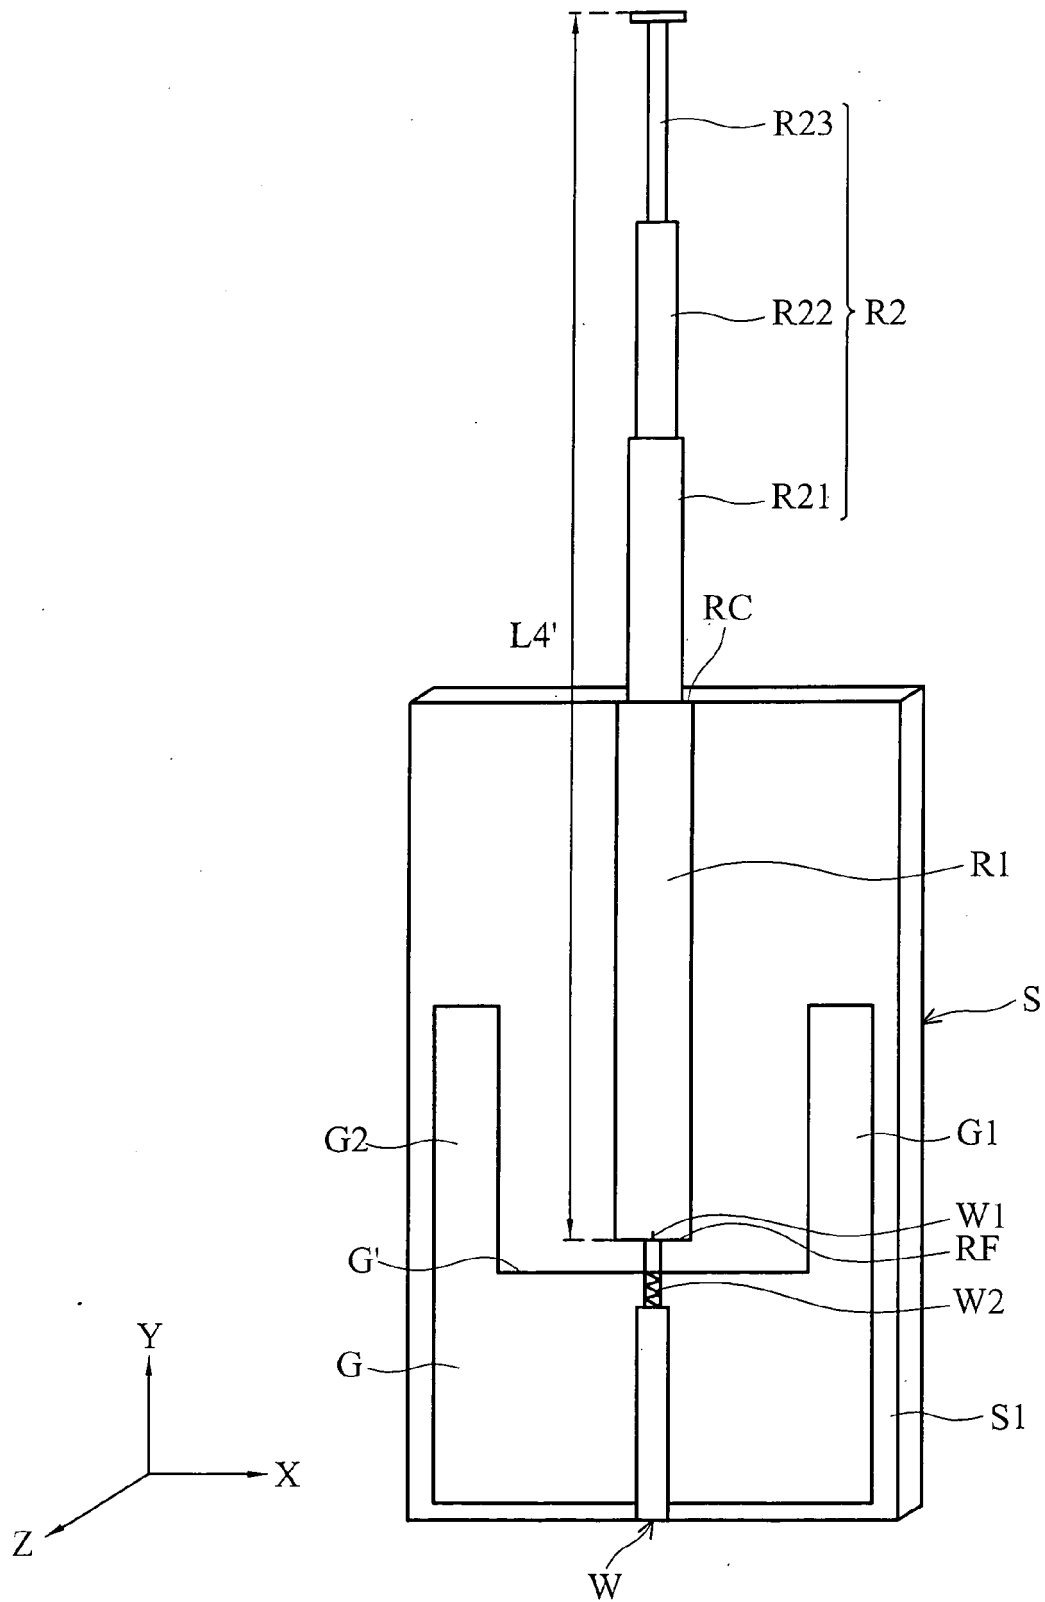


FIG. 2B

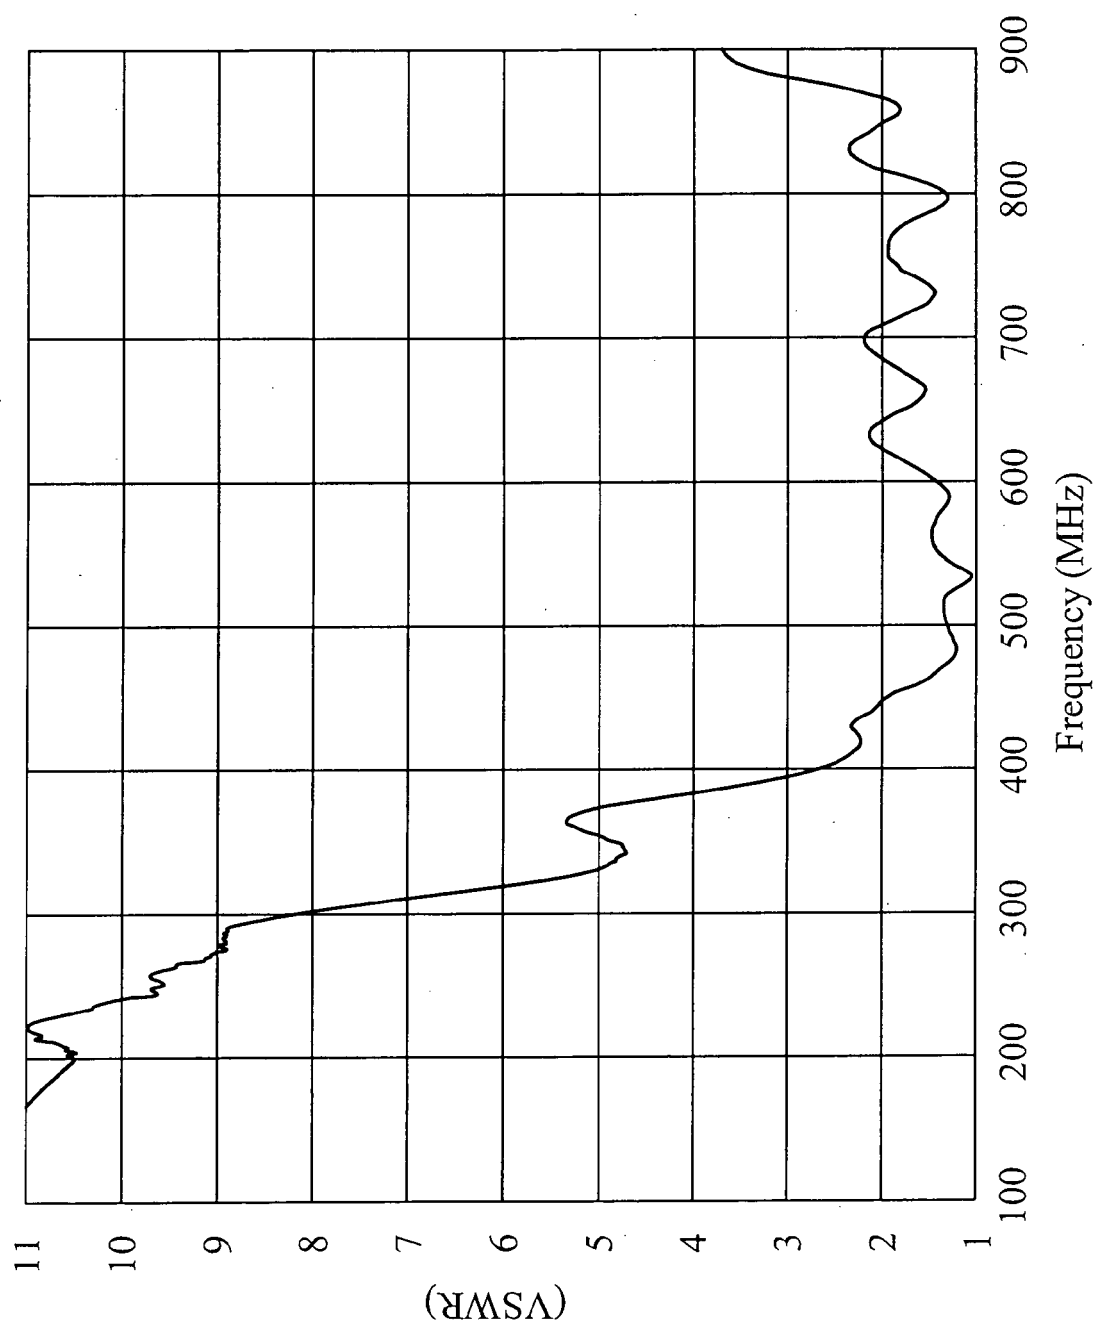


FIG. 3A

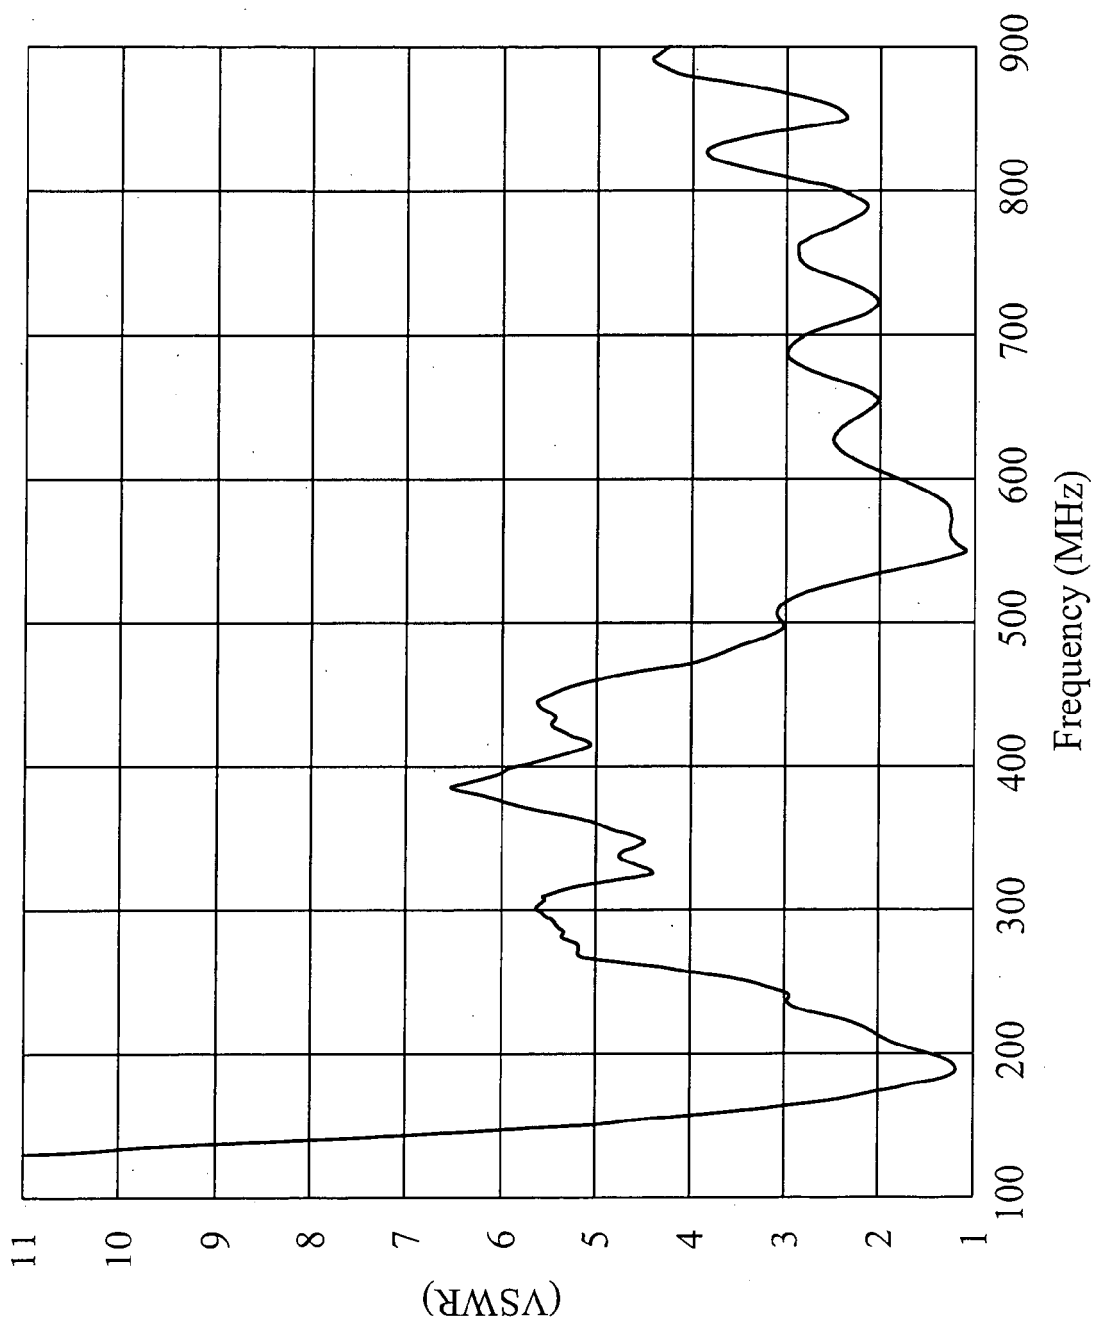


FIG. 3B

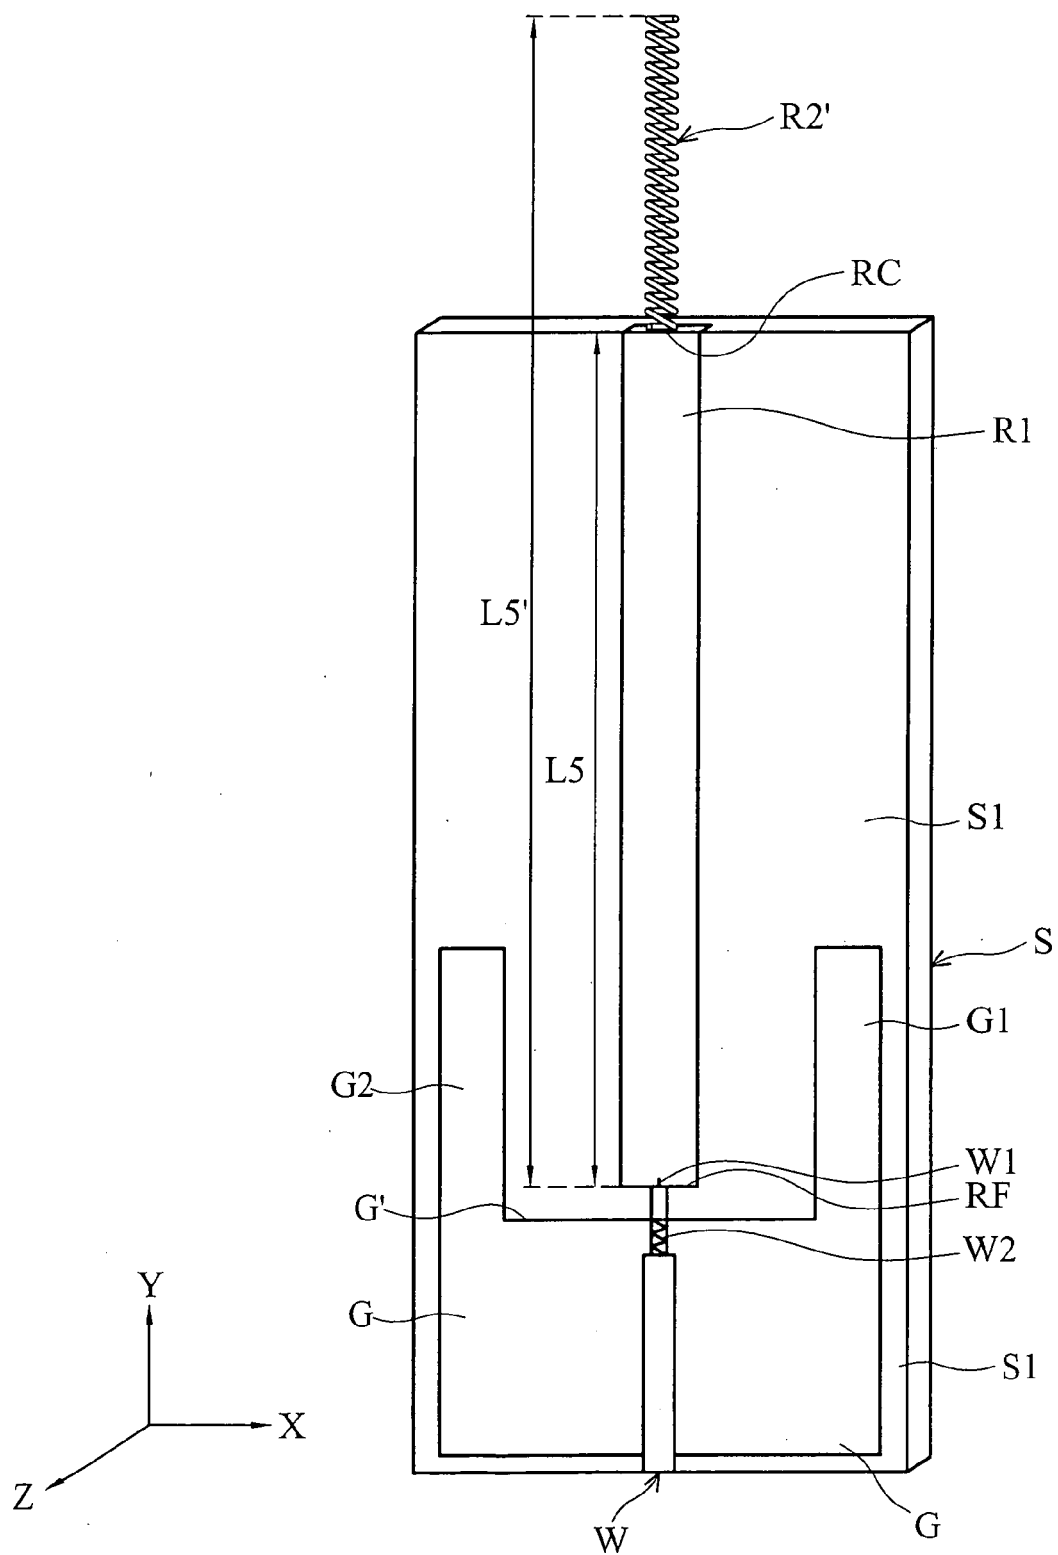


FIG. 4

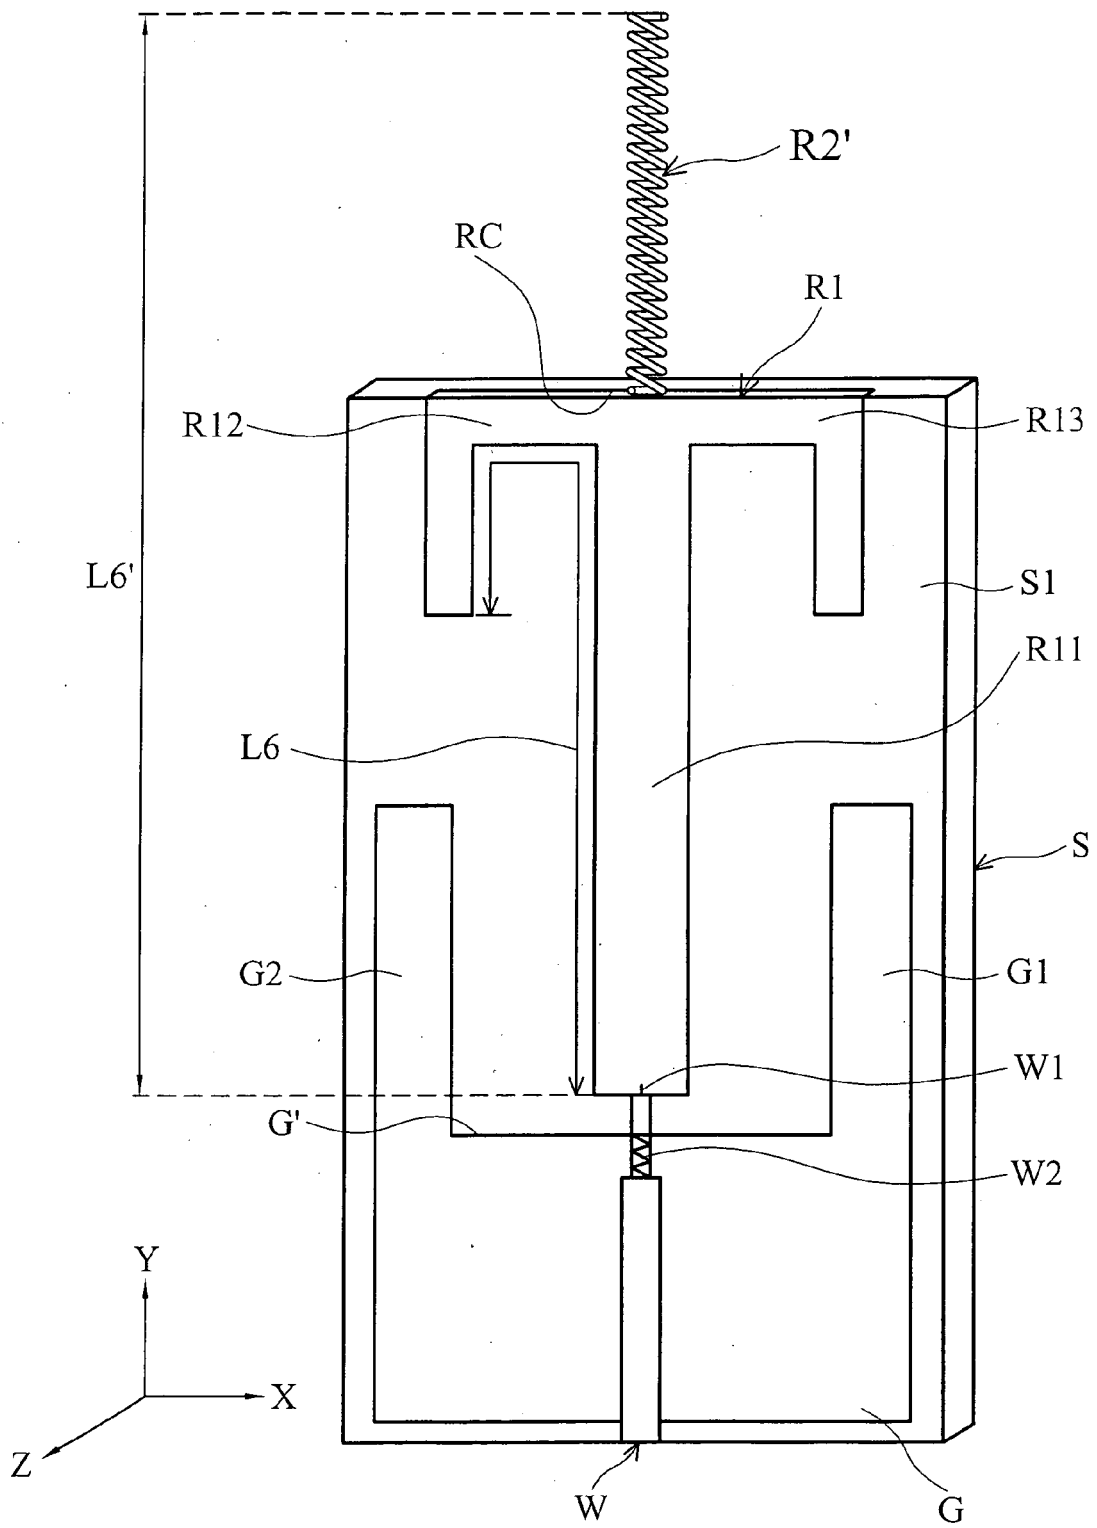


FIG. 5

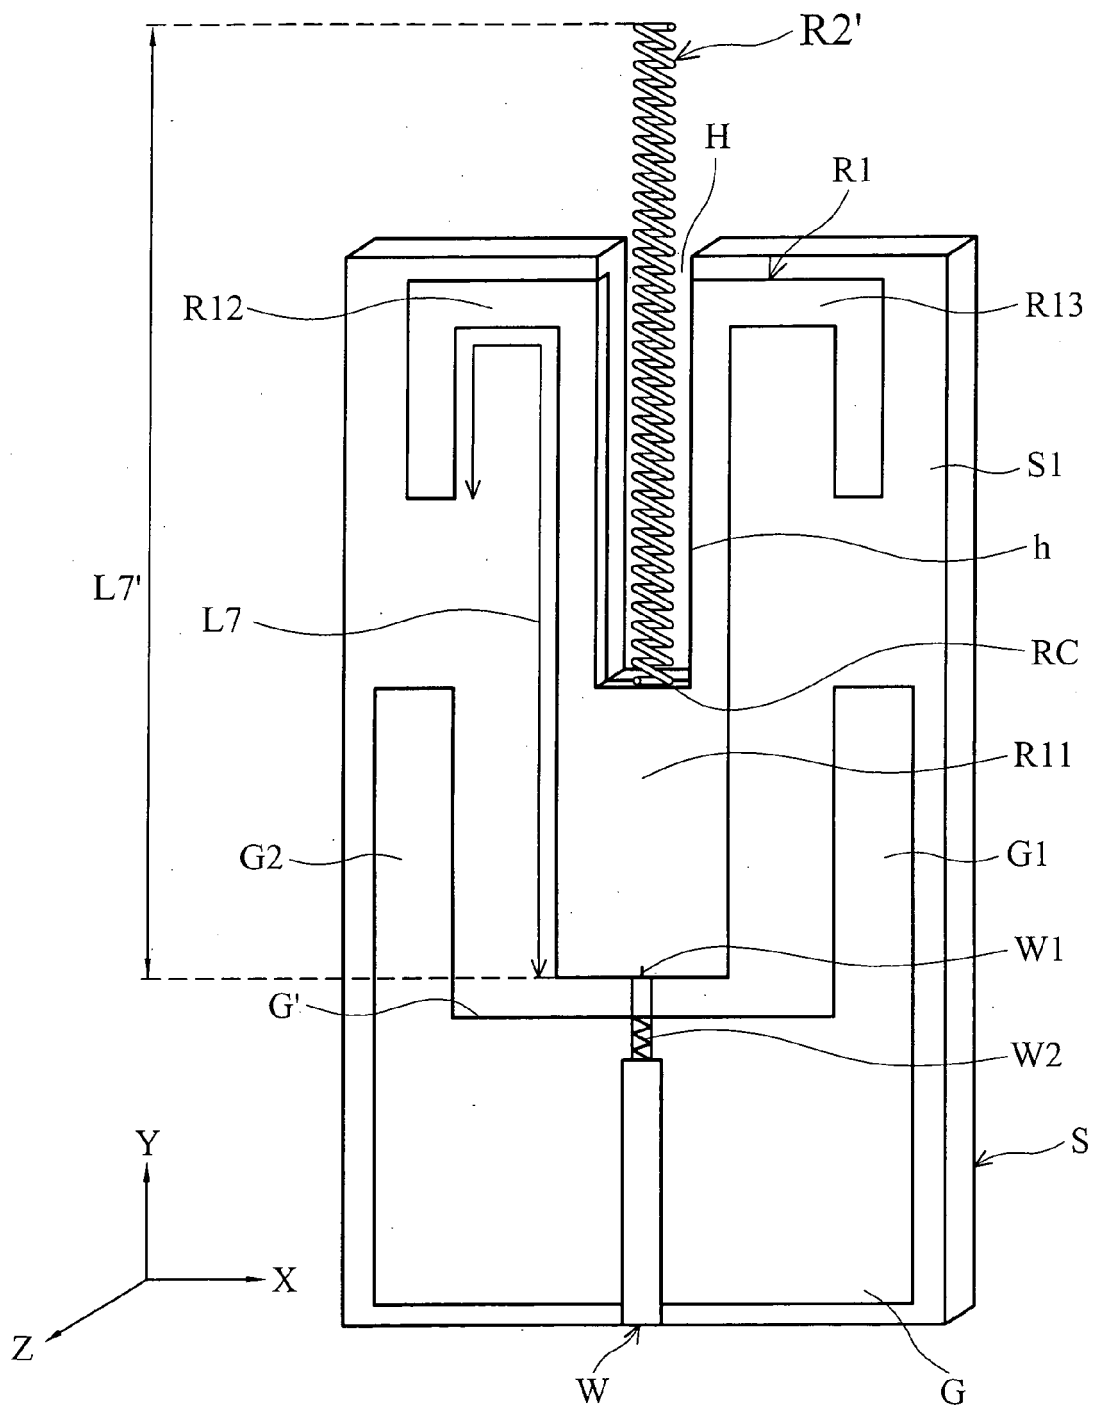


FIG. 6

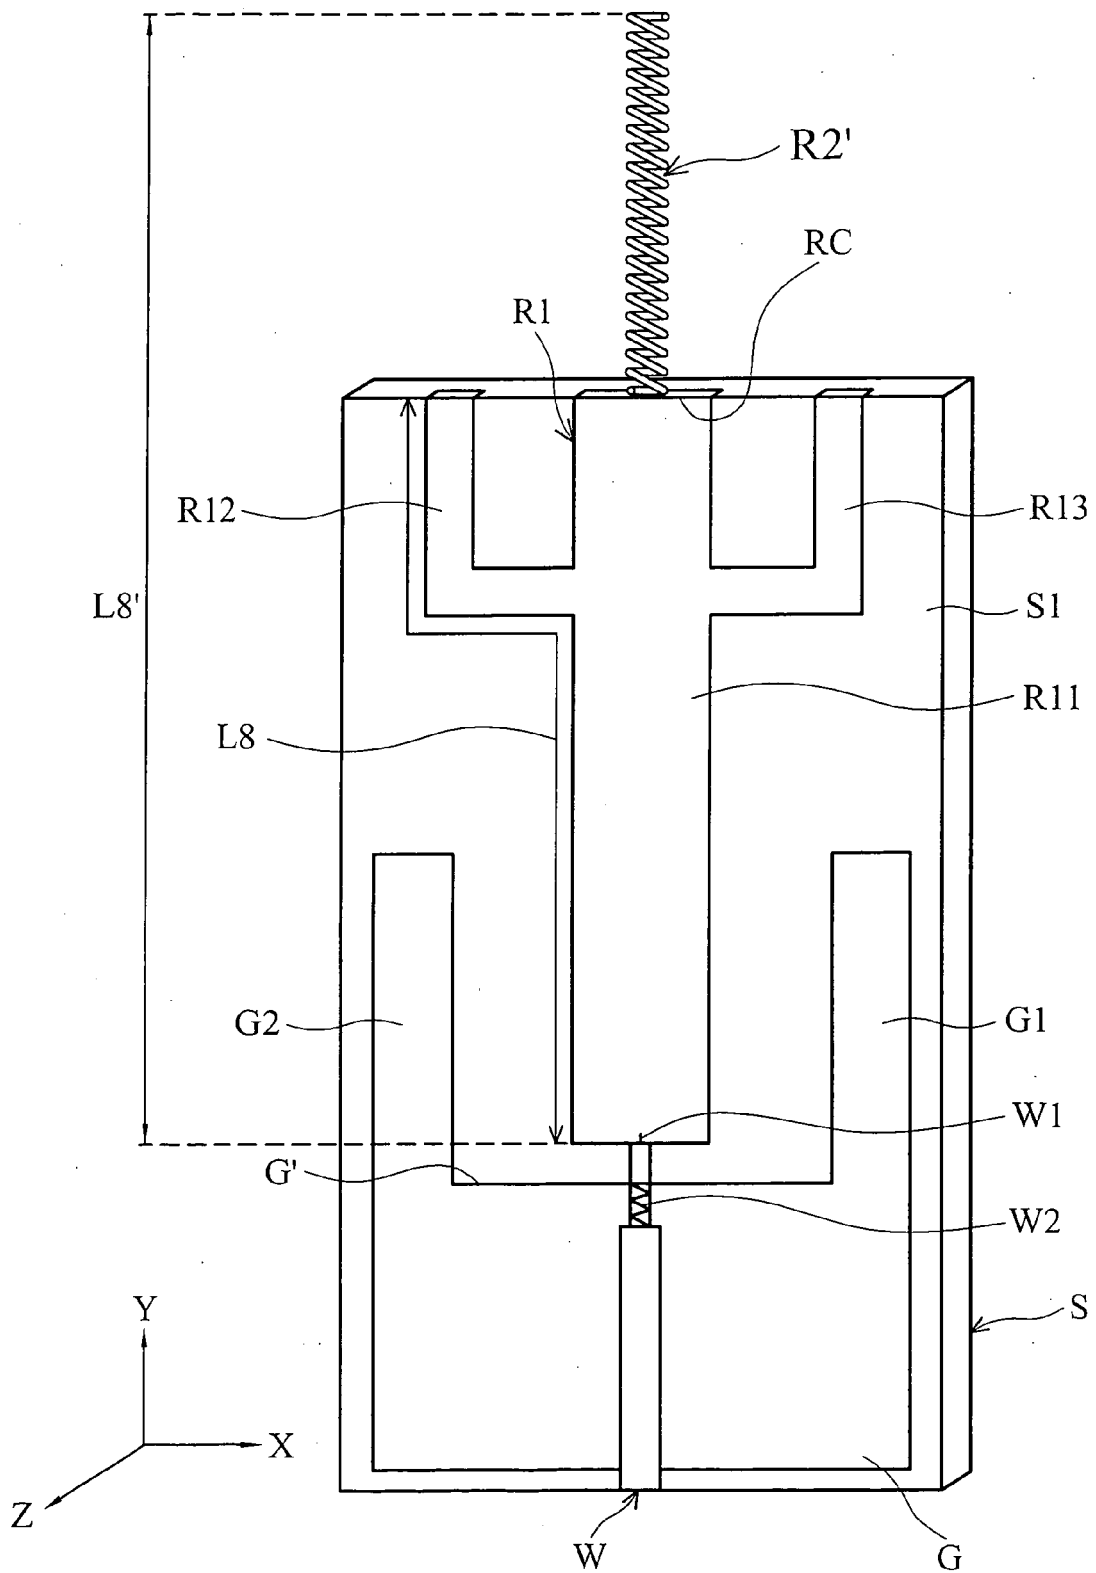


FIG. 7

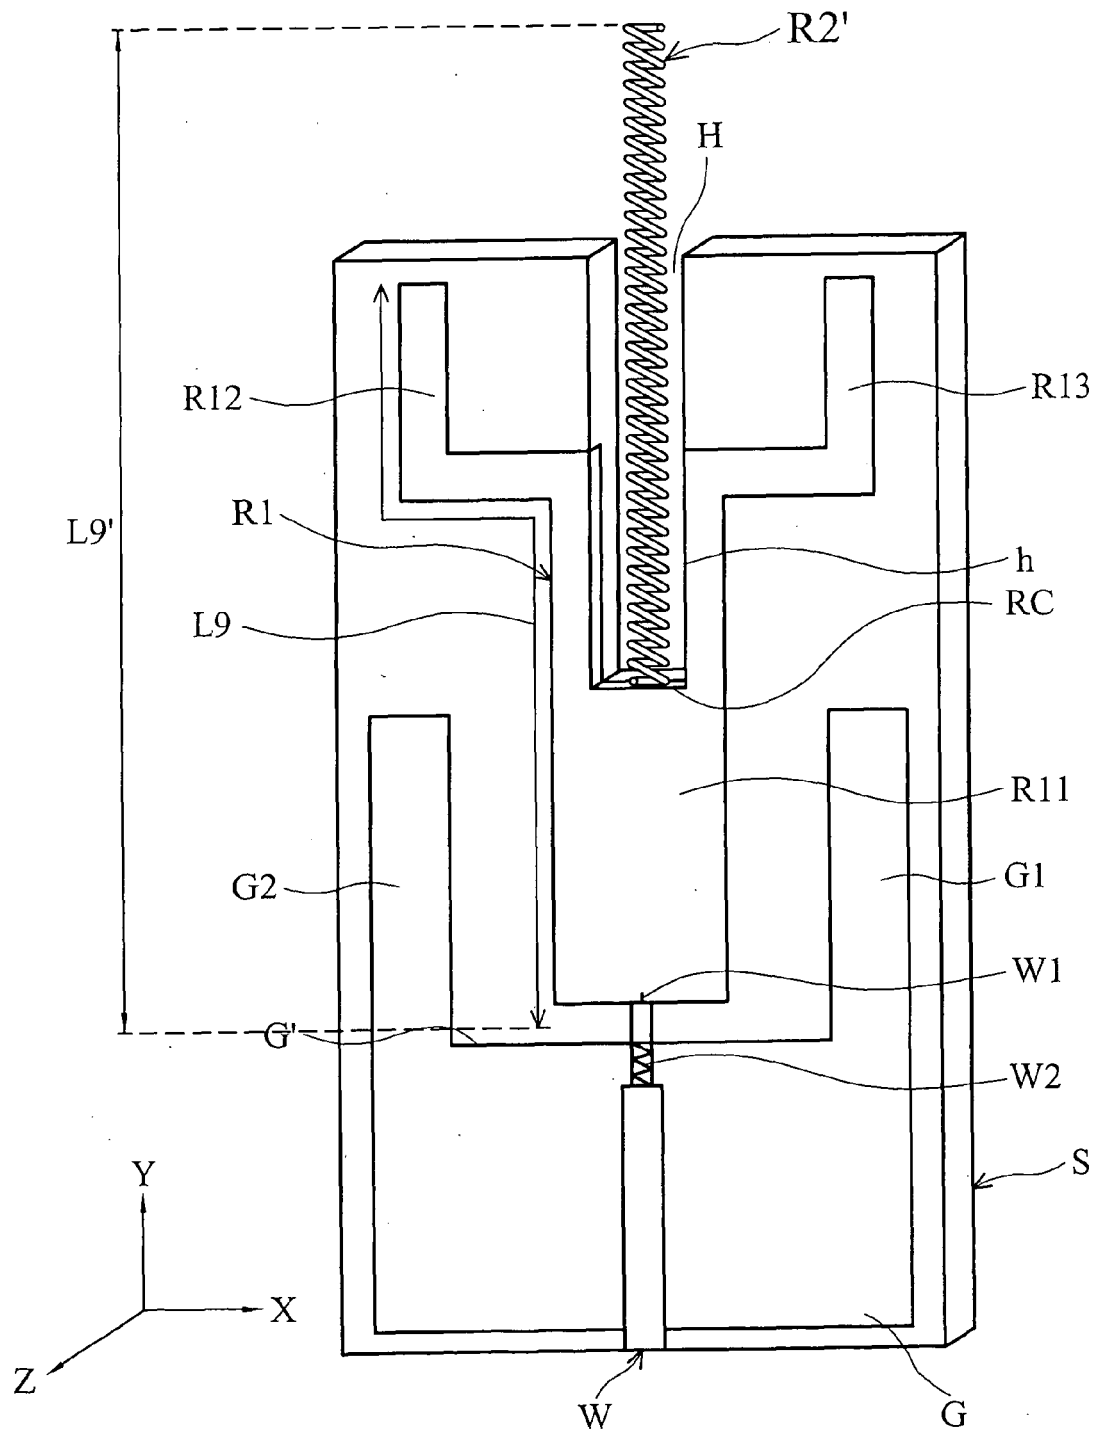


FIG. 8


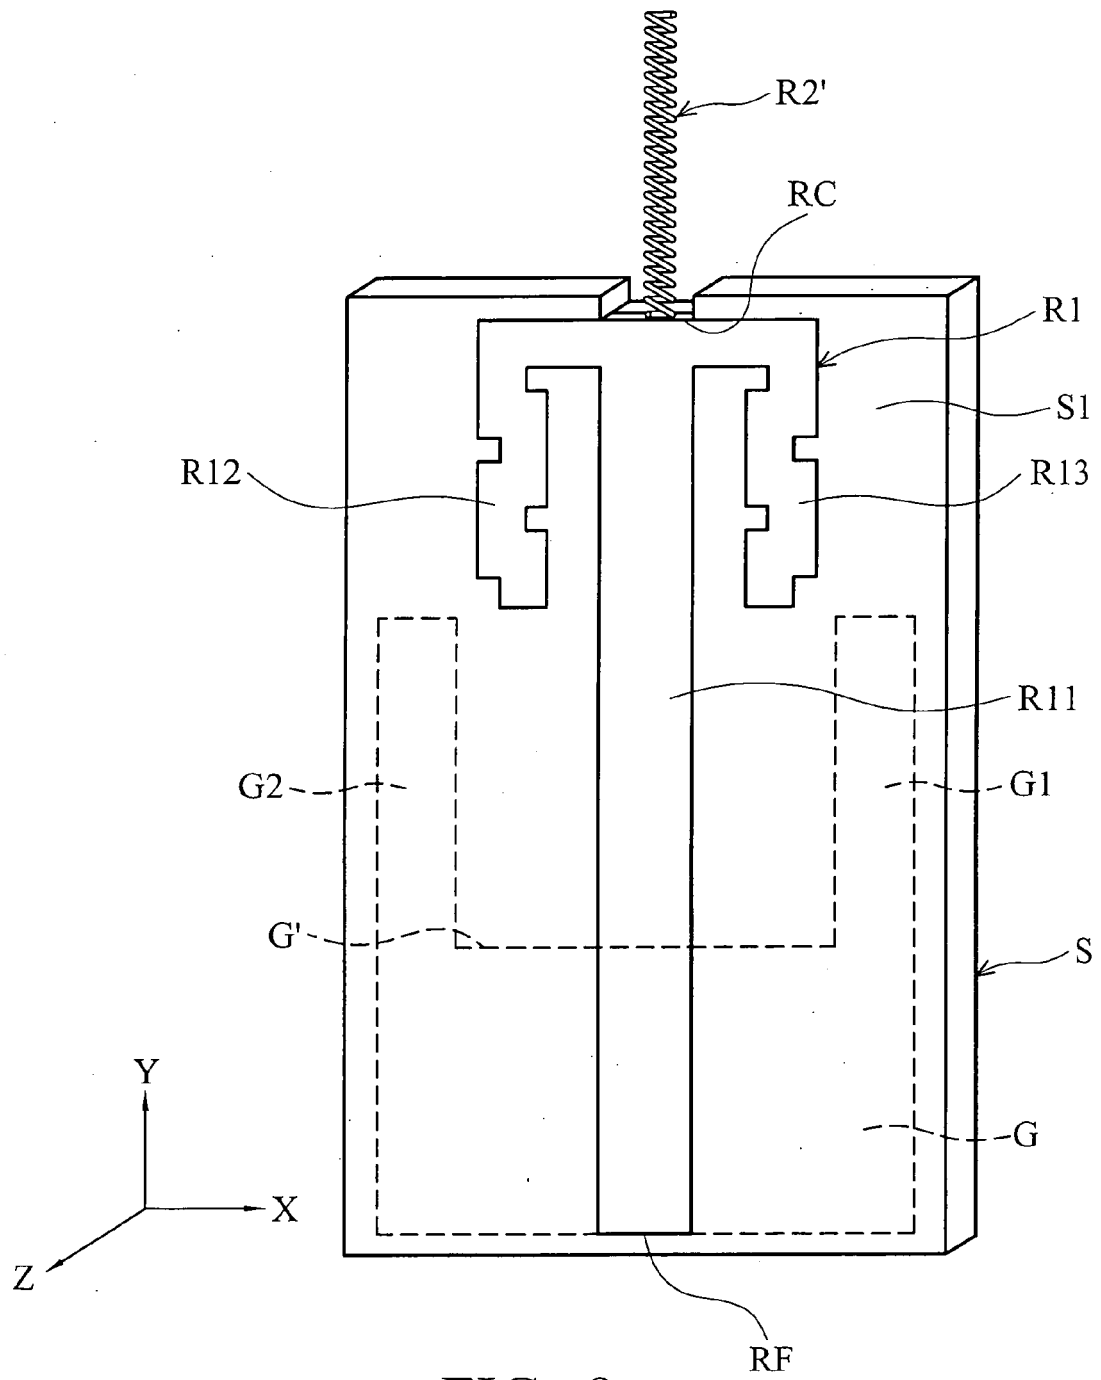


FIG. 9



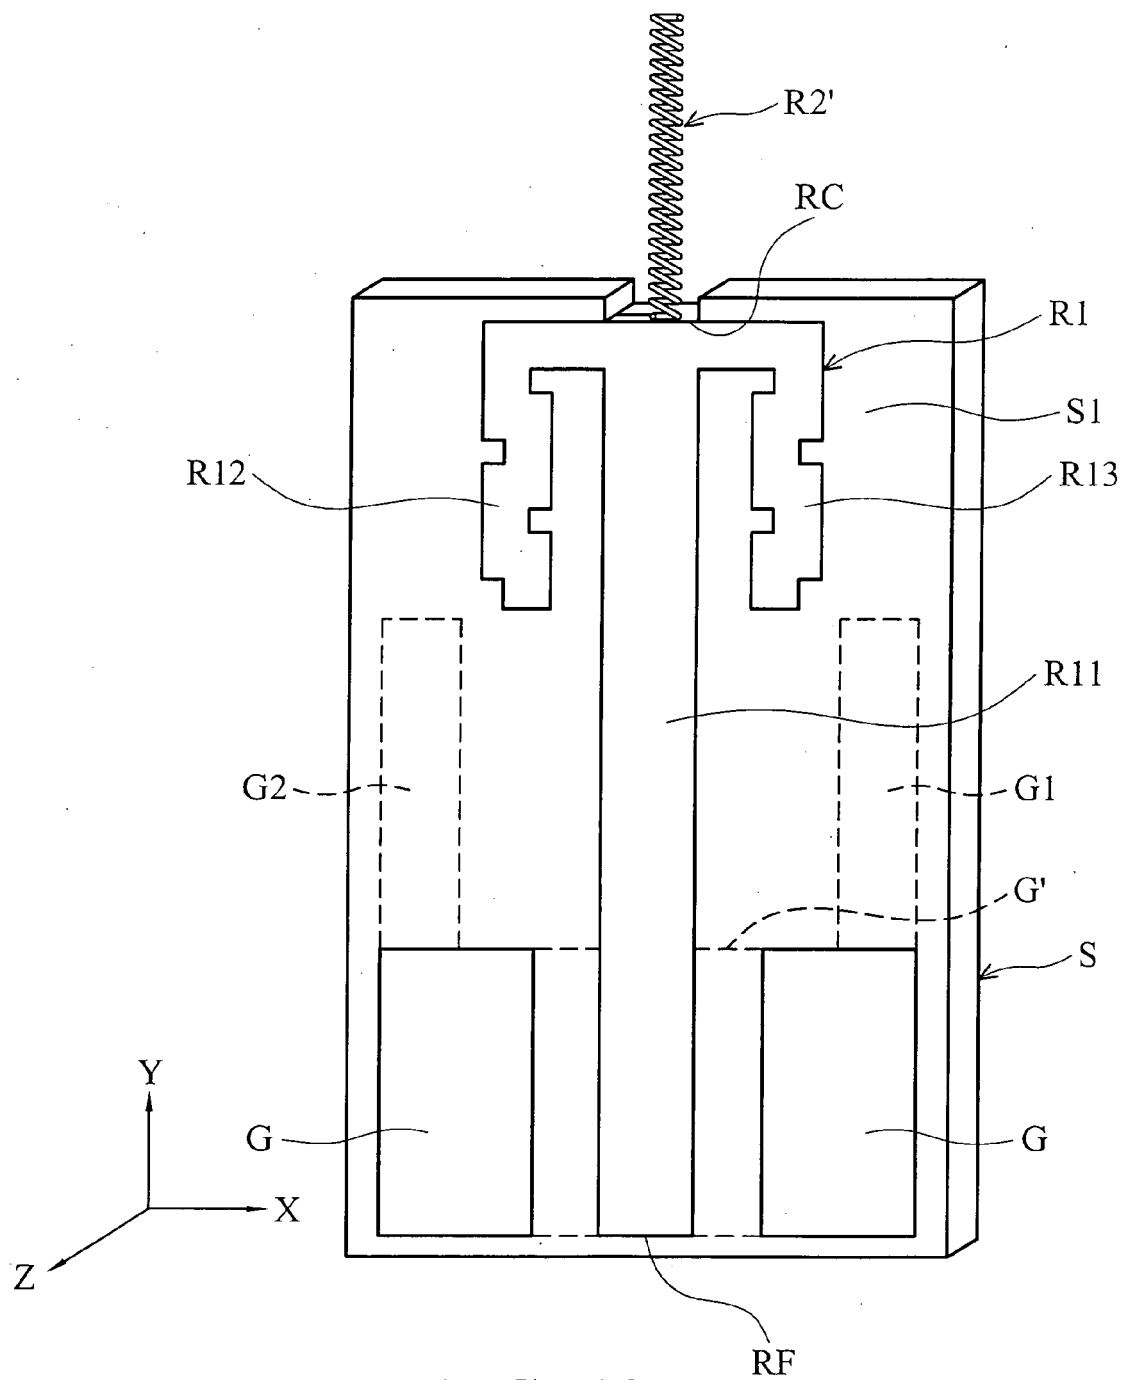

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 06 00 7138

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	PATENT ABSTRACTS OF JAPAN vol. 016, no. 379 (E-1247), 13 August 1992 (1992-08-13) -& JP 04 120902 A (MITSUBISHI ELECTRIC CORP; others: 01), 21 April 1992 (1992-04-21) * abstract *	1,5-7, 18-21, 24-28	INV. H01Q9/36 H01Q1/36 H01Q1/10 H01Q5/00
X	----- US 6 392 599 B1 (GANESHMORTHY DAVID ET AL) 21 May 2002 (2002-05-21) * the whole document *	1,21	
X	----- STUCHLY M A ET AL: "Modeling antenna close to the human body" 2000 IEEE AEROSPACE CONFERENCE PROCEEDINGS 18-25 MARCH 2000 BIG SKY, MT, USA, vol. 5, 2000, pages 83-89, XP002392287 2000 IEEE Aerospace Conference. Proceedings (Cat. No.00TH8484) IEEE Piscataway, NJ, USA * paragraph [0004]; figure 3a *	1	
X	----- EP 1 193 797 A (SAMSUNG ELECTRONICS CO., LTD) 3 April 2002 (2002-04-03) * figure 4A *	21	TECHNICAL FIELDS SEARCHED (IPC) H01Q
X	----- US 6 081 242 A (WINGO ET AL) 27 June 2000 (2000-06-27) * figures 1,2 *	21	
Y	----- EP 0 716 469 A (SONY CORPORATION) 12 June 1996 (1996-06-12) * figures 3,4 *	22,23	
X	----- EP 1 289 051 A (MITSUBISHI DENKI KABUSHIKI KAISHA) 5 March 2003 (2003-03-05) * abstract *	21,22	
Y	----- -/-	23	
X	----- -/-	21,24, 27,28	
----- -/-			
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 1 August 2006	Examiner Kaleve, Abraham
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

13

EPO FORM 1503 03.82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 06 00 7138

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 5 367 311 A (EGASHIRA ET AL) 22 November 1994 (1994-11-22)	21	
Y	* abstract *	22,23	
Y	----- US 6 097 341 A (SAITO ET AL) 1 August 2000 (2000-08-01) * column 4, line 19 - line 30; figures 7a,b *	22,23	
A	----- US 5 949 383 A (HAYES ET AL) 7 September 1999 (1999-09-07) * abstract *	1	
A	----- US 2 505 751 A (BOLLJAHN JOHN T) 2 May 1950 (1950-05-02) * the whole document *	1	
<p>The present search report has been drawn up for all claims</p>			<p>TECHNICAL FIELDS SEARCHED (IPC)</p>
Place of search		Date of completion of the search	Examiner
Munich		1 August 2006	Kaleve, Abraham
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>			

13

EPO FORM 1503 03.82 (P04C01)

**CLAIMS INCURRING FEES**

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☐ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☒ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:

1-7, 18-28



The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. claims: 1-7,18-28

Monopole antenna comprising a substrate, a ground formed on the substrate, a first and second sleeve portion formed on the substrate and projecting from the side of the ground in a first direction, a first conductive element formed between said first and second sleeve portion, and a second conductive element connected to the first conductive element and projecting from the edge of the substrate away from the substrate, wherein the second conductive element is retractable.

2. claims: 8,29

Monopole antenna comprising a substrate, a ground formed on the substrate, a first and second sleeve portion formed on the substrate and projecting from the side of the ground in a first direction, a first conductive element formed between said first and second sleeve portion, and a second conductive element connected to the first conductive element and projecting from the edge of the substrate away from the substrate, wherein the substrate comprises a slot with the second conductive element disposed therein.

3. claims: 9-17,30-33

Monopole antenna comprising a substrate, a ground formed on the substrate, a first and second sleeve portion formed on the substrate and projecting from the side of the ground in a first direction, a first conductive element formed between said first and second sleeve portion, and a second conductive element connected to the first conductive element and projecting from the edge of the substrate away from the substrate, wherein the first conductive element comprises a longitudinal main body extending in the first direction and two angle portions connected to the main body, symmetrically disposed on opposite sides of the main body.

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 06 00 7138

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

01-08-2006

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 04120902	A	21-04-1992	JP 2581834 B2	12-02-1997
US 6392599	B1	21-05-2002	CN 1124662 C	15-10-2003
			EP 1010213 A1	21-06-2000
			GB 2323476 A	23-09-1998
			WO 9843313 A1	01-10-1998
			JP 2001518264 T	09-10-2001
EP 1193797	A	03-04-2002	BR 0104160 A	04-06-2002
			CN 1345106 A	17-04-2002
			JP 3606827 B2	05-01-2005
			JP 2002158530 A	31-05-2002
			KR 2002022484 A	27-03-2002
			US 2002033774 A1	21-03-2002
US 6081242	A	27-06-2000	NONE	
EP 0716469	A	12-06-1996	AT 225084 T	15-10-2002
			CN 1129997 A	28-08-1996
			DE 69528340 D1	31-10-2002
			DE 69528340 T2	31-07-2003
			FI 960905 A	27-02-1996
			WO 9600990 A1	11-01-1996
			JP 3341897 B2	05-11-2002
			US 5861859 A	19-01-1999
EP 1289051	A	05-03-2003	CN 1367943 A	04-09-2002
			WO 0193368 A1	06-12-2001
			US 6768464 B1	27-07-2004
US 5367311	A	22-11-1994	JP 2502426 B2	29-05-1996
			JP 5129815 A	25-05-1993
US 6097341	A	01-08-2000	AU 740076 B2	25-10-2001
			AU 6479398 A	12-11-1998
			GB 2326531 A	23-12-1998
			JP 3328159 B2	24-09-2002
			JP 10308616 A	17-11-1998
US 5949383	A	07-09-1999	AU 1073699 A	10-05-1999
			CN 1276923 A	13-12-2000
			DE 69811928 D1	10-04-2003
			EP 1025614 A1	09-08-2000
			JP 2001521311 T	06-11-2001
			TW 428344 B	01-04-2001
			WO 9921245 A1	29-04-1999

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2505751	A	02-05-1950	NONE

EPO FORM P0459

24