



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
21.03.2007 Bulletin 2007/12

(51) Int Cl.:
H01Q 1/24 (2006.01) H01Q 9/04 (2006.01)
H01Q 21/30 (2006.01)

(21) Application number: **06076899.1**

(22) Date of filing: **06.05.2004**

(84) Designated Contracting States:
DE FR GB

(72) Inventor: **Erkocevic, Nedim**
Delfgauw (NL)

(30) Priority: **07.05.2003 US 468460 P**
30.10.2003 US 696852

(74) Representative: **Williams, David John et al**
Page White & Farrer
Bedford House
John Street
London, WC1N 2BF (GB)

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
04252632.7 / 1 475 859

(71) Applicant: **Agere Systems, Inc.**
Allentown, PA 18109 (US)

Remarks:


This application was filed on 19 - 10 - 2006 as a
divisional application to the application mentioned
under INID code 62.

(54) **Dual-band antenna for a wireless local area network device**

(57) A dual-band antenna (100), a method of manu-
facturing the same and a wireless networking card incor-
porating the antenna. In one embodiment, the antenna
includes:
a substrate (110), an inverted F antenna printed circuit

(130) supported by the substrate and tuned to resonate
in a first frequency band and a monopole antenna printed
circuit (170) supported by the substrate, connected to
the inverted F antenna printed circuit and tuned to reso-
nate in a second frequency band.

FIG. 1

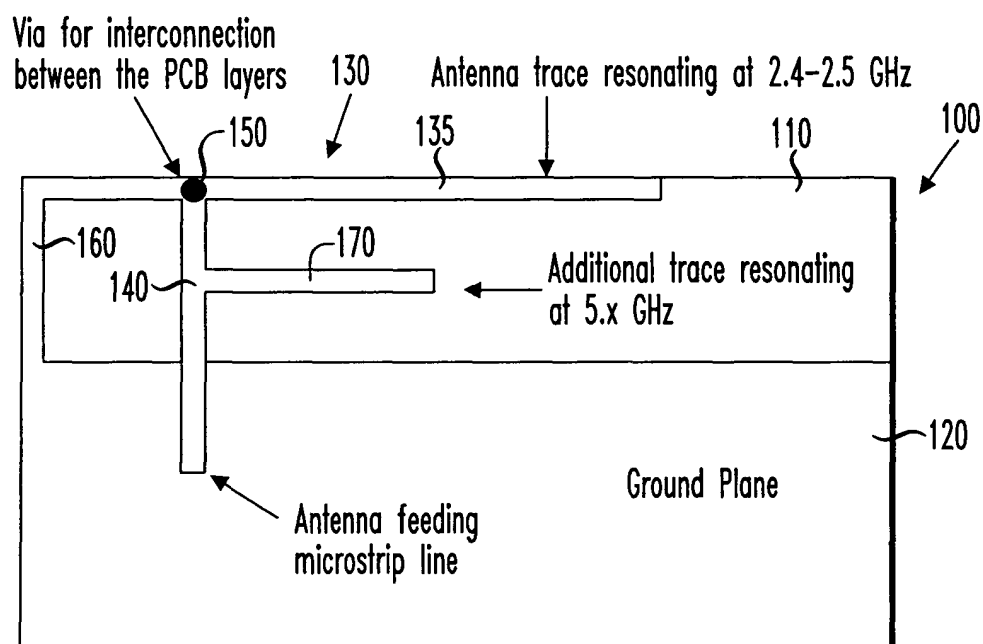

Description

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application is based on and claims priority of U.S. Provisional Patent Application Serial No. 60/468,460, filed on May 7, 2003, by Erkocevic, entitled "Dual Band Printed Circuit Antenna for Wireless LANs," commonly assigned with the present application and incorporated herein by reference. The present application is also related to U.S. Patent Application Serial No. 10/126,600, filed on April 19, 2002, by Wielsma, entitled "Low-Loss Printed Circuit Board Antenna Structure and Method of Manufacture Thereof," commonly assigned with the present invention and incorporated herein by reference.

TECHNICAL FIELD OF THE INVENTION

[0002] The present invention is directed, in general, to multi-band antennas and, more specifically, to a dual-band antenna for a wireless local area network (WLAN) device.

BACKGROUND OF THE INVENTION

[0003] One of the fastest growing technologies over the last few years has been WLAN devices based on the Institute of Electrical and Electronic Engineers (IEEE) 802.11b standard, commonly known as "Wi-Fi." The 802.11b standard uses frequencies between 2.4 GHz and 2.5 GHz of the electromagnetic spectrum (the "2 GHz band") and allows users to transfer data at speeds up to 11 Mbit/sec.

[0004] However, a complementary WLAN standard is now coming into vogue. The IEEE 802.11a standard extends the 802.11b standard to frequencies between 5.2 GHz and 5.8 GHz (the "5 GHz band") and allows data to be exchanged at even faster rates (up to 54 Mbit/sec), but at a shorter operating range than does 802.11b.

[0005] IEEE 802.11g, which is on the horizon, is an extension to 802.11b. 802.11g still uses the 2 GHz band, but broadens 802.11b's data rates to 54 Mbps by using OFDM (orthogonal frequency division multiplexing) technology.

[0006] Given that the two popular WLAN standards involve two separate frequency bands, the 2 GHz band and the 5 GHz band, it stands to reason that WLAN devices capable of operating in both frequency bands should have more commercial appeal. In fact, it is a general proposition that WLAN devices should be as flexible as possible regarding the communications standards and frequency bands in which they can operate.

[0007] Dual-band transceivers and antennas lend WLAN devices the desired frequency band agility. Much attention has been paid to dual-band transceivers; however, dual-band transceivers are not the topic of the present discussion. Developing a suitable dual-band an-

tenna has often attracted less attention. A dual-band antenna suitable for WLAN devices should surmount four significant design challenges.

[0008] First, dual-band antennas should be compact. While WLANs are appropriate for many applications, portable stations, such as laptop and notebook computers, personal digital assistants (PDAs) and WLAN-enabled cellphones, can best take advantage of the flexibility of wireless communication. Such stations are, however, size and weight sensitive. Second, dual-band antennas should be capable of bearing the bandwidth that its corresponding 802.11 standard requires. Third, dual-band antennas should attain its desired range as efficiently as possible. As previously described, WLAN devices are most often portable, meaning that they are often battery powered. Conserving battery power is a pervasive goal of portable devices. Finally, dual-band antennas should attain the first three design challenges as inexpensively as possible.

[0009] Accordingly, what is needed in the art is a dual-mode antenna that meets the challenges set forth above. More specifically, what is needed in the art is a dual-mode antenna suitable for IEEE 802.11a and 802.11b WLAN devices.

SUMMARY OF THE INVENTION

[0010] To address the above-discussed deficiencies of the prior art, the present invention provides a dual-band antenna, a method of manufacturing the same and a wireless networking card incorporating the antenna. In one embodiment, the antenna includes: (1) a substrate, (2) an inverted F antenna printed circuit supported by the substrate and tuned to resonate in a first frequency band and (3) a monopole antenna printed circuit supported by the substrate, connected to the inverted F antenna printed circuit and tuned to resonate in a second frequency band.

[0011] Another aspect of the present invention provides a wireless networking card, including: (1) wireless networking circuitry, (2) a dual-band transceiver coupled to the wireless networking circuitry and (3) a dual-band antenna coupled to the dual-band transceiver and including: (3a) a substrate, (3b) an inverted F antenna printed circuit supported by the substrate and tuned to resonate in a first frequency band and (3c) a monopole antenna printed circuit supported by the substrate, connected to the inverted F antenna printed circuit and tuned to resonate in a second frequency band.

[0012] Yet another aspect of the present invention provides a method of manufacturing a dual-band antenna, including: (1) forming an inverted F antenna printed circuit on a substrate, the inverted F antenna printed circuit tuned to resonate in a first frequency band and (2) forming a monopole antenna printed circuit on the substrate, the monopole antenna connected to the inverted F antenna printed circuit and tuned to resonate in a second frequency band.

[0013] The foregoing has outlined preferred and alternative features of the present invention so that those skilled in the art may better understand the detailed description of the invention that follows. Additional features of the invention will be described hereinafter that form the subject of the claims of the invention. Those skilled in the art should appreciate that they can readily use the disclosed conception and specific embodiment as a basis for designing or modifying other structures for carrying out the same purposes of the present invention. Those skilled in the art should also realize that such equivalent constructions do not depart from the spirit and scope of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] For a more complete understanding of the present invention, reference is now made to the following descriptions taken in conjunction with the accompanying drawings, in which:

FIGURE 1 illustrates a plan view of a first embodiment of a dual-band antenna constructed according to the principles of the present invention;
 FIGURE 2 illustrates a plan view of a second embodiment of a dual-band antenna constructed according to the principles of the present invention;
 FIGURE 3 illustrates a plan view of a third embodiment of a dual-band antenna constructed according to the principles of the present invention;
 FIGURE 4 illustrates a block diagram of one embodiment of a wireless networking card constructed according to the principles of the present invention;
 FIGURE 5 illustrates a plan view of one embodiment of a circuit board for a wireless networking card that includes multiple dual-band antennas constructed according to the principles of the present invention; and
 FIGURE 6 illustrates a flow diagram of one embodiment of a method of manufacturing a dual-band antenna carried out according to the principles of the present invention.

DETAILED DESCRIPTION

[0015] Referring initially to FIGURE 1, illustrated is a plan view of a first embodiment of a dual-band antenna constructed according to the principles of the present invention.

[0016] The dual-band antenna, generally designated 100, is supported by a substrate 110. The substrate 110 can be any suitable material. If cost is less of an object, the substrate 110 can be composed of a low-loss material (i.e., a material that does not significantly attenuate proximate electromagnetic fields, including those produced by the dual-band antenna 100). If cost is more of an object, the substrate 110 can be formed from a more conventional higher loss, or "lossy," material such as FR-4

PCB, which is composed of fiberglass and epoxy. However, as Wielsma, supra, describes, such "lossy" materials can compromise antenna range by absorbing energy that would otherwise contribute to the electromagnetic field produced by the dual-band antenna 100. Wielsma teaches that antenna range can be substantially preserved even with such "lossy" materials by providing lower-loss regions in the "lossy" substrate. These lower-loss regions may simply be holes in the substrate or may be composed of ceramic or polytetrafluoroethylene (PTFE), commonly known as Teflon®. The present invention encompasses the use of either low-loss or "lossy" materials either with or without such lower-loss regions.

[0017] The embodiment of the dual-band antenna 100 illustrated in FIGURE 1 spans both upper and lower (i.e., "opposing") surfaces (different planes) of the substrate 110. It is often the case that the lower surface of a substrate employed as a wireless networking card is largely occupied with a ground plane 120. The upper surface of the substrate 110 (and interior layers, also different planes, if such are used) are occupied with various printed circuit traces (not shown) that route power and signals among the various components that constitute wireless networking circuitry (also not shown). Because the dual-band antenna 100 of the present invention is a printed circuit antenna, the traces further define the printed circuits that constitute the dual-band antenna 100.

[0018] The dual-band antenna 100 includes an inverted F antenna printed circuit 130. Inverted F antennas in general have three parts: a radiator, a feed line and a ground line or ground plane. The ground plane 120 serves as the ground plane for the inverted F antenna printed circuit 130.

[0019] The inverted F antenna printed circuit 130 is illustrated as including a radiator 135 located on the lower surface of the substrate 110 apart from the ground plane 120. The radiator 135 is tuned to resonate in a first frequency band. In an alternative (and more power-efficient) embodiment, the radiator 135 is located on both the upper and lower surface of the substrate 110.

[0020] In the illustrated embodiment, this first frequency band is between about 2.4 GHz and about 2.5 GHz (the 2 GHz band). Those skilled in the art understand how inverted F antennas may be formed of printed circuit traces, are configured to resonate in a desired frequency band and further that the inverted F antenna printed circuit 130 of the present invention may be modified to resonate in any reasonable desired frequency band.

[0021] A feed line 140 is located on the upper surface of the substrate 110 and couples the radiator 135 to wireless networking circuitry (not shown in FIGURE 1) by way of a conductive interconnection 150 (e.g., a via containing a conductor). A ground line 160 extends from the radiator 135 to the ground plane 120. In the illustrated embodiment, the feed line 140 and the ground line 160 take the forms of traces.

[0022] Those skilled in the pertinent art understand that a trace proximate a ground line or plane does not

effectively radiate as an antenna. Only when the trace is separated from the ground line or plane does the trace radiate as an antenna.

[0023] The dual-band antenna 100 further includes a monopole antenna printed circuit 170. The monopole antenna printed circuit 170 is located on the upper surface of the substrate 110 outside of ("without") a footprint of the ground plane 120, is connected to the feed line 140 and is tuned to resonate in a second frequency band. In the illustrated embodiment, this second frequency band is between about 5.2 GHz and about 5.8 GHz (the 5 GHz band). Those skilled in the art understand how monopole antennas may be formed of printed circuit traces, are configured to resonate in a desired frequency band and further that the monopole antenna printed circuit 170 of the present invention may be modified to resonate in any reasonable desired frequency band, including a frequency band that is higher than the first frequency band.

[0024] Those skilled in the art understand that the inverted F and monopole antenna printed circuits 130, 170 should be combined such that they each present a desired impedance when operating in their respective bands. In the illustrated embodiment, that impedance is about 50 ohms. The impedance can be varied, however, without departing from the broad scope of the present invention. Further, an impedance matching circuit (not shown) may be employed with the inverted F and monopole antenna printed circuits 130, 170 to compensate for any mismatch therein.

[0025] It is apparent that the above-described and illustrated dual-band antenna 100 is compact. It is located on the same substrate as its associated wireless networking circuitry (not shown). The antenna 100 is a power-efficient design, it is neither compromised in terms of its range nor wasteful of battery resources. Because it uses printed circuits to advantage, the antenna 100 is relatively inexpensive. Thus, the first embodiment of the dual-band antenna 100 meets at least three of the four design challenges set forth in the Background of the Invention section above. If the bandwidth capability of the antenna 100 is inadequate in the 5 GHz band, however, further embodiments to be described with reference to FIGURES 2 and 3 are in order.

[0026] Turning now to FIGURE 2, illustrated is a plan view of a second embodiment of a dual-band antenna constructed according to the principles of the present invention. This second embodiment is in many ways like the first embodiment of FIGURE 1, except that the monopole antenna printed circuit 170 has been divided into first and second traces 171, 172 tuned to differing resonance in the second frequency band. The first and second traces 171, 172 cooperate to enable the monopole antenna printed circuit 170 to attain a higher bandwidth. As is apparent in FIGURE 2, a footprint of the radiator 135 of the inverted F antenna printed circuit 130 lies between footprints of the first and second traces 171, 172 of the monopole antenna printed circuit 170. Of course, the footprint of the radiator 135 can lie outside of the

footprints of the first and second traces 171, 172 of the monopole antenna printed circuit 170. In fact, an example of this embodiment is illustrated in FIGURE 3.

[0027] Turning now to FIGURE 3, illustrated is a plan view of a third embodiment of a dual-band antenna constructed according to the principles of the present invention. As stated above, this third embodiment of the dual-band antenna 100 calls for the footprint of the radiator 135 of the inverted F antenna printed circuit 130 to lie outside of the footprints of the first and second traces 171, 172 of the monopole antenna printed circuit 170. The monopole antenna printed circuit 170 has been further modified to introduce a root trace 173 from which the first and second traces 171, 172 extend. The root trace 173 serves to reduce the amount of conductive material required to form the monopole antenna printed circuit 170.

[0028] Those skilled in the pertinent art will see that the first, second and third embodiments of FIGURES 1, 2 and 3 are but a few of the many variants that fall within the broad scope of the present invention. Dimensions, materials, shapes, frequencies, numbers of antennas and traces and numbers of substrate layers, for example, can be changed without departing from the present invention.

[0029] Turning now to FIGURE 4, illustrated is a block diagram of one embodiment of a wireless networking card constructed according to the principles of the present invention.

[0030] The wireless networking card, generally designated 400, includes wireless networking circuitry 410. The wireless networking circuitry 410 may be of any conventional or later-developed type.

[0031] The wireless networking card 400 further includes a dual-band transceiver 420. The dual-band transceiver 420 is coupled to the wireless networking circuitry 410 and may operate at any combination of bands. However, the particular dual-band transceiver 420 of the embodiment illustrated in FIGURE 4 operates in accordance with the IEEE 802.11a, 802.11b and 802.11g standards (so-called "802.11a/b/g").

[0032] The wireless networking card 400 further includes a first dual-band antenna 100a and an optional second dual-band antenna 100b. For the purpose of antenna diversity, an optional switch 430 connects one of the dual-band antennas (*e.g.*, the first dual-band antenna 100a) to the dual-band transceiver 420. The switch 430 also connects the non-selected dual-band antenna (*e.g.*, the second dual-band antenna 100b) to ground (*e.g.*, the ground plane 120 of FIGURES 1, 2 or 3) to reduce RF coupling between the selected and the non-selected dual-band antenna. Further information on grounding the non-selected antenna can be found in U.S. Patent No. 5,420,599 to Erkocevic, which is incorporated by reference.

[0033] The first dual-band antenna 100a and the optional second dual-band antenna 100b may be configured according to the first, second or third embodiments

of FIGURES 1, 2 or 3, respectively, or of any other configuration that falls within the broad scope of the present invention.

[0034] Turning now to FIGURE 5, illustrated is a plan view of one embodiment of a circuit board for a wireless networking card that includes multiple dual-band antennas constructed according to the principles of the present invention.

[0035] The circuit board, generally designated 500, includes a substrate 110 composed of a "lossy" material and having a ground plane 120. Various printed circuit traces 510 route power and signals among the various components that constitute wireless networking circuitry (not shown, but that would be mounted on the circuit board 500). Lower loss regions (holes in the illustrated embodiment) are located in the circuit board 500 proximate the dual-band antenna 100. One lower loss region is designated 520 as an example. The function of the lower loss regions is explained above.

[0036] The circuit board 500 includes two dual-band antennas 100a, 100b positioned mutually with respect to one another to optimize antenna diversity. The circuit board 500 also supports a switch (not shown, but that would be mounted on the circuit board 500) that connects the selected one of the dual-band antennas (e.g., 100a) to the wireless networking circuitry. As previously stated, the switch can also connect the non-selected dual-band antenna (e.g., 100b) to the ground plane 120 to reduce RF coupling between the selected and the non-selected dual-band antenna.

[0037] The first dual-band antenna 100a includes a first inverted F antenna printed circuit 130a tuned to resonate in a first frequency band, a monopole antenna printed circuit 170a and a first feed line 140a coupling the first inverted F and monopole antenna printed circuits 130a, 170a to the wireless networking circuitry (not shown).

[0038] The second dual-band antenna 100b includes a second inverted F antenna printed circuit 130b tuned, for diversity purposes, to resonate in the first frequency band, a monopole antenna printed circuit 170b and a second feed line 140b coupling the second inverted F and monopole antenna printed circuits 130b, 170b to the wireless networking circuitry (not shown). Conductive interconnections and ground lines for the first and second dual-band antennas 100a, 100b are shown but not referenced for simplicity's sake.

[0039] Turning now to FIGURE 6, illustrated is a flow diagram of one embodiment of a method of manufacturing a dual-band antenna carried out according to the principles of the present invention.

[0040] The method, generally designated 600, begins in a start step 610, wherein it is desired to manufacturing a dual-band antenna. The method 600 proceeds to a step 620 in which an inverted F antenna printed circuit is formed on a suitable substrate. The inverted F antenna printed circuit is tuned to resonate in a first frequency band (e.g., the 2 GHz band). Next, in a step 630, a monopole antenna printed circuit is formed on the substrate.

The monopole antenna is connected to the inverted F antenna printed circuit and tuned to resonate in a second frequency band (e.g., the 5 GHz band). The monopole antenna printed circuit may include first and second traces tuned to differing resonance and may further include a root trace from which the first and second traces extend. The footprint of the inverted F antenna printed circuit may or may not lie between footprints of the first and second traces, if the monopole antenna printed circuit includes them.

[0041] Then, in a step 640, a feed line is formed on the substrate and connected to the inverted F and monopole antenna printed circuits. One or more conductive interconnections may be required to connect the feed line to the inverted F and monopole antenna printed circuits. Next, in a step 650, a ground plane is formed on the substrate. The ground plane is coupled to and spaced apart from both the inverted F antenna printed circuit and the monopole antenna printed circuit. The method 600 ends in an end step 660.

[0042] It should be understood that, since the ground plane and the printed circuits, traces and root are all printed circuit conductors, they can be formed concurrently. It is typical to form a layer of conductive material at a time. Thus, in forming a circuit board having upper and lower layers, all printed circuit conductors on a particular layer would probably be formed concurrently, such that the method 600 is carried out in two formation steps.

[0043] Although the present invention has been described in detail, those skilled in the art should understand that they can make various changes, substitutions and alterations herein without departing from the spirit and scope of the invention in its broadest form.

Claims

1. A dual-band antenna, comprising:

a substrate;
an inverted F antenna printed circuit supported by said substrate and tuned to resonate in a first frequency band, said inverted F antenna having a ground plane and a radiator located on one plane of said substrate; and
a monopole antenna printed circuit supported by said substrate and located on a different plane than said ground plane, said monopole antenna printed circuit tuned to resonate in a second frequency band.

2. The antenna as recited in Claim 1 further comprising a feed line located on another plane of said substrate from said radiator.

3. The antenna as recited in Claim 2 further comprising a conductive interconnection coupling said feed line to said radiator.

4. The antenna as recited in Claim 1 wherein said radiator has multiple portions with a first portion located on said one plane and a second portion located on a different plane from said one plane. 5
5. The antenna as recited in Claim 1 wherein said monopole antenna printed circuit comprises first and second traces tuned to differing resonance in said second frequency band and a footprint of said radiator lies between footprints of said first and second traces. 10
6. A wireless networking card, comprising:
 - wireless networking circuitry; 15
 - a dual-band transceiver coupled to said wireless networking circuitry; and
 - a dual-band antenna coupled to said dual-band transceiver and including: 20
 - a substrate;
 - an inverted F antenna printed circuit supported by said substrate and tuned to resonate in a first frequency band, said inverted F antenna having a ground plane and a radiator located on one plane of said substrate; and 25
 - a monopole antenna printed circuit supported by said substrate and located on a different plane than said ground plane, said monopole antenna printed circuit tuned to resonate in a second frequency band. 30
7. The wireless networking card as recited in Claim 6 wherein said monopole antenna printed circuit comprises first and second traces tuned to differing resonance in said second frequency band, said first trace directly coupled to said second trace. 35
8. The wireless networking card as recited in Claim 6 further comprising a second dual-band antenna coupled to said dual-band transceiver. 40
9. The wireless networking card as recited in Claim 8 further comprising a switch that selectively connects one of said first dual-band antenna and said second dual-band antenna to said dual-band transceiver and connects another of said first dual-band antenna and said second dual-band antenna to ground. 45
10. A method of manufacturing a dual-band antenna, comprising: 50
 - forming an inverted F antenna printed circuit on a substrate, said inverted F antenna printed circuit tuned to resonate in a first frequency band and having a ground plane and a radiator located on one plane of said substrate; and 55

forming a monopole antenna printed circuit on said substrate and on a different plane than said ground plane, said monopole antenna printed circuit tuned to resonate in a second frequency band.

FIG. 1

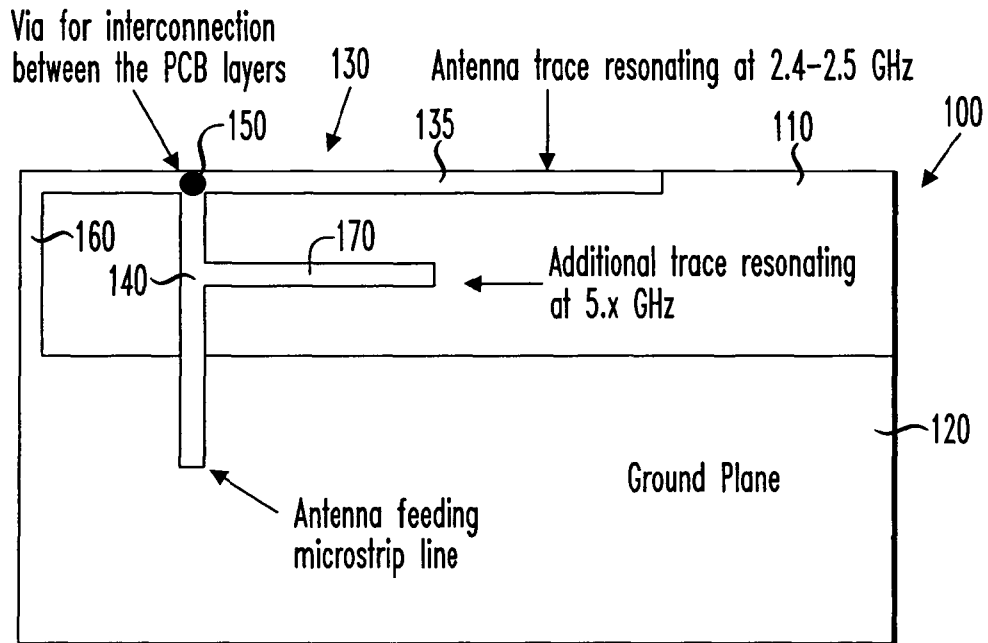


FIG. 2

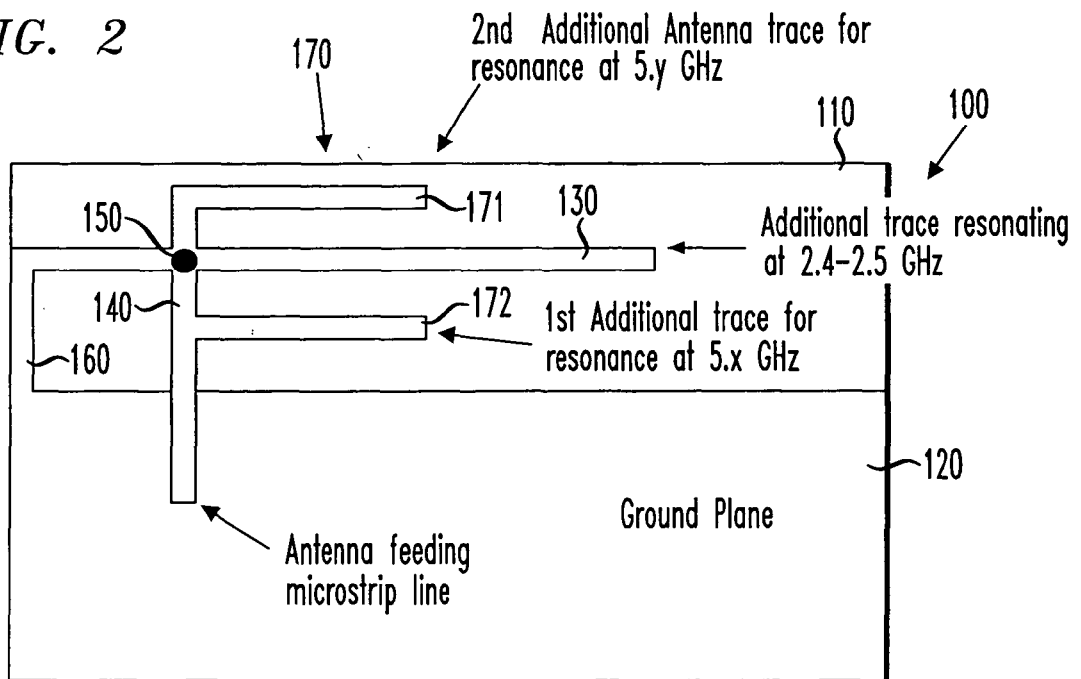


FIG. 3

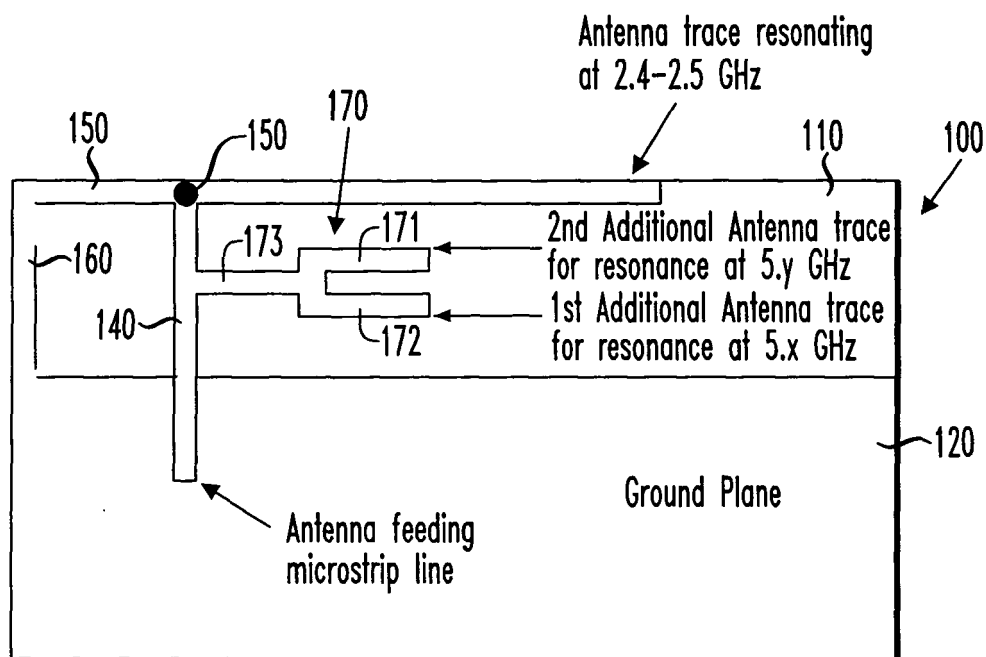
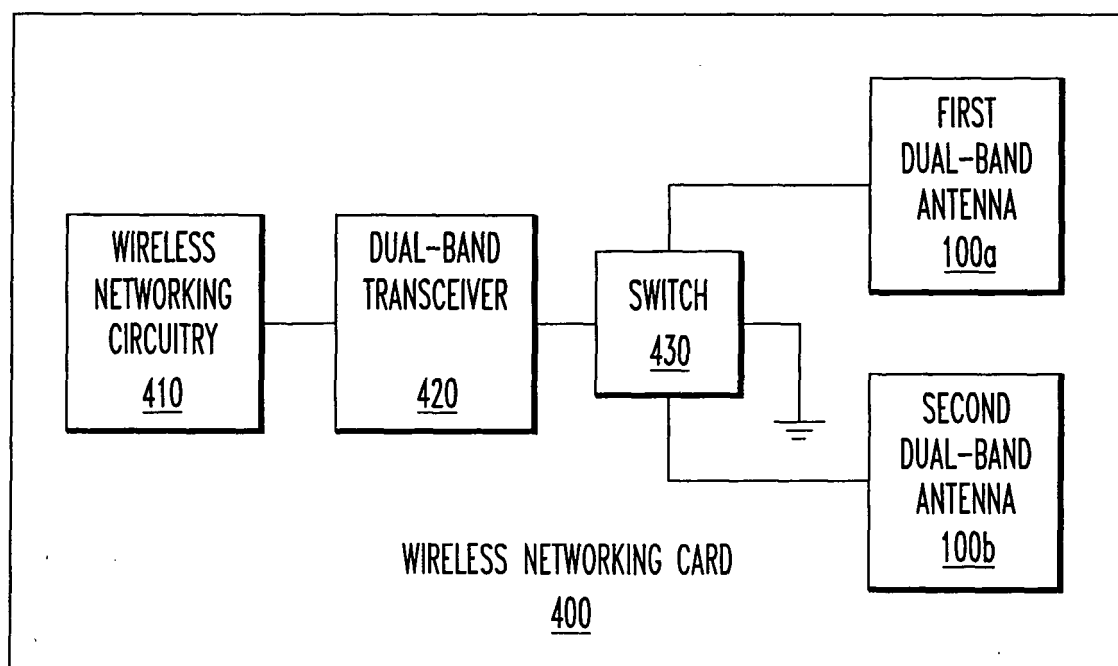


FIG. 4



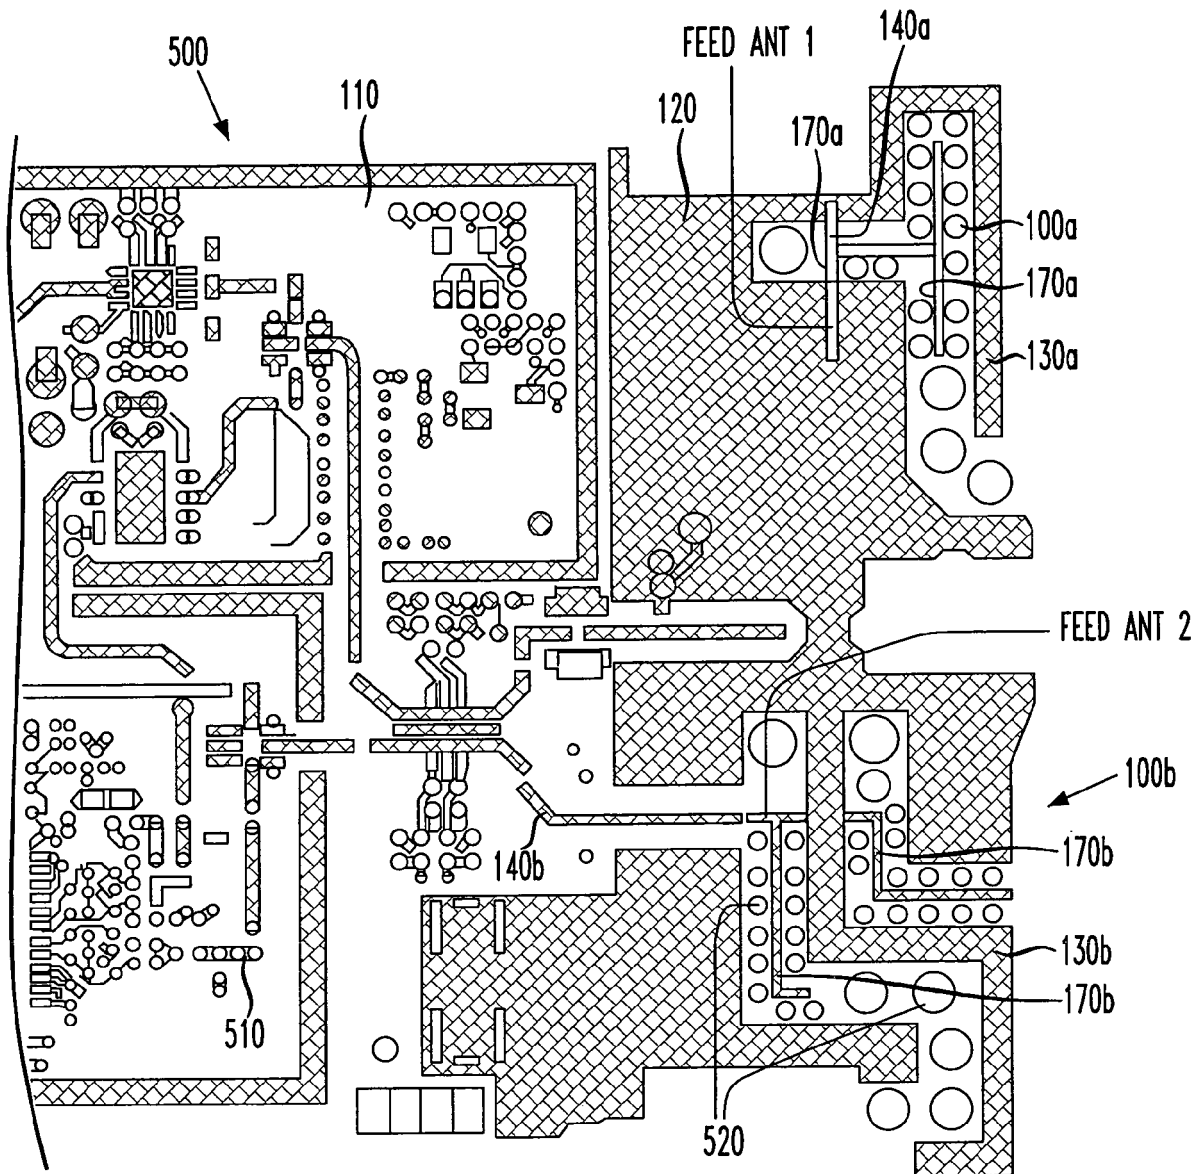


FIG. 5

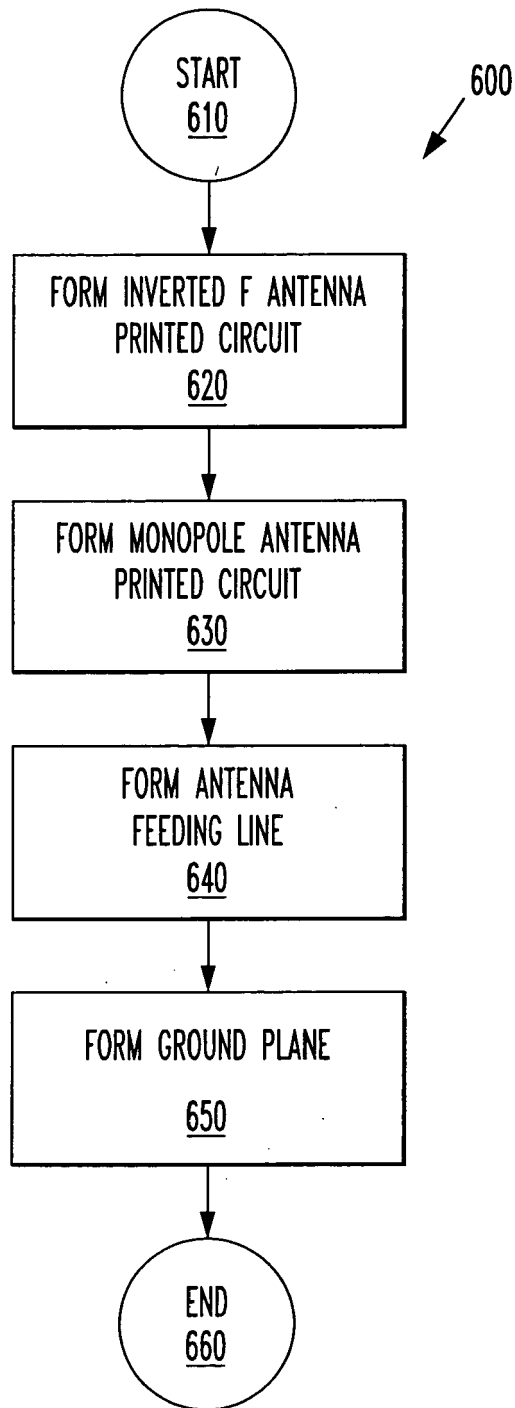


FIG. 6



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 06 07 6899

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 6 091 366 A (ZHANG XIN [JP] ET AL) 18 July 2000 (2000-07-18)	1-3,6,10	INV. H01Q1/24 H01Q9/04 H01Q21/30
Y	* column 3, line 60 - column 6, line 15 * * figures 5A-16 * * abstract *	4,7-9	
Y,D	----- US 5 420 599 A (ERKOCEVIC NEDIM [NL]) 30 May 1995 (1995-05-30) * column 4, line 17 - column 6, line 68 * * figures 4A-6C * * abstract *	8,9	
Y	----- EP 0 986 130 A2 (SIEMENS AG [DE]) 15 March 2000 (2000-03-15) * column 1, line 55 - column 3, line 5 * * figures 5-12 * * abstract *	4,7	
A	----- EP 1 033 821 A2 (FRAUNHOFER GES FORSCHUNG [DE]) 6 September 2000 (2000-09-06) * column 3, line 51 - column 6, line 32 * * figures 1-3 * * abstract *	1,6,10	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
			H01Q
Place of search		Date of completion of the search	Examiner
Munich		9 January 2007	von Walter, Sven-Uwe
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

3

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 06 07 6899

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

09-01-2007

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6091366	A	18-07-2000	NONE	
US 5420599	A	30-05-1995	DE 69433150 D1	23-10-2003
			DE 69433150 T2	08-07-2004
			EP 0623967 A1	09-11-1994
			JP 3004533 B2	31-01-2000
			JP 7131229 A	19-05-1995
EP 0986130	A2	15-03-2000	AT 272898 T	15-08-2004
			CN 1249546 A	05-04-2000
			DK 986130 T3	06-09-2004
			ES 2226252 T3	16-03-2005
EP 1033821	A2	06-09-2000	DE 29903715 U1	10-06-1999

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 46846003 P, Erkocevic [0001]
- US 12660002 A, Wielsma [0001]
- US 5420599 A, Erkocevic [0032]