



(12) **CORRECTED EUROPEAN PATENT APPLICATION**

Note: Bibliography reflects the latest situation

(15) Correction information:

Corrected version no 1 (W1 A1)
INID code(s) 72

(51) Int Cl.:

G03G 21/00 (2006.01)

(48) Corrigendum issued on:

27.06.2007 Bulletin 2007/26

(43) Date of publication:

28.03.2007 Bulletin 2007/13

(21) Application number: **06019867.8**

(22) Date of filing: **22.09.2006**

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**

Designated Extension States:

AL BA HR MK YU

(30) Priority: **22.09.2005 JP 2005276023**

22.11.2005 JP 2005336791

30.01.2006 JP 2006021221

30.03.2006 JP 2006093053

24.07.2006 JP 2006200270

(71) Applicant: **Ricoh Company, Ltd.**

Tokyo 143-8555 (JP)

(72) Inventors:

- **Kawahara, Shinichi**
Ohta-ku
Tokyo 143-8555 (JP)

• **Harada, Hiroomi**

Ohta-ku

Tokyo 143-8555 (JP)

• **Kasuga, Teruyuki**

Ohta-ku

Tokyo 143-8555 (JP)

• **Fujishiro, Takatsugu**

Ohta-ku

Tokyo 143-8555 (JP)

(74) Representative: **Engelhard, Maximilian**

Schwabe, Sandmair, Marx

Patentanwälte

Stuntzstrasse 16

D-81677 München (DE)

(54) **Lubricant supply device, image forming apparatus, and pressing device**

(57) A lubricant supply device includes a solid lubricant, a supply member contacting and rubbing the solid lubricant and thereby scraping a lubricant off the solid lubricant and supplying the lubricant to a lubricant supplying target, and a pressing mechanism pressing the solid lubricant against the supply member. The pressing mechanism includes a biasing device, and a plurality of pressing members receiving a biasing force of the biasing device and thereby pressing places of the solid lubricant at symmetrical positions with respect to a center of a contact part of the solid lubricant contacting the supply member, respectively.

FIG. 1

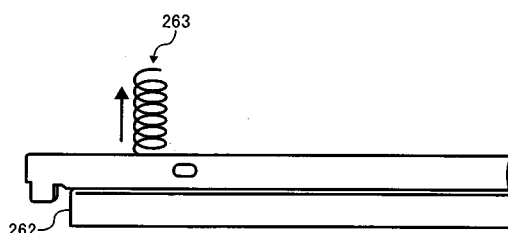


FIG. 4

