



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication: **18.04.2007 Bulletin 2007/16** (51) Int Cl.: **H04N 1/21 (2006.01)**

(21) Application number: **06021246.1**

(22) Date of filing: **10.10.2006**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI SK TR

Designated Extension States:
AL BA HR MK YU

(30) Priority: **11.10.2005 KR 20050095721**

(71) Applicant: **LG Electronics Inc.**
Yongdungpo-gu
Seoul (KR)

(72) Inventor: **Kim, Sung-sik**
Osan
Gyeonggi-Do (KR)


(74) Representative: **TER MEER - STEINMEISTER & PARTNER GbR**
Mauerkircherstraße 45
D-81679 München (DE)

(54) **Image photographing apparatus and method**

(57) A photographic apparatus and method are disclosed in which a preview of an acquired image and at least one image quality variable image are displayed in a multiview image. The image quality variable image is an image wherein the acquired image is coded, compressed and decoded according to at least one plurality

of quantizing coefficients, and is displayed as part of the multiview image according to the user's selection of image quality. Upon the user's selection of image quality, the corresponding image quality variable is stored in memory thereby enabling a user to select image quality in real time before storing an image.

FIG. 1

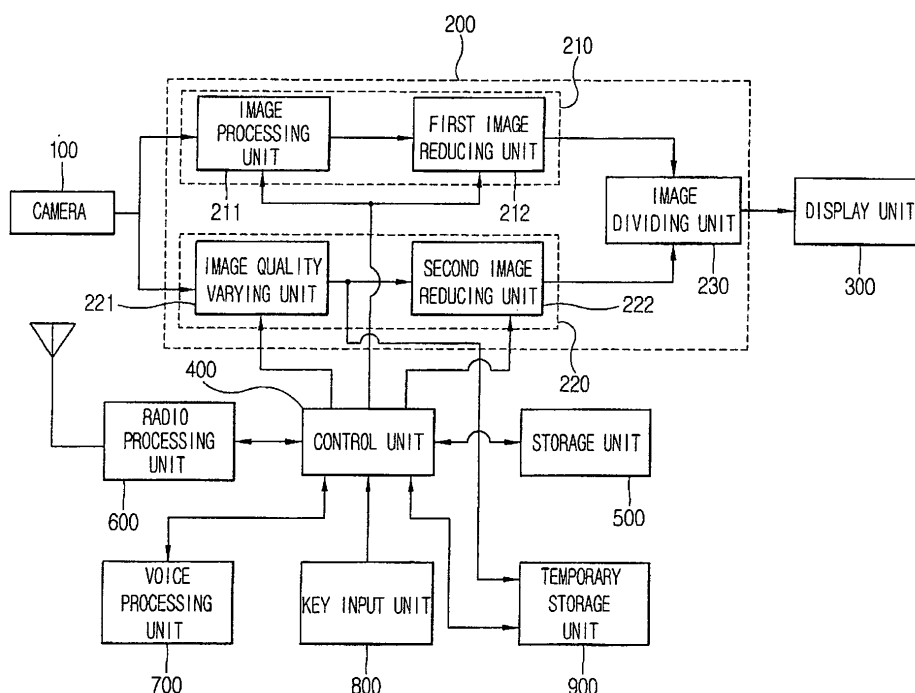

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention relates to an image photographing apparatus and method, and more particularly, to an image photographing apparatus and method which provides a multiview image by which the quality of an image compressed can be checked in real time when a subject is photographed to produce a still or moving image.

Description of the Background Art

[0002] A mobile communication terminal ("terminal") providing multimedia service to which a variety of functions are added has evolved from a mobile communication technology providing voice only communications.

[0003] Recently, the Internet, broadcasting and an image mail service have been provided for use with terminals. Supplementary features such as an MP3 player and a camera are often provided with the terminal for playing music and photographing an image.

[0004] In general, the camera is fixedly positioned at an upper center on one side of the terminal, and an image acquired by the camera is displayed on an LCD screen of the terminal. When still or moving images are acquired by the terminal, a user is generally unaware of the quality of the images as they are compressed and stored by just previewing the images on the terminal's display screen.

[0005] Also, since the users can only check the compressed and stored images one by one, user convenience is diminished.

SUMMARY OF THE INVENTION

[0006] Therefore, an object of the present invention is to provide an apparatus and method which maximizes user convenience by providing a multiview image by which the quality of an image can be checked in real time prior to the image being compressed when a subject is photographed to produce a still or moving image.

[0007] To achieve these and other advantages and in accordance with the purpose of the present invention, as embodied and broadly described herein, an image photographing apparatus is provided comprising: a camera acquiring an image; and an image processing unit processing the acquired image into an image quality variable image; and a display unit displaying the processed image quality variable image.

[0008] To achieve these and other advantages and in accordance with the purpose of the present invention, as embodied and broadly described herein, an image photographing method is provided comprising acquiring an image by photographing a subject; creating a preview image by the image signal processing of the acquired

image; creating an image quality variable image by quantizing the acquired image; displaying the preview image and the image quality variable image in a multiview image; and storing the image according to an image quality selected by a user.

[0009] The foregoing and other objects, features, aspects and advantages of the present invention will become more apparent from the following detailed description of the present invention when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] The accompanying drawings are included to provide a further understanding of the invention and are incorporated in and constitute a unit of this specification, and illustrate embodiments of the invention and together with the description serve to explain the principles of the invention. In the drawings:

Figure 1 is a block diagram illustrating a mobile communication terminal having a camera therein in accordance with one embodiment of the present invention;

Figure 2 is an operational flowchart of an image photographing method in a mobile communication terminal having a camera therein in accordance with embodiment of the present invention;

Figure 3 is an exemplary view showing a typical single image as a preview image on a screen in Figure 1; Figure 4 is an exemplary view showing a multiview image on a screen in accordance with one embodiment of the present invention in Figure 1; and

Figure 5 is an exemplary view showing a multiview image on the screen in accordance with another embodiment of the present invention.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0011] Reference will now be made in detail to the one embodiment of the present invention, examples of which are illustrated in the accompanying drawings.

[0012] A mobile communication terminal having a camera is described in one embodiment of the present invention. When a video or an image is acquired, the terminal displays the image quality of the video or the picture according to compression ratio prior to storing the video or image. Accordingly, selection can be made of one of a plurality of images by displaying the plurality of images according to the compression ratios.

[0013] To provide a selection of real-time image qualities, the terminal has a multiview image function.

[0014] As shown in Figure 1, one embodiment of the present invention includes: a camera 100 acquiring an image of a subject; an image processing unit 200; a control unit 400; a display unit 300; a storage unit 500; a radio processing unit 600; a voice processing unit 700; a key input unit 800; and a temporary storage unit 900.

[0015] The image processing unit 200 processes an image acquired by the camera 100 into a preview image and an image quality variable image. The image processing unit 200 separates the processed preview image from the image quality variable image and processes both images to provide a multiview image.

[0016] The image processing unit 200 includes a preview image processing unit 210, an image quality variable image processing unit 220, and an image dividing unit 230.

[0017] The preview image processing unit 210 processes the image acquired by the camera 100 and reduces the size of the processed image to provide a preview image, and further includes an image processing unit 211 and a first image reducing unit 212.

[0018] The image processing unit 211 processes the image acquired by the camera 100. The first image reducing unit 212 reduces the size of the image processed in the image processing unit 211 to a predetermined size.

[0019] The image quality variable image processing unit 220 varies image quality of the image acquired by the camera 100 and reduces the acquired image of which image quality has been varied to provide at least one image quality variable image.

[0020] The image quality variable image processing unit 220 includes an image quality varying unit 221 and a second image reducing unit 222.

[0021] The image quality varying unit 221 codes and compresses the acquired image by a predetermined quantizing coefficient and decodes the compressed image to provide an image quality variable image.

[0022] The second image reducing unit 222 reduces the image quality variable image by a predetermined size. In addition, the second image reducing unit 222, when a plurality of image quality variable images are provided, reduces the image quality variable images to be of equal size for displaying on a portion of the display screen.

[0023] The image dividing unit 230 processes the preview image and the image quality variable images into a single multiview image for display on the display unit 300.

[0024] The control unit 400 controls image processing and image size of the preview image, selects a quantizing coefficient, codes and compresses the image by the selected quantizing coefficient, and controls the size of the compressed image quality variable image.

[0025] In addition, the control unit 400, according to a user's selection, selects one or more quantizing coefficients and compresses an image by the selected one or more quantizing coefficients to thereby vary the image quality according to the selected quantizing coefficient.

[0026] In addition, the control unit 400 temporarily stores the acquired image and each compression image which is coded and compressed by one or more quantizing coefficients, and stores the image compressed according to compression ratio selected by the user.

[0027] In addition, the control unit 400 displays the remaining memory according to storage of the compression image selected by the user, and also displays a level bar to adjust image quality of the image by stages.

sion image selected by the user, and also displays a level bar to adjust image quality of the image by stages.

[0028] The storage unit 500, according to the present invention, stores a table of quantizing coefficients corresponding to image compression ratios.

[0029] The temporary storage unit 900, temporarily stores the acquired image and the images coded and compressed by one or more quantizing coefficients.

[0030] In addition, the control unit 400 performs the overall control of the terminal. The storage unit 500 stores applications programs operating the features of the terminal and additional supplementary information such as telephone numbers and text message.

[0031] The key input unit 800 receives user's commands, and more particularly, commands a multiview image mode selection and a compression image selection.

[0032] The voice processing unit 700 processes a voice signal by radio for radio communication. The radio processing unit 600 transmits the voice signal processed in the voice processing unit 700 to a receiving side.

[0033] The operation and effect in accordance with the embodiment of the present invention will be described in accordance with an operational flowchart of Figure 2.

[0034] The storage unit 500 stores a table of quantizing coefficients corresponding to image compression ratios in which the higher value a quantizing coefficient has, the more the compression ratio increases and accordingly, the more the image quality of the image is deteriorated.

[0035] First, the camera 100 photographs a subject and acquires an image (SP1).

[0036] The control unit 400 determines whether or not a multiview image mode is selected (SP2). If the multiview image mode is not selected, the control unit 400 processes the image acquired by the camera 100 (SP3) and displays a single image on the display unit 300 as a preview image as shown in Figure 3 (SP4).

[0037] When the multiview image mode is selected (SP2), the control unit 400, performs a preview image processing procedure (SP5, SP6 and SP 7) and an image quality variable image processing procedure (SP5, SP8 to SP 10) to display a multiview image.

[0038] The preview image processing procedure and the image quality variable image processing procedure will be described below. First, the preview image processing procedure will be described. The image acquired by the camera 100 is processed (SP6) and the size of the processed image is reduced by half with respect to the screen to produce a preview image (SP7).

[0039] The image quality variable image processing procedure is described as follows: First, according to a user's command provided by the key input unit 800, the control unit 400 selects one or more quantizing coefficients which have been previously stored in the storage unit 500 (SP8).

[0040] Next, the image quality varying unit 221 codes the acquired image by the one or more quantizing coefficients and compresses each coded image, and then

decodes each of the compressed images to produce one or more image quality variable images (SP9). The control unit 400 stores the one or more compression images in the temporary storage unit 900. Then, the second image reducing unit 222 reduces the one or more image quality variable image signals provided by the image quality varying unit 221.

[0041] When one image quality variable image is provided by the image quality varying unit 221, the second image reducing unit 222 reduces the image quality variable image in half and provides the reduced image quality variable image (SP10).

[0042] In addition, when a plurality of image quality variable image signals are inputted from the image quality varying unit 221, the second image reducing unit 222, reduces the plurality of image quality variable image signals to be of equal size for display on a screen divided in half, and provides the plurality of image quality variable images having been reduced to equal size. The image processing unit 200 compresses the preview image and the image quality variable image on one screen (SP11), and displays a multiview image as shown in Figure 4 on the display unit 300 (SP12).

[0043] Also, the image processing unit 200 displays the preview image and the plurality of image quality variable images on one screen as a multiview image as shown in Figure 5 on the display unit 300.

[0044] A level bar 401 as shown in Fig. 4 is displayed on the multiview image to allow the user to adjust image quality of a compression image by stages. The remaining memory is displayed on the screen, according to storage of the compression image selected by the user.

[0045] Accordingly, the user adjusts image quality of the image quality variable image from the multiview image using the level bar 501 as shown in Fig. 5 and checks the remaining memory depending upon storage of the compression image in advance of actually storing the compressed image.

[0046] If the available memory is sufficient, the selected (SP13) image quality variable image is stored in the storage unit 500 (SP14).

[0047] Accordingly, the control unit 400 moves the image quality variable image previously stored in the temporary storage unit 900 to the storage unit 500. The image stored in the storage unit 500 is stored as a picture or a video according to a user's selection.

[0048] In the present invention when a subject is photographed to produce a still or moving image and displayed on the screen, a multiview image by which the quality of a compressed image can be checked in advance of storing the image.

[0049] As so far described, the present invention provides a multiview image through which image quality of a compressed image can be checked in order to maximize user convenience when a subject is photographed to produce a still or moving image in the terminal having a camera.

[0050] As the present invention may be embodied in

several forms without departing from the spirit or essential characteristics thereof, it should also be understood that the above-described embodiments are not limited by any of the details of the foregoing description, unless otherwise specified, but rather should be construed broadly within its spirit and scope as defined in the appended claims, and therefore all changes and modifications that fall within the metes and bounds of the claims, or equivalence of such metes and bounds are therefore intended to be embraced by the appended claims.

Claims

1. An image photographing apparatus comprising:
 - a camera acquiring an image;
 - an image processing unit processing the acquired image into an image quality variable image; and
 - a display unit displaying the processed image quality variable image.
2. The apparatus of claim 1, wherein the image processing unit processes the acquired image into a preview image.
3. The apparatus of claim 2, wherein a display unit displays the processed preview image.
4. The apparatus of claim 2, further comprising:
 - a control unit for controlling image processing and image size of the preview image, selecting a quantizing coefficient, coding and compressing the acquired image by the selected quantizing coefficient, and controlling the size of the compressed image quality variable image.
5. The apparatus of claim 4, wherein the control unit, according to a user's selection, selects one or more quantizing coefficients and compresses the acquired image according to the one or more coefficients to thereby vary the acquired imaged quality.
6. The apparatus of claim 4, wherein the control unit stores the acquired image in the temporary storage unit, codes and compresses the acquired image by one or more quantizing coefficients, and stores one compressed image according to one compression ratio selected by the user in the storage unit.
7. The apparatus of claim 6, wherein the control unit displays the remaining memory according to storage of the compression image selected by the user to be displayed on the screen.
8. The apparatus of claim 6, wherein the control unit

provides a level bar for adjusting the image quality variable image displayed on the screen.

9. The apparatus of claim 1, wherein the image processing unit includes a preview image processing unit processing the acquired image and reducing the processed image to provide a preview image.
10. The apparatus of claim 9, wherein the preview image processing unit includes a first image reducing unit for reducing the size of the processed image according to a predetermined ratio.
11. The apparatus of claim 1, wherein the image processing unit includes an image quality variable image processing unit for varying image quality of the acquired image and reducing the image of which image quality has been varied to provide an image quality variable image.
12. The apparatus of claim 11, wherein the image quality variable image processing unit includes an image quality varying unit for coding and compressing the acquired image by a certain quantizing coefficient, decoding the compressed image and providing the image quality variable image.
13. The apparatus of claim 11, wherein the image quality varying unit codes and compresses the acquired image according to a plurality of quantizing coefficients thereby generating a plurality of compressed images, separately decodes the plurality compressed of images and provides a plurality of image quality variable images.
14. The apparatus of claim 11, wherein the image quality variable image processing unit includes a second image reducing unit for reducing the size of the processed image according to a predetermined ratio.
15. The apparatus of claim 14, wherein the second image reducing unit reduces a plurality of image quality variable images to be of equal size for display on a portion of the display unit.
16. The apparatus of claim 2, further comprising:

an image dividing unit for providing the preview image and the image quality variable image for display on the display unit as a multiview image.
17. The apparatus of claim 1, further comprising:

a storage unit storing a table of quantizing coefficients corresponding to a plurality of compression ratios.
18. The apparatus of claim 1, further comprising:

a temporary storage unit temporarily storing the acquired image coded and compressed by one or more quantizing coefficients.

19. An image photographing method comprising:

acquiring an image of a subject;
creating a preview image of the acquired image;
creating an image quality variable image by quantizing the acquired image;
displaying the preview image and the image quality variable image as a multiview image; and
storing the acquired image according to an image quality selected by a user.
20. The method of claim 19, wherein the creating of the preview image comprises processing the acquired image.
21. The method of claim 19, wherein the creating of the preview image comprises reducing acquired image size according to a certain ratio.
22. The method of claim 19, wherein the creating an image quality variable image comprises:

selecting a quantizing coefficient to vary quality of the acquired image;
coding and compressing the acquired image by the selected quantizing coefficient; and
decoding the compressed image and creating an image quality variable image.
23. The method of claim 19, wherein the creating an image quality variable image comprises reducing the image quality variable image according to a certain ratio for displaying on a display unit.
24. The method of claim 19, wherein the creating an image quality variable image comprises:

selecting a plurality of quantizing coefficients to vary image quality of the acquired image;
coding and compressing the acquired image according to each of the selected quantizing coefficients to generate a plurality of compressed images;
decoding the plurality of compressed images and creating a plurality of image quality variable images having different image quality from each other; and
reducing the size of each of the plurality of image quality variable images.
25. The method of claim 24, wherein reducing comprises reducing the size of each of the plurality of image quality variable images to be of equal size for displaying the display unit according to a certain ratio.

- 26.** The method of claim 19, wherein displaying the multiview image comprises combining the preview image and the image quality variable image into a single image and displaying the single image. 5
- 27.** The method of claim 22, wherein compressing further comprises temporarily storing the compressed image.
- 28.** The method of claim 19, wherein displaying a multiview image further comprises displaying a level bar for adjusting the quality of the image quality variable image that is displayed in the multiview image. 10
- 29.** The method of claim 19, wherein storing comprises displaying the remaining memory according to the image quality variable image selected by the user. 15

20

25

30

35

40

45

50

55

FIG. 1

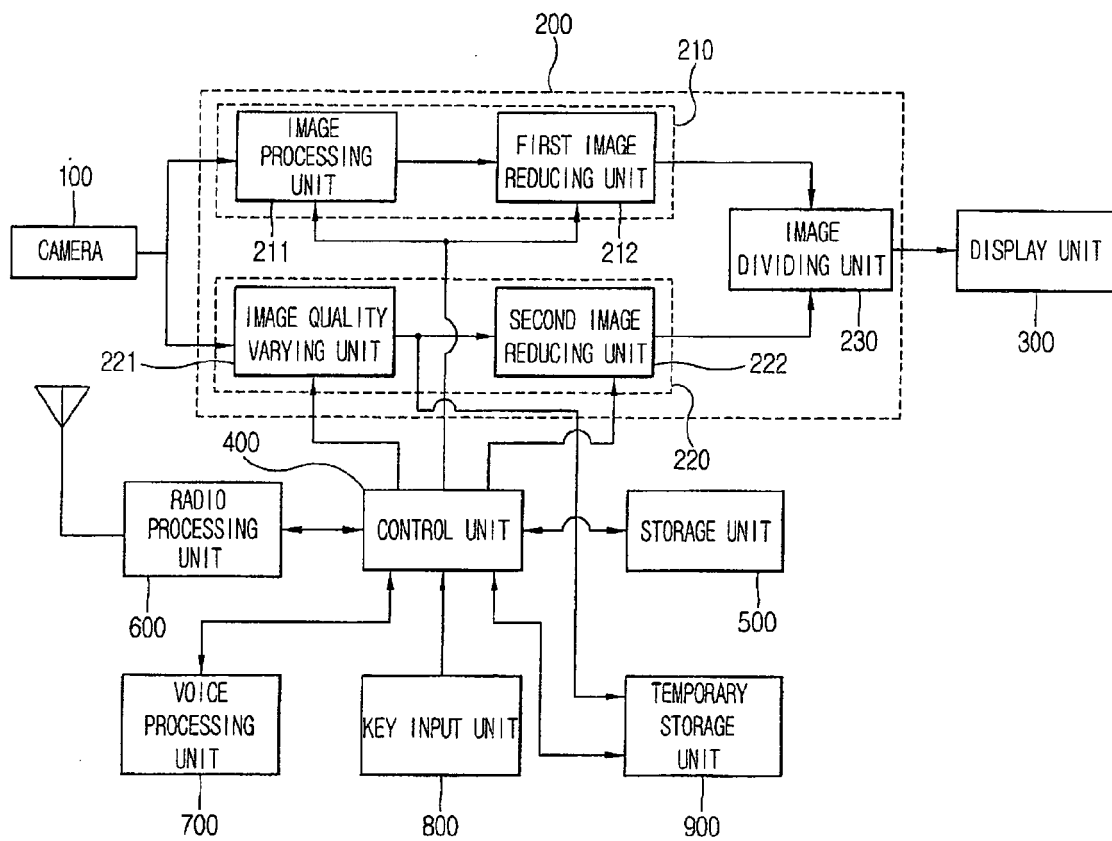


FIG. 2

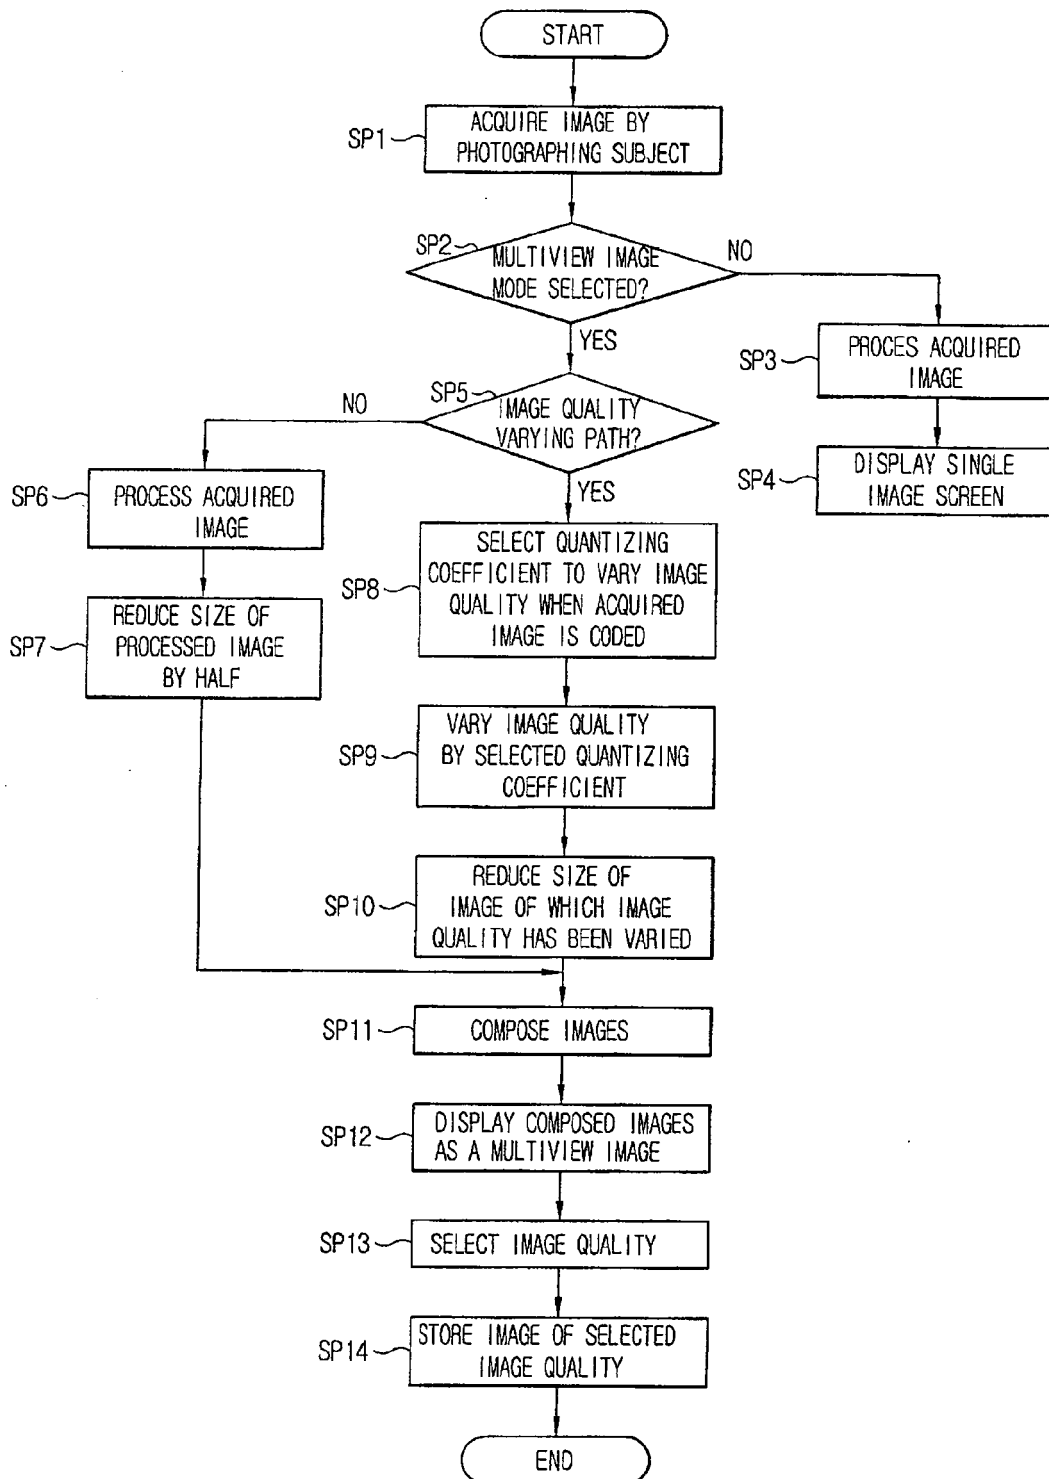


FIG. 3



FIG. 4


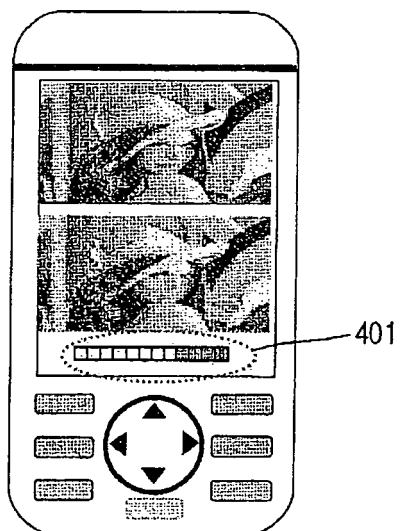


FIG. 5



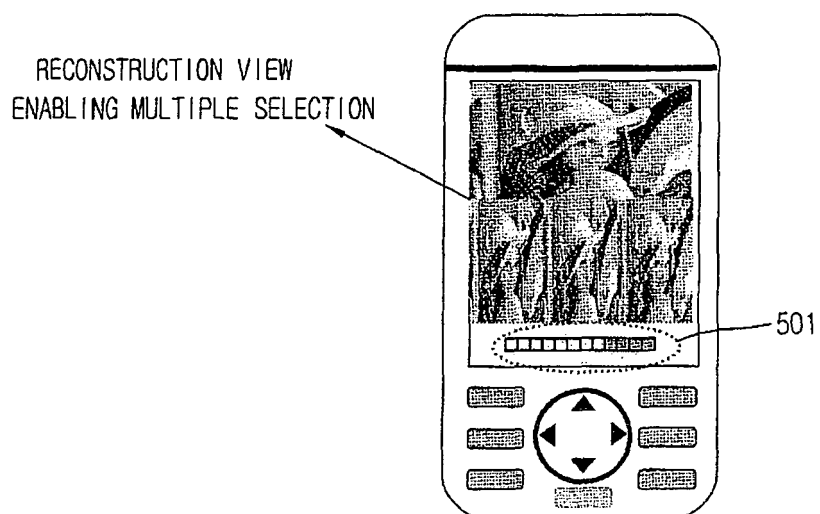

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 06 02 1246

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	JP 11 298848 A (MINOLTA CO LTD) 29 October 1999 (1999-10-29)	1-5, 9-11,14, 15	INV. H04N1/21
Y	* abstract; figures 1,15 *	6-8,12, 13,16-29	
Y	JP 2005 229326 A (CASIO COMPUTER CO LTD) 25 August 2005 (2005-08-25) * abstract; figures 5,7,8 *	16, 19-21, 23,26	
Y	US 5 821 997 A (KAWAMURA KOICHIRO [JP] ET AL) 13 October 1998 (1998-10-13) * column 1, line 19 - line 21 * * column 2, line 66 - column 3, line 17 * * column 4, line 48 - line 55 *	6,12,13, 17-19, 22,24,27	
Y	EP 0 978 988 A (HEWLETT PACKARD CO [US]) 9 February 2000 (2000-02-09) * figure 8 *	7,29	TECHNICAL FIELDS SEARCHED (IPC)
Y	EP 1 571 825 A (SEIKO EPSON CORP [JP]) 7 September 2005 (2005-09-07) * paragraph [0157]; figure 23 *	8,19-29	H04N
A	JP 62 057368 A (NIPPON ELECTRIC CO) 13 March 1987 (1987-03-13) * abstract; claim 1 *	1-6, 11-13, 17-29	
A	JP 63 286078 A (FUJI PHOTO FILM CO LTD) 22 November 1988 (1988-11-22) * abstract *	1	
		-/--	
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 21 February 2007	Examiner Breccia, Luca
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

3
EPO FORM 1503 03.82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 06 02 1246

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	US 6 487 366 B1 (MORIMOTO YASUHIRO [JP] ET AL) 26 November 2002 (2002-11-26) * column 4, line 7 - line 25; figure 14 * * column 5, line 1 - line 10 * -----	1-6, 9-12,17, 18	
A	EP 1 069 764 A2 (NIPPON ELECTRIC CO [JP]) 17 January 2001 (2001-01-17) * paragraph [0022] - paragraph [0024] * * paragraph [0048] - paragraph [0052] * * paragraph [0067] - paragraph [0069] * * figures 2,5 * -----	1,16,19	
A	US 2003/193602 A1 (SATO MAKOTO [JP] ET AL) 16 October 2003 (2003-10-16) * paragraphs [0046], [0058], [0062], [0063] * * figure 1 * -----	1-6,16, 19-24,26	
A	EP 1 548 730 A2 (HUMAX CO LTD [KR]) 29 June 2005 (2005-06-29) * paragraphs [0018], [0023], [0024] * -----	16,26	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
Place of search		Date of completion of the search	Examiner
The Hague		21 February 2007	Breccia, Luca
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

3
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 06 02 1246

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

21-02-2007

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 11298848	A	29-10-1999	NONE	
JP 2005229326	A	25-08-2005	NONE	
US 5821997	A	13-10-1998	NONE	
EP 0978988	A	09-02-2000	CN 1244690 A	16-02-2000
			JP 2000113178 A	21-04-2000
			US 6441927 B1	27-08-2002
EP 1571825	A	07-09-2005	CN 1664859 A	07-09-2005
			US 2005281536 A1	22-12-2005
JP 62057368	A	13-03-1987	JP 1958014 C	10-08-1995
			JP 6091615 B	14-11-1994
JP 63286078	A	22-11-1988	JP 2801002 B2	21-09-1998
US 6487366	B1	26-11-2002	NONE	
EP 1069764	A2	17-01-2001	JP 2001036844 A	09-02-2001
US 2003193602	A1	16-10-2003	JP 3610195 B2	12-01-2005
			JP 11027616 A	29-01-1999
EP 1548730	A2	29-06-2005	KR 20050066249 A	30-06-2005
			US 2005152667 A1	14-07-2005