



(11) **EP 1 775 985 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

(15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see
Claims EN 1, 3, 5, 6

(51) Int Cl.:
H04W 4/08 (2009.01)

(48) Corrigendum issued on:
12.05.2010 Bulletin 2010/19

(45) Date of publication and mention
of the grant of the patent:
16.12.2009 Bulletin 2009/51

(21) Application number: **06021765.0**

(22) Date of filing: **17.10.2006**

(54) **Group call system, terminal and group call control method for rejoining group calls**

Gruppenrufsystem, Endgerät und Gruppenrufkontrollverfahren zur Wiederverbindung von Gruppenrufen

Système d'appel de groupe, terminal et procédé d'appel de groupe pour se recommander à un appel de groupe

(84) Designated Contracting States:
DE ES FR GB IT

(30) Priority: **17.10.2005 JP 2005301924**

(43) Date of publication of application:
18.04.2007 Bulletin 2007/16

(73) Proprietor: **NTT DoCoMo, Inc.**
Chiyoda-ku
Tokyo 100-6150 (JP)

(72) Inventors:
• **Takahashi, Rei**
NTT DoCoMo, Inc.
I.P.D.
Chiyoda-ku
Tokyo 100-6150 (JP)
• **Ando, Tomohiro**
NTT DoCoMo, Inc.
I.P.D.
Chiyoda-ku
Tokyo 100-6150 (JP)

• **litaka, Takeshi**
NTT DoCoMo, Inc.
I.P.D.
Chiyoda-ku
Tokyo 100-6150 (JP)

(74) Representative: **Viering, Jentschura & Partner**
Postfach 22 14 43
80504 München (DE)

(56) References cited:
WO-A-01/31968 WO-A-99/66757
WO-A2-2005/057890 US-A- 6 163 692

• **OMA OPEN MOBILE ALLIANCE: "Push to talk over Cellular (PoC) - Architecture Draft Version 1.0 Open Mobile Alliance OMA-AD_PoC-V1_0-20041117-D" INTERNET CITATION, [Online] 17 November 2004 (2004-11-17), XP002372965 Retrieved from the Internet: URL: http://member.openmobilealliance.org/f tp/Public_documents/POC/Permane nt_documents/> [retrieved on 2006-03-17]**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 775 985 B9

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention relates to a group call server, which provides a plurality of terminals with a function of a group call between the terminals through a communications network, a group call system configured by comprising the group call server, a terminal, and a group call control method for the group call server, group call system and terminal.

Description of the Related Art

[0002] Group calls, in which a plurality of users converse using communications terminals through a communications network, have been realized, for example, in telephone conferencing systems, television conferencing systems and the like. Moreover, in the past there have been proposals for systems that use a server as a method to realize group calls in a mobile communications network (for example, refer to Japan Patent Application Laid-open No. 2001-195762). Disclosed in Japan Patent Application Laid-open No. 2001-195762 is a method that not only realizes a group call, but allows a terminal that has been disconnected from the group call for such reasons as being out of the coverage area to reconnect to (rejoin) the group call. Specifically, that method sends a reconnection request (request to rejoin) from the server to the terminal disconnected from the group call, and the terminal receives the reconnection request.

[0003] Document OMA OPEN MOBILE ALLIANCE: "Push to talk over Cellular (PoC) - Architecture Draft Version 1.0 Open Mobile Alliance OMA-AD_PoC-V1.0-20041117-D", XP002372965 discloses a standard PoC (Push to talk over Cellular) for communication with mobile telephones. The information is transmitted by packet-switched cellular phone network. PoC allows user voice and data communications shared with a single recipient (1 to 1) as well as between groups of recipients (1 to many) like in a session. In case of a Chat PoC group and pre-arranged group session the PoC server owning the group identity shall perform the controlling PoC function. The PoC client uses group identities for addressing PoC group sessions and an operator may be able to create a static group identity. Furthermore, the PoC client may be able to request the PoC XDMS to generate a group identity at establishment of an ad hoc group session. The PoC server maintains the PoC address of the inviting PoC user used in the originating request. In case of the PoC group session the PoC server provides the group identity to the invited PoC clients.

[0004] Document WO99/66757 A discloses that a terminal is made to connect to a group call according to a location of a mobile terminal. The processes in D3 are performed by nodes in a cellular network.

SUMMARY OF THE INVENTION

[0005] Nevertheless, the technology described in Japan Patent Application Laid-open No. 2001-195762 has the problems that the user cannot spontaneously conduct the operations, that the timing for rejoining is limited, and that it is not always possible to rejoin the group call at a suitable timing.

[0006] The present invention was made to resolve the aforementioned problems, and an object is to provide a group call system, terminal, and group call control method that can allow rejoining a group call by spontaneous operation from the terminal side and at an optional timing.

[0007] The group call system related to the present invention is a group call system configured to include: a group call server that provides a plurality of terminals with a function of a group call between the terminals through a communications network; and a plurality of terminals that conduct the group call by receiving provision of a group call function from the group call server, wherein the group call server comprises: ID granting means for granting to a group call to be established a call ID that specifies the group call; ID notification means for giving the terminals participating in the group call to be established notification of the call ID that the ID granting means has granted to the group call; rejoin request receiving means for receiving a request to rejoin the group call, the request being sent from a terminal disconnected from the group call and containing the call ID; and rejoin control means for allowing a terminal that has sent the rejoin request to rejoin the group call related to the call ID contained in the rejoin request received by the rejoin request receiving means; and the terminal comprises: ID acquisition means for acquiring the call ID assigned by the group call server to a group call in which the terminal itself participates; and a rejoin request transmission means for transmitting a request to rejoin the group call containing the call ID acquired by the ID acquisition means.

[0008] Preferably, the communications network is a mobile communications network, and the terminal further comprises request transmission control means for determining whether or not the terminal itself is positioned in the communications area of the mobile communications network, and controls the rejoin request transmission means such that a rejoin request is transmitted based on the determination. According to this configuration, it is possible for a terminal that has been disconnected from a group call based on leaving the communications area of the mobile communications network to automatically rejoin the group call, thus improving the convenience of group calls on the mobile communications network.

[0009] Preferably, the terminal of the group call system further comprises: history data storage means for storing the communications history related to the group calls in which the terminal itself has participated, in conjunction with the call ID related to the group call; and rejoin request generation means for referencing the communications

history stored by the history data storage means, and generating a rejoin request to be sent by the rejoin request transmission means. According to this configuration, it is possible to easily transmit a rejoin request from the terminal to the group call server, and rejoining from the terminal can be easily accomplished.

[0010] Moreover, the terminal itself of the group call system also has a novel point. Specifically, the terminal related to the present invention is a terminal that conducts group calls by receiving from a group call server provision of a function of a group call between a plurality of terminals through a communications network, further comprising: a group call function control means for participating in a group call by sending a group call start request to the group call server, or by receiving a participation request sent from the aforementioned group call server based on the group call start request from a terminal other than the terminal itself; ID acquisition means for acquiring a call ID, which identifies the group call and is assigned by the group call server to the group call to be joined via the group call function control means; and rejoin request transmission means for transmitting a request to rejoin the group call, which includes the call ID acquired by the ID acquisition means.

[0011] In addition to being described as the invention of a group call server and a group call system as stated above, the present invention may also be described as the invention of a group call control method of a group call server, group call system, and terminal as described below. These are substantially the same invention, and the actions and effects are the same.

[0012] The group call control method related to the present invention is a group call control method of a group call system configured to include: a group call server that provides a plurality of terminals with a function of a group call between the terminals through a communications network; and a plurality of terminals that conduct a group call by receiving provision of a group call function from a group call server, wherein the group call server comprises the steps of: ID granting that grants to a group call to be established a call ID that identifies the group call; ID notifying that gives the terminals participating in the group call to be established notification of the call ID granted to the group call in the ID granting step; rejoin request receiving that receives a request to rejoin the group call, the request being sent from a terminal disconnected from the group call and containing the call ID; and rejoin controlling that allows a terminal that has sent the rejoin request to rejoin the group call related to the call ID contained in the rejoin request received in the rejoin request receiving step; and the terminal comprises the steps of: ID acquiring to acquire the call ID assigned by the group call server to a group call in which the terminal itself participates; and rejoin request transmitting to transmit a request to rejoin the group call containing the call ID acquired by the ID acquiring step.

[0013] The group call control method related to the present invention is a group call control method of a ter-

terminal that conducts group calls by receiving from a group call server provision of a function of a group call between a plurality of terminals through a communications network, further comprising the steps of: group call function controlling that participates in a group call by sending a group call start request to a group call server, or by receiving a participation request sent from the aforementioned group call server based on the group call start request from a terminal other than the terminal itself; ID acquiring to acquire the call ID, which identifies the group call and is assigned by the group call server to the group call to be joined in the group call function controlling step; and rejoin request transmitting that transmits a request to rejoin the group call, which includes the call ID acquired in the ID acquiring step.

[0014] According to the present invention, rejoining is triggered by the transmission of a rejoin request from the terminal side, and therefore it is possible to rejoin the group call by spontaneous operations and with optional timing.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015]

FIG. 1 is a diagram indicating the configuration of a group call system comprising a group call server 10 and a mobile communications terminal 20 related to an embodiment of the present invention;

FIG. 2 is a diagram indicating the configuration of the mobile communications terminal 20 related to the embodiment;

FIG. 3 is a sequence diagram indicating the processing executed by the group call system of the embodiment;

FIG. 4 is a diagram indicating the display of the mobile communications terminal 20 in the state when a group call has been established; and

FIG. 5 is a sequence diagram indicating other processing executed by the group call system of the embodiment.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0016] An optimal embodiment of the present invention will be explained in detail below using diagrams. When describing the diagrams, the same elements will be given the same codes and redundant explanations will be omitted.

[0017] FIG. 1 indicates the configuration of an embodiment of the group call system 1 according to the present invention. The group call system 1 comprises a group call server 10 and multiple mobile communications terminals (terminals) 20. The group call server 10 is connected to a mobile communications network (not indicated in the diagram), and provides a group call function for the mobile communications terminals 20 to the related

mobile communications terminal 20 partners through the mobile communications network. Concretely, the group call server 10 is realized by a server apparatus configured, for example, by a CPU, memory and the like. Further, it is not always necessary for the group call server 10 to be configured by a single server apparatus, and, for example, apparatuses that configure a mobile communications network such as packet nodes (part of the functions), for example, may be comprised as configuring elements.

[0018] The mobile communications terminal 20 is an apparatus that can connect to the mobile communications network and can conduct mobile communications, concretely, a portable telephone and the like configured by a CPU, memory, and a wireless communications module are suitable. The mobile communications terminal 20 conducts a group call by receiving the provision of a group call function from the group call server 10.

[0019] A group call makes a conversation possible between a plurality of people using a plurality of terminals. Moreover, group calls also include transmitting call data to a plurality of terminals participating in a call using push to talk (PTT). Further, participating in a group call indicates the state when a terminal is provided a group call function from the group call server 10, and can transmit and receive call data that is voice data with another terminal (participating in the group call).

[0020] The various elements configuring the group call server 10 and mobile communications terminal 20 will be explained below. As indicated in FIG. 1, the group call server 10 comprises a group call function provider 11, an ID granting unit 12, an ID notification unit 13, a rejoin request receiving unit 14, a rejoin control unit 15, and a status notification unit 16.

[0021] The group call function provider 11 is a group call function provision means for providing a group call function to the mobile communications terminals 20. Concretely, the following processing is conducted when assuming that the group call is based on PTT. A group call start request (INVITE) transmitted from a mobile communications terminal 20 (outgoing call terminal) is received, and a participation request based on the related start request is transmitted to a plurality of mobile communications terminals 20 (incoming call terminals, participating terminals) related to the applicable start request. The replies to the participation request from the applicable incoming call terminals are received, and a session is opened between the mobile communications terminals 20 using, for example, a protocol such as SIP (Session Initiation Protocol), and a group call is established. Moreover, voice data (packets), which are call data, are copied and transferred. It is also possible to establish a plurality of group calls, and status control and call rights control of the terminals participating in the group call are also conducted.

[0022] The ID granting unit 12 is ID granting means for granting to the group call that is established by the group call function provider 11 a call ID that identifies the group

call in question. Concretely, the call ID is, for example, configured by a character string of several to several dozen characters, and is produced and granted such that there is no duplication with the call IDs of other group calls. The call IDs are granted, for example, when triggered by the group call function provider 11 receiving a group call start request from a calling terminal. Control is conducted by transmitting the granted call ID to the group call function provider 11, and correlating with the group call data related to the call ID.

[0023] The ID notification unit 13 is ID notification means for giving to the mobile communications terminals 20 participating in the group call established by the group call function provider 11 notification of the call ID granted to the group call in question by the ID granting unit 12. Notification of the call ID is conducted by transmitting the call ID to the mobile communications terminals 20 through the mobile communications network. Transmissions, for example, transmissions to incoming call terminals, are best conducted in conjunction with the timing of the transmission of the group call participation request from the group call function provider 11. Moreover, transmissions to outgoing call terminals are most suitably conducted after a call ID has been granted by the ID granting unit 12.

[0024] The rejoin request receiving unit 14 is rejoin request receiving means for receiving requests to rejoin the group call that have been transmitted from mobile communications terminals 20 and include the call ID. The received rejoin request is transmitted to the rejoin control unit 15.

[0025] The rejoin control unit 15 is rejoin control means for allowing the mobile communications terminal 20 that transmitted the applicable request to rejoin the group call related to the call ID included in the rejoin request received by the rejoin request receiving unit 14. Concretely, for example, data that identifies the mobile communications terminal 20 and the call ID are notified to the group call function provider 11, and the group call function provider 11 is controlled so as to allow the applicable mobile communications terminal 20 to rejoin the group call related to the related call ID.

[0026] The status notification unit 16 is status notification means for giving the mobile communications terminal 20 that has been disconnected from the group call in question notification of the status of the group call. The status to be notified, for example, is the status that the (group call) has ended. Concretely, the notification of the status that the group call has ended is conducted by transmitting to the mobile communications terminal 20 the information to that effect through the mobile communications network at the time when the group call has ended. Moreover, the information that associates the call ID with the mobile communications terminal 20 that has been disconnected from the group call related to the related call ID is controlled by the group call function provider 11, and the mobile communications terminal 20 targeted for transmission is, for example, identified by re-

ferring to that information.

[0027] As indicated in FIG. 2, the mobile communications terminal 20 is configured to comprise a communications unit 21, a display unit 22, and a group call function unit 30. The communications unit 21 is communication means for connecting to the mobile communications network. The display unit 22 is display means for displaying information related to the group call. Moreover, the display unit 22 is status information output means for displaying status information sent from the group call server 10 regarding the group call in which the terminal is participating. The participating user can know the status of the group call by referring to this display. Further, because it is best if the user knows the status, output may also be conducted by means other than a display, for example, by audio. Information not only of group calls joined in the past, but also information on the status of currently active group calls may be displayed.

[0028] The group call function unit 30 executes the group call by receiving a command to provide the group call function, and also controls the communications unit 21 and the display unit 22 as necessary. As indicated in FIG. 2, the group call function unit 30 is configured to comprise a group call function controller 31, an ID manager 32, a redial information manager 33, a call status manager 34, a rejoin request transmission unit 35, a rejoin request generator 36, and a request transmission controller 37.

[0029] The group call function controller 31 is group call function control means for participating in a group call by transmitting a group call start request to the group call server 10, or by receiving a participation request transmitted from the group call server 10. Moreover, the group call function controller 31 has primary functions relating to the group call such as accessing the group call server 10 through the mobile communications network and transceiving call data, and controlling the input/output apparatus comprised by the mobile communications terminal 20.

[0030] When a local host terminal is participating in a group call, the ID manager 32 is ID acquisition means for acquiring the call ID that the group call server 10 has assigned to the group call in question. Acquisition of the call ID is conducted by receiving the call ID transmitted from the group call server 10. The acquired call ID is stored in the redial information manager 33, and is used to rejoin the group call after having been disconnected.

[0031] The redial information manager 33 is historical information storage means for storing the call history relating to the group calls in which the local host terminal has participated, together with the call IDs related to the group call in question. The call ID to be stored is transmitted from the ID manager 32.

[0032] The call status manager 34 manages the status of the participation in the group call by the local host terminal and the participant terminals of the group call. The participation status in the group call, for example, may be "connected" when participating, "disconnected" when

disconnected, and "not responding" when not responding.

[0033] The rejoin request transmission unit 35 is rejoin request transmission means for transmitting a request to rejoin the group call containing the call ID acquired by the ID manager 32. The rejoin request to be transmitted is generated by the rejoin request generator 36. This rejoin request is executed through the mobile communications network, and is triggered by user manipulations or control from the request transmission controller 37.

[0034] The rejoin request generator 36 generates rejoin requests based on control from the rejoin request transmission unit 35. The call ID included in the rejoin request to be generated is acquired from the redial information manager 33. Moreover, information identifying the local host terminal such as, for example, the telephone number and the user ID that is defined in advance for every mobile communications terminal 20 is included in the rejoin request to be generated so that the target terminal to be rejoined can be identified.

[0035] The request transmission control unit 37 is request transmission control means for monitoring the communications unit 21, determines whether the local host terminal is positioned in the communications area of the mobile communications network, and based on the applicable determination, controls the rejoin request transmission unit 35 to transmit rejoin requests. Concretely, the determination of whether or not the terminal is positioned in the communications area is conducted, for example, based on the strength of the electronic waves received from the ground station of the mobile communications network in the same manner as determining that a portable telephone is in range. Control of rejoin request transmission is conducted if positioned in the communications area. This is because mobile communications and group calling are also possible when positioned in the communications area.

[0036] Continuing, the processing executed by the group call system 1 of the present embodiment will be explained below using the sequence diagram in FIG. 3. The present processing is processing to rejoin a group call after the mobile communications terminal 20 has participated in that group call based on the present system 1 and was then disconnected. In the present embodiment, the aforementioned mobile communications terminal 20 shall be called the rejoining terminal 20a. In addition, the mobile communications terminal 20 that transmit a group call start request to the group call server 10 shall be called the outgoing call terminal 20b.

[0037] In the present processing, first, the outgoing call terminal 20b transmits a group call start request to the group call server 10 via a mobile communications network (S01). The applicable start request is transmitted based on manipulation of the outgoing call terminal 20b by the user. Contained in the applicable start request is information, specifically, telephone numbers, that identify the addresses of a plurality of mobile communications terminals 20 (incoming call terminal, participating termi-

nal) that are requested to participate in the group call. Here, the rejoining terminal 20a is included among the plurality of addresses of mobile communications terminals 20 (incoming call terminal, participating terminal).

[0038] Next, at the group call server 10, the group call function provider 11 receives the applicable start request. The group call function provider 11 gives the ID granting unit 12 notification that there is a group call start request from the outgoing call terminal 20b. The ID granting unit 12 receives that notification, and grants the group call related to the start request from the outgoing call terminal 20b a call ID that identifies the group call in question (S02). The call ID is generated and granted based on pre-stipulated rules such that no call ID for a group call is duplicated. Concretely, the call ID is, for example, configured by a character string of several to several dozen characters. The call ID is transmitted to the group call function provider 11, and is managed by the group call function provider 11 as a group call related to the start request from the outgoing call terminal 20b.

[0039] Next, the ID notification unit 13 gives the plurality of mobile communications terminals 20 that are specified by the information contained in the start request notification of the call ID granted by the ID granting unit 12 (S03). The applicable notification, which is conducted by the group call function provider 11, is given to the applicable plurality of mobile communications terminals 20 together with the transmission of the request to participate in the group call. At the same time, just the notification of the call ID is given independently to the outgoing call terminal 20b.

[0040] The group call function controller 31 gives a reply to the group call server 10 regarding the participation request based on the user manipulating the mobile communications terminal 20 that received from the group call server 10 the participation request related to the group call start request sent from the outgoing call terminal 20b (S04). At that time, the mobile communications terminal 20 receives the call ID the ID manager 32 transmitted from the group call server 10. The received call ID is stored in the redial information manager 33 together with the call history of the call in question.

[0041] When receiving the reply in question, at the group call server 10, the group communications function provider 11 allows the mobile communications terminal 20 to participate in the group call. When there are replies from one or more mobile communications terminals 20, the group call is established (S05). Here, at the group call server 10, the group communications function provider 11 manages the group call participation status of the various terminals 20 that have joined the group call. Moreover, in the respective mobile communications terminals 20, as well, the call status manager 34 manages the group call participation status of the terminals 20 by receiving information from the group call server 10.

[0042] When a group call has been established, communication is possible between the mobile communications terminals 20 participating in the group call. When

executing a group call, at the mobile communications terminal 20, the display unit 22 executes a display relating to the group call, such as that in FIG. 4. As indicated in FIG. 4, the caller of the group call, the users who are participating in the group call, and the participation status are displayed.

[0043] After the group call has been established as described above, the rejoining terminal 20a is disconnected from the call (S06). This disconnection from the group call may be based on the manipulations of the user of the rejoining terminal 20a or may be based on disconnection from communications by the rejoining terminal 20a going outside the communications area of the mobile communications network. If disconnected from the group call based on disconnection from communications, preferably, the rejoining terminal 20a gives the user notification of the disconnection from the group call by using the display unit 22 to display such content. Moreover, if disconnected from the group call based on being disconnected from communications, the group call server 10 can detect that the rejoining terminal 20a has been disconnected from the group call because of transmission errors from the call data sent to the rejoining terminal 20a. In addition, when the rejoining terminal 20a has been disconnected from the group call, the participation status of the rejoining terminal 20a, which is managed by the recall terminal 20a and the group call server 10 respectively, is updated to "disconnected". The group call continues based on the other mobile communications terminals 20 even after the rejoining terminal 20a has been disconnected from the group call.

[0044] Subsequently, in order for the rejoining terminal 20a to participate in the disconnected group call, the rejoin request transmission unit 35 transmits a rejoin request to the group call server 10 (S07). Here, the generator 36 acquires the call ID related to the group call to be rejoined, which is stored in the redial information manager 33, and generates a rejoin request that contains the related call ID. The transmission of this rejoin request is conducted, for example, by manipulations by the user. The interface used when rejoining based on manipulations by the user is preferably the same interface as that of the call history and redial used, for example, in a portable telephone. Specifically, it is best to display the call history related to the group call stored in the redial information manager 33 on the display unit 22, allow the user to reference this history, and then transmit the recall request by the user selecting the group call to be rejoined.

[0045] Here, if disconnected from the group call caused by the rejoining terminal 20a passing outside the communications area of the mobile communications network, the rejoining terminal 20a must enter into the communications area before rejoining. Here, the convenience may be heightened such that, for example, if the rejoining terminal 20a detects that the communications unit 21 has entered the communications area, the user is prompted to rejoin the group call by the display unit 22 displaying "Returned to the communications coverage

area. Would you like to restart the group call?"

[0046] Continuing, at the group call server 10, the rejoin request reception unit 14 receives the applicable rejoin request. Next, the rejoin control unit 15 references the call ID contained in the applicable rejoin request, and controls the group call function provider 11 such that the rejoining terminal 20a is allowed to rejoin the group call identified by the related call ID (S08). The rejoining terminal 20a can rejoin the group call based on the applicable control (S09). When the rejoining terminal 20a has rejoined the group call, the participation status of the rejoining terminal 20a, which is controlled by the rejoining terminal 20a and the group call server 10 respectively, is updated to "Connected".

[0047] As described above, according to the group call system 1 configured to comprise the group call server 10 of the present embodiment, rejoining the group call is triggered by the transmission of a rejoin request from the rejoining terminal 20a (S07). Consequently, it is possible to rejoin the group call by spontaneous operation from the rejoining terminal 20a side (not by the group call server 10 side) and at an optional timing.

[0048] Further, in the above embodiment the terminal was a mobile communications terminal, but fixed communications terminals such as personal computers (PC) may also be used. Also in the above embodiment the communications network was a mobile communications network, but a communications network such as the internet may also be used. Moreover, the timing by which the call ID is notified is not limited to that explained in the aforementioned embodiment. For example, notification to the mobile communications terminal 20 participating in the group call in question may be given after the group call has been established.

[0049] Moreover, the aforementioned transmission of the rejoin request (S07) was, for example, conducted by the manipulations of the user, but other methods may also be used. For example, the functions of the request transmission control unit 37, which the rejoining terminal 20a comprises, may also be used. Specifically, at S06, the request transmission control unit 37 determines whether or not the local host terminal is positioned in the communications area of the mobile communications network, and control is executed such that the rejoin request is transmitted by the rejoin request transmission unit 35 based on the applicable determination.

[0050] Preferably, this function is used when disconnected from the group call based on disconnecting from communication by the rejoining terminal 20a passing outside the communications area of the mobile communications network. According to this configuration, the rejoining terminal 20a that was disconnected from the group call can automatically rejoin the group call, and the convenience of the group call on the mobile communications network is improved. However, if automatic participation in the group call is not executed, it is not always necessary for the mobile communications terminal 20 to comprise a request transmission control unit 37.

[0051] Moreover, if the group call in question ends after the rejoin request terminal 20a has been disconnected from the group call, the following processing may be conducted, which will be explained using the sequence diagram in Fig. 5.

[0052] First, the group call is established by the processing described above (S01 to S05). The rejoining terminal 20a is disconnected from the group call in the same manner as described above (S06). Afterwards, the group call ends (S11). The group call has ended, for example, when the mobile communications terminals 20 participating in the group call have disconnected from the group call in an orderly way, and the number of mobile communications terminals 20 participating in the group call in question becomes one.

[0053] When the group call ends, at the group communications server 10, the status notification unit 16 transmits to the mobile transmission terminals 20 disconnected from the group call in question, including the recall terminal 20a, information stating the group call in question has ended (S12).

[0054] At the mobile communications terminal 20, the display unit 22 receives and displays the applicable information to notify the user that that group call has ended (S13). Consequently, useless rejoin requests can be prevented because the user can determine whether or not the group call in which the user participated is continuing.

[0055] Moreover, notification of the status when the group call is continuing may be conducted at times other than when the group call has ended. Moreover, notification of the status may correspond to a request from the rejoining terminal 20a. However, the aforementioned processing is not always necessary, such as when it is not necessary to give notification of the group call status.

Claims

1. A group call system configured to include: a group call server (10) that provides a plurality of terminals (20) with a function of a group call between the terminals 20 through a communications network; and a plurality of terminals (20) that conduct the group call by receiving the provision of a group call function from the group call server (10) in question, wherein said group call server (10) comprises:

ID granting means (12) for granting to a group call to be established a call ID that identifies the group call;

ID notification means (13) for giving the terminals participating in said group call to be established notification of the call ID that said ID granting means (12) has granted to the group call;

rejoin request receiving means (14) for receiving a request to rejoin said group call, the request being sent from a terminal (20) disconnected from said group call and containing said call ID;

and
 rejoin control means (15) for allowing a terminal
 (20) that has sent the rejoin request to rejoin the
 group call related to the call ID contained in the
 rejoin request received by said rejoin request
 receiving means (14), and

said terminal (20) comprises:

ID acquisition means (32) for acquiring said call
 ID assigned by said group call server (10) to a
 group call in which said terminal (20) itself par-
 ticipates; and
 a rejoin request transmission means (35) for
 transmitting a request to rejoin said group call
 containing said call ID acquired by said ID ac-
 quisition means (32), **characterized in that**
 said communications network is a mobile com-
 munications network, and
 said terminal (20) further comprises request
 transmission control means (37) for determining
 after said terminal (20) has been disconnected
 from said group call by the terminal passing out-
 side a communication area of said communica-
 tion network whether or not said terminal (20)
 itself is positioned in a communications area of
 said mobile communications network, and con-
 trolling said rejoin request transmission means
 (37) such that a rejoin request is transmitted
 based on the determination.

2. The group call system according claim 1, wherein
 said terminal (20) further comprises:

history data storage means (33) for storing com-
 munications history related to the group calls in
 which said terminal (20) itself has participated,
 in conjunction with the call ID related to the group
 call; and
 rejoin request generation means (36) for refer-
 encing the communications history stored by the
 history data storage means (33), and generating
 a rejoin request to be sent by said rejoin request
 transmission means (35).

3. A terminal (20) that conducts a group call by receiv-
 ing, from a group call server (10), provision of a func-
 tion of a group call between a plurality of terminals
 (20) through a communications network, comprising:

a group call function control means (31) for par-
 ticipating in a group call by sending a group call
 start request to said group call server (10), or by
 receiving a participation request sent from said
 group call server (10) based on said group call
 start request from a terminal (20) other than said
 terminal (20) itself;
 ID acquisition means (32) for acquiring a call ID,

which identifies the group call and is assigned
 by said group call server (10) to the group call
 to be joined via said group call function control
 means (31) and;

rejoin request transmission means (14) for
 transmitting a request to rejoin said group call,
 which includes the call ID acquired by said ID
 acquisition means, **characterized in that**
 said communications network is a mobile com-
 munications network, and
 said terminal further comprising a request trans-
 mission control means for determining after said
 terminal (20) has been disconnected from said
 group call by the terminal passing outside a com-
 munication area of said communication network
 whether or not said terminal itself is positioned
 in the communications area of the mobile com-
 munications network, and controlling said rejoin
 request transmission means (35) such that a re-
 join request is transmitted based on the deter-
 mination.

4. The terminal according to claims 3, further compris-
 ing:

history data storage means (33) for storing com-
 munications history related to group calls in
 which said terminal (20) itself has participated,
 in conjunction with the call ID related to the group
 call; and
 rejoin request generation means (36) for refer-
 encing the communications history stored by the
 history data storage means (33), and generating
 a rejoin request to be sent by said rejoin request
 transmission means (36).

5. A group call control method of a group call system
 configured to include: a group call server (10) that
 provides a plurality of terminals (20) with a function
 of a group call between said terminals (20) through
 a communications network; and a plurality of termi-
 nals (20) that conduct a group call by receiving pro-
 vision of a group call function from a group call server
 (10), wherein
 said group call server (10) comprises the steps of:

ID granting (S02) that grants to a group call to
 be established a call ID that identifies the group
 call;
 ID notifying (S03) that gives the terminals (20)
 participating in said group call to be established
 notification of the call ID granted to the group
 call in said ID granting step (S02);
 rejoin request receiving that receives a request
 to rejoin said group call, the request being sent
 from a terminal disconnected from said group
 call and containing said call ID; and
 rejoin controlling (S02) that allows a terminal that

has sent the rejoin request to rejoin the group call related to the call ID contained in the rejoin request received in said rejoin request receiving step, and

said terminal (20) comprises the steps of:

ID acquiring to acquire said call ID assigned by said group call server (10) to a group call in which said terminal (20) itself participates; and

rejoin request transmitting (S07) to transmit a request to rejoin said group call containing the call ID acquired by said ID acquiring step, **characterized in that** said terminal further comprising the steps of:

request transmission control step for determining after said terminal (20) has been disconnected from said group call by the terminal passing outside a communication area of said communication network whether or not said terminal (20) itself is positioned in a communications area of said mobile communications network and controlling said rejoin request transmitting step such that a rejoin request is transmitted based on the determination.

6. A group call control method of a terminal (20) that conducts group calls by receiving from a group call server (10) provision of a function of a group call between a plurality of terminals (20) through a communications network, further comprising the steps of:

group call function controlling that participates in a group call by sending (S01) a group call start request to a group call server (10), or by receiving a participation request sent from said group call server (10) based on said group call start request from a terminal (20) other than said terminal (20) itself;

ID acquiring that acquires the call ID, which identifies the group call and is assigned by said group call server to the group call to be joined in said group call function controlling step; and rejoin request transmitting (S07) that transmits a request to rejoin the group call, which includes the call ID acquired in said ID acquiring step, **characterized in that** said terminal further comprising the steps of:

request transmission control step for determining after said terminal (20) has been disconnected from said group call by the terminal passing outside a communication area of said communication network whether

or not said terminal (20) itself is positioned in a communications area of said mobile communications network and controlling said rejoin request transmitting step such that a rejoin request is transmitted based on the determination.

Patentansprüche

1. Gruppenruf-System, eingerichtet aufzuweisen: einen Gruppenruf-Server (10), der einer Mehrzahl von Endgeräten (20) eine Funktion eines Gruppenrufs zwischen den Endgeräten (20) durch ein Kommunikationsnetz bereitstellt; und eine Mehrzahl von Endgeräten (20), die den Gruppenruf ausführen durch Empfangen der Bereitstellung einer Gruppenruf-Funktion von dem Gruppenruf-Server (10), wobei der Gruppenruf-Server (10) aufweist:

ein ID-Vergabemittel (12) zum Vergeben einer Ruf-ID an einen aufzubauenden Gruppenruf, die den Gruppenruf kennzeichnet;

ein ID-Benachrichtigungsmittel (13) zum Benachrichtigen der an dem aufzubauenden Gruppenruf teilnehmenden Endgeräte über die Ruf-ID, die das ID-Vergabemittel (12) an den Gruppenruf vergeben hat;

ein Wiederanschlussanfrageempfangsmittel (14) zum Empfangen einer Anfrage nach Wiederanschluss an den Gruppenruf, wobei die Anfrage von einem von dem Gruppenruf getrennten Endgerät (20) gesendet wird und die Ruf-ID enthält; und

ein Wiederanschlussssteuermittel (15), um einem Endgerät (20), das die Wiederanschlussanfrage gesendet hat, zu ermöglichen, sich dem Gruppenruf, der mit der in der Wiederanschlussanfrage, die von dem Wiederanschlussanfrageempfangsmittel (14) empfangen wurde, enthaltenen Ruf-ID verbunden ist, wieder anzuschließen, und das Endgerät (20) aufweist:

ein ID-Erfassmittel (32) zum Erfassen der Ruf-ID, die von dem Gruppenruf-Server (10) einem Gruppenruf zugewiesen wurde, an dem das Endgerät (20) selbst teilnimmt; und ein Wiederanschlussanfrageübertragungsmittel (35) zum Übertragen einer Anfrage nach Wiederanschluss an den Gruppenruf, welche die von dem ID-Erfassmittel (32) erfasste Ruf-ID enthält, **dadurch gekennzeichnet, dass**

das Kommunikationsnetz ein Mobilkommunikationsnetz ist, und

das Endgerät (20) ferner ein Anfrageübertragungssteuermittel (37) aufweist zum Er-

- mitteln, nachdem das Endgerät (20) durch Herauslaufen aus einem Kommunikationsbereich des Kommunikationsnetzes von dem Gruppenruf getrennt worden ist, ob sich das Endgerät (20) selbst in einem Kommunikationsbereich des Mobilkommunikationsnetzes befindet oder nicht, und zum Steuern des Wiederanschlussanfrageübertragungsmittels (37), derart, dass basierend auf der Ermittlung eine Wiederanschlussanfrage übertragen wird.
2. Gruppenruf-System gemäß Anspruch 1, wobei das Endgerät (20) ferner aufweist:
- ein Vorgeschichtedatenspeichermittel (33) zum Speichern der die Gruppenrufe, an denen das Endgerät (20) selbst teilgenommen hat, betreffenden Kommunikationsvorgeschichte, zusammen mit der Ruf-ID, die mit dem Gruppenruf verbunden ist; und
- ein Wiederanschlussanfrageerzeugungsmittel (36) zum Bezugnehmen auf die von den Vorgeschichtedatenspeichermitteln (33) gespeicherte Kommunikationsvorgeschichte und Erzeugen einer von dem Wiederanschlussanfrageübertragungsmittel (35) zu sendenden Wiederanschlussanfrage.
3. Endgerät (20), das einen Gruppenruf ausführt durch Empfangen, von einem Gruppenruf-Server (10), der Bereitstellung einer Funktion eines Gruppenrufs zwischen einer Mehrzahl von Endgeräten (20) durch ein Kommunikationsnetz, aufweisend:
- ein Gruppenruf-Funktion-Steuermittel (31) zum Teilnehmen an einem Gruppenruf durch Senden einer Gruppenrufstartanfrage an den Gruppenruf-Server (10) oder durch Empfangen einer Teilnahmeanfrage, welche von dem Gruppenruf-Server (10) gesendet wurde basierend auf der Gruppenrufstartanfrage von einem anderen Endgerät (20) als dem Endgerät (20) selbst;
- ein ID-Erfassmittel (32) zum Erfassen einer Ruf-ID, welche den Gruppenruf kennzeichnet und durch den Gruppenruf-Server (10) dem Gruppenruf zugewiesen ist, dem mittels des Gruppenruf-Funktion-Steuermittels (31) beigetreten werden soll; und
- ein Wiederanschlussanfrageübertragungsmittel (14) zum Übertragen einer Anfrage nach Wiederanschluss an den Gruppenruf, welche die durch das ID-Erfassmittel erfasste Ruf-ID enthält, **dadurch gekennzeichnet, dass** das Kommunikationsnetz ein Mobilkommunikationsnetz ist, und das Endgerät ferner ein Anfrageübertragungssteuermittel aufweist zum Ermitteln, nachdem
- das Endgerät (20) durch Herauslaufen aus einem Kommunikationsbereich des Kommunikationsnetzes von dem Gruppenruf getrennt worden ist, ob sich das Endgerät selbst in dem Kommunikationsbereich des Mobilkommunikationsnetzes befindet oder nicht, und zum Steuern des Wiederanschlussanfrageübertragungsmittels (35), derart, dass basierend auf der Ermittlung eine Wiederanschlussanfrage übertragen wird.
4. Endgerät gemäß Anspruch 3, ferner aufweisend:
- ein Vorgeschichtedatenspeichermittel (33) zum Speichern der die Gruppenrufe, an denen das Endgerät (20) selbst teilgenommen hat, betreffenden Kommunikationsvorgeschichte, zusammen mit der Ruf-ID, die mit dem Gruppenruf verbunden ist; und
- ein Wiederanschlussanfrageerzeugungsmittel (36) zum Bezugnehmen auf die von dem Vorgeschichtedatenspeichermittel (33) gespeicherte Kommunikationsvorgeschichte und Erzeugen einer von dem Wiederanschlussanfrageübertragungsmittel (36) zu sendenden Wiederanschlussanfrage.
5. Gruppenruf-Steuerverfahren eines Gruppenruf-Systems eingerichtet aufzuweisen: einen Gruppenruf-Server (10), der einer Mehrzahl von Endgeräten (20) eine Funktion eines Gruppenrufs zwischen den Endgeräten (20) durch ein Kommunikationsnetz bereitstellt; und eine Mehrzahl von Endgeräten (20), die einen Gruppenruf ausführen durch Empfangen der Bereitstellung einer Gruppenruf-Funktion von einem Gruppenruf-Server (10), wobei der Gruppenruf-Server (10) die Schritte aufweist der/des:
- ID-Vergabe (S02), der an einen aufzubauenden Gruppenruf eine Ruf-ID vergibt, die den Gruppenruf kennzeichnet;
- ID-Benachrichtigung (S03), der die an dem aufzubauenden Gruppenruf teilnehmenden Endgeräte (20) benachrichtigt über die Ruf-ID, die in dem ID-Vergabeschritt (S02) an den Gruppenruf vergeben wurde;
- Wiederanschlussanfrageempfangs, der eine Anfrage nach Wiederanschluss an den Gruppenruf empfängt, wobei die Anfrage von einem von dem Gruppenruf getrennten Endgerät gesendet wird und die Ruf-ID enthält; und
- Wiederanschlussteuerung (S08), der einem Endgerät, das die Wiederanschlussanfrage gesendet hat, ermöglicht, sich dem Gruppenruf, der mit der in der Wiederanschlussanfrage, die in dem Wiederanschlussanfrageempfangsschritt empfangen wurde, enthaltenen Ruf-ID verbunden ist, wieder anzuschließen, und das

Endgerät (20) aufweist die Schritte des:

ID-Erfassens zum Erfassen der Ruf-ID, die von dem Gruppenruf-Server (10) einem Gruppenruf zugewiesen wurde, an dem das Endgerät (20) selbst teilnimmt; und
Wiederanschlussanfrageübertragens (S07) zum Übertragen einer Anfrage nach Wiederanschluss an den Gruppenruf, welche die durch den ID-Erfassschritt erfasste Ruf-ID enthält, **dadurch gekennzeichnet, dass**

das Endgerät ferner die Schritte aufweist:

Anfrageübertragungssteuerschritt zum Ermitteln, nachdem das Endgerät (20) durch Herauslaufen aus einem Kommunikationsbereich des Kommunikationsnetzes von dem Gruppenruf getrennt worden ist, ob sich das Endgerät (20) selbst in einem Kommunikationsbereich des Mobilkommunikationsnetzes befindet oder nicht, und zum Steuern des Wiederanschlussanfrageübertragungsschrittes, derart, dass basierend auf der Ermittlung eine Wiederanschlussanfrage übertragen wird.

6. Gruppenruf-Steuerverfahren eines Endgeräts (20), das Gruppenrufe ausführt durch Empfangen von einem Gruppenruf-Server (10) der Bereitstellung einer Funktion eines Gruppenrufs zwischen einer Mehrzahl von Endgeräten (20) durch ein Kommunikationsnetz, ferner aufweisend die Schritte des:

Gruppenruf-Funktion-Steuerns, der an einem Gruppenruf teilnimmt durch Senden (S01) einer Gruppenrufstartanfrage an einen Gruppenruf-Server (10) oder durch Empfangen einer Teilnahmeanfrage, die von dem Gruppenruf-Server (10) gesendet wurde basierend auf der Gruppenrufstartanfrage von einem anderen Endgerät (20) als dem Endgerät (20) selbst;
ID-Erfassens, der die Ruf-ID erfasst, welche den Gruppenruf kennzeichnet und durch den Gruppenruf-Server (10) dem Gruppenruf zugewiesen ist, dem in dem Gruppenruf-Funktion-Steuerschritt beigetreten werden soll; und
Wiederanschlussanfrageübertragens (S07), der eine Anfrage nach Wiederanschluss an den Gruppenruf überträgt, welche die in dem ID-Erfassschritt erfasste Ruf-ID enthält, **dadurch gekennzeichnet, dass**

das Endgerät ferner die Schritte aufweist:

Anfrageübertragungssteuerschritt zum Ermitteln, nachdem das Endgerät (20) durch Herauslaufen aus einem Kommunikations-

bereich des Kommunikationsnetzes von dem Gruppenruf getrennt worden ist, ob sich das Endgerät (20) selbst in einem Kommunikationsbereich des Mobilkommunikationsnetzes befindet oder nicht, und zum Steuern des Wiederanschlussanfrageübertragungsschrittes, derart, dass basierend auf der Ermittlung eine Wiederanschlussanfrage übertragen wird.

Revendications

1. Système d'appel de groupe configuré pour comprendre : un serveur d'appel de groupe (10) qui fournit à une pluralité de terminaux (20) une fonction d'un appel de groupe entre les terminaux (20) par l'intermédiaire d'un réseau de communication ; et à une pluralité de terminaux (20) qui effectuent l'appel de groupe en recevant la fourniture d'une fonction d'appel de groupe du serveur d'appel de groupe (10) en question, dans lequel
ledit serveur d'appel de groupe (10) comprend :

des moyens d'octroi d'identifiant (12) pour octroyer à un appel de groupe devant être établi un identifiant d'appel qui identifie l'appel de groupe ;

des moyens de notification d'identifiant (13) pour donner aux terminaux participant audit appel de groupe devant être établi une notification de l'identifiant d'appel que lesdits moyens d'octroi d'identifiant (12) ont octroyée à l'appel de groupe ;

des moyens de réception de demande de reprise de participation (14) pour recevoir une demande de reprise de participation audit appel de groupe, la demande étant envoyée par un terminal (20) déconnecté dudit appel de groupe et contenant ledit identifiant d'appel ; et

des moyens de contrôle de reprise de participation (15) pour autoriser un terminal (20) qui a envoyé la demande de reprise de participation à participer de nouveau à l'appel de groupe lié à l'identifiant d'appel contenue dans la demande de reprise de participation reçue par lesdits moyens de réception de demande de reprise de participation (14) ; et

ledit terminal (20) comprend :

des moyens d'acquisition d'identifiant (32) pour acquérir ledit identifiant d'appel attribuée par ledit serveur d'appel de groupe (10) à un appel de groupe auquel ledit terminal (20) lui-même participe ; et

des moyens de transmission de demande de reprise de participation (35) pour transmettre une demande de reprise de partici-

pation audit appel de groupe contenant ledit identifiant d'appel acquis par lesdits moyens d'acquisition d'identifiant (32), **caractérisé en ce que**

ledit réseau de communication est un réseau de communication mobile, et ledit terminal (20) comprend en outre des moyens de contrôle de transmission de demande (37) pour déterminer, après que ledit terminal (20) a été déconnecté dudit appel de groupe du fait du passage du terminal à l'extérieur d'une zone de communication dudit réseau de communication, si, oui ou non, ledit terminal (20) lui-même est positionné dans une zone de communication dudit réseau de communication mobile, et contrôler lesdits moyens de transmission de demande de reprise de participation (37) de sorte qu'une demande de reprise de participation soit transmise sur la base de la détermination.

2. Système d'appel de groupe selon la revendication 1, dans lequel ledit terminal (20) comprend en outre :

des moyens de mémorisation de données d'historique (33) pour mémoriser l'historique des communications lié aux appels de groupe auxquels ledit terminal (20) lui-même a participé, conjointement avec l'identifiant d'appel liée à l'appel de groupe ; et des moyens de génération de demande de reprise de participation (36) pour se référer à l'historique des communications mémorisé par les moyens de mémorisation de données d'historique (33), et générer une demande de reprise de participation à envoyer par lesdits moyens de transmission de demande de reprise de participation (35).

3. Terminal (20) qui effectue un appel de groupe en recevant, d'un serveur d'appel de groupe (10), la fourniture d'une fonction d'un appel de groupe entre une pluralité de terminaux (20) par l'intermédiaire d'un réseau de communication, comprenant :

des moyens de contrôle de fonction d'appel de groupe (31) pour participer à un appel de groupe en envoyant une demande de commencement d'appel de groupe audit serveur d'appel de groupe (10), ou en recevant une demande de participation envoyée par ledit serveur d'appel de groupe (10) sur la base de ladite demande de commencement d'appel de groupe d'un terminal (20) autre que ledit terminal (20) lui-même ; des moyens d'acquisition d'identifiant (32) pour acquérir un identifiant d'appel, qui identifie l'appel de groupe et qui est attribuée par ledit ser-

veur d'appel de groupe (10) à l'appel de groupe à rejoindre par l'intermédiaire desdits moyens de commande de fonction d'appel de groupe (31) ; et

des moyens de transmission de demande de reprise de participation (14) pour transmettre une demande de reprise de participation audit appel de groupe, qui comprend l'identifiant d'appel acquise par lesdits moyens d'acquisition d'identifiant, **caractérisé en ce que** ledit réseau de communication est un réseau de communication mobile, et ledit terminal comprend en outre des moyens de contrôle de transmission de demande pour déterminer, après que ledit terminal (20) a été déconnecté dudit appel de groupe du fait du passage du terminal à l'extérieur d'une zone de communication dudit réseau de communication, si, oui ou non, ledit terminal lui-même est positionné dans la zone de communication du réseau de communication mobile, et commander lesdits moyens de transmission de demande de reprise de participation (35) de sorte qu'une demande de reprise de participation soit transmise sur la base de la détermination.

4. Terminal selon la revendication 3, comprenant en outre :

des moyens de mémorisation de données d'historique (33) pour mémoriser l'historique des communications lié aux appels de groupe auxquels ledit terminal (20) lui-même a participé, conjointement avec l'identifiant d'appel liée à l'appel de groupe ; et des moyens de génération de demande de reprise de participation (36) pour se référer à l'historique des communications mémorisé par les moyens de mémorisation de données d'historique (33), et générer une demande de reprise de participation à envoyer par lesdits moyens de transmission de demande de reprise de participation (36).

5. Procédé de commande d'appel de groupe d'un système d'appel de groupe configuré pour comprendre : un serveur d'appel de groupe (10) qui fournit à une pluralité de terminaux (20) une fonction d'un appel de groupe entre lesdits terminaux (20) par l'intermédiaire d'un réseau de communication ; et une pluralité de terminaux (20) qui effectuent un appel de groupe en recevant la fourniture d'une fonction d'appel de groupe d'un serveur d'appel de groupe (10), dans lequel ledit serveur d'appel de groupe (10) effectue les étapes :

d'octroi d'identifiant (S02) pour octroyer à un ap-

pel de groupe devant être établi un identifiant d'appel qui identifie l'appel de groupe ;
 de notification d'identifiant (S03) pour donner aux terminaux (20) participant audit appel de groupe devant être établie une notification de l'identifiant d'appel octroyée à l'appel de groupe à ladite étape d'octroi d'identifiant (S02) ;
 de réception de demande de reprise de participation pour recevoir une demande de reprise de participation audit appel de groupe, la demande étant envoyée par un terminal déconnecté dudit appel de groupe et contenant ledit identifiant d'appel ; et
 de contrôle de reprise de participation (S08) pour autoriser un terminal qui a envoyé la demande de reprise de participation à participer de nouveau à l'appel de groupe lié à l'identifiant d'appel contenue dans la demande de reprise de participation reçue à ladite étape de réception de demande de reprise de participation, et ledit terminal (20) effectue les étapes :

d'acquisition d'identifiant pour acquérir ledit identifiant d'appel attribuée par ledit serveur d'appel de groupe (10) à un appel de groupe auquel ledit terminal (20) lui-même participe ; et
 de transmission de demande de reprise de participation (S07) pour transmettre une demande de reprise de participation audit appel de groupe contenant l'identifiant d'appel acquise par lesdits moyens d'acquisition d'identifiant , **caractérisé en ce que** ledit terminal effectue en outre l'étape :

de contrôle de transmission de demande pour déterminer, après que ledit terminal (20) a été déconnecté dudit appel de groupe du fait du passage du terminal à l'extérieur d'une zone de communication dudit réseau de communication, si, oui ou non, ledit terminal (20) lui-même est positionné dans une zone de communication dudit réseau de communication mobile, et commander ladite étape de transmission de demande de reprise de participation de sorte qu'une demande de reprise de participation soit transmise sur la base de la détermination.

6. Procédé de contrôle d'appel de groupe d'un terminal (20) qui effectue des appels de groupe en recevant, d'un serveur d'appel de groupe (10), la fourniture d'une fonction d'un appel de groupe entre une pluralité de terminaux (20) par l'intermédiaire d'un réseau de communication, comprenant en outre les étapes :

de contrôle de fonction d'appel de groupe pour participer à un appel de groupe en envoyant (S01) une demande de commencement d'appel de groupe à un serveur d'appel de groupe (10), ou en recevant une demande de participation envoyée par ledit serveur d'appel de groupe (10) sur la base de ladite demande de commencement d'appel de groupe d'un terminal (20) autre que ledit terminal (20) lui-même ;
 d'acquisition d'identifiant pour acquérir l'identifiant d'appel, qui identifie l'appel de groupe et qui est attribuée par ledit serveur d'appel de groupe à l'appel de groupe à rejoindre à ladite étape de commande de fonction d'appel de groupe ; et
 de transmission de demande de reprise de participation (S07) pour transmettre une demande de reprise de participation à l'appel de groupe, qui comprend l'identifiant d'appel acquise à ladite étape d'acquisition d'identifiant , **caractérisé en ce que** ledit terminal effectue en outre l'étape :

de contrôle de transmission de demande pour déterminer, après que ledit terminal (20) a été déconnecté dudit appel de groupe du fait du passage du terminal à l'extérieur d'une zone de communication dudit réseau de communication, si, oui ou non, ledit terminal (20) lui-même est positionné dans une zone de communication dudit réseau de communication mobile, et contrôler ladite étape de transmission de demande de reprise de participation de sorte qu'une demande de reprise de participation soit transmise sur la base de la détermination.

Fig. 1

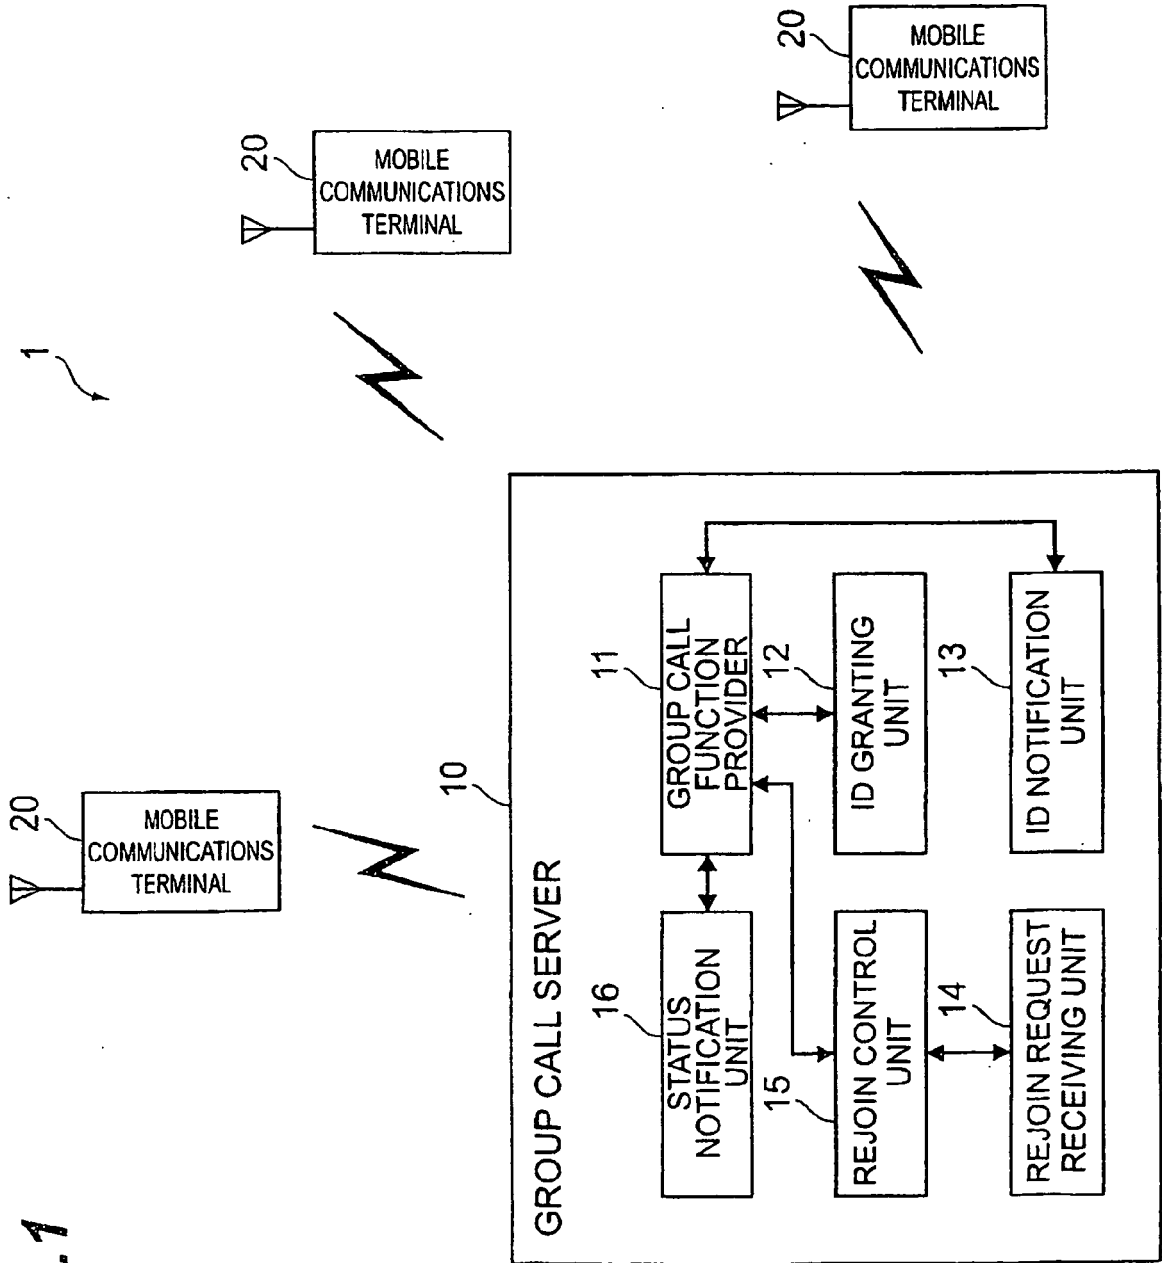


Fig.2

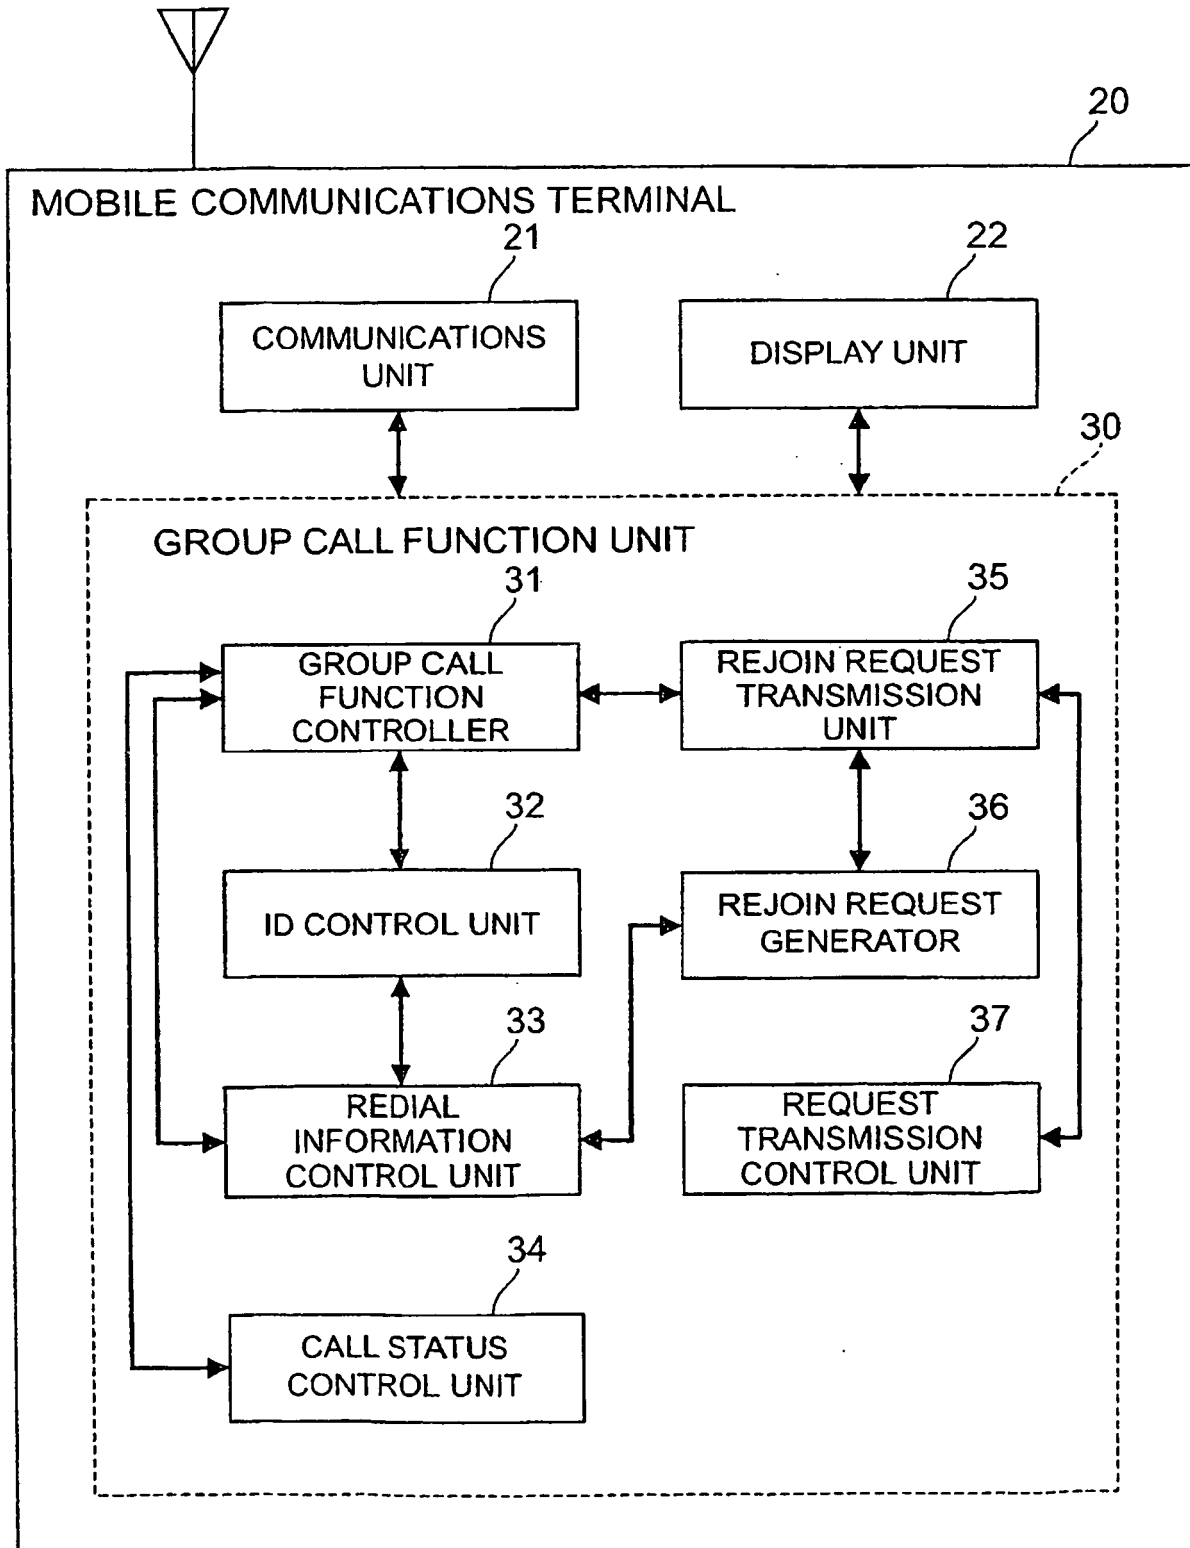


Fig.3

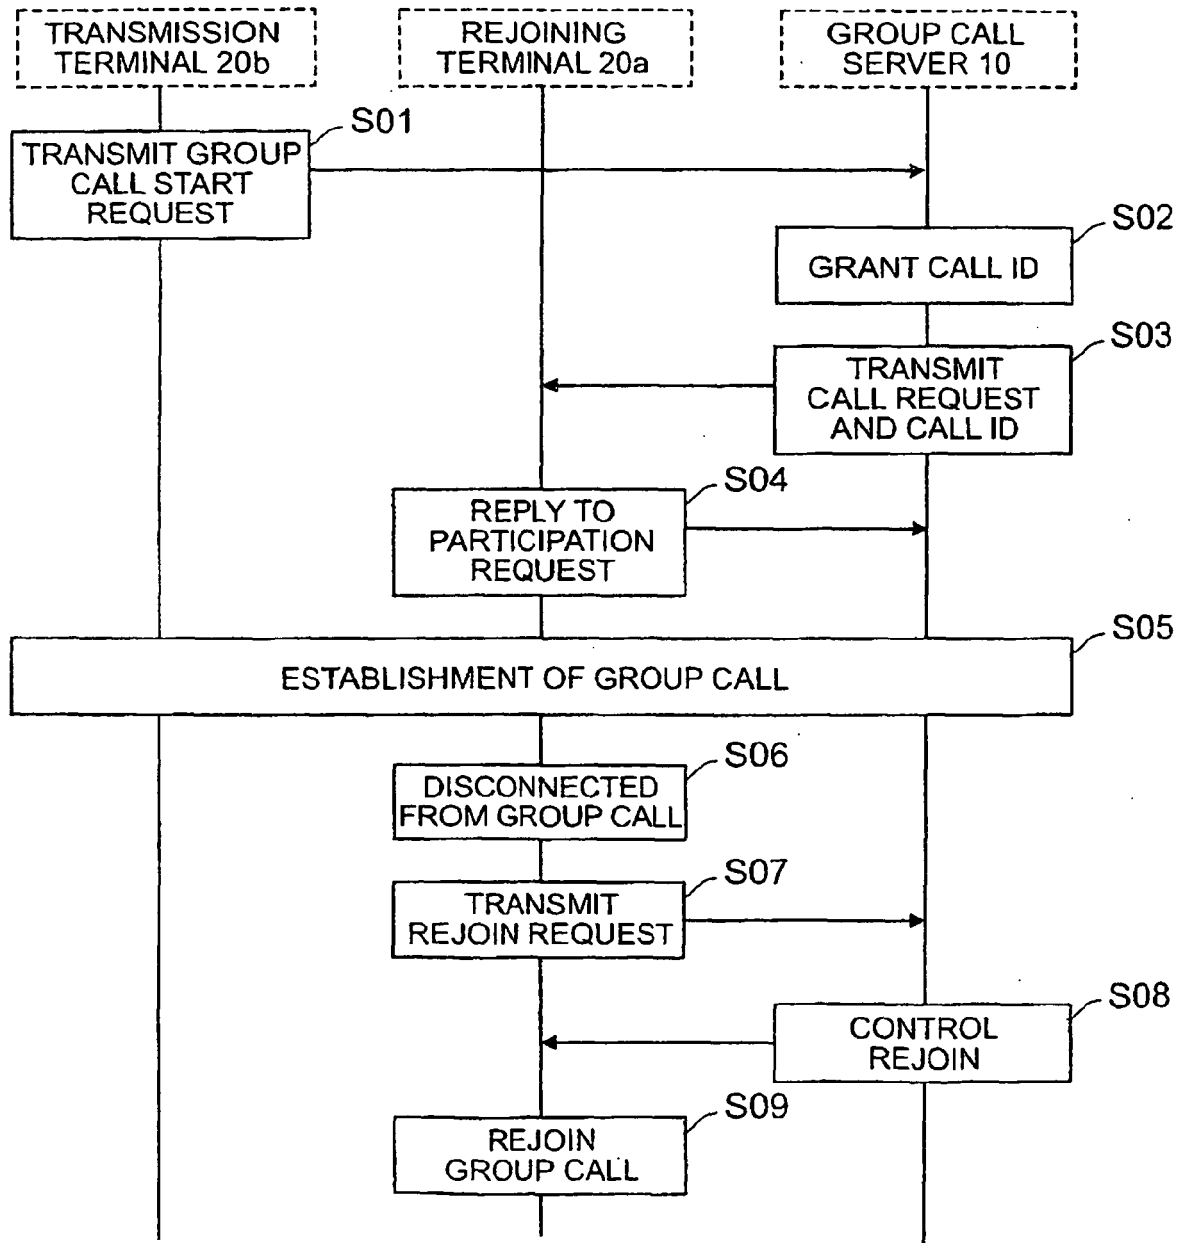


Fig.4







PTT





PTT COMMUNICATIONS

SENDER

JIRO TANAKA

【FIRST DEVELOPMENT DEPARTMENT】

O09012345678

CONNECTED

OTARO DOCOMO

DISCONNECTED


OHANAKO SUZUKI

NOT RESPONDING

●JIRO TANAKA

CONNECTED

Fig.5

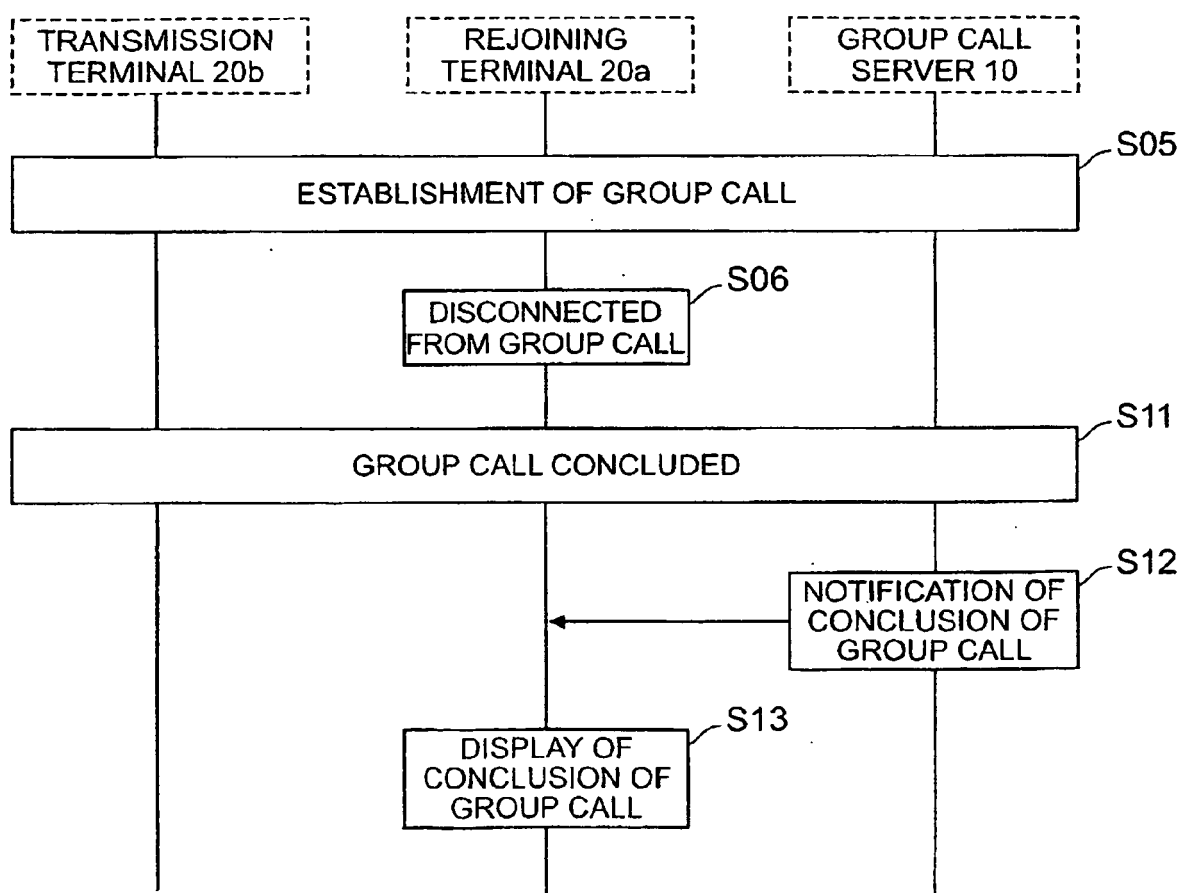

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2001195762 A [0002] [0005]
- WO 9966757 A [0004]