

(19)



(11)

EP 1 780 131 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
02.05.2007 Bulletin 2007/18

(51) Int Cl.:
B65D 5/02 (2006.01)

(21) Application number: **06121929.1**

(22) Date of filing: **06.10.2006**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
 HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
 SK TR**
 Designated Extension States:
AL BA HR MK YU

(71) Applicant: **Grafica Zannini S.p.A.**
56014 Ospedaletto PI (IT)

(72) Inventor: **Farnesi, Flaminio**
56122, Pisa (IT)

(30) Priority: **28.10.2005 IT FI20050082 U**

(74) Representative: **Bardini, Marco Luigi et al**
c/o Società Italiana Brevetti S.p.A.
Corso dei Tintori, 25
50122 Firenze (IT)

(54) **Container with reinforced base for bottles**

(57) A container (1) for bottles, comprising main faces (3, 4, 5, 6) joined by parallel fold lines (7, 8, 9), the two end faces (3, 6) being attached one to the other by means of a connection flap (11) extending from one of them and glued to the other; an upper part and a base (1a) formed by closure flaps joined to the respective faces (12, 13, 14, 15, 16, 17) via fold lines (18, 19, 20, 21, 22, 23), one of said closure flaps (12, 16) of said upper part and of said base comprising respective closure tabs (24,

25) extending from one of its sides via a fold lines (26, 27) and suitable for engaging between one face (3, 5) of the container and the sides of at least two closure flaps (13, 14, 15, 17) turned towards said face. At least one of the closure flaps (15, 17) of the base (1a) is provided with a tooth (15a, 17a) projecting laterally from one of its sides and suitable for engaging in a notch (28) correspondingly formed along the fold line (23) that joins at least one of the other closure flaps (16) of said base to the respective faces (5) of the container.

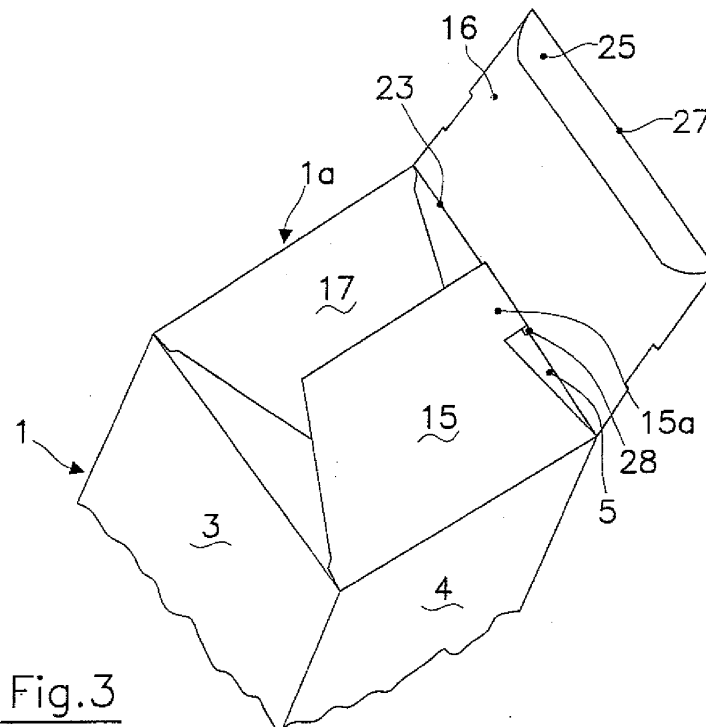


Fig.3

EP 1 780 131 A1

Description

[0001] The present invention relates in general to the field of packaging and more particularly relates to a container made in board or similar materials for bottles, for example glass or plastic bottles filled with a pharmaceutical product.

[0002] The problem of ensuring a sufficient mechanical resistance to the bottom wall or base of containers in board, with special reference to containers for the pharmaceuticals industry, is greatly felt. As is known, the closure of these containers, is generally achieved by first folding one over the other in succession (in the case of parallelepiped containers) three closure flaps extending from respective faces of the container and then engaging between one face and the sides of two opposite closure flaps turned towards said face a closure tab that extends from the corresponding side of the third closure flap.

[0003] Various techniques have been proposed and implemented for giving the base of the container made in this way sufficient mechanical strength for supporting the weight of the bottle placed therein without collapsing. It has however been found that a growing degree of safety offered by these techniques corresponds to greater difficulties in the operations of formation and automatic closure of the containers with standard boxing machines. To limit operating failure of the assembling machines and the rejects due to the difficulties of closure of the base of the containers with these techniques, complex and frequent operations of setting up the machines are necessary which, in conclusion, lead to undesirable production slowing-down.

[0004] The object of the present invention is to provide a container for bottles which has sufficient mechanical resistance of its base and at the same time does not create operating problems during the phases of its formation in the boxing machines currently in use.

[0005] This object is achieved with the container for bottles according to the invention whose feature lies in the fact that at least one of the flaps for closure of its base is provided with a tooth projecting laterally from at least one of its sides and suitable for engaging in a notch correspondingly formed along the fold line which joins at least one of the other flaps for closure of said base to the respective side faces of the container.

[0006] Thanks to the engagement of this tooth, or a pair of overlapped teeth, in the notch formed at the fold line that joins another closure flap to the corresponding side face of the container, it is possible to anchor at least one closure flap or, advantageously, two closure flaps to the faces of the same container, ensuring sufficient resistance of the base and eliminating the problems found in the closure of the base with the presently used assembling machines and which are responsible for the inconveniences found in the prior art.

[0007] The invention will now be illustrated in greater detail with the following description of one of its embodiments, given by way of a non-limiting example with ref-

erence to the accompanying drawings, in which:

- Figure 1 is a blank of a container for bottles according to the present invention;
- Figure 2 is a plan view of the open base of the container formed with the blank of Figure 1;
- Figure 3 is a perspective view of the base portion of the bottle of Figure 2 in the closure phase;
- Figure 4 shows a blank of a first variation of the container for bottles according to the invention;
- Figure 5 is a plan view of the open base of the container made with the blank of Figure 4;
- Figure 6 is a perspective view of the base portion of the container of Figure 5 in the closure phase;
- Figure 7 is a blank of a second variation of the container for bottles according to the present invention;
- Figure 8 is a plan view of the open base of the container made with the blank of Figure 7;
- Figure 9 is a perspective view of the base portion of the container of Figure 8 in the closure phase.

[0008] Referring to Figures 1, 2 and 3, 1 denotes a container for bottles, for example containing pharmaceutical products, of which only the base portion indicated at 1a in Figure 3 is shown. The container 1 is made up from a blank indicated generically at 2 and illustrated in Figure 1, obtained by punching a sheet of board, Bristol paper or equivalent paper materials. The blank 2 is made up of four panels 3, 4, 5 and 6, joined one to the other in succession by fold lines 7, 8 and 9. The panels 3, 4, 5 and 6 make up the side faces of the container 1. An additional fold line 10, parallel to the previous ones, joins the panel 3 to a connection flap 11 that can be attached with glue or another adhesive to the panel 6 to close the flat development 2, giving it a parallelepiped shape.

[0009] The panels 3, 4, 5 and 6 have a rectangular shape in the embodiment illustrated, with the connection flap 11 that extends from a larger side of the panel 3. Closure flaps 12, 13 and 14 extend from the smaller consecutive sides of said panels, forming, once overlapped, the upper closure portion of the container. Similarly further closure flaps 15, 16 and 17 extend from the opposite smaller and consecutive sides of said panels, forming, once overlapped, the lower closure portion or base, indicated at 1a in Figure 3, of the container 1. More particularly the pair of panels 4 and 6 have opposite closure flaps 13, 15 and 14, 17 joined to the respective panels by fold lines 18, 19 and 20, 21. Instead the two closure flaps 12 and 16 extend, from opposite sides, from the pair of panels 3 and 5, joined to the respective panels via fold lines 22 and 23. Respective closure tabs 24 and 25 also extend from the closure flaps 12 and 16, joined to said flaps via fold lines 26 and 27.

[0010] The closure flaps 15 and 17 are sheared from the closure flap 16, placed between them, so as to form a pair of teeth 15a and 17a turned one towards the other in the blank 2. Along the fold line 23 that joins the closure flap 16 to the panel 5 of the blank 2 (corresponding to

the side face of the container 1) a notch 28 is formed wherein the teeth 15a and 17a engage, overlapped one over the other, once the closure flaps 15 and 17 are folded one over the other, as shown in Figure 3. The closure of the base 1a of the container 1 is then completed by turning the closure flap 16 over the two flaps 15 and 17 already folded and engaging the closure tab 25 in the container 1 between the side face 3 and the sides of the closure flaps 15 and 17 turned towards it. In this way the closure flaps 15 and 17 are anchored via the respective teeth 15a and 17a to the side face 5 of the container 1.

[0011] In the embodiment of the invention shown in Figures 4, 5 and 6, wherein identical reference numerals correspond to identical parts in relation to the previous figures, the closure flap 17 has a further tooth 17b which extends from the side which, once the closure flaps 15 and 17 have been overlapped, is turned towards the closure flap 15. Moreover the closure flap 17 has a length substantially equal to the length of the fold line 23. Along the fold line 19, which joins the closure flap 15 to the respective face 4, a notch 29 is formed wherein the tooth 17b engages when the two closure flaps 15 and 17 are folded one over the other. Therefore, in this embodiment the closure flaps 15 and 17 are anchored both to the face 5, with the teeth 15a and 17a overlapped and engaged in the notch 28, and to the face 4 of the container 1 with the tooth 17b which engages in the notch 29.

[0012] In the embodiment of the invention shown in Figures 7, 8 and 9, wherein identical reference numerals correspond to identical parts in relation to the previous drawings, only the tooth 17b is provided, extending from the outer side of the closure flap 17 so as to be able to engage in the notch 29 formed along the fold 19 that joins the closure flap 15 to the face 4 of the container 1. In this case too the closure flap 17 has a length substantially equal to that of the fold line 23 that joins the closure flap 16 to the face 5 of the container 1 to allow the insertion of the tooth 17b in the notch 29.

[0013] It will be noted that in none of the embodiments of the invention illustrated above the presence of the anchorage teeth 15a, 17a and 17b hinders the closure of the base 1a of the container 1.

[0014] As a matter of fact, these teeth do not interfere with the closure movement of the closure flap 16, which is arranged externally above the already overlapped opposite closure flaps 15 and 17, nor with the insertion of the closure tab 25 between the face 3 of the container 1 and the sides of the closure flaps 15 and 17.

[0015] Variations and/or modifications may be brought to the container with reinforced base for bottles according to the present invention, without departing from the scope of the invention as set forth in the following claims.

Claims

1. Container (1) for bottles, comprising: main faces (3, 4, 5, 6) joined by parallel fold lines (7, 8, 9), the two

end faces (3, 6) being attached one to the other by means of a connection flap (11) extending from one of them and glued to the other; an upper part and a base (1a) formed by closure flaps (12, 13, 14, 15, 16, 17) joined to the respective faces via fold lines (18, 19, 20, 21, 22, 23), one of said closure flaps (12, 16) of said upper part and of said base comprising respective closure tabs (24, 25) extending from one of its sides via fold lines (26, 27) and suitable for engaging between one face (3, 5) of the container and the sides of at least two closure flaps (13, 14, 15, 17) turned towards said face, said container being **characterized in that** at least one of the closure flaps (15, 17) of the base (1a) is provided with a tooth (15a, 17a) projecting laterally from one of its sides and suitable for engaging in a notch (28) correspondingly formed along the fold line (23) that joins at least one of the other closure flaps (16) of said base to the respective faces (5) of the container.

2. Container according to claim 1, wherein two opposite closure flaps (15, 17) of said base (1a) are provided with respective teeth (15a, 17a) projecting laterally from their sides, suitable for overlapping when said flaps are overlapped to form a single tooth suitable for engaging in said notch (28) formed correspondingly along the fold line (23) of the closure flap (16) towards which the sides of the two closure flaps bearing said teeth are turned.
3. Container according to claims 1 or 2, wherein a further tooth (17b) extends from the side of one of said closure flaps (17) provided with said projecting and superimposable teeth (15a, 17a), said further tooth (17b) being turned towards the other (15) of said closure flaps, a notch (29) for the engaging of said further tooth being formed at the fold line (19) that joins said other closure flap (15) to the respective face (4) of the container.
4. Container according to claim 1, wherein a projecting tooth (17b) extends from one side of one of said closure flaps (17) of said base (1a) opposite the side with which said closure flap (17) is joined to the respective face of said container, said projecting tooth being engageable in a notch (29) formed at and along the fold line (19) that joins the opposite closure flap (15) to the respective face (4).

Fig.1

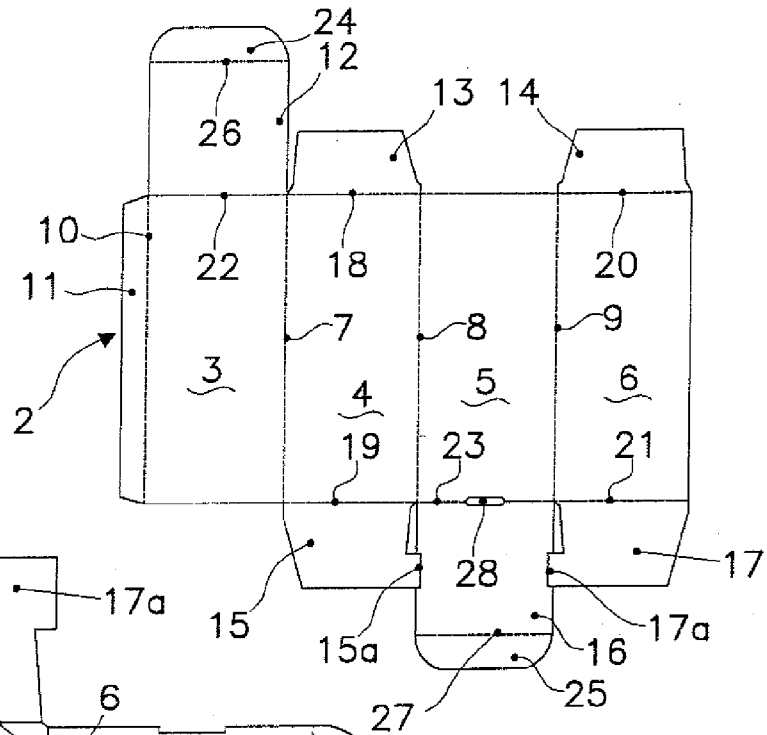


Fig.2





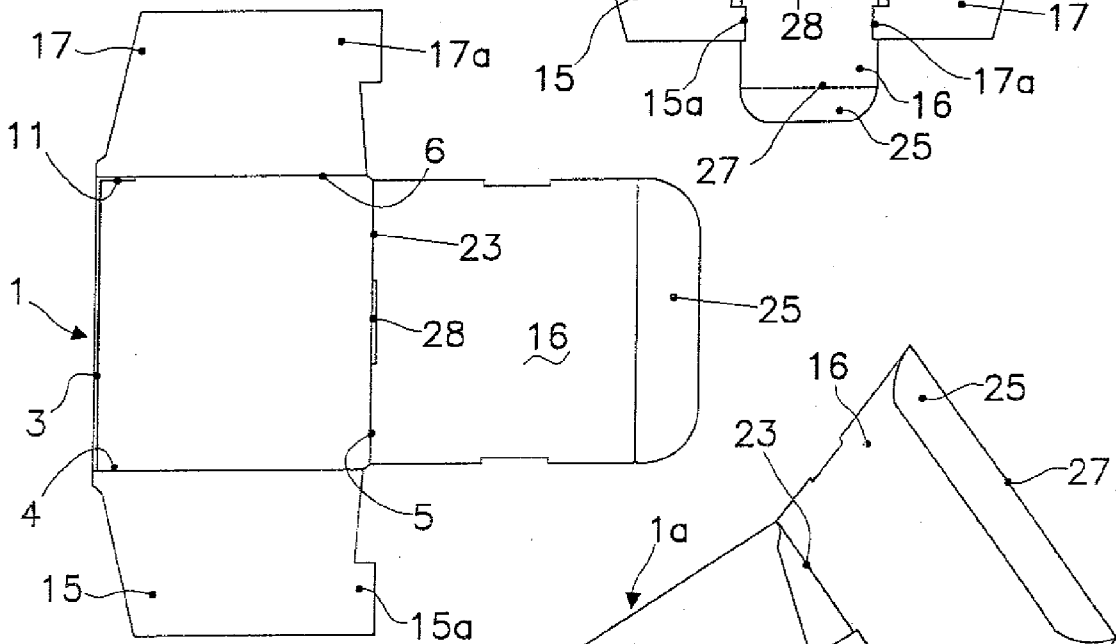


Fig.3

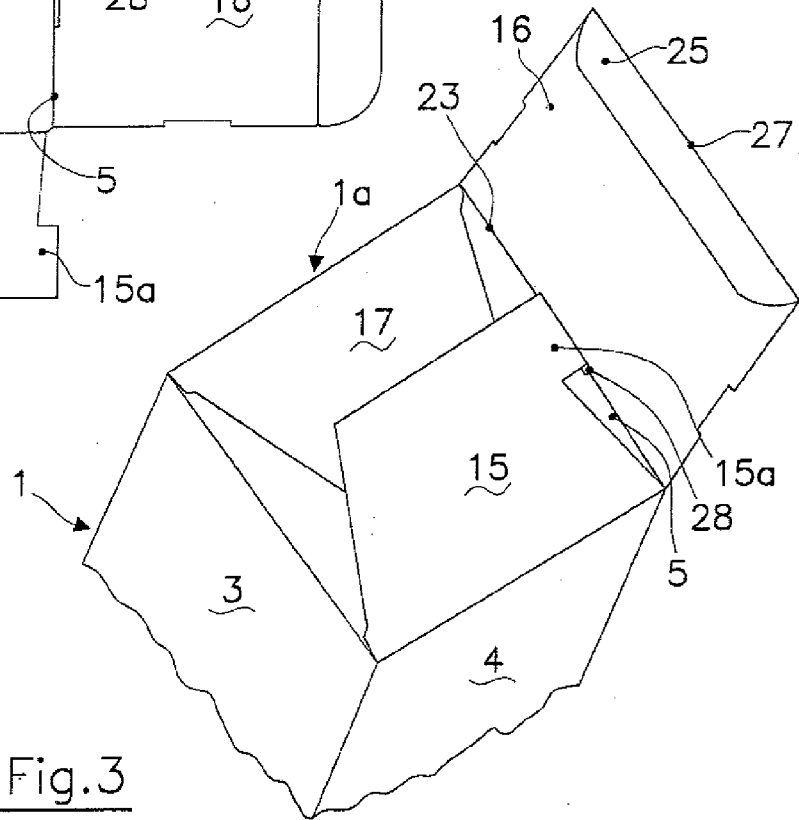

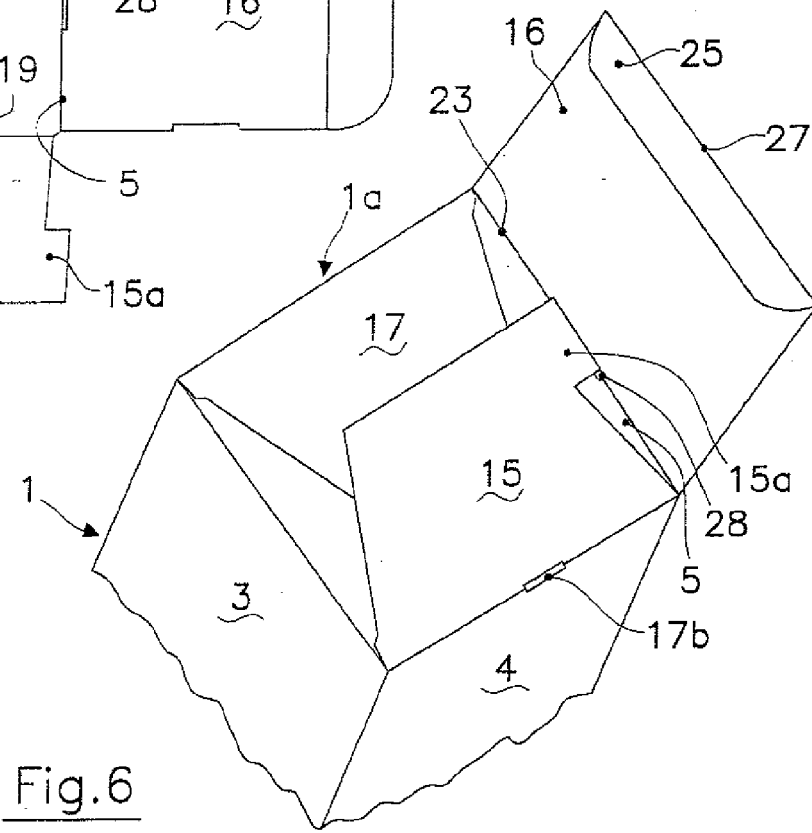

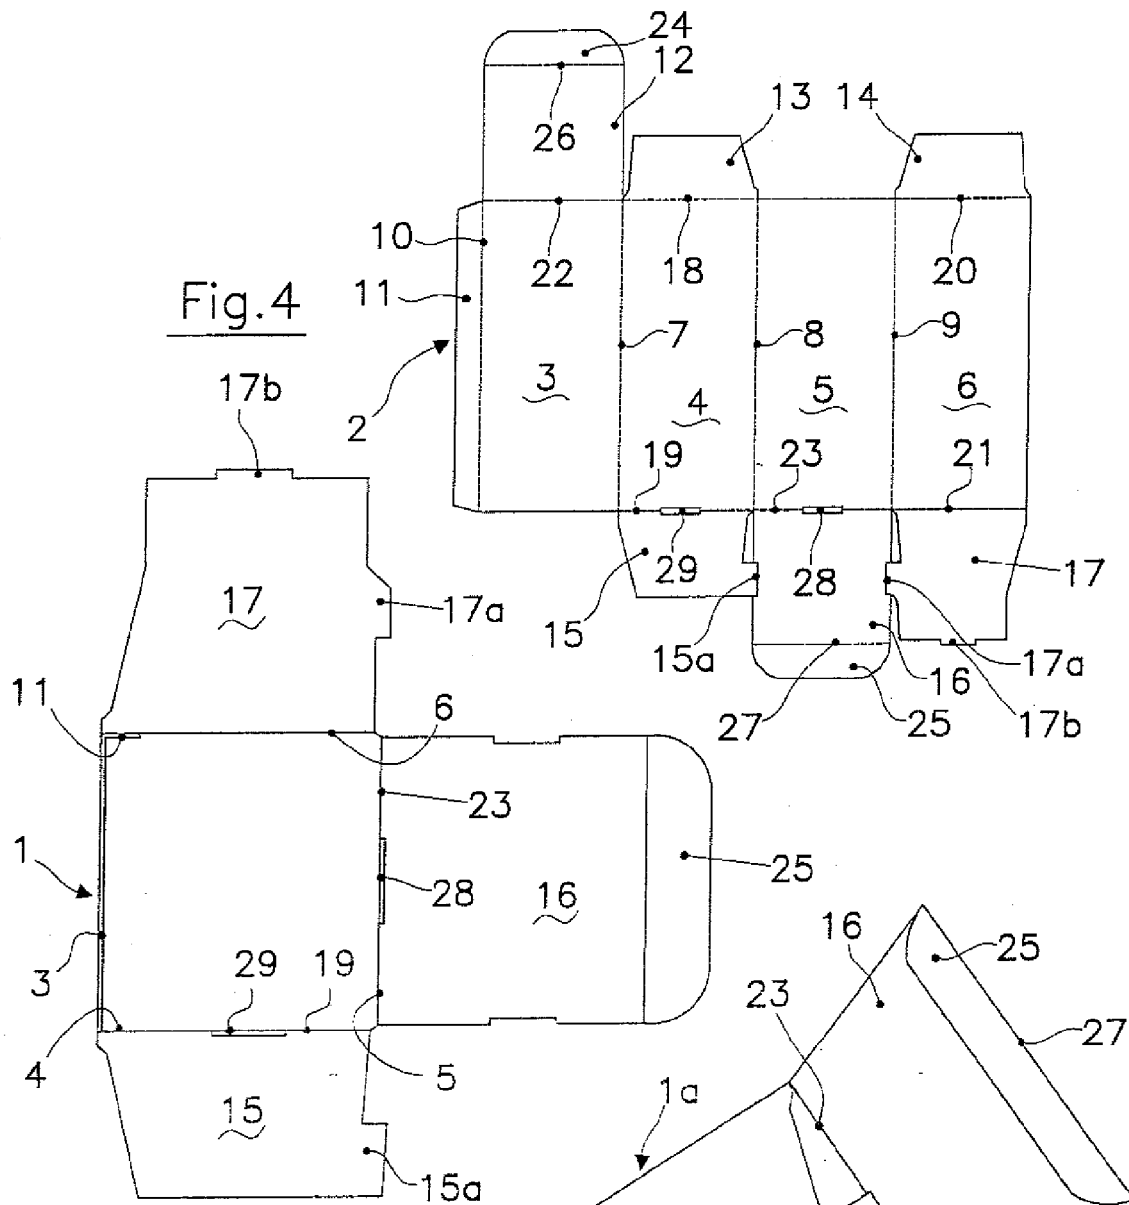

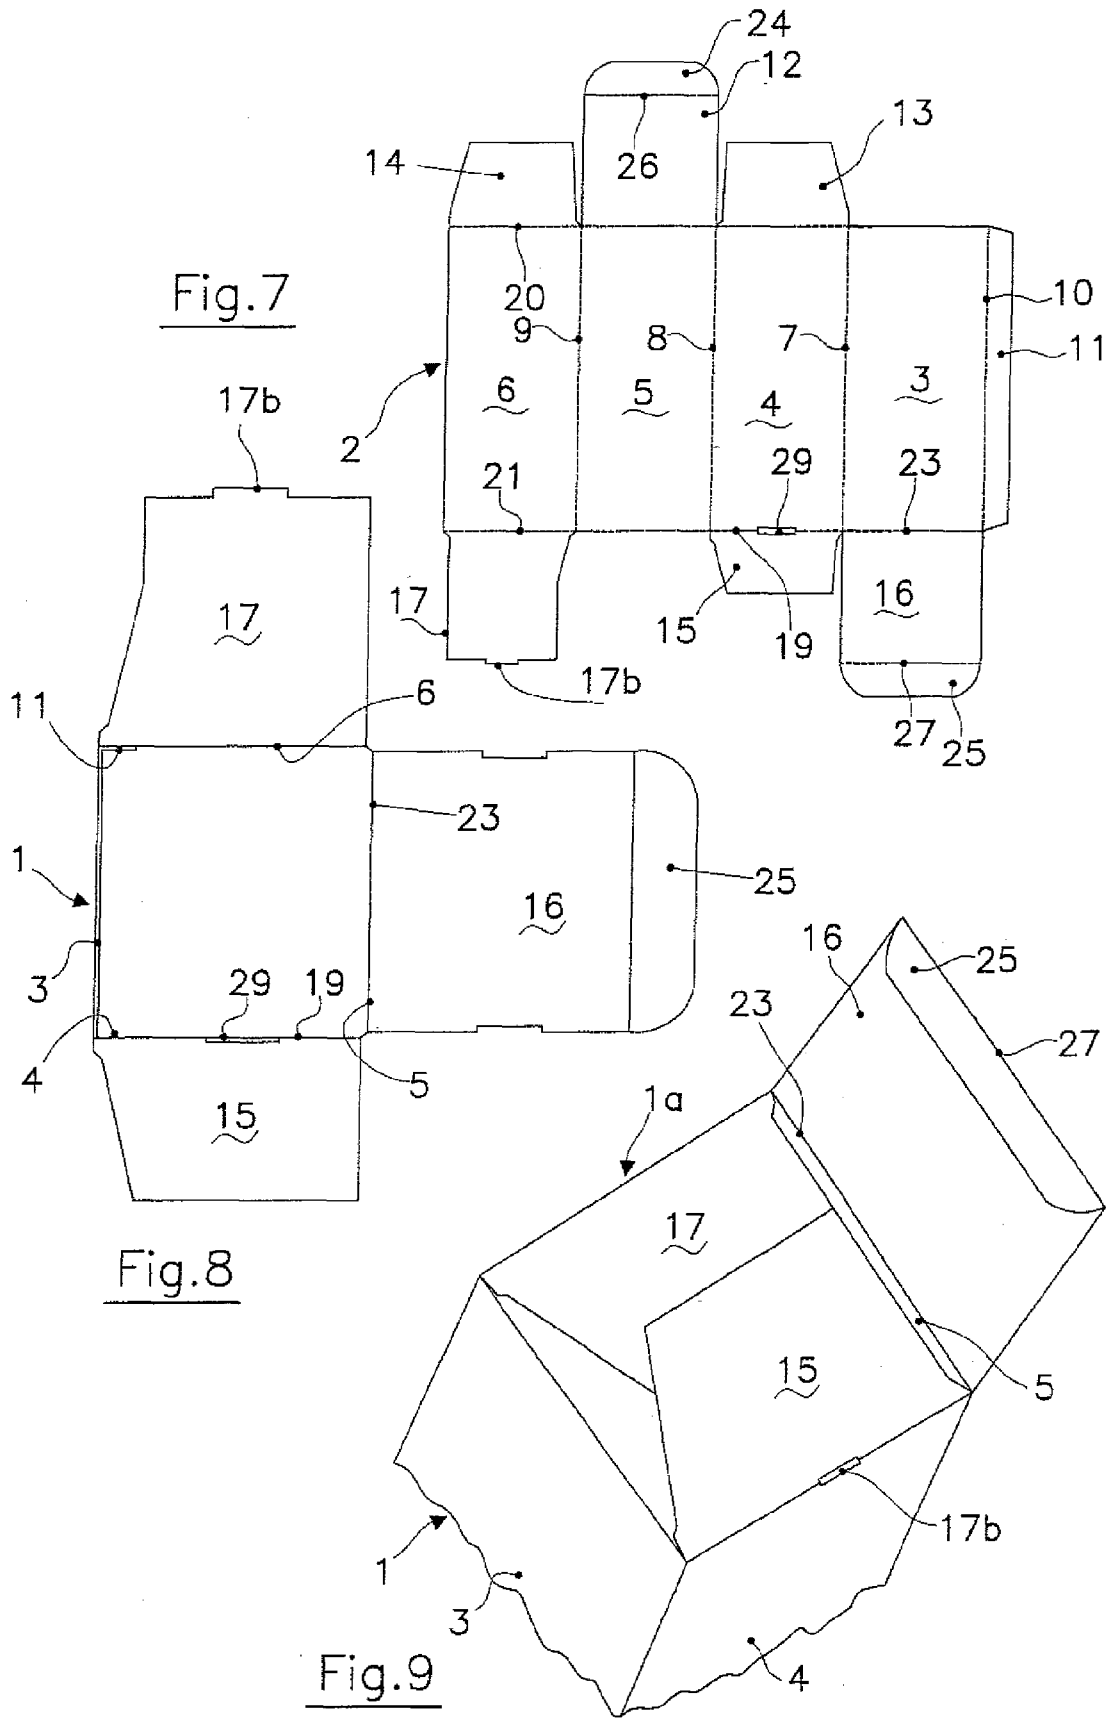

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	EP 1 577 221 A1 (SMURFIT SOCAR SA [FR] SMURFIT KAPPA FRANCE SAS [FR]) 21 September 2005 (2005-09-21) * abstract; figures * -----	1	INV. B65D5/02
X	GB 449 265 A (JOHN LAIRD & SON LTD; ROBERT PATRICK; JAMES CAMERON BUCHAN; RONALD ALL) 24 June 1936 (1936-06-24) * abstract; figures * -----	1,4	
A	US 5 755 376 A (GREER JERRY A [US] ET AL) 26 May 1998 (1998-05-26) * abstract; figures * -----	1	
			TECHNICAL FIELDS SEARCHED (IPC)
			B65D
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
The Hague		12 February 2007	SERRANO GALARRAGA, J
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

2
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 06 12 1929

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-02-2007

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1577221	A1	21-09-2005	FR 2867751 A1	23-09-2005
GB 449265	A	24-06-1936	NONE	
US 5755376	A	26-05-1998	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82