



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
23.05.2007 Bulletin 2007/21

(51) Int Cl.:
F04C 18/02 (2006.01)

(21) Application number: **05257185.8**

(22) Date of filing: **22.11.2005**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI SK TR
Designated Extension States:
AL BA HR MK YU

(72) Inventor: **Young, Terence William Thomas**
Gravesend, Kent DA11 7RN (GB)


(74) Representative: **Dutton, Erica L. G.**
Rosemount
Pednor Vale Road
Chesham, Bucks HP5 2ST (GB)

(71) Applicant: **J&E Hall Limited**
Dartford
Kent DA1 1PU (GB)

Remarks:
Amended claims in accordance with Rule 86 (2) EPC.

(54) **Method and apparatus for compressor re-manufacture**

(57) A method of repairing a scroll compressor, wherein the casing (100) of the compressor is cut open by making two transverse cuts through the casing to give access to the internal components of the compressor. The casing (100) is then resealed, using two annular reinforcing structures (300), one at each cut, to conserve the dimensions of the casing (100). This allows a scroll compressor to be repaired and re-assembled without losing the fine positioning of internal components which are held in place by the casing (100). Each annular reinforcing structure (300) comprises a ring (310) with an outwardly directed flange (305). The flange (305) has a thickness chosen to conserve the dimensions of the re-assembled casing while allowing single-pass welding and the ring (310) has a length which is chosen to provide at least location of the cut surfaces of the casing (100) during re-assembly and, optionally, shielding to prevent weld pool, slag or splatter entering the canister (100).

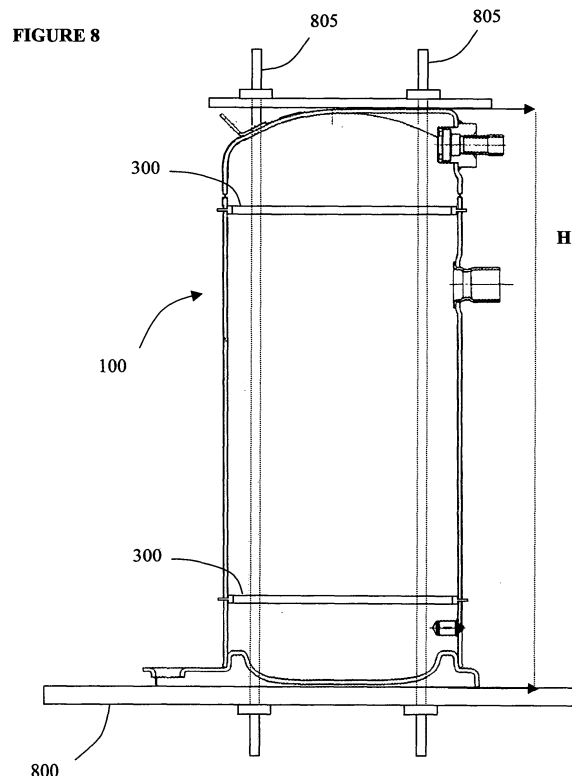

Description

[0001] The present invention relates to methods and apparatus for compressor remanufacture.

[0002] Compressors are known for use in cooling, for example for use in refrigeration and air conditioning units. They generally comprise a compression mechanism for compressing a gas so that it can be rapidly expanded, producing cooling.

[0003] Known compressors are of different types, for example screw compressors and scroll compressors. In a scroll compressor, two parts of generally spiral cross section are interleaved. Gas enters a pocket at an outer edge between the two spiral surfaces and is trapped and moved towards the centre of the spirals by a cranked motion of one spiral surface against the other. As the gas nears the centre of the spirals, it becomes fully compressed and exits at the centre. Scroll compressors are described for example in the following paper: "Scroll Compressor Design and Application Characteristics for Air Conditioning, Heat Pump, and Refrigeration Applications" by JP Elson, GF Hundy and KJ Monnier, published in the Proceedings of the Institute of Refrigeration 1990-1991, 2-1.

[0004] Screw compressors have long been subject to repair and remanufacture for maintenance purposes. However, this has not been possible with scroll compressors. Although the two scroll components providing the spiral surfaces may be designed with a degree of axial and radial compliance, there are other factors which come into play. For example, the scroll components may be loaded together axially to bring each vane tip into contact with the opposing scroll base. According to the paper referenced above, "This demands great precision of the vane heights of the mating scroll components and consequently a highly sophisticated manufacturing process."

[0005] Scroll compressors are hermetically sealed in a welded, pressure-tight container. To repair a scroll compressor would mean opening this pressure-tight canister. However, the canister is formed and assembled to position the internal components in relation to each other with the great precision required. No provision is made for opening the canister and there is no known method for opening a canister, repairing working parts and reassembling the compressor to give adequate subsequent performance. Although it is perfectly possible to cut open the canister with cutting equipment and to weld it back together after repair or maintenance, this destroys the original factory set component positions and it would be extremely difficult, probably impossible, to reestablish the components correctly upon reassembly. Further, debris can be introduced to the inside of the canister.

[0006] According to a first aspect of embodiments of the present invention, there is provided an annular reinforcing structure for use in remanufacturing scroll compressors having a casing which provides positioning for internal components, the annular structure having a T-

shaped, or substantially T-shaped, cross section provided by a ring with an outwardly projecting flange positioned partway along the outer surface of the ring, the flange comprising weldable material, having a thickness of not more than 10mm and being arranged, in use, to be welded between opposing cut surfaces of a reassembled compressor casing.

[0007] Preferably, the ring has an outer surface which, in use, abuts the inner surface of the casing to either side of the flange. The outer surface of the ring is preferably flat or concave and provides an interference fit with the inner surface of the casing. This ring part of the annular structure, extending inside the remanufactured casing, has at least two functions, one being to re-align the cut parts of the casing for welding and the other being to act as a shield against any weld splatter and slag. Re-alignment of the cut parts is facilitated where the outer surface of the ring provides an interference fit with the inner surface of the casing. To act as an effective shield, the outer surface of the ring preferably extends away from the weld in each direction sufficiently far to prevent any weld pool, splatter or slag from penetrating the canister during re-assembly. For example, it has been found sufficient that the outer surface of the ring extends away from the weld in each direction to approximately twice the wall thickness of the casing in the weld area. Typically, this will mean the overall dimension of the ring in the longitudinal (or axial) direction of the casing, in use, is at least 8mm. If, however, a welding technique is used which generally avoids entry of material to the canister and the primary purpose of the ring is to provide location rather than a shield, then the length of the ring in the axial direction can be reduced. A working minimum for the length of the ring in the axial direction in this situation has been found to be 0.5mm greater than the thickness of the flange, giving 0.25mm at each end of the ring for use in locating the cut parts of the casing for welding.

[0008] The reinforcing structure comprises a material such as low carbon welding grade steel which can be welded in reassembly of a compressor casing so as to produce a repaired casing with sufficient strength and positional accuracy to support subsequent use of the compressor. The reinforcing structure must be manufactured of a suitable grade material to be compatible with and ensure a full penetration weld can be achieved with the material of the compressor casing.

[0009] In practice, the annular reinforcing structure has been found to have multiple advantages:

- It ensures that the original critical assembly positions can be re-established, both axially and radially, despite loss of material in cutting open the casing
- It shields the inside of the canister, preventing weld pool, splatter or other debris from entering the canister during remanufacture
- Importantly, it obviates the need for a full penetration weld to join cut surfaces of the casing with the resultant weld splatter whilst ensuring that the weld

gap can still be closed with a single welding operation.

[0010] A full penetration weld, extending right through the container casing from outside to inside, would normally be done to prevent any potential gaps from which a fatigue crack could propagate. However, this has the disadvantage that weld splatter and slag can be left inside the container. Using an annular reinforcing structure according to an embodiment of the invention means that the cut edges of the casing can be welded to the flange instead of to each other, using a single welding operation taken across the flange from one side to the other. The flange and/or the central part of the ring melts to provide effectively one weld to the cut edges of the casing while the ring extends across the weld site inside the casing and provides a shield against any weld splatter and slag.

[0011] The ring will have a shape in plan view which is dictated by the cross section of the casing. This will usually be circular. However, it is not essential that it is circular since a compressor casing may in practice have an oval or other cross section.

[0012] Preferably, the thickness of the flange is kept small in order to minimise the size of the final weld. However, the cutting tool used to cut the casing open will necessarily remove material which must be replaced by material of the flange in the remanufactured casing. Otherwise, the original critical assembly positions will not be re-established. There are conflicting requirements here. If the cutting tool is too thin the tool itself may lose rigidity but a wide cut means increasing the thickness of the flange.

[0013] A complicating factor is that, although the thickness of the outwardly projecting flange can be used to substitute for material lost during cutting of the casing, the relationship is not necessarily direct. The step of welding the structure into place can in practice affect the relationship between the depth of material lost and the thickness of the outwardly projecting flange significantly. The degree to which this happens depends on the welding technique used. For example, using multipass welding, the thickness of the flange may need to be of the order of 1.5mm greater than the width of the cutting tool. On the other hand, using metal inert gas (MIG) or tungsten inert gas (TIG) welding in one pass, the relationship can be maintained and the thickness of the flange and the width of the cutting tool can be the same.

[0014] In preferred embodiments of the invention, both the thickness of the flange and the width of the cutting tool are less than 10mm, for instance 6mm or more preferably 3mm. The thickness of the flange need be no more than 2mm, for example 1.5mm, greater than the width of the cutting tool. If a one pass welding technique is used which avoids loss of dimension during the welding step, for instance the inert gas techniques such as MIG or TIG welding, then the thickness of the flange and the width of the cutting tool can be the same.

[0015] According to a second aspect of embodiments

of the present invention, there is provided a scroll compressor comprising a reassembled casing and an annular reinforcing structure according to an embodiment of the invention in its first aspect, the reinforcing structure being welded to opposing cut surfaces of the reassembled casing to provide a seal.

[0016] According to a third aspect of the present invention, there is provided a method of repairing a scroll compressor having a casing, the method comprising the steps of:

- i) opening the casing for repair of the compressor by making at least one cut through the casing to produce cut surfaces; and
- ii) subsequently closing the casing, including the step of welding said cut surfaces to an annular reinforcing structure having a T-shaped cross section such that the cut surfaces are welded to opposing sides of an outwardly directed flange of the reinforcing structure, the flange being mounted on a ring whose outer surface, in use, abuts an inner surface of the closed casing,

wherein the closed casing is supported and sealed by the reinforcing structure.

[0017] Where the step of welding said cut surfaces results in shrinkage, the outwardly directed flange of the reinforcing structure preferably, prior to the closing step ii), has a thickness greater than the thickness of material removed in making said at least one cut. The greater thickness of the flange can then compensate for the shrinkage.

[0018] Preferably, the step of welding the cut surfaces comprises a single pass welding step. That is, the welding equipment only has to complete one circuit of the casing to complete a weld of the surfaces to the flange.

[0019] Scroll compressors normally have a generally cylindrical casing. It will usually, if not always, be appropriate that the at least one cut through the casing is made in a plane transverse to the longitudinal axis of the casing.

[0020] In order to gain sufficient access to the contents of the casing of a scroll compressor to make an effective repair, it has been found preferable to make two cuts through the casing. The step of closing the casing is then done using two annular reinforcing structures, welding the cut surfaces at each cut to a flange of a respective reinforcing structure.

[0021] It has been found possible, using embodiments of the invention, to achieve sufficient accuracy in the dimensions of the casing of a repaired scroll compressor that the compressor can be restored to working functionality. Although the requirement for accuracy in these dimensions is driven at least primarily by the design and construction of the scroll compressor, in known scroll compressors the requirement has been high. An advantage of embodiments of the present invention is that it has been found possible to achieve an accuracy in restoring the overall length of a compressor casing to the

order of thousandths of an inch. For example, it has been found possible to achieve an accuracy within five thousandths of an inch in restoring the overall length of a compressor casing.

[0022] Typically, a compressor casing is of the order of eighteen or twenty inches long.

[0023] The remanufacture of a scroll compressor using an annular reinforcing structure will now be described, by way of example only, with reference to the accompanying figures in which:

Figure 1 shows a vertical cross section through a scroll compressor;

Figure 2 shows a cross section through the casing of the scroll compressor of Figure 1, indicating the location of a cutting operation;

Figure 3 shows a cross section through an annular reinforcing structure for use in remanufacturing the scroll compressor of Figure 1;

Figure 4 shows a cross section through the annular reinforcing structure and the casing of the scroll compressor of Figure 1, after remanufacture of the casing;

Figures 5 and 6 show cross sections through annular reinforcing structures of alternative profiles;

Figure 7 shows a plan view of the reinforcing structures of Figure 3; and

Figure 8 shows a vertical cross section of the casing of the scroll compressor of Figure 1, fitted with two of the reinforcing structures of Figure 3 and held in position on a bench prior to welding.

[0024] It should be noted that the figures are schematic only, none being drawn to scale.

[0025] Referring to Figure 1, a scroll compressor is generally assembled into a welded, sealed, pressure-retaining canister 100. Working components of the compressor include, as shown, a floating seal 115, an internal pressure relief valve 120, a gas bypass tube 125, an axial compliance guide 130, an Oldham coupling 135 and an unloader bushing 140. Centrally positioned in the canister, there is the compressor unit 145: a housing holding the cranked spiral vanes (not shown) which co-operate to provide compression in use of the compressor. These components are all known and as described in the paper referenced above.

[0026] Generally it can be seen that the canister 100 fits closely around the internal components of the compressor, particularly in the region of the compressor unit 145. The floating seal 115 is a critical component in assembly of the canister about these internal components. The seal 115 must be free to move under pressure to effect a seal against a sealing plate, above it as shown in Figure 1. It is important to leave a gap for this seal to move in and not for instance to produce a situation in which the plate is kept permanently clamped against the top housing.

[0027] The assembly of a new compressor produces

a welded, sealed, pressure-retaining canister 100. The factory assembly process is such that internal components are held in correct alignment during both assembly and final welding processes. Cutting into the external hermetic seal provided by the canister 100 in order to make repairs or undertake rebuilding of the compressor means this critical positioning and alignment is lost. Subsequent reassembly is not possible by repeating the original assembly process due to the cutting of the original vessel leading to both material and positioning loss.

[0028] Referring to Figure 2, in embodiments of the present invention, the hermetic chamber provided by the canister 100 of the compressor must be cut open to gain access to the internal components. In order to repair or maintain the cranked spiral vanes, access needs to be gained to the compressor unit 145 in the crowded upper part of the canister 100.

Measurement

[0029] In a method according to an embodiment of the invention, the unopened canister 100 is first measured to an accuracy of thousandths of an inch. This is done in the longitudinal direction of the canister 100, giving the height H of the canister 100, and in two orthogonal diametric directions, giving two measurements for the width W of the canister 100. The height H is used during reassembly, to ensure that the repaired canister 100 is the same height, to within thousandths of an inch, as it was before opening. The width W is used to select the correct dimensions for an annular reinforcing structure 300, as shown in Figures 3 to 7 and discussed below, for use in reassembly.

Opening

[0030] The compressor is rigidly mounted. This can be done in any convenient way, for instance using a machine tool such as a suitably sized lathe, mill, pedestal drill, optionally with a rotary cutting table, or the like. The canister 100 can then be cut open. Still referring to Figure 2, circumferential cuts are made at two positions C1, C2, a first of these (C1 as shown) being level with a point about halfway up the compressor unit 145 and a second of these (C2 as shown) being near the base of the canister 100. These positions C1, C2 give good access for disassembly and/or removal of the internal components of the canister 100 while giving enough space for reassembly using a reinforcing ring structure as shown in Figures 3 to 8 and discussed below. Once cut, the canister 100 can be opened for removal of the compressor unit 145 for repair or replacement.

[0031] Scroll compressors are a general type and embodiments of the present invention can be used to remanufacture most or all scroll compressors. A specific example of a scroll compressor in widespread use which can be remanufactured as described herein is the Copeland compressor. Scroll compressors in general have a

motor in the main body of the canister 100, this comprising a stator mounted between the two cutting positions C1 and C2 and a main shaft assembly extending through it. The two scrolls of the compressor unit 145 are driven by the main shaft assembly and extend across the upper cutting position C1, as shown in Figure 2. Once the canister 100 is cut and opened, these components become accessible.

[0032] The cutting tool used to cut open the canister 100 will remove a depth of material in the axial direction of the canister 100 which is mainly determined by the thickness of the cutting tool. Thicknesses of material which might be removed at each cut are for example 3mm or 6mm. Cutting can be done using known techniques, for example by milling, slitting or using a laser, and using various configurations of equipment. For example, the canister 100 can be mounted on a variety of machine tools which rotate the canister, alternatively the canister can be stationary and the machine tool rotated; such machine tools can be either horizontal or vertical in configuration.

[0033] Cutting can be done using known techniques, for example by milling or slitting, and using various configurations of equipment. For example, the canister 100 can be mounted on a lathe and a milling or slitting tool can be used with a milling machine. Another alternative is to use a pedestal drill with a rotary cutting table.

[0034] After repair or replacement of the compressor unit 145, the canister 100 is reassembled using a reinforcing ring structure 300 at each cut.

Reinforcing Ring Structure 300

[0035] Referring to Figures 3 and 7, a reinforcing ring structure 300 is constructed by turning a low carbon welding grade steel bar, for instance according to the British/European standard BS970-1983 070M20 (EN3B). Alternatively, it would be possible to cut the structure 300 from a seamless tube. The structure 300 has an outwardly projecting flange 305 mounted on a flat-sided ring 310. The outwardly projecting flange 305 projects 2.6mm. The length of the ring 310 in the axial direction of the canister 100 is 13mm. The thickness of the flange 305 in the axial direction is 3mm and the internal diameter of the ring structure 300 overall is 157.6mm. The thickness of the ring 310 is 1.45mm.

[0036] The material of the ring structure 300 is not necessarily low carbon welding grade steel but will be chosen in known manner, usually primarily according to the welding technique being used.

[0037] The dimensions of the ring structure 300 are chosen to match the relevant dimensions of the canister 100, the cutting tool used to make the cuts and the effect of the welding process in reclosing the canister 100. In particular, the ring structure 300 is sized to meet the following criteria:

- to ensure an interference fit between the outer sur-

face of the ring 310 and the internal surface of the canister 100

- to prevent any weld pool from penetrating the canister 100 during reassembly
- so that the ring 310 is sufficiently thin to ensure clearance with internal compressor components but strong enough to guide the cut parts of the canister 100 in reassembly
- to compensate for material lost in the cutting process with the thickness of the flange 305, taking into account any further dimensional losses incurred in welding

[0038] Referring to Figure 4, in reassembling a canister 100, the ring structure 300 is placed so that the flange 305 sits between cut surfaces of the canister 100 at one of the cutting positions C2. The thickness of the flange 305 (3mm) and the length of the ring 310 in the axial direction of the canister 100 (13mm) together mean that the ring 310 will extend to a distance 5mm away from the finished weld in each axial direction. This is selected to be approximately twice the wall thickness (2.5mm or 2.6mm) of the canister 100 in the weld area. Expressed more generally, the ring 310 has a length in the axial direction which is substantially five times, or slightly more than five times, the wall thickness of the canister 100 in the weld area. As mentioned earlier, this has been found to be sufficiently far to prevent any weld pool from penetrating the canister 100 during reassembly. However, depending on the welding technique used, the length of the ring 310 in the axial direction of the canister 100 could be reduced. If the welding technique is selected to avoid material penetrating into the canister 100, the length of the ring 310 in the axial direction of the canister 100 could be reduced to enough to provide location of the sections of the canister 100 at the cutting positions C1 and C2. This might be as little as 0.25mm away from the finished weld in each axial direction. In this case, the ring 310 has a length in the axial direction which is substantially, or at least, 0.5mm greater than the thickness of its flange 305.

[0039] The dimensions of the ring structure 300 given above will vary according to circumstance, in particular the specific dimensions of a canister 100 being repaired and the cutting method being used. Thus for example, ring structures falling within the ambit of the invention and for use with known canisters 100 might have flanges up to 10 mm thick, up to 4 mm thick, or considerably less.

Reassembly

[0040] Referring to Figures 2 and 4, once the compressor unit 145 has been repaired, the scroll compressor can be reassembled using a reinforcing ring structure 300 at each of the original cut lines C1, C2 in the canister 100. In more detail, reassembly is carried out as follows:

- Fit top bearing to the housing of the compressor unit 145

- Refit stator of motor to the main section of the canister 100, between cut lines C1 and C2
- Fit main shaft assembly into the stator in the main section of the canister 100
- Fit new lower bearing to the housing of the compressor unit 145
- Fit a reinforcing ring structure 300 at the lower cut line C2 in the canister 100, as shown in Figure 2
- Fit main section of the canister 100 onto the reinforcing ring structure 300 at the lower cut line C2 in the canister 100
- Fit eccentric bush to main shaft
- Fit lower and upper scrolls into the compressor unit 145
- Fit and tighten scroll clamping bolts with spacers
- Fit a reinforcing ring structure 300 at the upper cut line C1 in the canister 100, as shown in Figure 2
- Fit axial seal
- Fit top dome section of canister onto the reinforcing ring structure 300 at the upper cut line C 1 (relief valve previously checked and replaced as necessary)
- Rotationally align the three sections of the canister 100 by turning the sections relative to one another at the cut lines C 1 and C2
- Fit axial clamping alignment fixture to the canister 100
- Mount on welding bed
- Weld top and bottom joints at cut lines C1 and C2.

[0041] With MIG welding, additional filler rod/wire is required but it is possible with TIG welding to size the reinforcing ring structures 300 such that no filler rod/wire is required.

[0042] Known scroll compressor canisters 100 in practice have a weld in the axial direction as a result of the original manufacturing process. The step of rotationally aligning the three sections of the canister 100 mentioned above can conveniently be done with reference to this axial weld as a datum. Accuracy in the rotational alignment of the parts of the canister 100 is not as critical as accuracy in the reconstruction of the canister 100 in the axial direction. Rotational accuracy is only necessary to an extent allowing the correct connections to be made within the canister 100.

[0043] Referring to Figure 8, the axial clamping alignment fixture mentioned above must hold the parts of the canister 100 during welding. It can be provided in more than one way but one solution is to use an assembly bench 800 which has been drilled and tapped to take a series of long studs 805. Once the canister 100 is assembled on the bench 800, using two ring structures 300, these long studs 805 are screwed in to the bench 800 and a top plate 810 added. A clamping pressure is applied via the top plate 810 so that the height H of the canister 100, measured before opening, can be restored to within thousandths of an inch after welding. The canister 100 is then tack welded on the bench 800 before being moved

to welding equipment for final welding.

[0044] The height H can be measured in known manner, using for example a Vernier height gauge or the like.

[0045] In an alternative arrangement to that described above, it would be possible to implement both the cutting open and the final welding of the canister 100 on a modified pillar drill with cutting and welding attachments. The welding step could then conveniently be automated by presetting the position of the welding equipment in relation to the drill and setting a rotational speed to achieve an acceptable weld. A pillar drill usually has a support for an item to be worked on, plus a drill head, but the pillar can also be used to support other equipment in relation to the item, such as jigs and attachments for setting, retaining alignment, machining and welding as necessary.

[0046] In a further alternative arrangement, it would be possible to use a similarly modified milling machine in place of the pillar drill.

Alternative reinforcing ring structures 300

[0047] Referring to Figures 5 and 6, it is not essential that the ring 310 of the ring structure 300 has a flat outer surface. In the ring structure of Figure 5, the outer surface of the ring 310 is concave and just the tips of it, at top and bottom as shown, provide the interference fit with the internal surface of the canister 100 in use. In the ring structure of Figure 6, the outer surface of the ring 310 is rounded off at top and bottom as shown. Either of these variations can potentially make the process of reassembling the canister 100 easier.

Claims

1. An annular reinforcing structure for use in remanufacturing scroll compressors having a casing which provides positioning for internal components, the annular structure having a T-shaped, or substantially T-shaped, cross section provided by a ring with an outwardly projecting flange positioned partway along the outer surface of the ring, the flange comprising weldable material and being arranged, in use, to be welded to opposing cut surfaces of a reassembled compressor casing.
2. An annular reinforcing structure according to Claim 1 wherein the flange has a thickness of not more than 10mm.
3. An annular reinforcing structure according to Claim 1 wherein the flange has a thickness of not more than 4mm.
4. An annular reinforcing structure according to Claim 1 wherein the ring has a length in the axial direction which is at least 0.5mm greater than the thickness

of the flange.

5. A scroll compressor comprising a reassembled casing and at least one annular reinforcing structure according to Claim 1, the reinforcing structure(s) being welded to opposing cut surfaces of the reassembled casing to provide a seal. 5
6. A scroll compressor according to Claim 5 wherein the length of the annular reinforcing structure in its axial direction is at least five times the thickness of the casing in the region of the welded cut surfaces. 10
7. A method of repairing a scroll compressor having a casing which provides positioning for internal components of the compressor, the method comprising the steps of: 15
 - i) making a transverse cut through the casing so as to gain access to one or more of said internal components; and 20
 - ii) welding the cut surfaces of the casing to an annular reinforcing structure having a T-shaped cross section such that the cut surfaces abut opposing sides of an outwardly directed flange of the reinforcing structure, the flange being mounted on a ring whose outer surface abuts inner surfaces of the casing, 25

wherein the closed casing is supported and sealed by the reinforcing structure. 30
8. A method according to Claim 7 which comprises making two transverse cuts through the casing and welding the cut surfaces of the casing to each of two such annular reinforcing structures, such that the welded casing is supported and sealed by the two reinforcing structures. 35
9. A method according to Claim 7 wherein the step of welding the cut surfaces comprises a single pass welding step. 40

Amended claims in accordance with Rule 86(2) EPC. 45

1. A scroll compressor having a casing (100) which provides positioning for internal components in relation to each other, wherein the casing (100) comprises a reassembled casing (100) and the compressor comprises at least one annular structure (300) having a T-shaped, or substantially T-shaped, cross section provided by a ring (310) with an outwardly projecting flange (305) positioned partway along the outer surface of the ring (310), the flange (305) comprising weldable material and being welded to opposing cut surfaces of the reassembled compressor casing (100) to provide a seal. 50 55

2. A scroll compressor according to Claim 1 wherein the flange (305) has a thickness of not more than 10mm.

3. A scroll compressor according to Claim 1 wherein the flange (305) has a thickness of not more than 4mm.

4. A scroll compressor according to Claim 1 wherein the ring (310) has a length in the axial direction which is at least 0.5mm greater than the thickness of the flange (305).

5. A scroll compressor according to any one of the preceding claims wherein the length of the annular reinforcing structure (300) in its axial direction is at least five times the thickness of the casing (100) in the region of the welded cut surfaces.

6. A method of repairing a scroll compressor having a casing (100) which provides positioning for internal components of the compressor in relation to each other, the method comprising the steps of:

- i) making a transverse cut through the casing (100) so as to gain access to one or more of said internal components; and
- ii) subsequently closing the casing (100), including the step of welding the cut surfaces of the casing (100) to an annular reinforcing structure (300) having a T-shaped cross section such that the cut surfaces are welded to opposing sides of an outwardly directed flange (305) of the reinforcing structure (300), the flange (305) being mounted on a ring (310) whose outer surface abuts an inner surfaces of the closed casing (100),

wherein the closed casing (100) is supported and sealed by the reinforcing structure (300).

7. A method according to Claim 6 which comprises making two transverse cuts through the casing (100) and welding the cut surfaces of the casing (100) to each of two such annular reinforcing structures (300), such that the welded casing (100) is supported and sealed by the two reinforcing structures (300).

8. A method according to either one of Claims 6 or 7 wherein the step of welding the cut surfaces comprises a single pass welding step.

FIGURE 1

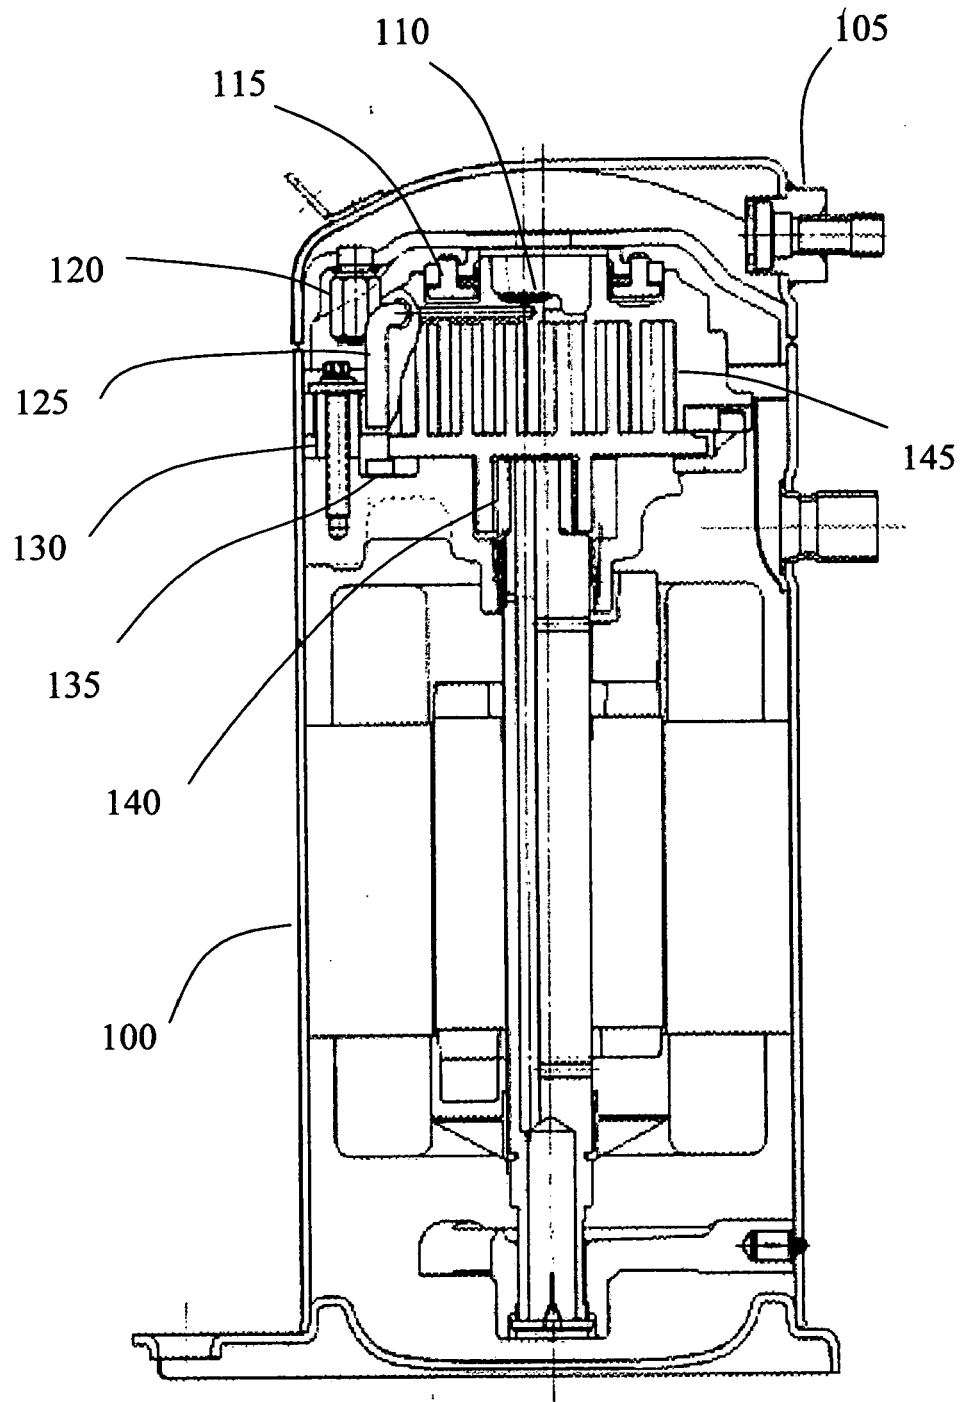


FIGURE 2

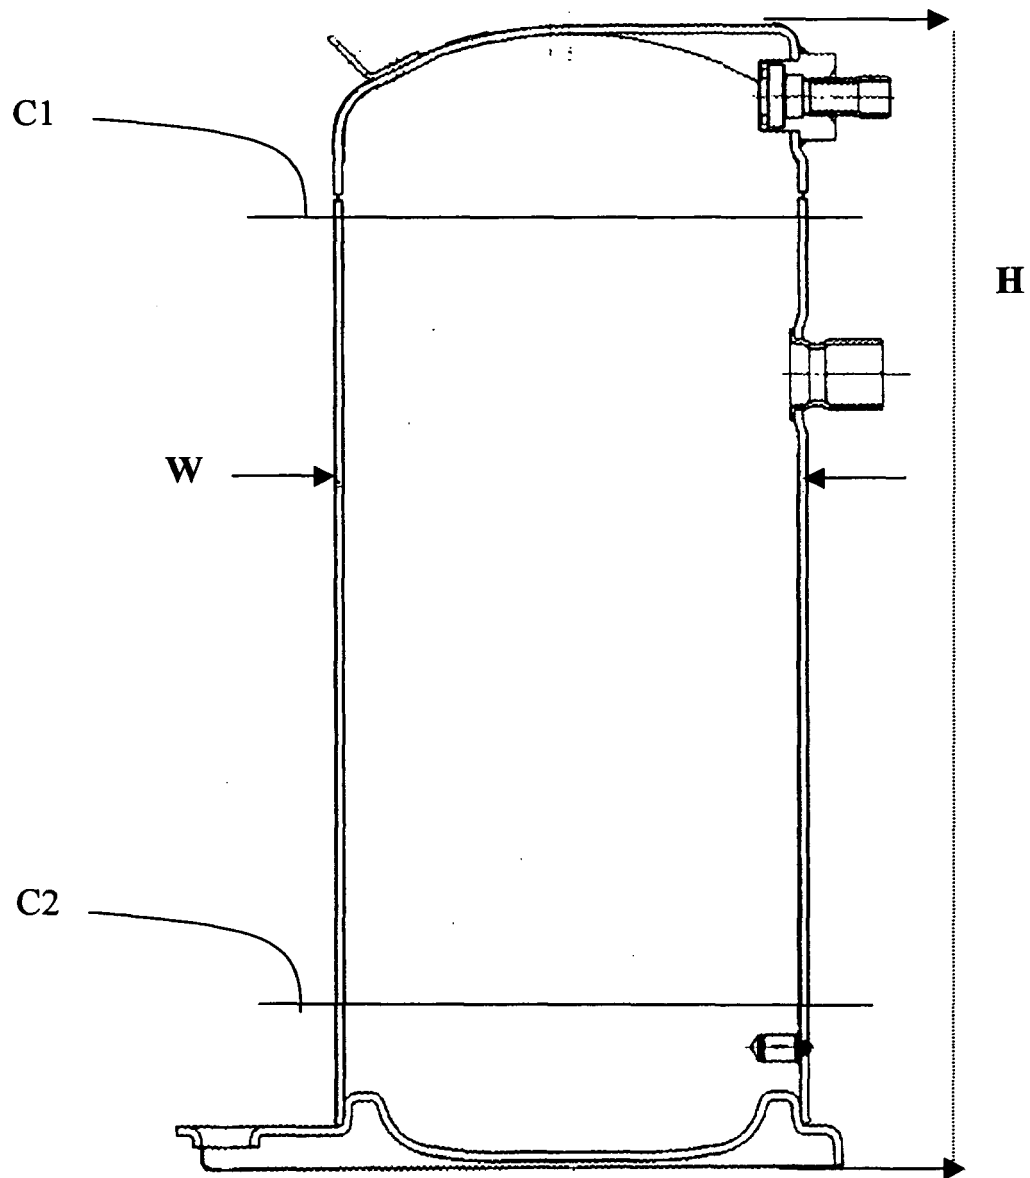
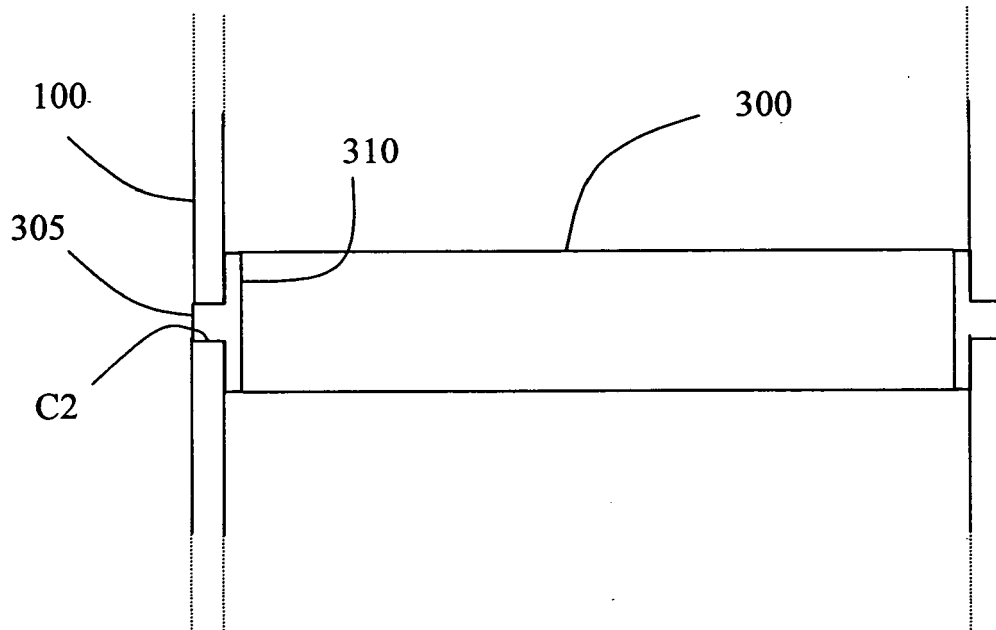
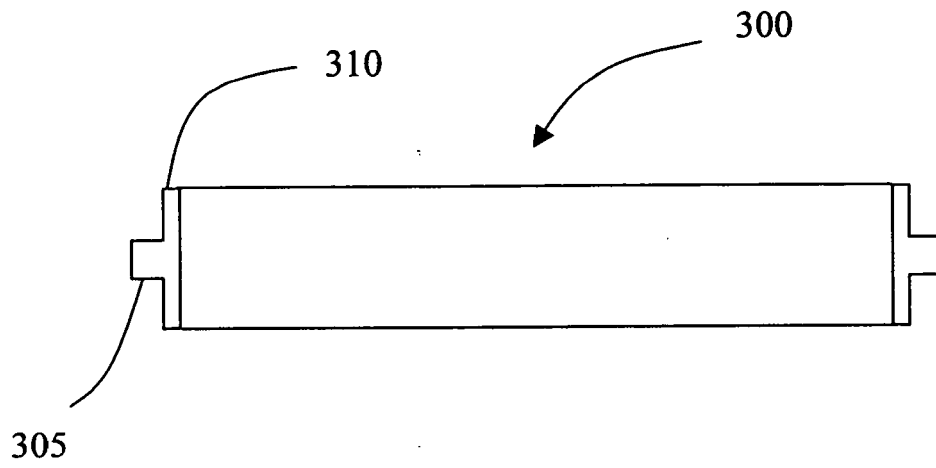


FIGURE 3

**FIGURE 4**

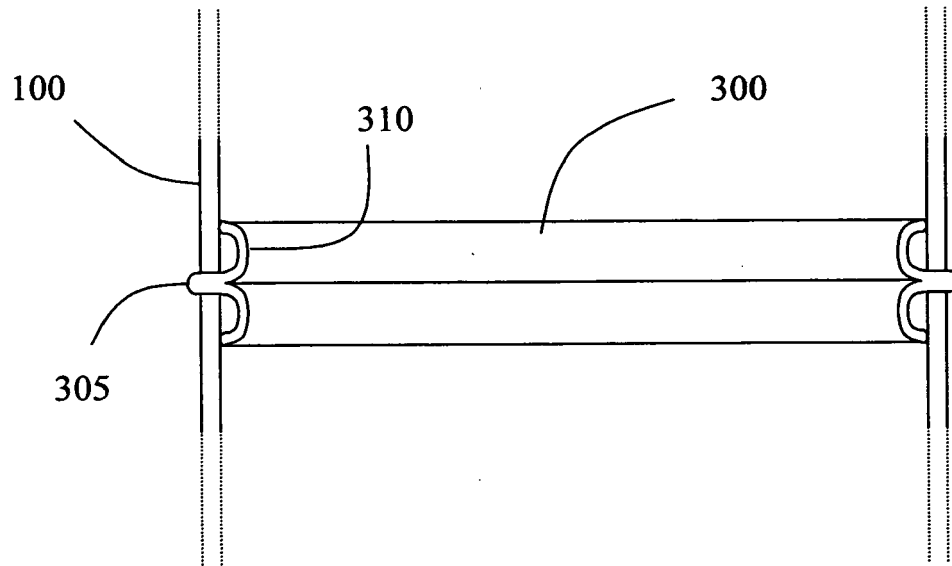


FIGURE 5

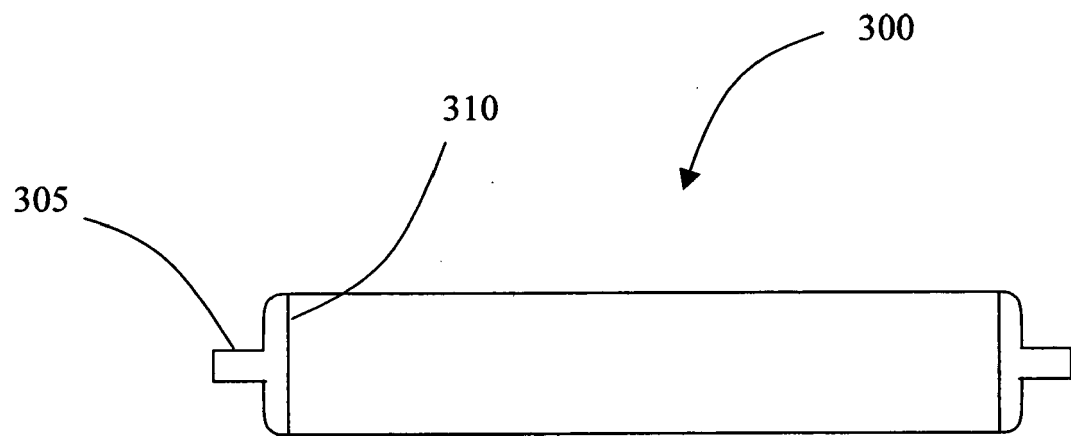


FIGURE 6


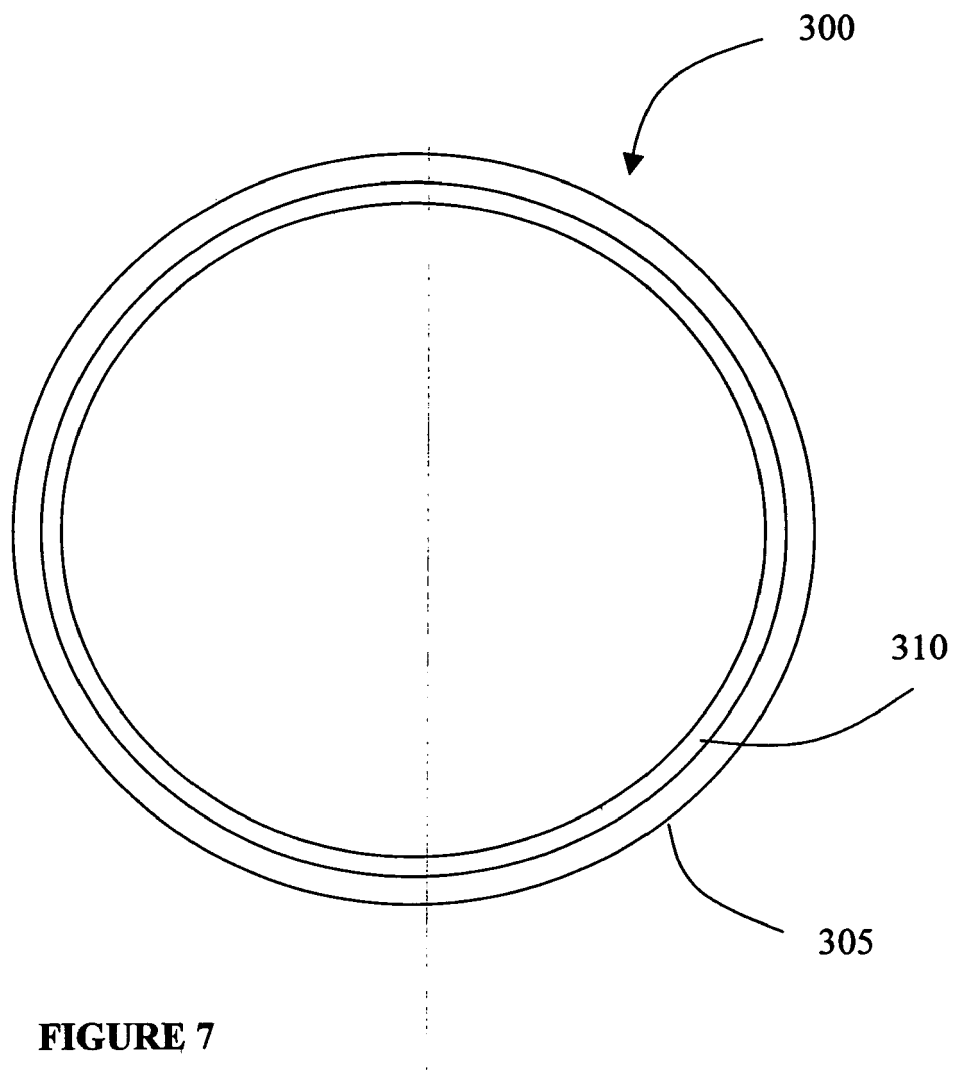


FIGURE 8



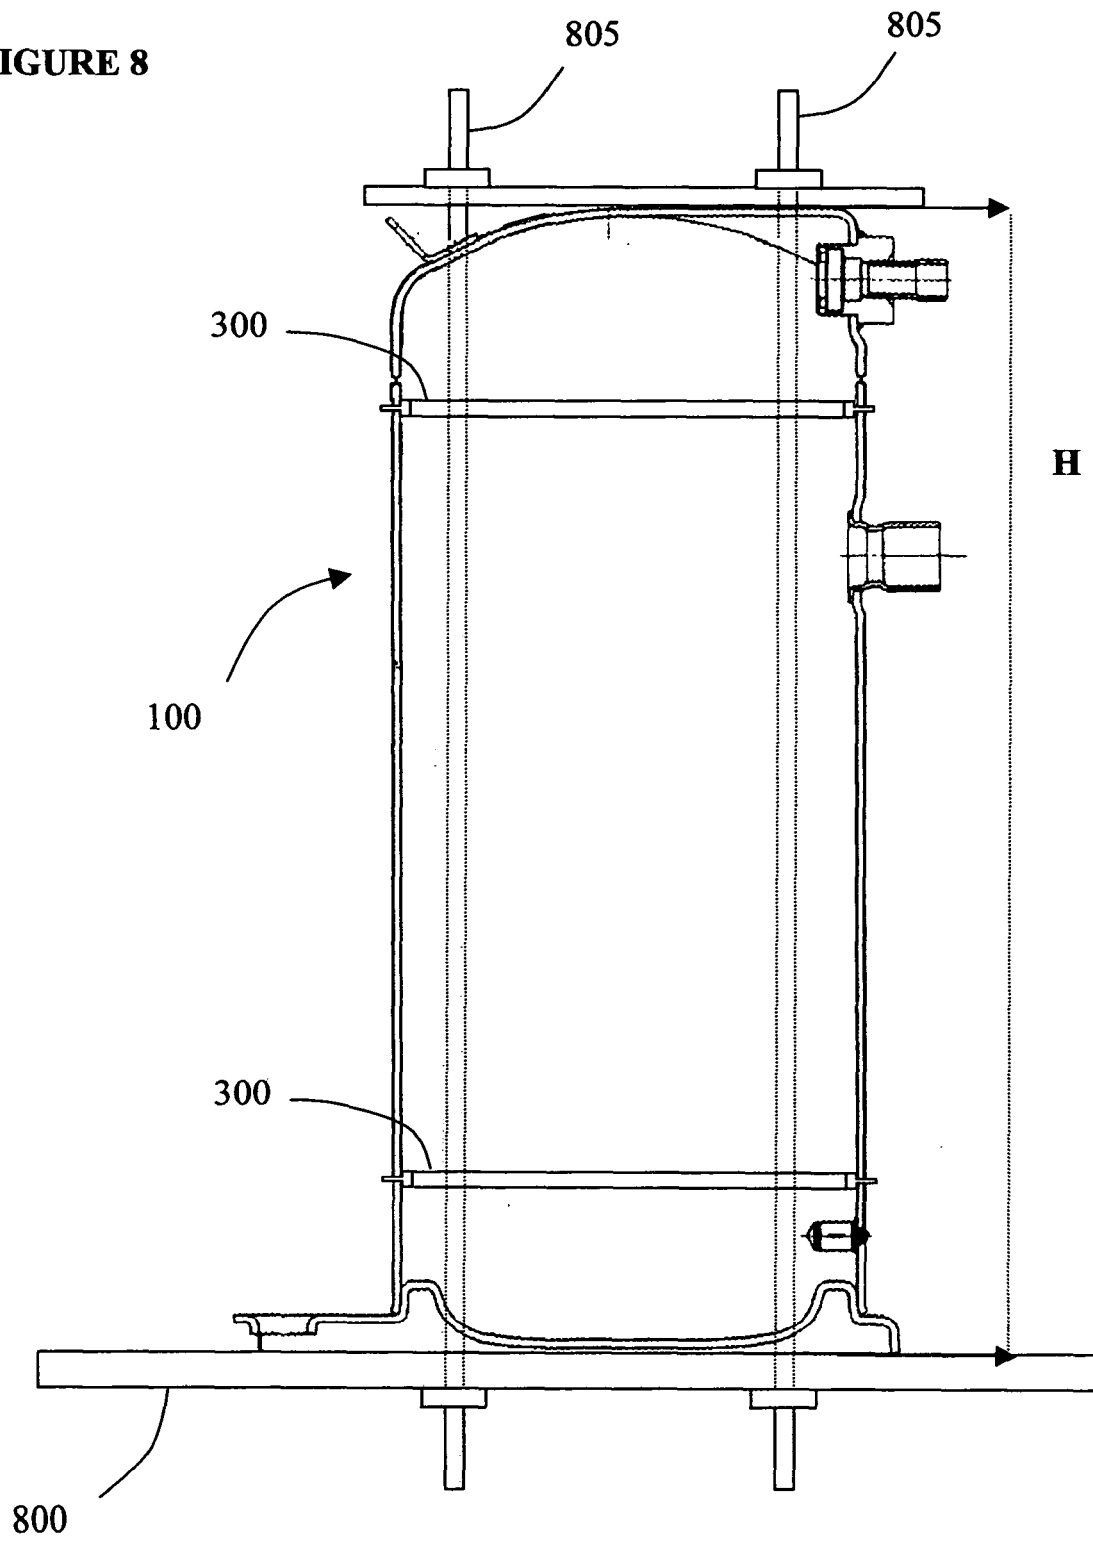

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 05 25 7185

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	PATENT ABSTRACTS OF JAPAN vol. 007, no. 126 (M-219), 31 May 1983 (1983-05-31) & JP 58 044288 A (HITACHI SEISAKUSHO KK), 15 March 1983 (1983-03-15) * abstract *	1-4	INV. F04C18/02
A	----- PATENT ABSTRACTS OF JAPAN vol. 011, no. 054 (M-563), 19 February 1987 (1987-02-19) & JP 61 215487 A (HITACHI LTD), 25 September 1986 (1986-09-25) * abstract *	1-9	
A	----- PATENT ABSTRACTS OF JAPAN vol. 016, no. 399 (M-1300), 24 August 1992 (1992-08-24) & JP 04 132894 A (HITACHI LTD), 7 May 1992 (1992-05-07) * abstract *	1-9	
			TECHNICAL FIELDS SEARCHED (IPC)
			F04C F01C
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 24 April 2006	Examiner Descoubes, P
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>			

2
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 05 25 7185

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

24-04-2006

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 58044288	A	15-03-1983	NONE	
JP 61215487	A	25-09-1986	NONE	
JP 04132894	A	07-05-1992	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Non-patent literature cited in the description

- **JP ELSON ; GF HUNDY ; KJ MONNIER.** Scroll Compressor Design and Application Characteristics for Air Conditioning, Heat Pump, and Refrigeration Applications. *Proceedings of the Institute of Refrigeration*, 1990, 2-1 **[0003]**