



Europäisches
Patentamt
European
Patent Office
Office européen
des brevets



EP 1 795 916 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
13.06.2007 Bulletin 2007/24

(51) Int Cl.:
G01S 13/93 (2006.01) **G01S 7/02** (2006.01)

(21) Application number: **07075178.9**

(22) Date of filing: **18.10.2005**

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**

Designated Extension States:

AL BA HR MK YU

(30) Priority: **27.10.2004 US 974346**

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
05077393.6 / 1 653 247

(71) Applicant: **Delphi Technologies, Inc.**
Troy, Michigan 48007 (US)

(72) Inventors:

• **Sapletal, Greg J.**
Plainwell, MI 49080 (US)

- **Shi, Shawn**
Thousand Oaks
California 91320 (US)
- **McClure, Kirk E.**
Kokomo, IN 46901 (US)

(74) Representative: **Denton, Michael John et al**
Delphi European Headquarters,
64 avenue de la Plaine de France,
Paris Nord II,
B.P. 65059, Tremblay en France
95972 Roissy Charles de Gaulle Cedex (FR)


Remarks:

This application was filed on 08 - 03 - 2007 as a
divisional application to the application mentioned
under INID code 62.

(54) **Horizontally polarized wide-angle radar object detection**

(57) Radar apparatus (10) for detecting objects through an intervening plastics fascia (12), comprising a radar transmitter including a transmit antenna (16) for directing radar energy through the fascia over a wide-angle field of view, said transmitter having a slant polar-

ization feature that slant polarizes the directed radar energy; and a first receiver antenna (18) including a horizontal polarization feature for admitting only horizontally polarized components of said radar energy reflected through said fascia from objects in said wide-angle field of view.

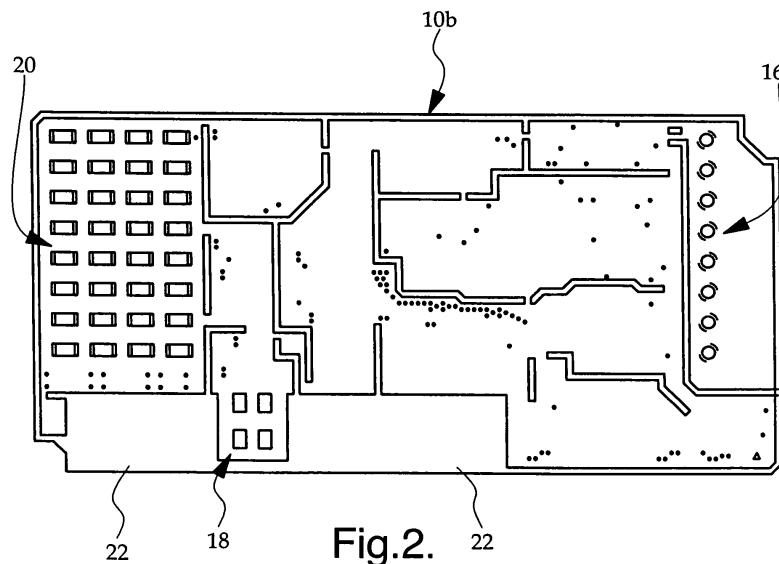

Description

TECHNICAL FIELD

[0001] The present invention is directed to radar object detection, and more particularly to a horizontally polarized radar for achieving a wide-angle field of view through a plastic fascia.

BACKGROUND OF THE INVENTION

[0002] Short-range obstacle detection for vehicle back-up and parking aid functions can be achieved with a wide-angle radar system, but cost and packaging considerations force design constraints that tend to limit the system performance. For example, overall vehicle cost considerations may effectively rule out the use of multiple transceivers for meeting wide zone-of coverage requirements, and radar system packaging and cost considerations may effectively require the use of planar transmit and receive antennas, which in general are not well-suited to wide zone-of-coverage applications. Additionally, vehicle styling and design considerations frequently require the radar system to be concealed behind a plastic fascia panel, such as a bumper fascia, that variably attenuates radar energy transmission, especially at large angles with respect to the longitudinal axis of the vehicle.

[0003] A common approach for achieving the required zone-of-coverage in vehicle applications is to narrow the antenna radiation pattern and to radiate the specified zone-of-coverage by scanning. Another approach is to utilize custom-fabricated horns or non-planar antenna elements to broaden the radar field-of-view. However, such approaches are usually ruled out by cost and packaging considerations. Accordingly, what is needed is a low cost radar capable of placement behind a plastic fascia without sacrificing wide-angle field of view.

SUMMARY OF THE INVENTION

[0004] The present invention is directed to an improved radar including fixed beam transmitter and receiver antennae that utilize horizontal polarization for improved wide-angle field-of-view through a plastic fascia. In a preferred embodiment, the transmitter antenna transmits radar energy with slant polarization, a first receiver antenna designed for short-range wide-angle object detection includes a horizontal polarization feature, and a second receiver antenna designed for long-range narrow-angle object detection includes a vertical polarization feature.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] The present invention will now be described, by way of example, with reference to the accompanying drawings, in which:-

Figure 1 is a cross-sectional side-view diagram of a

vehicle bumper-mounted radar apparatus according to this invention.

Figure 2 depicts a multi-layer printed circuit board defining a planar transmitter antenna, a first planar receiver antenna for short-range wide-angle object detection, and a second planar receiver antenna for long-range narrow-angle object detection.

Figures 3A, 3B and 3C respectively depict first, second and third layers of the circuit board of Figure 2 relative to the first receiver antenna, and Figure 3D depicts a composite of the first, second and third layers.

Figures 4A, 4B and 4C respectively depict first, second and third layers of the circuit board of Figure 2 relative to the second receiver antenna, and Figure 4D depicts a composite of the first, second and third layers.

Figures 5A, 5B and 5C respectively depict first, second and third layers of the circuit board of Figure 2 relative to the transmitter antenna, and Figure 5D depicts a composite of the first, second and third layers.

DESCRIPTION OF THE PREFERRED EMBODIMENT

[0006] The radar system of the present invention applies in general to the use of a fixed beam radar in applications requiring a wide-angle zone-of coverage, where the sensor will be concealed behind a plastic/dielectric panel or fascia. The invention is illustrated herein in the context of a vehicle back-up and parking aid mounted on a vehicle bumper structure, but is applicable to other vehicle systems such as frontal or side object detection systems, and also to non-vehicle systems.

[0007] Figure 1 depicts a bumper-mounted back-up aid mechanization where a fixed beam radar sensor 10 is concealed behind a plastic fascia 12 surrounding the rear bumper frame 14. The radar sensor includes a base frame 10a mounted to a vehicle frame element (not shown), a multi-layer printed circuit board 10b supported on a set of base frame posts 10c, and a radome or cover 10d mounted on the base frame 10a to enclose and environmentally seal the circuit board 10b.

[0008] Referring to Figure 2, the circuit board 10b is generally rectangular in shape, and defines three planar patch-type antennae. A transmitter antenna, generally designated by the reference numeral 16, is formed on the right-hand side of the circuit board 10b as viewed in Figure 2, and first and second receiver antennae, generally designated by the reference numerals 18 and 20, are formed on the left-hand side of the circuit board 10b. The first receiver antenna 18 is designed for short-range wide-angle object detection, while the second receiver antenna 20 is designed for long-range narrow-angle object detection. A conductive ground plane, designated by the reference numerals 22 is disposed laterally or horizontally about the first receiver antenna 18 for enhanced wide-angle sensitivity.

[0009] In general, we have found that horizontally polarized radar frequency energy is subject to significantly less transmission attenuation when directed through a plastic/dielectric material than vertically polarized or unpolarized radar energy, particularly at small angles of incidence (i.e., at the extremities of the overall field of view). Vertical polarization is conventionally utilized for long-range narrow-angle fields of view in order to reduce background clutter and enhance detection of vertically oriented objects such as poles, but short-range wide-angle fields of view are not similarly constrained. Thus, using horizontal polarization for short-range wide-angle fields of view and retaining the use of vertical polarization for long-range narrow-angle fields of view significantly improves the overall performance of the radar system, so long as both vertically polarized and horizontally polarized reflected energy is returned to the radar sensor. In a preferred implementation, the first receive antenna 18 is horizontally polarized for enhanced short-range wide-angle object detection through a plastic fascia, the second receive antenna 20 is vertically polarized for reduced scatter and enhanced detection of vertically oriented objects, and the transmit antenna 16 is slant-polarized to create both vertical and horizontal reflected energy for the first and second receive antennae 18 and 20.

[0010] Figures 3A-3D, 4A-4D and 5A-5D depict the formation of the antennae 18, 20 and 16, respectively. Each antenna includes a set of three axially aligned features defined in three successive layers of the multi-layer circuit board 10b. In each case, the features include a feed network 18a, 20a, 16a, a set of polarization slots 18b, 20b, 16b, and a set of planar antenna patches 18c, 20c, 16c. The polarization slots 18b, 20b, 16b overlie the respective feed networks 18a, 20a, 16a, and the planar antenna patches 18c, 20c, 16c overlie the respective polarization slots 18b, 20b, 16b.

[0011] Figures 3A-3C respectively depict the feed network 18a, the polarization slots 18b, and the planar antenna patches 18c for the first receive antenna 18. The horizontally extending ground plane 22 is co-planar with the planar antenna patches 18c, and the polarization slots 18b pass horizontally polarized return signal to the feed network 18a. Figure 3D is a composite view, depicting all three features of the antenna 18, and their axial alignment.

[0012] Figures 4A-4C respectively depict the feed network 20a, the polarization slots 20b, and the planar antenna patches 20c for the second receive antenna 20. In this case, the polarization slots 20b pass vertically polarized return signal to the feed network 20a. Figure 4D is a composite view, depicting all three features of the antenna 20, and their axial alignment.

[0013] Figures 5A-5C respectively depict the feed network 16a, the polarization slots 16b, and the planar antenna patches 16c for the transmit antenna 16. The polarization slots 16b pass slant-polarized radar frequency energy, which in turn is radiated over a wide-angle field of view by the planar antenna patches 16c. The reflected

radar energy includes both horizontally polarized and vertically polarized components, which are respectively received by the first and second receive antennae 18 and 20. Figure 5D is a composite view, depicting all three features of the transmit antenna 16, and their axial alignment.

[0014] Summarizing, the present invention provides a simple and very cost effective way of utilizing horizontal polarization to achieve a high gain wide-angle radar field of view through a plastic fascia such as an automotive bumper covering. In applications where a long-range narrow-angle field of view is used in connection with the wide-angle field, the use of vertical polarization for reduced background clutter and enhanced vertical object detection can be retained by slant polarizing a single transmit antenna that produces both horizontally polarized and vertically polarized return energy for the wide-angle and narrow-angle receive antennae. In applications where a narrow-angle field of view is not required, the receive antenna 20 may be omitted, and the transmitter antenna 16 may be either horizontally polarized or slant polarized as shown.

[0015] While the invention has been described in reference to the illustrated embodiment, an automotive back-up and parking aid, it should be understood that the invention may be used in other applications as well. For example, the invention may be used other types of automotive applications such as forward-looking radars, collision avoidance systems and safety sensing, and also in non-automotive applications such as security systems. Also, it is expected that various modifications in addition to those mentioned above will occur to those skilled in the art. For example, the invention can be implemented with non-planar antennae, and so on. Accordingly, it is intended that the invention not be limited to the disclosed embodiment, but that it have the full scope permitted by the language of the following claims.

40 Claims

1. Radar apparatus (10) for detecting objects through an intervening plastics fascia (12), comprising:

45 a radar transmitter including a transmit antenna (16) for directing radar energy through the fascia over a wide-angle field of view, said transmitter having a slant polarization feature that slant polarizes the directed radar energy; and
50 a first receiver antenna (18) including a horizontal polarization feature for admitting only horizontally polarized components of said radar energy reflected through said fascia from objects in said wide-angle field of view.

55 2. The radar apparatus described in claim 1, wherein said first receiver antenna (18) includes planar antenna patches (18c) and a ground plane conductor

(22) that extends horizontally in opposite directions from said antenna patches.

3. The radar apparatus of claim 1, wherein said transmit antenna (16) and said first receiver antenna (18) are formed on a single multi-layer printed circuit board (10b). 5
4. The radar apparatus of claim 1, further comprising a second receiver antenna (20) including a vertical polarization feature for admitting only vertically polarized components of said radar energy reflected through said fascia (12) from objects in said field of view. 10
5. The radar apparatus of claim 4, wherein said transmit antenna (16) and said first and second receiver antennae (18,20) are formed on a single multi-layer printed circuit board (10b). 15
6. The radar apparatus of claim 1, wherein said intervening plastic fascia (12) is a bumper covering fascia of a motor vehicle. 20
7. A method of utilizing radar (10) for object detection through an intervening plastic fascia (12), comprising the steps of: 25



transmitting slant polarized radar energy through the fascia over a wide-angle field of view; and 30
receiving horizontally polarized components of said radar energy reflected through said fascia from objects in said wide-angle field of view. 35

8. The method of claim 7, including the step of separately receiving horizontally polarized and vertically polarized components of said radar energy reflected through said fascia (12) from objects in said wide-angle field of view. 40

45

50

55

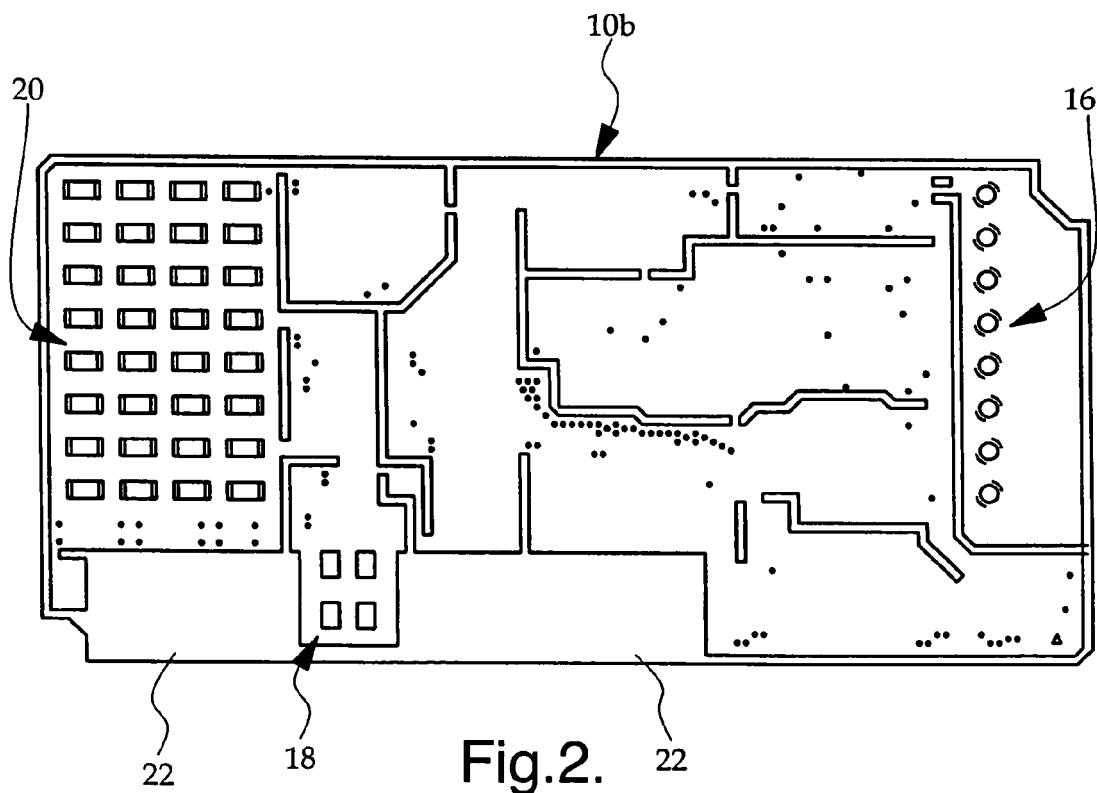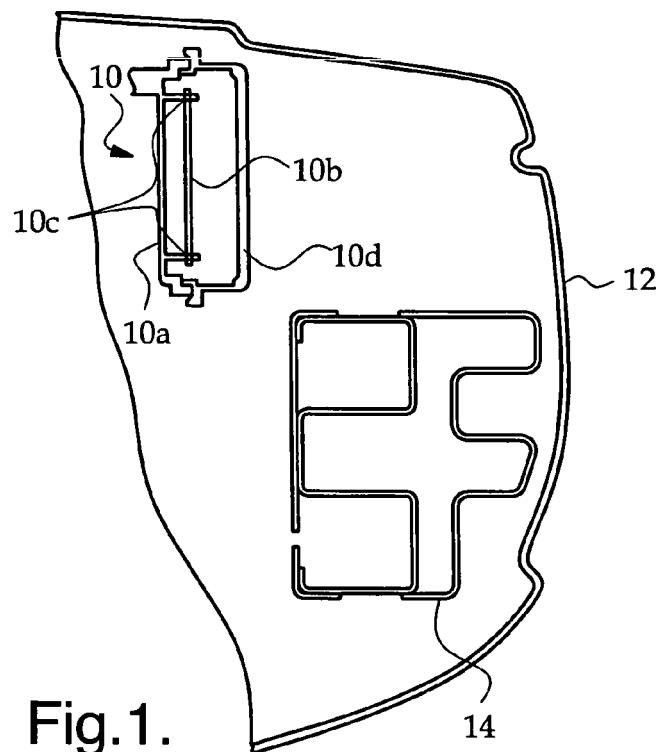

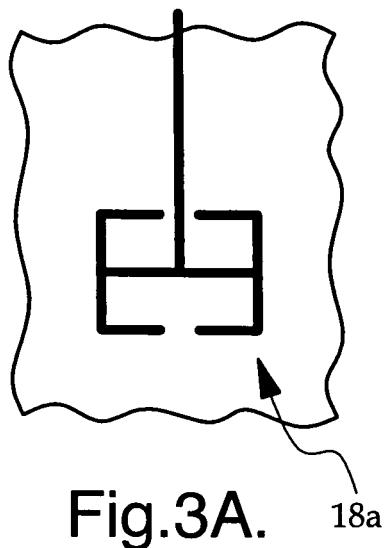


Fig.3A.

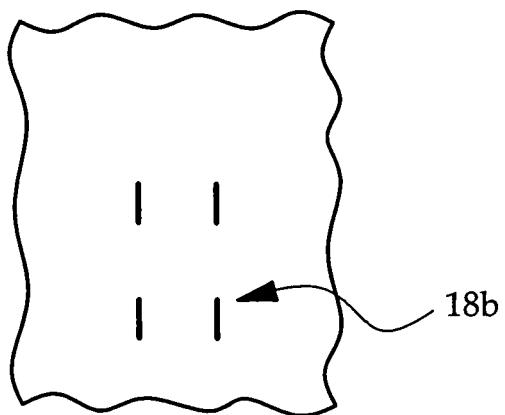


Fig.3B.

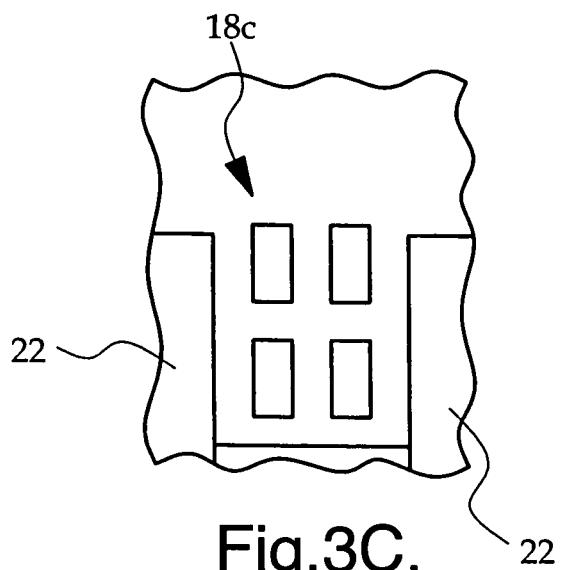


Fig.3C.

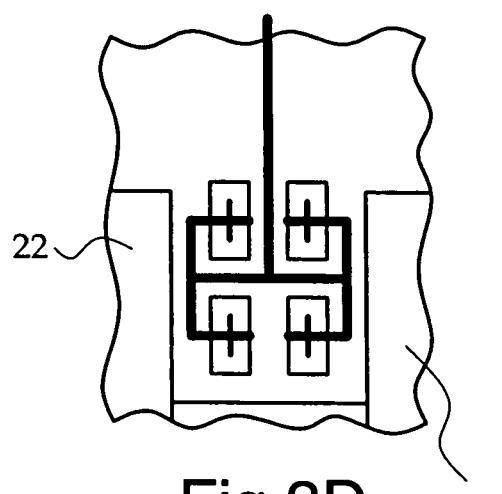


Fig.3D.

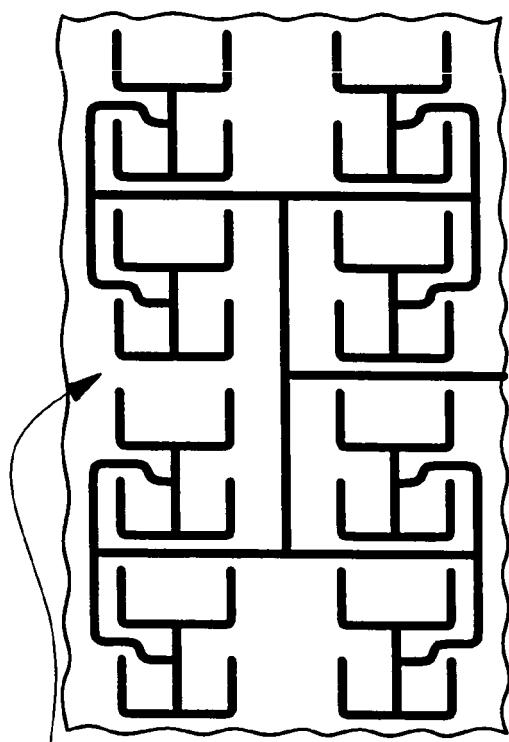


Fig.4A.

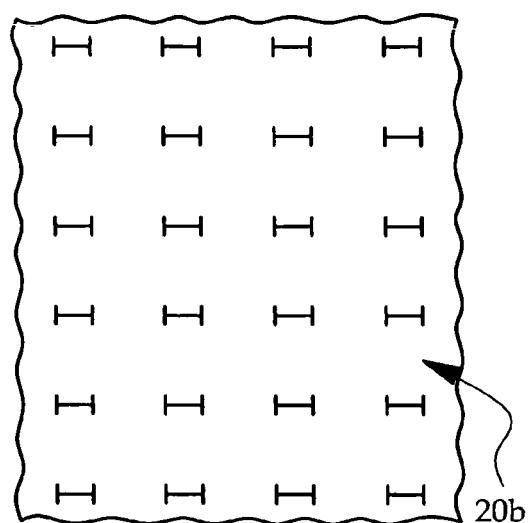


Fig.4B.

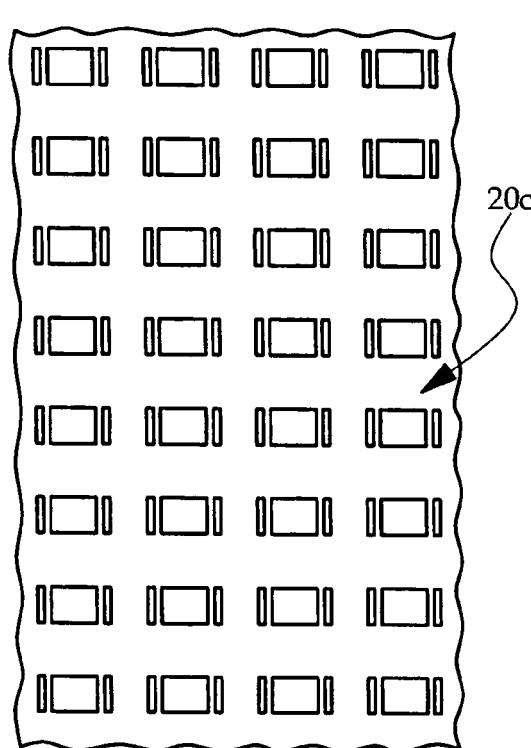


Fig.4C.

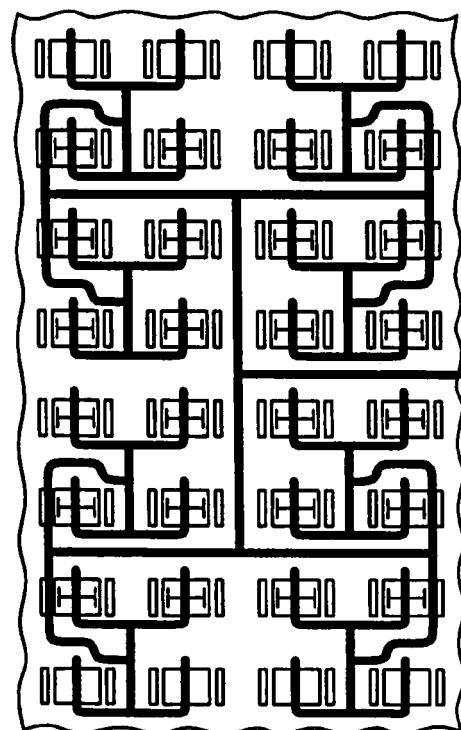


Fig.4D.

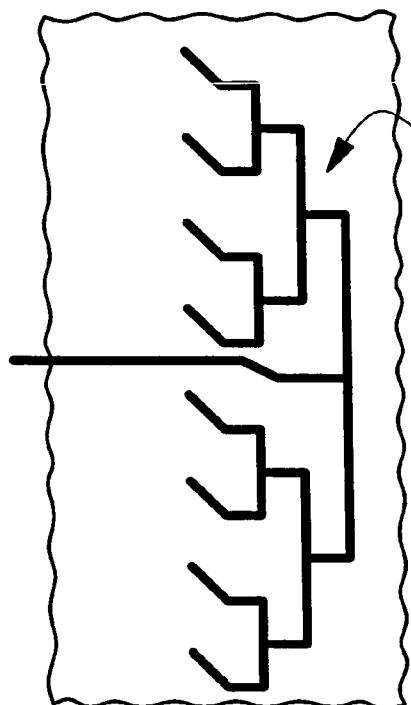


Fig.5A.

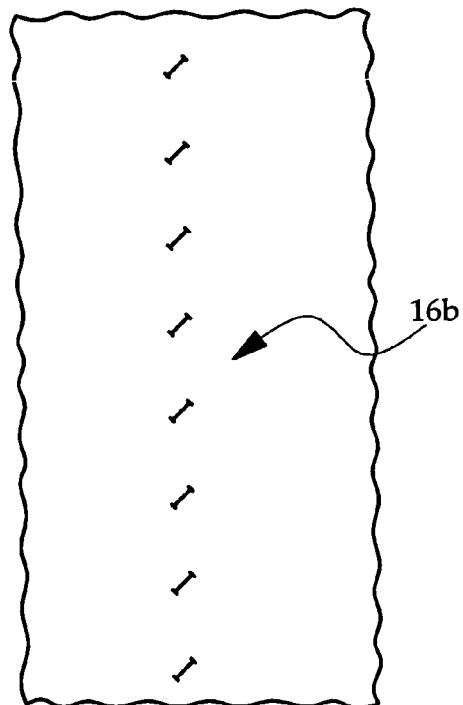


Fig.5B..

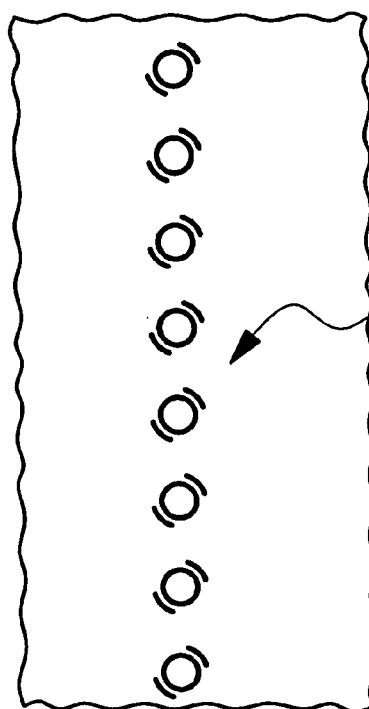


Fig.5C.

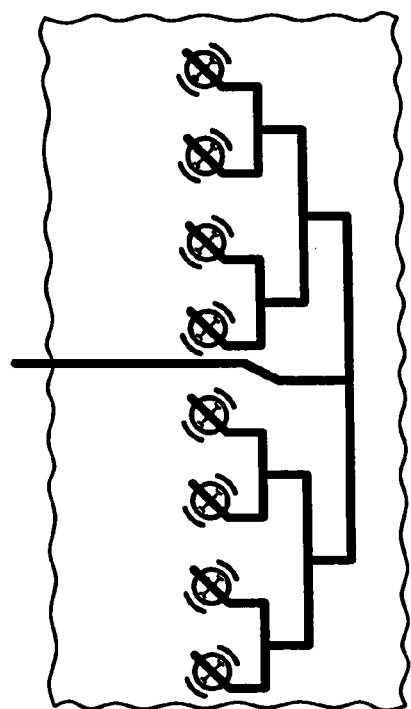


Fig.5D.



DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (IPC)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
A	DE 44 12 769 A1 (SIEMENS AG [DE]) 19 October 1995 (1995-10-19) * figures 1-5 *	1-8	INV. G01S13/93 G01S7/02
A	DE 197 19 764 A1 (BOSCH GMBH ROBERT [DE]) 12 November 1998 (1998-11-12) * figures 1-4 *	1-8	
A	US 3 781 879 A (STARAS H ET AL) 25 December 1973 (1973-12-25) * figure 2 *	1-8	
A	US 4 308 536 A (SIMS JR JOHN C ET AL) 29 December 1981 (1981-12-29) * figure 1 *	1-8	
A	DE 38 41 267 A1 (TELEFUNKEN SYSTEMTECHNIK [DE] DAIMLER BENZ AEROSPACE AG [DE]) 13 June 1990 (1990-06-13) * figure 2 *	1-8	
A	DE 40 28 603 A1 (TELEFUNKEN SYSTEMTECHNIK [DE]) 12 March 1992 (1992-03-12) * figure 1 *	1-8	TECHNICAL FIELDS SEARCHED (IPC)
A	US 2002/101385 A1 (HUOR OU HOK [JP] OU HOK HUOR [JP]) 1 August 2002 (2002-08-01) * paragraphs [0022], [0023] *	1-8	G01S
A	US 6 377 202 B1 (KROFFLI ROBERT A [US] ET AL) 23 April 2002 (2002-04-23) * column 5, lines 44-49 *	1-8	
The present search report has been drawn up for all claims			
1	Place of search Munich	Date of completion of the search 2 May 2007	Examiner Johansson, Roland
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			
T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 07 07 5178

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on. The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-05-2007

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
DE 4412769	A1	19-10-1995		NONE		
DE 19719764	A1	12-11-1998		WO 9852247 A1 EP 0935825 A1 JP 2000514989 T KR 20000023616 A US 6107955 A		19-11-1998 18-08-1999 07-11-2000 25-04-2000 22-08-2000
US 3781879	A	25-12-1973		CA 1013452 A1 DE 2333292 A1 FR 2191131 A1 GB 1416504 A JP 50024091 A		05-07-1977 10-01-1974 01-02-1974 03-12-1975 14-03-1975
US 4308536	A	29-12-1981		AU 5586280 A CA 1135819 A1 DE 3069479 D1 EP 0024430 A1 JP 56500426 T WO 8001782 A1		04-09-1980 16-11-1982 29-11-1984 11-03-1981 02-04-1981 04-09-1980
DE 3841267	A1	13-06-1990		NONE		
DE 4028603	A1	12-03-1992		NONE		
US 2002101385	A1	01-08-2002	JP	2002223115 A		09-08-2002
US 6377202	B1	23-04-2002		NONE		