



(11) **EP 1 799 010 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**

published in accordance with Art. 158(3) EPC

Note: Bibliography reflects the latest situation

(15) Correction information:

Corrected version no 1 (W1 A1)

Bibliography INID code(s) 86

(51) Int Cl.:

H04R 3/02 (2006.01)

(86) International application number:

PCT/JP2006/301562

(48) Corrigendum issued on:

26.09.2007 Bulletin 2007/39

(87) International publication number:

WO 2007/032100 (22.03.2007 Gazette 2007/12)

(43) Date of publication:

20.06.2007 Bulletin 2007/25

(21) Application number: **06712705.0**

(22) Date of filing: **31.01.2006**

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**

Designated Extension States:

AL BA HR MK YU

(72) Inventors:

• **SUGIURA, Tomohiro**
c/o Mitsubishi Denki Engineering Kabushiki
Kaisha

Tokyo 102-0073 (JP)

• **YOSHIDA, Shunji**
c/o Mitsubishi Denki Engineering Kabushiki
Kaisha

Tokyo 102-0073 (JP)

(30) Priority: **14.09.2005 JP 2005267371**

(71) Applicant: **Mitsubishi Denki Engineering**

Kabushiki Kaisha

Chiyoda-ku

Tokyo 102-0073 (JP)

(74) Representative: **Pfenning, Meinig & Partner GbR**

Patent- und Rechtsanwälte



Theresienhöhe 13

80339 München (DE)

(54) **ACOUSTIC APPARATUS AND TELEPHONE CONVERSATION APPARATUS**

(57) An acoustic apparatus has permanent magnets 2 and 3, which have north poles and south poles magnetized alternately in a stripe-like fashion, at the front and back of a diaphragm 1, respectively; and has a conductor circuit 4 wired on the diaphragm 1 along the stripe-like poles of the permanent magnets 2 and 3. This offers an advantage of being able to prevent an echo. The diaphragm 1, permanent magnets 2 and 3, conductor circuit 4, spacer 5, and iron plates 6 and 7 are installed in a baffle 8.

FIG.2

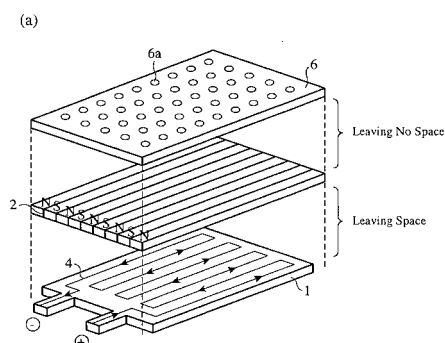

EP 1 799 010 A8