



(11) **EP 1 801 411 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**

Note: Bibliography reflects the latest situation

(15) Correction information:

Corrected version no 1 (W1 A1)

Bibliography INID code(s) 84

(51) Int Cl.:

F02M 59/44 (2006.01)

F02M 59/48 (2006.01)

(48) Corrigendum issued on:

03.10.2007 Bulletin 2007/40

(43) Date of publication:

27.06.2007 Bulletin 2007/26

(21) Application number: **07007833.2**

(22) Date of filing: **05.01.2001**

(84) Designated Contracting States:

DE FR IT

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:

01900261.7 / 1 348 868

(71) Applicants:

- **Hitachi, Ltd.**
Chiyoda-ku
Tokyo 100-8280 (JP)
- **Hitachi Car Engineering Co., Ltd.**
Hitachinaka-shi,
Ibaraki 312-0062 (JP)

(72) Inventors:

- **Yamada, Hiroyuki**
Hitachinaka-shi
Ibaraki 312-0062 (JP)
- **Saito, Atsuji**
Hitachinaka-shi
Ibaraki 312-0062 (JP)

• **Kotaki, Masayoshi**

Hitachinaka-shi
Ibaraki 312-0062 (JP)

• **Odakura, Hiroshi**

Hitachinaka-shi
Ibaraki 312-0062 (JP)

• **Abe, Masami**

Hitachinaka-shi
Ibaraki 312-0062 (JP)

(74) Representative: **Beetz & Partner**

Patentanwälte,
Steinsdorfstrasse 10
80538 München (DE)


Remarks:

This application was filed on 17 - 04 - 2007 as a divisional application to the application mentioned under INID code 62.

(54) **Fluid pump and high-pressure fuel feed pump**

(57) The invention relates to a fluid pump, wherein a cylinder 20 supporting a plunger 2 and a pump housing 1 are formed with dissimilar metals and a pressing mechanism to press the cylinder 20 and the pump housing 1 relatively to each other is provided so that a pressurizing chamber 12 is sealed through a pressing surface between the pump housing 1 and the cylinder 20, whereby the number of seal points can be reduced and a reduction in reliability can be eliminated while realizing a reduction in weight of the pump housing 1 and a reduction in cost due to increase in cutting capability using a soft member such as aluminium alloy for the pump housing 1.

FIG. 1

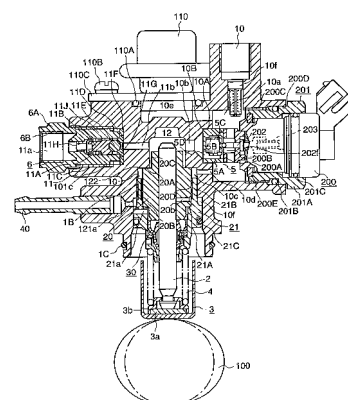

EP 1 801 411 A8