



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
18.07.2007 Bulletin 2007/29

(51) Int Cl.:
C10M 169/04 (2006.01) C10N 30/08 (2006.01)

(21) Application number: **07250119.0**

(22) Date of filing: **12.01.2007**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI SK TR
Designated Extension States:
AL BA HR MK YU

(30) Priority: **16.01.2006 GB 0600816**

(71) Applicant: **L & S Fluids Limited**
West Cluden Mill
Irongray
Dumfries DG2 9UW (GB)

(72) Inventors:
• **Hutchinson, Richard**
Burnley
Lancashire, BB10 4TX (GB)
• **Reid, Steven**
Irongray
Dumfries, DG2 9UW (GB)

(74) Representative: **Sayce, Alastair George et al**
A.A. Thornton & Co.
235 High Holborn
London WC1V 7LE (GB)


(54) **Lubricant compositions**

(57) A lubricant composition is provided, comprising boron nitride particles dispersed in a propylene glycol or water-soluble polyglycol base. The lubricant composition

does not produce harmful vapours and forms a clean lubricating film capable of operation up to 2200°C, thus making it particularly suitable for lubricating ovens, particularly baking ovens.

FIGURE 1

Coefficient of Friction vs Time @ 280 Degrees Centigrade

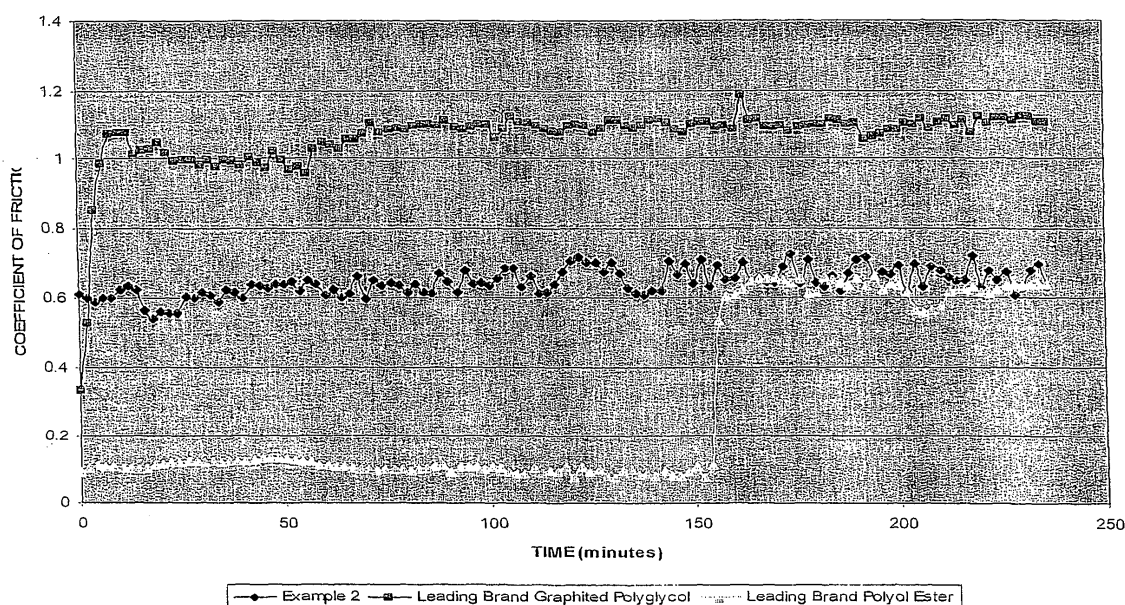

Description

[0001] The present invention relates to lubricant compositions. More particularly, this invention relates to dry-film lubricant compositions for high temperature applications. More particularly still, this invention relates to boron nitride-containing lubricants, in which the boron nitride is dispersed in a glycol or polyglycol base material. The base material may be water-soluble or water-insoluble.

[0002] A number of different lubricants currently exist for use in high temperature environments, typically at temperatures over 260°C, and potentially up to 2000°C, such as on conveyor chains and bearings subjected to high temperatures in, for example, bakery ovens, kilns and paint stoving ovens. When selecting a lubricant for such uses, extreme pressure performance, operating temperature range, coefficient of friction and even the colour of the film are all relevant considerations. In addition, when working at high temperatures, particularly in baking ovens, safety is of paramount importance; the lubricant should not, of course, be flammable, nor should it produce toxic vapours. Furthermore, downtime for the machinery should be kept to a minimum, for economic reasons, and thus the lubricant should be easy to apply, not leave behind deposits or require cleaning, and it must maintain its lubricity for as long as possible.

[0003] Such known products include synthetic ester-based formulations: liquid lubricants enhanced with chemical additives to improve wear resistance and protect them from thermal degradation. Such compositions are generally limited to maximum operating temperatures of approximately 260°C, and their use will eventually lead to the formation of lacquers, gums and carbon deposits on the equipment being lubricated, which necessitates periodic cleaning (which, in turn, necessitates periodic shut-down of the equipment). In addition, being liquid products, synthetic ester-based formulations have a tendency to attract dust and dirt, which adheres to the lubricant film and, over time, will contribute to abrasive wear.

[0004] Another known lubricant for high-temperature use comprises a polyglycol-borne solid lubricant, typically graphite and/or molybdenum, dispersed in a high molecular weight, water-insoluble polypropylene glycol (typically having molecular weights of greater than 250). These fluids are designed to deposit a dry film of the solid lubricant; the polyglycol fluid acts, initially, as a conventional fluid lubricant, but depolymerises at a high-temperature and evaporates, thereby avoiding the formation of lacquers, and also avoiding gummy or carbon deposits. Following the evaporation of the polyglycol, a dry film of lubricating solids remains on the lubricated surfaces, which has little tendency to attract dust and dirt. Both graphite and molybdenum provide good load carrying capacity, and can withstand temperatures of up to approximately 450°C and 350°C, respectively. However, both are black in colour, and are electrically conductive, which can be disadvantageous in some uses. Such solid lubricants over time cake the equipment and thus form a barrier inhibiting the penetration of subsequent applications of lubricant. Regular application is necessary in view of the fact that graphite/molybdenum do not provide sufficient lubricity once the polyglycol base fluid has evaporated. In some applications, polyglycol bases can also carry their own disadvantages, which are mentioned more fully below.

[0005] Graphite and molybdenum can also be dispersed in water, in place of the polyglycol. However, aqueous dispersions tend to be very low viscosity fluids and accordingly have a tendency to drip from machinery and require frequent re-application, increasing downtime. In addition, aqueous dispersions exhibit "spitting" at raised temperatures, which is undesirable.

[0006] A further known class of lubricants are the polytetrafluoroethylene (PTFE) greases/dispersions. PTFE greases are dispersions of PTFE in perfluorinated polyether fluids (PFPE). PTFE is also used to enhance conventional ester-based lubricants, and is supplied as a dry film lubricant deposited in a similar manner to graphite and molybdenum. However, when supplied in ester fluids, the same problems occur as mentioned above. In addition, PTFE and PFPE lubricants cannot be recommended for continuous use above 260°C due to thermal degradation and emission of corrosive and toxic fumes. They are also extremely expensive.

[0007] Boron nitride particles are also used as the basis of various commercially available lubricant compositions, including lubricants for high temperature applications. Boron nitride is commercially available in various forms, either as a concentrate (in water, alcohol, oil or polyalphaolefin), for dilution with preferred base materials, or as a finished lubricant. Boron nitride can withstand extremely high temperatures and high loads, it is also non-reactive, thermally conductive, electrically insulating, and is white in appearance. However, at present, there are no commercially available boron nitride based lubricants for baking ovens. Oil dispersions and those in polyalphaolefin are unacceptable due to carbonaceous deposit formation at high temperatures (i.e. over 260°C), which, over time, require extensive cleaning (ultrasonic or dry-ice). Furthermore, alcohol dispersions give rise to flammable vapours in use and are also unsuitable. Water-based (i.e. aqueous) dispersions are disadvantageous, as discussed above. In addition, dispersing agents present in such compositions are generally not approved for food grade use.

[0008] The selection of the base material for the lubricant is of considerable importance. The production of corrosive and/or toxic fumes from a lubricant is a significant problem in all circumstances, and particularly in baking ovens. Baking ovens must not, of course, produce toxic fumes during baking, and enforced downtime to enable re-lubrication is undesirable, for economic reasons. In addition, baking ovens are often located in small premises where it is impractical to install the necessary ventilation equipment to remove any fumes which are produced during the lubricating process. As

mentioned above, polyglycols, in particular polypropylene glycol, have been used as a base fluid. However, it has been found that application of high molecular weight polyglycol-based lubricants can be difficult, and a great care must be taken in order to avoid the generation of dense smoke and fumes when the oven is first heated to working temperature after re-application. Indeed, in some circumstances, it is practice to turn off the building's fire alarm whilst this process is carried out.

[0009] Whilst there are several commercially available lubricants which are labelled as "food grade", the majority of these products are listed as FDA H2 approved (no possibility of contact with food). As these products may clearly come into contact with food, or with food preparation surfaces, it is clearly desirable to have at least FDA H1 approval (incidental contact with food). There are commercially available products which are listed as FDA H1 approved, but these products, as discussed above, are based on synthetic esters, medicinal quality white oils, polyalphaolefins, or a combination of these, all of which form deposits when used at high temperatures in excess of 260°C.

[0010] The base fluid must provide a suitable suspension of the lubricant material therein. The inventors of the present invention have found that typical lubricant base fluids which are suitable for use in food ovens are unsuitable or unsatisfactory in this respect, particularly when the solid lubricant material is boron nitride.

[0011] Thus, there is a continuing need to provide an improved lubricant composition, particularly one comprised of food quality components and being suitable for use at high temperatures in baking or cooking ovens.

[0012] The present invention solves or alleviates the problems of the prior art.

[0013] In a first aspect of the invention, there is provided a lubricant composition for food ovens comprising boron nitride particles dispersed in a base material comprised of propylene glycol, a polyglycol, or mixtures thereof.

[0014] In a first embodiment, the base material is comprised of a water-insoluble polyglycol.

[0015] In this embodiment, the lubricant composition may operate as a dry-film lubricant, as a wet-film lubricant, or as both a dry-film and wet-film lubricant. Preferably the lubricant composition is both a dry-film and wet-film lubricant.

[0016] The base material is preferably non-toxic. More preferably, the base material is approved by the regulatory authorities for use where incidental contact with food may occur. In particular, the base material preferably has FDA approval for use as a lubricant where incidental contact with food may occur.

[0017] Preferably the water-insoluble polyalkylene glycol is a polypropylene glycol. The polypropylene glycol may be butyl terminated.

[0018] The viscosity of suitable polyglycols increases with the molecular weight of the polyglycol (which in turn increases with the length of the polymerisation reaction time). Preferably, the water-insoluble polyglycol has a viscosity at 40°C of from 50 to 400 cSt. More preferably, the water-insoluble polyglycol has a viscosity in the range of 75 to 350 cSt at 40°C.

[0019] Preferred water-insoluble polyglycols are butanol-initiated (monol-initiated) propylene oxide homo-polymers. Such compounds are obtained by the reaction between butanol and propylene oxide only. The reaction is terminated when the desired molecular weight of the polymer is attained. Preferred butanol-initiated propylene oxide homopolymers have a viscosity of from 75 to 350 cSt at 40°C.

[0020] Preferred propylene glycols are selected from one or more of the Cognis™ Breox range. Most preferred are the butanol-initiated propylene oxide homopolymers marketed as the Cognis™ Breox B-Range (for instance, those market under the trade names Breox B75, B125, B225 and B335, wherein the "B number" corresponds approximately to the viscosity, in centipoises, at 40°C), which are FDA compliant. Further preferred water-insoluble polyalkylene glycols are those marketed under the trade name Emkarox VG by Uniquema™.

[0021] In one embodiment, the polyglycol has a molecular weight of around 1200 to around 2800 amu. More preferably still the polyglycol has a molecular weight of around 1400 to 2500 amu. The most preferred polyalkylene glycols have molecular weights of 1403, 1710, 2117 and 2446. The viscosity of such materials is 75 cSt, 122 cSt, 224 cSt and 330 cSt, respectively. These viscosities are representative of the materials Breox B75, B125, B225 and B335 respectively.

[0022] The flash point of the polyalkylene glycol component is typically from 211°C to 225°C.

[0023] The use of a base material having a relatively high boiling point enables the lubricant to operate as a wet-film lubricant in cooler end-uses.

[0024] The lubricant composition comprises a suspension of boron nitride particles in said base material. The boron nitride particles are preferably substantially evenly dispersed in said base material.

[0025] In an embodiment, the lubricant composition may comprise, by weight of the composition, between 1% and 20% boron nitride. Preferably the composition comprises between 2% and 10% by weight boron nitride. More preferably, the composition comprises between 4% and 7.5% by weight boron nitride. Most preferably, the composition comprises approximately 5% by weight boron nitride.

[0026] The remainder of the composition may comprise the base, which may be present in an amount of up to 99% by weight of the composition. The base is typically present in an amount from 87.5 to 97.4% by weight of the composition, preferably from 90.0 to 95.0% by weight. More preferably the base is present in an amount of approximately 93.5% by weight.

[0027] The lubricant composition may comprise additional components. For instance, the lubricant composition may additionally comprise a suspending agent (also known as a rheology modifier). Where present, the composition may

comprise up to 5% by weight of the suspending agent. Typically the composition comprises 0.1 to 3.0% by weight of the suspending agent. Preferably the composition comprises approximately 0.5 to 2.0% by weight of the suspending agent. Preferably the composition comprises approximately 1.0% by weight of the suspending agent. A preferred inert suspending agent is hydrophilic fumed silica. One such product is marketed as HDK®-N20 hydrophilic fumed silica by Wacker Silicones (HDK®-N20P, HDK®-T30 or HDK®-T40 could also be used).

[0028] The lubricant composition may further comprise a corrosion inhibitor and/or an extreme pressure and anti-wear additive. Typically, the composition comprises between 0.01% and 5.0% by weight of the corrosion inhibitor/anti-wear additive. Preferably the composition comprises 0.1 and 2.0% of the corrosion inhibitor/anti-wear additive. More preferably the corrosion inhibitor/anti-wear additive is present in an amount of from 0.1 to 0.5% by weight of the composition. Still more preferably the composition comprises approximately 0.5% by weight of the corrosion inhibitor. A preferred corrosion inhibitor/anti-wear additive comprises phosphoric acid, mono and dihexyl esters and compounds with alkylamines. A particularly preferred corrosion inhibitor/extreme pressure anti-wear additive is marketed under the trade name Irgalube®349 by Ciba® Speciality Chemicals.

[0029] The remainder of the composition preferably comprises the base. The base may consist of the water-insoluble polyglycol.

[0030] In one embodiment, the lubricant composition comprises, by weight: from 2.0% to 10% boron nitride particles; from 87.5% to 97.4% base; from 0.1 % to 0.5% corrosion inhibitor and extreme pressure and anti-wear additive; and from 0.5% to 2.0% suspending agent.

[0031] In a preferred embodiment, the lubricant composition comprises, by weight, 5.0% boron nitride particles; 93.5% base; 0.5% corrosion inhibitor and extreme pressure and anti-wear additive; and 1.0 % inert suspending agent.

[0032] Typically the water-insoluble polyalkylene glycol will slowly depolymerise after application and exposure to heat, and will evaporate at higher temperatures without leaving carbonaceous residues or lacquers. The base fluid will remain for a sufficient length of time such that it carries the boron nitride particles into the moving components of the equipment, such as chain linkages and bearings.


[0033] Alternatively, the lubricant composition of the present invention can be used as a highly effective wet-film lubricant, when used at temperatures below the temperature at which the base material evaporates.

[0034] The particular choice of polyalkylene glycol component will depend on the end use/working temperature of the oven. The desired level of lubricity, viscosity, etc. can be adjusted by variation of the choice of polyalkylene glycol and level of boron nitride, in particular.

[0035] In another embodiment, the base material is comprised of propylene glycol, a water-soluble polyglycol, or mixtures thereof. The lubricant is preferably a dry-film lubricant.

[0036] In this embodiment, the water-soluble polyglycol has a molecular weight of less than or equal to 250. In a more preferred embodiment, the water-soluble polyglycol has a molecular weight of less than or equal to 192. In a still more preferred embodiment, water-soluble polyglycol preferably has a molecular weight of less than or equal to 134.

[0037] In a preferred embodiment, the water-soluble polyglycol is a poly(propylene)glycol of Formula I:



wherein: m is 1, 2, 3 or 4; or a mixture thereof.

[0038] More preferably the base material is comprised of propylene glycol (Mwt: 76), dipropylene glycol (Mwt: 134) tripropylene glycol (Mwt: 192), tetrapropylene glycol (Mwt: 250), or a mixture thereof. Most preferably, the base material is propylene glycol.

[0039] In an embodiment, the base material is comprised of one or more water-soluble polyglycols having a molecular weight of less than or equal to 250. In another embodiment, the base material is comprised of one or more water-soluble polyglycols having a molecular weight of less than or equal to 192. In another embodiment, the base material is comprised of one or more water-soluble polyglycols having a molecular weight of less than or equal to 134. In another embodiment, the base material is comprised of propylene glycol or polyglycols having a molecular weight in the range of 76 to 250.

[0040] In another embodiment, the water-soluble polyglycol consists of one or more water-soluble copolymers of ethylene and propylene glycol. Preferred copolymers of ethylene and propylene glycol are butanol-initiated ethylene/propylene copolymers. More preferred are those butanol-initiated ethylene/propylene copolymers which are FDA compliant for use as food contact lubricants.

[0041] Typically the molecular weight of the preferred butanol-initiated ethylene/propylene copolymers are greater than or equal to 2000. Such polyglycols include those sold under the trade names Cognis Breox 50A, 140, Breox FGL 150, 220, 320, 460, 680, 1000, and Uniqema Emkarox VG 132 W.

[0042] The lubricant composition may comprise, by weight of the composition, between 1% and 30% boron nitride. Preferably the composition comprises between 5% and 25% by weight boron nitride. More preferably, the composition comprises between 7.5% and 15% by weight boron nitride. Most preferably, the composition comprises approximately 10% by weight boron nitride.

[0043] The lubricant composition may further comprise water. The composition typically comprises between 0% and 50% by weight water. Preferably, however, the composition comprises between 0% and 40% by weight water. More preferably, the composition comprises between 0% and 20% by weight water. More preferably still, the composition comprises between 0% and 15% by weight water. Most preferably, the composition comprises between 0% and 10% by weight water.

[0044] The lubricant composition may further comprise a corrosion inhibitor. Typically, the composition comprises between 0.01% and 5% by weight of the corrosion inhibitor. More preferably the composition comprises 0.1 and 2% of the corrosion inhibitor. Still more preferably the composition comprises approximately 0.5% by weight of the corrosion inhibitor.

[0045] The lubricant composition may further comprise a dispersing agent. The composition may comprise between 0.1% and 0.5%, preferably approximately 0.3%, by weight of the dispersing agent.

[0046] The lubricant composition may further comprise a rheology modifier (also known as a suspending agent). Where present, the composition may comprise up to 1% by weight of the rheology modifier. Preferably the composition comprises approximately 0.1% by weight of the rheology modifier.

[0047] The remainder of the composition preferably comprises the base. The base may consist of the propylene glycol and/or the water-soluble polyglycol.

[0048] In one embodiment, the lubricant composition comprises, by weight: from 5% to 15% boron nitride particles; from 5% to 45% water; from 0.1% to 1.0% corrosion inhibitor; from 0.1% to 0.5% dispersing agent; from 0% to 1% rheology modifier; and from 40% to 90% of said propylene glycol, water-soluble polyglycol or mixtures thereof. Preferably said propylene glycol, water-soluble polyglycol, or mixtures thereof is one or more of propylene glycol, dipropylene glycol or tripropylene glycol.

[0049] In one embodiment, the lubricant composition comprises, by weight, 10% boron nitride particles; 40% water; 0.5% corrosion inhibitors; and 49.5% of said propylene glycol or water-soluble polyglycol or mixture thereof. This composition may further comprise 0.2% dispersing agent and 0.5% rheology modifier, in place of the equivalent weight of said glycol. Preferably said propylene glycol, water-soluble polyglycol, or mixtures thereof is one or more of propylene glycol, dipropylene glycol or tripropylene glycol.

[0050] In a preferred embodiment, the lubricant composition comprises, by weight, 10.0% boron nitride particles; 9.1% water; 0.5% corrosion inhibitor; 0.3% dispersing agent; 0.1% rheology modifier; and 80.0% of one or more of propylene glycol, dipropylene glycol or tripropylene glycol.

[0051] The boiling point of the (poly)glycol component is preferably less than around 280°C. More preferably, the boiling point is between approximately 187°C to 276°C. The boiling point of the preferred poly(glycol) components are as follows: propylene glycol - approximately 187°C; dipropylene glycol - approximately 236°C; tripropylene glycol - approximately 276°C. The particular choice of poly(glycol) component will depend on the end use/working temperature of the oven.

[0052] A composition according to the present invention may consist essentially of boron nitride and said base material. The composition may optionally further include, independently, water, said corrosion inhibitor, said rheology modifier and/or said dispersing agent.

[0053] The boron nitride particles may be of any size suitable to operate as a lubricant material. Preferred boron nitride particles have a diameter of less than around 15 μm, preferably less than 13 μm. In a preferred embodiment, the boron nitride particles have a particle diameter range of 12 to 13 μm. Such a material is available from GB Advanced Ceramics of Ohio, under the trade name AC6004, which is NSF approved for food contact. In another preferred embodiment, the boron nitride particles preferably have an average diameter of less than 5 microns, more preferably less than 1 micron. Preferably the boron nitride particles are hexagonal. Hexagonal boron nitride particles are also commercially available from Acheson Colloids Company, of Michigan, USA.

[0054] The base material acts as a carrier for the boron nitride particles in the composition.

[0055] The base material is preferably non-toxic. The components of the composition, in particular the corrosion inhibitor, dispersing agent and rheology modifier (where present) are preferably approved by regulatory authorities (FDA) for use in circumstances where incidental contact with food may occur. More preferably, the base material is approved by the regulatory authorities for use where incidental contact with food may occur. In particular, the base material preferably has FDA approval for use as a lubricant where incidental contact with food may occur.

[0056] The present invention provides a lubricating composition which can operate at temperatures up to 2200°C.

[0057] In another aspect of the invention, there is provided the use of a lubricant composition comprising boron nitride for lubricating components in a baking oven. The components may be moving parts of said baking ovens. The oven will typically operate at a working temperature of 260°C or more, and is typically a food-baking oven.

[0058] In another aspect of the invention, there is provided the use of monopropylene glycol or a water-soluble polyglycol in a dry-film lubricant composition.

[0059] In another aspect of the invention, there is provided the use of at least one of propylene glycol and a water-soluble polyglycol as a base material in a dry-film lubricant composition.

[0060] In another aspect of the invention, there is provided a method of lubricating a baking oven, the method comprising the steps of applying a composition according to the invention to a baking oven.

[0061] The composition will generally be applied to the moving parts of said oven.

[0062] After the application step, the method may include the further step of heating said lubricant composition to a temperature at which the (poly)glycol component evaporates. In this manner, the boron nitride lubricant composition forms a thin dry film on the lubricated components, and leaves behind no form of dirty residue.

[0063] The term "glycol" as used herein describes an essentially aliphatic carbon chain comprising two hydroxyl groups, for example propylene glycol ($C_3H_6(OH)_2$).

[0064] Glycols can be polymerised by dehydration. The resultant polymers and co-polymers are typically referred to as "polyglycols" (or polyalkylene glycols), and include, for example, dipropylene glycol or tripropylene glycol, polypropylene glycol and co-polymers of ethylene glycol and propylene glycol.

[0065] The solubility of a propylene and higher alkylene glycols decreases as the molecular weight of the molecule increases. Thus, propylene glycol is more water soluble than, for example, tetrapropylene glycol.

[0066] In one embodiment, the present invention utilises polyglycols which are water-soluble in all proportions at 20°C. The propylene glycol and water-soluble polyglycols in the composition of the present invention evaporate on heating and do not produce smoke or toxic vapours.

[0067] In another embodiment, the invention utilised polyglycols which are water-insoluble in all proportions at 20°C. Such polyglycol based lubricants can be used as dry or wet film lubricants. The water-insolubility of such compositions allows them to be used in steam ovens and the like, where high levels of moisture are present. In addition, the higher boiling point - when compared to the water-soluble glycols/polyglycols - water insoluble polyglycols will de-polymerise and evaporate at higher temperatures and thus provide extended time for the boron nitride to penetrate linkages. By correct application, lacquers and deposits can also be avoided.

[0068] The lubricant compositions of the present invention are stable dispersions of boron nitride in the base material. By careful selection of the base material and optionally the suspending agent and other materials the inventors of the present invention have provided stable dispersions of boron nitride particles. The lubricant compositions of the present invention will not separate (i.e. the boron nitride will not separate from the base material) for substantial periods of time - and considerably longer than the lubricants of the prior art. For example, compositions prepared according to the present invention do not separate for at least 4 months. Prior art compositions for equivalent purposes typically separate into solid lubricant and base material within a few days or 1 to 2 weeks at most.

[0069] The invention will now be further described with reference to the Examples and Figures 1 to 3, in which:

Figure 1 is graphical representation of the results of comparative testing of a composition according to an embodiment of the present invention with known polyol ester and graphited polyglycol lubricants;

Figure 2 is a photographic depiction of the results of weight loss testing at 280°C with the lubricants used in Figure 1; and

Figure 3 is a graphical representation of the change in friction coefficient over time of a composition according to an embodiment of the present invention.

Example 1

[0070] A dry-film lubricant composition according to the present invention and comprising propylene glycol was made up to the specification shown in Table 1 below.

[0071] The composition had the appearance of a white viscous fluid. Solids content was 10 wt%. Viscosity at 20°C : thixotropic. The composition was also odourless and had a pH of 7.5.

Table 1

Component	% by weight
boron nitride particles (pharmaceutical grade) ¹	10.0%
water	9.1%
Water soluble food quality corrosion inhibitor ²	0.5%
Ciba [™] Dispex [™] N40 (food quality dispersant)	0.3%
Keltrol [™] E (food quality rheology modifier and suspending agent)	0.1 %

(continued)

Component	% by weight
monopropylene glycol (food quality)	80.0%
¹ AC6004 GE Advanced Ceramics ² Ciba [™] Irgacor [™] DSS G	

[0072] The lubricating composition of Example 1 was applied to the moving components of a Mecatherm[™] baking oven, which had been switched off. The oven was then run up to working temperature (around 280°C to 300°C), prior to the introduction of steam. Re-application of lubricant was carried out as and when necessary - determined by the operators of the oven. Typically the operator will become aware that the lubricating film is breaking down by the audible sound of metal-metal contact between the moving parts within the oven.

[0073] Two commercially available baking oven lubricants were tested in the same manner. Re-application was carried out as and when necessary. The tested products were Rocol[™] Foodlube High Temperature Chain Fluid (Comparative lubricant 1 [CL1]) and Kluber[™] YF100 (CL2). CL1 is a food grade dry-film lubricant comprising talc particles in a polyalkylene glycol base fluid. It has an off-white appearance, and as a dry-film can operate at temperatures up to 550°C. CL2 is a graphite based lubricant, using a water-insoluble polypropylene glycol as a base fluid.

[0074] In comparative testing, it was found that, after the initial weekly maintenance of the oven (in which around 7.5 litres of lubricant was applied), CL2 must be re-applied (5.0 litres each time) approximately once every 48 hours, each re-application involving an oven downtime of approximately 3 hours. Thus, over the course of a week, the use of CL2 led to a downtime of approximately 6 hours, and used around 17.5 litres of lubricant.

[0075] Lubricant CL1 was applied to ovens at double the dosage rate of the composition of the present invention in order to achieve "silencing" of the chains and conveyors (i.e. 15 litres of CL1 per application). Re-application of CL1 was necessary after approximately 24 hours. On heating, smoke was produced, although to a lesser extent than CL2.

[0076] By comparison, the dry-film lubricant of Example 1 was applied during the weekly maintenance period (7.5 litres lubricant applied) and did not need any further re-application until the next weekly maintenance. Over the course of a year, the downtime could therefore be reduced by 288 hours or more. It was found that re-application of the dry-film lubricant of the present invention was necessary once per week (a total of 6 hours downtime per week).

[0077] In operation, the base fluid in the lubricating composition of Example 1 volatilises completely on heating to the working temperature, leaving behind a dry, white-coloured film of boron nitride, which is completely free from gums, resins and carbon residues. The (poly)glycol component evaporates cleanly, producing no smoke or harmful vapours. CL2 generated dense smoke when the oven was heated to working temperature, and CL1 was observed to leave behind a varnish-like deposit at high operating temperature.

[0078] In addition to the economic advantage provided by the present invention, the lubricant is also clean and fume-free. CL 1 and CL2, in contrast, produced dense smoke/fumes when the oven was first heated to working temperature.

Example 2

[0079] An alternative dry- or wet- film lubricant composition according to the present invention was made up to the specification shown in Table 2 below.

Table 2

Component	% by weight
Butanol-initiated propylene oxide homo-polymer ¹	93.5
Boron nitride particles ²	5.0
Corrosion inhibitor ³	0.5
Hydrophobic fumed silica ⁴	1.0
¹ base carrier fluid and lubricant with viscosity of 225 cSt at 40°C; ² AC6004 GE Advanced Ceramics ³ Ciba [®] Specialities Irgalube [®] 349 ⁴ Wacker Silicones HDK [®] -N20.	

[0080] In operation, the base fluid in the lubricating composition of the Example 2 volatilises completely on heating to the working temperature, leaving behind a dry, white-coloured film of boron nitride, which is completely free from gums,

EP 1 808 478 A1

resins and carbon residues. The base evaporates cleanly, producing no smoke or harmful vapours.

[0081] The results set out in Table 3 below compare the properties of boron nitride with those of other competitive dry film lubricants and an oil-based wet film lubricant.

Table 3

Lubricant	Test Method			
	Falex Extreme Pressure Failure Load ASTM D3233 lbs	Four Ball Weld Load ASTM D2783 Kgs	Coefficient of Friction - Falex Method	Continuous Operating Temperature (degC)
Boron nitride - dry film	4500	200	0.105	2200
Graphite - dry film	1250	150	0.123	450
PTFE - dry film	4250	200	0.094	260
Oil based lubricant	750	125	0.159	230

Example 3

[0082] Further comparative testing was carried out on the composition of Example 2 using the ball on reciprocating plate technique under the following conditions:

Ball and plate of ANSI standard steel No. E-52100;
Ball size 12mm
Reciprocating frequency 1Hz
Load applied 100 N
Temperature 280°C.

[0083] The results are shown in Figures 1 and 2. The graphited polyol lubricant, and the polyol ester were Kluber YF100 and APV High Temperature Chain Oil, respectively.

[0084] After 236 minutes at 280°C, the weight loss of the plates was assessed.

[0085] Graphited polyglycol lubricant: -10mg - Figure 2A

[0086] Polyol ester lubricant: N/A due to severe oxidation/degradation - Figure 2B

Example 2: -6mg - Figure 2C

[0087] In terms of stability, the product of the present invention had not noticeably separated after a period of 4 months. In comparison, CL1 separates in a matter of days, and CL2 begins to show deposition within two weeks.

Example 4

[0088] The friction coefficient of the composition of Example 2 was assessed over time, at 280°C and a 100N load. The results of the assessment are shown in Figure 3.

[0089] It is clear that the composition of Example 2 exhibits a steady friction coefficient over a prolonged period of time. By comparison, friction becomes very high with the graphited lubricant, and the polyol severely degrades at 280°C. At high temperature, the wear rate of Example 2 is considerably less than that of the graphited lubricant (the wear rate of the polyol lubricant could not be measured due to the formation of deposits).

Example 5

[0090] Further wear testing was performed at ambient temperature, to assess the performance of Example 2 as a wet-film lubricant. The tests were performed using a portable Reichert Wear Tester having a hardened steel roller, a fixed roller bearing and a 3Kg applied load.


[0091] Example 2 performed as well as perfluorinated polyether alternatives, and outperformed all other currently available, leading brand lubricant products.

[0092] The present invention provides a food-safe lubricant material that is clean, energy efficient, cost effective and decreases downtime and running costs. The lubricants do not form carbonaceous deposits or lacquers, provide excellent lubrication performance at a wide variety of temperatures, and can be manufactured in varying viscosities to meet end needs.

[0093] The above-mentioned examples and specific description are not limiting on the scope of the invention. For instance, the compositions of the present invention may be formulated for administration as aerosols, or as greases (such as a No. 2 grease). It will therefore be appreciated that the embodiments described above may be modified within the scope of the appended claims.

Claims

1. A lubricant composition for food ovens comprising boron nitride particles dispersed in a base material comprised of propylene glycol, a polyglycol, or a mixture thereof.
2. A lubricant according to claim 1, wherein the base material is comprised of one or more water-insoluble polyglycol.
3. A lubricant according to claim 1 or 2, wherein the water-insoluble polyglycol is a polypropylene glycol.
4. A lubricant according to any preceding claim, wherein the water-insoluble polyglycol has a viscosity at 40°C of from 50 to 400 cSt.
5. A lubricant according to any preceding claim, wherein the water-insoluble polyglycol is a butanol-initiated propylene oxide homo-polymer.
6. A lubricant according to any preceding claim comprising, by weight of the composition, from 2% to 10% boron nitride.
7. A lubricant according to any preceding claim comprising, by weight of the composition, from 87.5 to 97.4% of said base material.
8. A lubricant according to any preceding claim, comprising up to 5% by weight of a suspending agent.
9. A lubricant according to claim 8, wherein the suspending agent is hydrophilic fumed silica.
10. A lubricant according to any preceding claim, further comprising a corrosion inhibitor and/or an extreme pressure and anti-wear additive.
11. A lubricant according to any preceding claim comprising, by weight: from 2.0% to 10% boron nitride particles; from 87.5% to 97.4% base; from 0.1% to 0.5% corrosion inhibitor and extreme pressure and anti-wear additive; and from 0.5% to 2.0% suspending agent.
12. A lubricant according to claim 1, wherein the base material is comprised of propylene glycol, a water-soluble polyglycol, or a mixture thereof.
13. A lubricant according to claim 12, wherein the water-soluble polyglycol is a polypropylene glycol of Formula I:



wherein: m is 2, 3 or 4.

14. A lubricant according to claim 12 or 13, wherein the base material is comprised of propylene glycol.
15. A lubricant according to claim 12, wherein the water-soluble polyglycol comprises a co-polymer of ethylene glycol and propylene glycol.
16. A lubricant according to claim 15, wherein the co-polymer of ethylene glycol and propylene glycol has a molecular weight of approximately 2000 or more.

EP 1 808 478 A1

17. A lubricant according to any of claims 12 to 16, wherein the composition comprises between 1% and 30% by weight boron nitride.
- 5 18. A lubricant according to any of claims 12 to 17, further comprising one or more of water, a corrosion inhibitor, a dispersing agent, and a rheology modifier.
- 10 19. A lubricant composition according to claim 1 or any of claims 12 to 18, comprising, by weight, from 5% to 15% boron nitride particles; from 5% to 45% water; from 0.1% to 1.0% corrosion inhibitor; from 0.1% to 0.5% dispersing agent; from 0% to 1% rheology modifier; and from 40% to 90% of said propylene glycol, water-soluble polyglycol, or mixtures thereof.
20. The use of a lubricant composition comprising boron nitride for lubricating components in an oven.

15

20

25

30

35

40


45

50

55

FIGURE 1

Coefficient of Friction vs Time @ 280 Degrees Centigrade

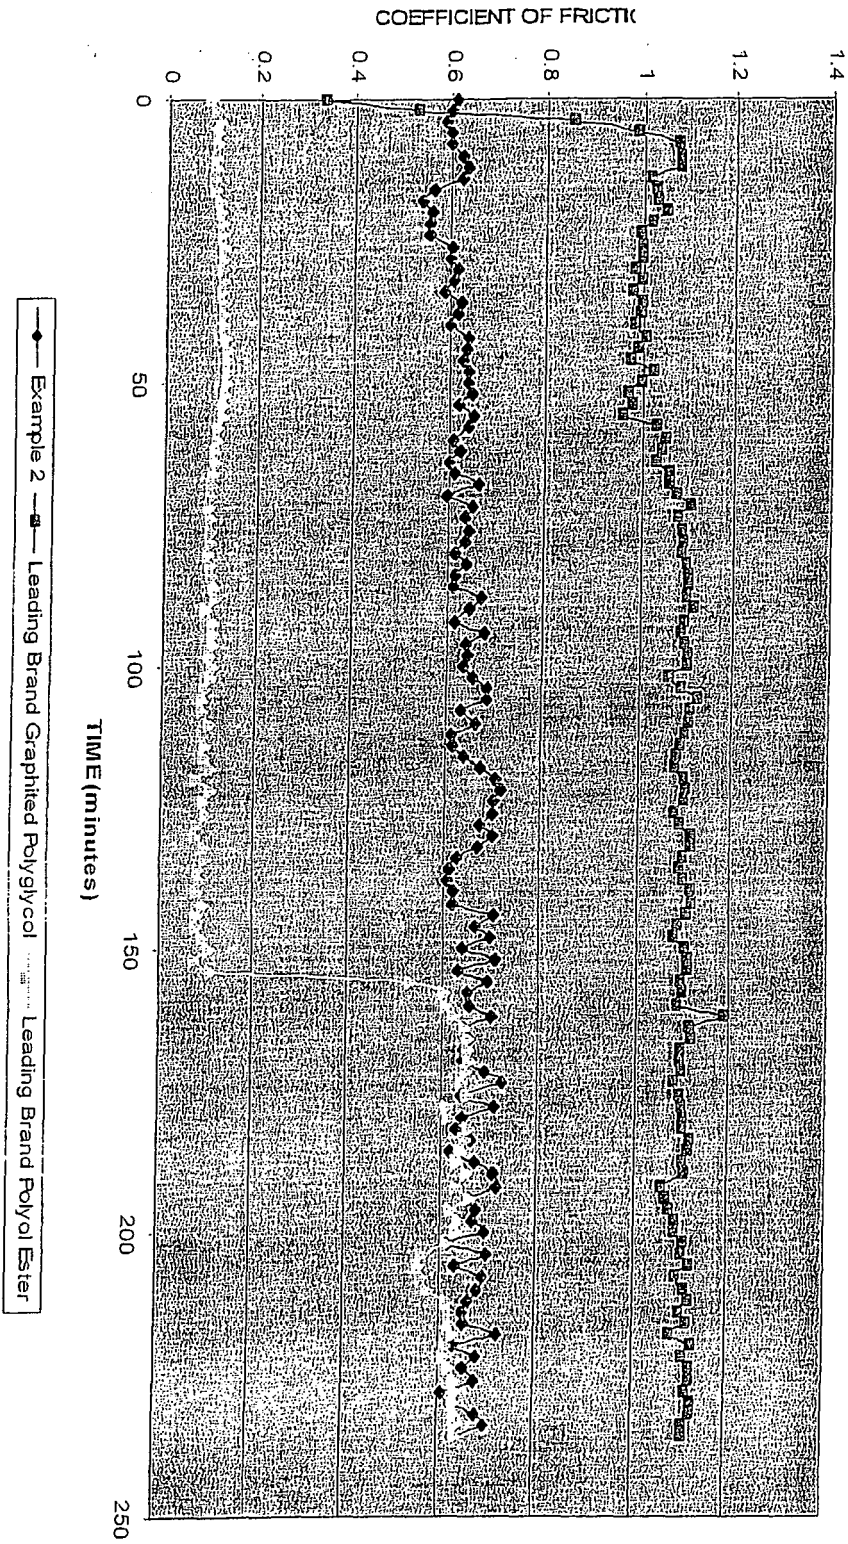

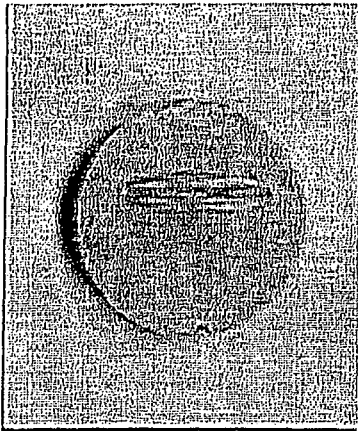


Figure 2A

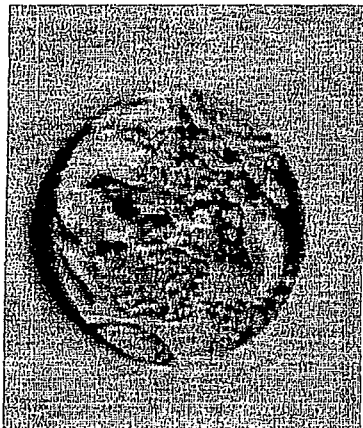


Figure 2B


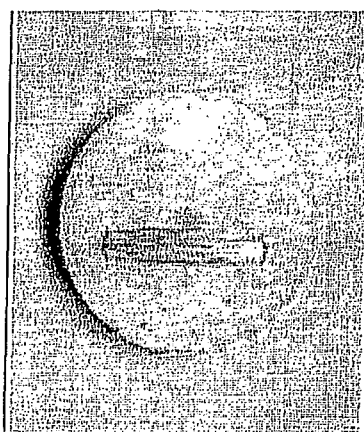


Figure 2C

FIGURE 3

Dri-coat MR - Friction Coefficient @ 280°C for 20 hrs



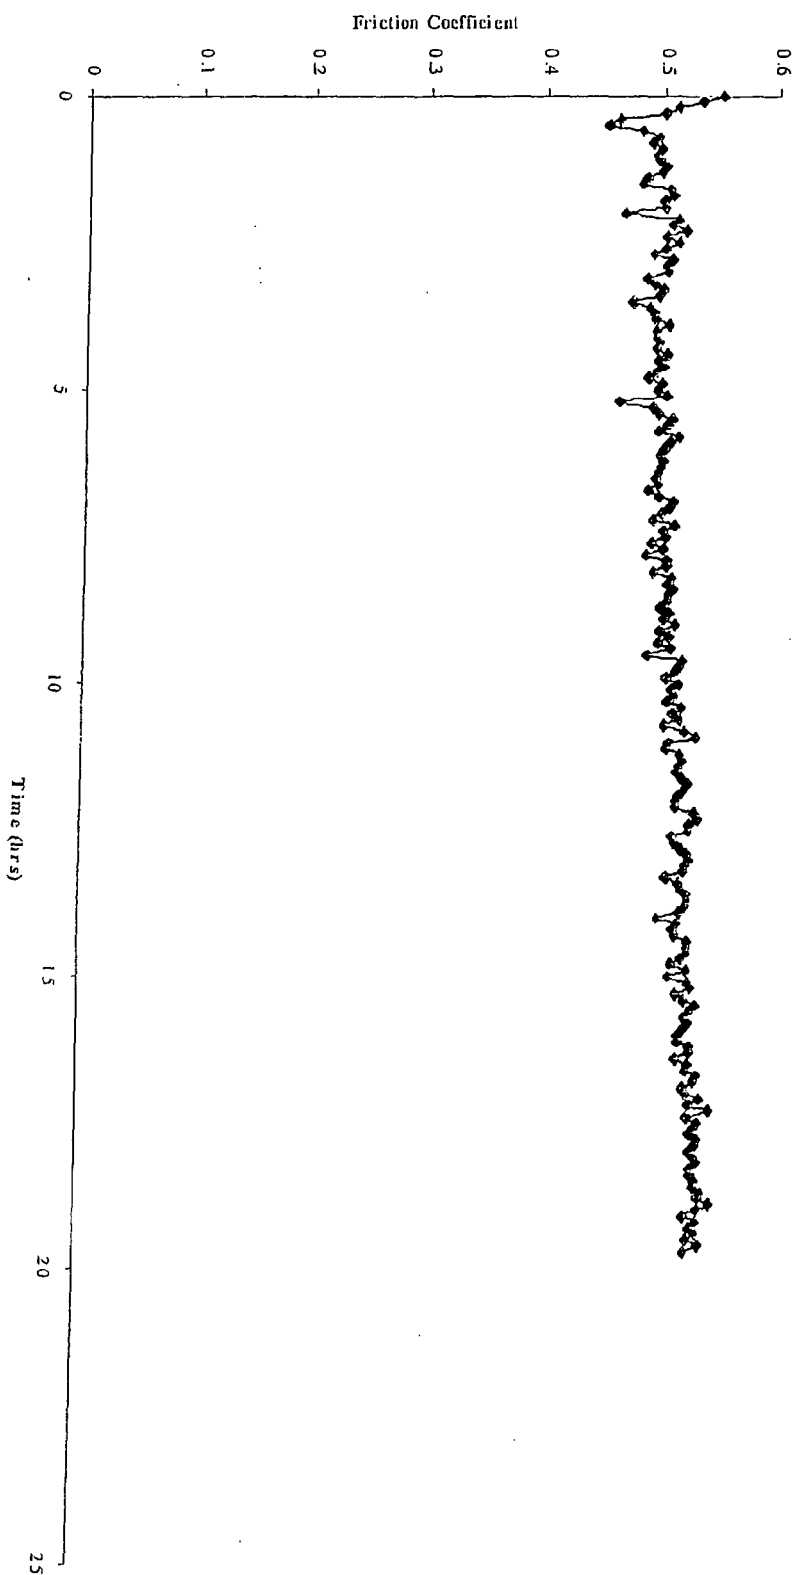

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 07 25 0119

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	DE 20 2004 020067 U1 (WABO SCHMIERTECHNIK GMBH & CO [DE]) 10 March 2005 (2005-03-10) * the whole document *	1,12-14, 17,20	INV. C10M169/04
X	US 5 167 851 A (JAMISON WILLIAM L [US] ET AL) 1 December 1992 (1992-12-01) * column 3, line 20 - column 4, line 12; claim 1; examples *	1-4,8,9	ADD. C10N30/08
X	DATABASE WPI Week 197912 Derwent Publications Ltd., London, GB; AN 1979-22780B XP002436006 & JP 54 019057 A (null) 13 February 1979 (1979-02-13) * abstract *	1,9,12, 15,16,18	
X	US 3 196 109 A (MORWAY ARNOLD J ET AL) 20 July 1965 (1965-07-20) * column 1, lines 14-45; examples *	1,6,12, 18,20	
X	DATABASE WPI Week 200544 Derwent Publications Ltd., London, GB; AN 2005-429525 XP002435976 & JP 2005 146031 A (NIPPON SAN SEKIYU KK) 9 June 2005 (2005-06-09) * abstract; examples *	1,4,7	TECHNICAL FIELDS SEARCHED (IPC) C10M
A	JP 03 114525 A (SHINETSU CHEMICAL CO) 15 May 1991 (1991-05-15) * table 1 * * abstract *	1,6,8,9	
P,A	US 2006/154830 A1 (OLLIGES WILLIAM E [US]) 13 July 2006 (2006-07-13) * paragraphs [0005], [0008], [0020] - [0022] *	1-20	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 1 June 2007	Examiner Kazemi, Pirjo
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

2
EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 07 25 0119

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

01-06-2007

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 202004020067 U1	10-03-2005	NONE	
US 5167851 A	01-12-1992	AU 1903892 A WO 9218579 A1	17-11-1992 29-10-1992
JP 54019057 A	13-02-1979	NONE	
US 3196109 A	20-07-1965	NONE	
JP 2005146031 A	09-06-2005	NONE	
JP 3114525 A	15-05-1991	JP 2004417 C JP 7034857 B	20-12-1995 19-04-1995
US 2006154830 A1	13-07-2006	NONE	