



(11) **EP 1 818 642 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
03.03.2010 Bulletin 2010/09

(21) Application number: **05767390.7**

(22) Date of filing: **27.07.2005**

(51) Int Cl.:
F28F 3/08 (2006.01)

(86) International application number:
PCT/JP2005/013756

(87) International publication number:
WO 2007/013153 (01.02.2007 Gazette 2007/05)

(54) **HEAT EXCHANGE DEVICE AND HEAT EXCHANGER VENTILATOR LOADED WITH THE SAME**
WÄRMEAUSTAUSCHVORRICHTUNG UND DAMIT BELADENER
WÄRMETAUSCHERVENTILATOR
DISPOSITIF D'ECHANGE DE CHALEUR ET VENTILATEUR ECHANGEUR DE CHALEUR CHARGE
AVEC CELUI-CI

(84) Designated Contracting States:
DE FR GB IT SE

(43) Date of publication of application:
15.08.2007 Bulletin 2007/33

(73) Proprietor: **mitsubishi electric**
corporation
Chiyoda-ku
Tokyo 100-8310 (JP)

(72) Inventors:
• **TAKADA, Masaru,**
c/o MITSUBISHI Electric Corporation
Tokyo 100-8310 (JP)
• **ARAI, Hidemoto,**
c/o MITSUBISHI Electric Corporation
Tokyo 100-8310 (JP)

- **YAMAWAKI, Terufumi,**
c/o MITSUBISHI Electric Corporation
Tokyo 100-8310 (JP)
- **YAMADA, Yasuo,**
c/o MITSUBISHI Electric Corporation
Tokyo 100-8310 (JP)
- **SUGIYAMA, Youichi,**
c/o MITSUBISHI Electric Corporation
Tokyo 100-8310 (JP)

(74) Representative: **Pfenning, Meinig & Partner GbR**
Patent- und Rechtsanwälte
Theresienhöhe 13
80339 München (DE)

(56) References cited:
EP-A- 1 052 458 GB-A- 2 407 151
JP-A- 63 280 635 JP-A- 2000 502 788
JP-A- 2001 152 116 JP-A- 2001 241 867

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**Technical Field**

5 **[0001]** The present invention relates to a heat exchange element for exchanging heat between two flows supplying and exhausting air for ventilation, used for air-conditioning in, for example, buildings and motor vehicles, and to a heat exchange ventilator including the same.

Background Art

10 **[0002]** Heat exchange ventilators generally used in the field of air conditioning use a variety of heat exchange elements. There is a static type among the heat exchange elements. The static heat exchange element, which itself does not operate, basically includes partition members whose front and rear surfaces are in contact with respective two air flows to exchange heat, and moisture (in total heat exchange ventilators), from one air flow to the other, and spacing members
15 for forming paths through which the two air flows pass the front and rear surfaces of the partition members. Many of these members are bonded with an adhesive or a pressure-sensitive adhesive and then stacked. Such heat exchange elements include a cross-flow type as disclosed in Patent Document 1 and a counterflow type as disclosed in Patent Document 2.

20 **[0003]** Two blowers are installed in the paths for the two air flows of the heat exchange element: one introduces air from the outdoors to one of the flow paths of the element; the other introduces air from an indoor living space to the other flow path. When the air flows pass through the heat exchange element, the heat and moisture in the flows are exchanged in such a structure. Consequently, outdoor fresh air is introduced with its temperature and moisture close to those of the air in the indoor living space, and ventilation thus can be performed without impairing amenity.

25 Patent Document 1: Japanese Unexamined Patent Application Publication No. 2004-190921
Patent Document 2: Japanese Unexamined Patent Application Publication No. 2004-003824

30 **[0004]** Recently, living spaces in, for example, buildings have been made highly airtight in order to save energy and increase the lifetime of the buildings, and chemical substance are used more for the buildings and the equipment in the buildings. Accordingly, the concentration of organic compounds (volatile organic compounds (VOC)) vaporizing from the buildings and the equipment is an issue. The Ministry of Health, Labour and Welfare of Japan specifies guideline values of concentrations in indoor air for 13 compounds that are considered to be harmful to the human body. In order to reduce the concentration of indoor chemicals including the 13 compounds, mechanical ventilation for clearing indoor
35 air becomes more important. A heat exchange ventilator is advantageous which performs ventilation to introduce fresh air into a living space while heat is exchanged between intake air and exhaust air, in view of minimizing the energy loss resulting from the mechanical ventilation. Since the heat exchange ventilator can reduce the concentration of volatile organic compounds in the air of the living space while ensuring energy saving, harmful effects of the chemical compounds in question to the human body can be reduced advantageously.

Disclosure of Invention**Problems to be Solved by the Invention**

45 **[0005]** The heat exchange element contained in the heat exchange ventilator is intended to exchange heat and moisture and generally designed so as to have an extremely large contact area with air flow passing through it. Accordingly, even if a very small amount of chemical substances, such as volatile organic compounds, are emitted from a component of the heat exchange element, the total chemical concentration in the air flowing into the living space is disadvantageously increased after ventilation.

50 **[0006]** For example, a heat exchange element of a heat exchanger uses a bonding agent (adhesive or pressure-sensitive adhesive), and the bonding agent is generally of an emulsion type using water as a principal solvent. Some of the emulsion-type bonding agents emit a large amount of volatile organic compounds, such as the residue (unreacted monomer) of the base resin, after drying. Part of the volatile organic compounds adheres to the heat exchange element or the ventilator during manufacture and may be reemitted from the element or the heat exchange ventilator in use. Some of the adhesives and pressure-sensitive adhesives contain a plasticizer for ensuring that the resin has film formability at low temperatures or flexibility after curing, or an organic solvent for adjusting the viscosity. The plasticizer and
55 the solvent are also emitted after curing, consequently increasing the chemical emission from the heat exchanger.

[0007] In order to overcome these disadvantages, a device for removing or decomposing chemical substances (for example, an activated carbon filter, a decomposition catalyst, a decomposition device using electric discharge, etc.) can

be provided downstream from the heat exchange element, upstream from the outlet to the living space. Such a device must be large in order to reduce the chemical substances in the air of the living space to a very low concentration. Accordingly, a larger space is required and a higher energy must be consumed. This is disadvantageous to the heat exchange ventilator intended for energy saving ventilation.

[0008] It is therefore preferable that the reduction of indoor chemicals be performed by introducing fresh air from the outdoors while the emission of chemical substances from the heat exchange ventilator is minimized.

[0009] In view of the above-described disadvantages, the object of the present invention is to provide a heat exchange element that minimizes the emission of chemical substances whose presence in space, particularly in the living space of human beings and other organisms, is unfavorable, and a heat exchange ventilator that is provided with the heat exchange element to reduce the chemical emission, and thus to enhance the effect of reducing the concentration of the chemical substances in the space equipped with the ventilator.

GB 2407151 A describes a heat exchange element having spacing members and partition members, wherein the partition members and the spacing members have moisture permeable portions and flame resisting portions, the portions not overlapping with each other.

EP 1052 458 A2 disclose a method for producing a heat exchanger, wherein the spacing members are corrugated and directly after corrugation bonded to the partition members.

JP 63 280635 A discloses a method for producing a heat exchange element, wherein unit members, each of which comprises a string-shaped rib material adhered to a raw paper, are bonded using a hot-melt adhesive comprising magnetic particulates.

JP 2001 241867 A discloses a heat exchanger having partition members made of moisture permeable material and corrugated spacing members made of non-hygroscopic material.

JP 2000 502788 A describes a ceramic packing with channels for thermal and catalytic beads. Ceramic plates with ribs are stacked one above another such that channels are constructed.

JP 2001 152116 A describes adhesives for wall papers.

It is the object of the present invention to provide a heat exchange element and a heat exchanger, which have a reduced emission of vaporized chemicals such as VOC.

This object is solved by the heat exchange element according to claim 1 and the heat exchanger according to claim 6. Advantageously improvements of the heat exchange element are given in the dependent claims.

Means for Solving the Problems

[0010] A heat exchange element of the present invention exchanges heat between two flows passing through an air supply space and an exhaust space partitioned with a plurality of members. The plurality of members are bonded with a bonding agent (adhesive or pressure-sensitive adhesive) which contains a volatile organic compound (VOC) or a carbonyl compound but from which the total emission of such a chemical substance is 100 $\mu\text{g/hr}$ or less per gram.

For the measurement, a bonding agent to be tested is dried in a clean container with a cross section of about 2 to 3 cm^2 (for example, at 100°C for about 5 minutes), and then air over the bonding agent is sampled. The chemical emission is then measured as the emission rate of total volatile organic compounds collected and analyzed by the method specified in JIS A 1901 (Determination method of the emission of volatile organic compounds (VOC), form aldehydes and other carbonyl compounds for building products Small chamber method).

Advantages

[0011] In the heat exchange element of the present invention, the members constituting the heat exchange element are bonded with a bonding agent from which the emission of volatile organic compounds is reduced to a rate of 100 $\mu\text{g/hr}$ or less per gram. Consequently, the amount of chemical substances emitted from the heat exchange element and the heat exchange ventilator including the heat exchange element can be reduced. Accordingly, ventilation using the heat exchange ventilator of the present invention can reduce the concentration of chemical substances in the living space effectively.

[0012] In the present invention, furthermore, by using a bonding agent from which the emission of volatile organic compounds is low after drying and which contains no plasticizer or organic solvent, for bonding the members constituting the heat exchange element, the chemical emission from the heat exchange element and the heat exchange ventilator including the heat exchange element can be greatly reduced.

Brief Description of the Drawings

[0013]

[Fig. 1] Fig. 1 is a perspective view of a heat exchange element according to Embodiment 1 of the present invention.

[Fig. 2] Fig. 2 is a perspective view of a unit component constituting the heat exchange element shown in Fig. 1.

Reference Numerals

[0014]

1: heat exchange element

2: partition member

3: spacing member

4, 5: flow path

Best Mode for Carrying Out the Invention

Embodiment 1

[0015] Fig. 1 is a perspective view of a heat exchange element 1 having a cross-flow stack structure, contained in a heat exchange ventilator of the present invention. For producing the heat exchange element 1, a unit component is first prepared by bonding a planar partition member 2 to a waved spacing member 3 as shown in Fig. 2, and then unit components are stacked in the direction in which the partition member 2 is stacked on the spacing member 3. In this instance, the unit components are stacked in such a manner as to be turned 90 degree with respect to one another so that the spacing members 3 form two gas flow paths 4 and 5 perpendicular to each other.

[0016] When the unit component shown in Fig. 2 is formed or stacked, a bonding agent (adhesive or pressure-sensitive adhesive) is used and mainly applied to the ridge lines at the summits of the spacing member 3. The application of the bonding agent, the formation of the unit components, and the stacking for the heat exchange element can be performed according to known methods.

[0017] In the present embodiment, an example of the heat exchange element 1 using an adhesive is explained as a case where the unit component is formed with a machine (corrugator) for manufacturing single-faced corrugated paper for packaging. In the corrugator, material sheets for the partition member 2 and the spacing member 3 are used as the liner and the corrugated portion, respectively, and a desired bonding agent, whose viscosity may have been adjusted, is placed in the glue feeder of the corrugator. Thus unit component is continuously formed. Then, a bonding agent is further applied to the ridges at the summits of the resulting unit component using, for example, a roll coater, and unit components are stacked while being turned 90 degree with respect to one another. The heat exchange element 1 is thus produced.

[0018] The bonding agent for bonding the partition member 2 and the spacing member 3 used in the manufacture of the heat exchange element 1 is often of a resin emulsion type containing water as a principal solvent. For example, this type of adhesive contains a base resin that is dispersed in particle form in water. The resin particles are aggregated and cured to form film by drying to remove the water. At the same time, the resin of the adhesive permeates into the asperities on the surfaces of the members in contact with each other and hardens to exhibit an effect of adhesion. The adhesive is selected from various types, depending on the compatibility with the materials to be bonded, the presence or absence of water resistance, the degree of viscosity, and other desired physical properties. Generally used adhesives include vinyl acetate resin emulsion adhesives, acrylic resin emulsion adhesives, vinyl acetate-acrylic ester copolymer resin emulsion adhesives, and ethylene-vinyl acetate copolymer resin (EVA) emulsion adhesives. In addition, combined adhesives containing some of these different types may be used.

Many pressure-sensitive adhesives are of an emulsion type containing water as a principal solvent, as with the above-described adhesives. Generally used emulsion types include epoxy, synthetic rubber, polyurethane, acrylic, ethylene-vinyl acetate copolymer (EVA), and silicone pressure-sensitive adhesives.

[0019] However, these bonding agents may contain an unintended residue of the base resin. The residue may be a unreacted residual monomer or a decomposition product produced at the time of polymerization of monomers to prepare a polymer of the resin (for example, a vinyl acetate monomer being a residual monomer, or acetic acid or acetaldehyde being a decomposition product, in the preparation of vinyl acetate resin or ethylene-vinyl acetate copolymer (EVA) resin)). The residual monomer and decomposition product contain volatile organic compounds (defined as organic compounds generally having boiling points in the range of 50 to 260°C, or defined in JIS A 1901 as organic compounds having gas chromatographic peaks in the range between n-hexane and n-hexadecane) or components having lower boiling points than the volatile organic compounds. JIS A 1901 specifies an example of a method for collecting and measuring these components in detail.

[0020] In order to help the film formation by curing, or in order to maintain the flexibility of the resin after curing, the emulsion-dispersed adhesive and pressure-sensitive adhesive may contain a phthalate ester as a plasticizer, such as

n-butyl phthalate (DBP) or di-2-ethylhexyl phthalate (DOP). While some of the phthalate esters have relatively high melting points and are not classified as volatile organic compounds, the above-mentioned DBP and DOP in the phthalate ester are particularly designated as compounds whose indoor concentration should be reduced and the Ministry of Health, Labour and Welfare specifies guideline values for their indoor concentrations.

[0021] Some of the emulsion-dispersed adhesives containing water as a principal solvent contain an organic solvent, such as toluene, xylene, ethylbenzene, or styrene, for the purpose of, for example, adjusting the viscosity. After all, a major part of the chemical substances emitted from adhesives at the time of drying results from the chemical substances contained in aqueous emulsion adhesives, such as plasticizers and organic solvents. It is therefore preferable to use adhesives not containing those chemical substances. The above organic solvents have relatively low boiling points, and accordingly almost all the organic solvent in an adhesive is emitted when the adhesive is cured to form a film. However, part of the organic solvent remains in the resin.

[0022] Some of the heat exchange ventilators are used under high-humidity conditions. The heat exchange element used under these conditions requires that the partition members 2 and the spacing members 3 be water-resistant so as to prevent damage resulting from water absorption, and that the bonding agent be also water-resistant so as to ensure reliability for a long time. In order to enhance the water resistance, some of the bonding agents contain formaldehyde or the like as a crosslinking agent for crosslinking molecular chains during curing, in addition to a plasticizer which is generally contained in bonding agents. Although formaldehyde has a very low boiling point (boiling point: about -19 degree) and is not classified into the group of volatile organic compounds, it is suspected to be a causative agent of the sick building syndrome or the like. The Ministry of Health, Labour and Welfare specifies a guideline value for its concentration in indoor air, as well as that for acetaldehyde.

[0023] The above solvent and chemical inclusions are not only left in the bonding agent and emitted after curing and film formation, but also are emitted during drying or curing in the preparation of the heat exchange element. The emitted chemical compounds are absorbed by the partition members 2 and the spacing members 3 and, thus, contained in the resulting product. When the product is used, the chemical compounds may be reemitted by airflow passing through the element. It is therefore preferable to use a bonding agent which does not include such chemical substances as far as possible.

[0024] Recently developed aqueous emulsion-dispersed adhesives include adhesives using a resin whose residual monomer is reduced, adhesives containing no plasticizer or any other chemical substance, but functioning in the same manner as known adhesives, and adhesives containing no organic solvent. Examples of these adhesives are disclosed in Japanese Patent No. 3299920 and Japanese Unexamined Patent Application Publication Nos. 2004-155997, 2001-152116, 2002-179719, and 2003-171639. These adhesives do not contain chemical substances likely to be emitted as main constituents, and consequently they hardly emit the chemical substances during and after drying.

[0025] By using the above-described adhesive as the bonding agent of the heat exchange element to bond the members constituting the heat exchange element, chemical substances, such as volatile organic compounds, plasticizers, and organic solvents, which are likely to remain in and be emitted from the bonding agent or likely to be absorbed by and emitted from the heat exchange element can be extremely reduced. Accordingly, the heat exchange ventilator including the heat exchange element can further reduce the chemical emission to fresh air introduced from the outdoors; hence, the heat exchange ventilator can more enhance the effect of reducing the indoor concentration of the chemical substances than the known products. In addition, since the volatile organic compounds, plasticizers and organic solvents usually have foul odors, the effect of reducing the foul odors emitted from the ventilator can be subsidiarily expected by reducing emitted volume of such chemical substances.

[0026] When the bonding agent used in the present invention is used in the above-described manufacturing process, the following should be noted. If a bonding agent not satisfying the requirements for the bonding agent used in the present invention (adhesive or pressure-sensitive adhesive emitting a large amount of volatile organic compounds, or containing a plasticizer, an organic solvent, or the like) has been used in the corrugator or the roll coater before feeding the bonding agent of the present invention into the equipment, the chemical substances may be mixed with the bonding agent of the present invention and contaminate it, and consequently the chemical emission from the resulting heat exchange element may be extremely increased. In order to prevent the contamination, the portion in the equipment coming into contact with the bonding agent should be sufficiently cleaned before using the bonding agent.

[0027] The partition member 2 and the spacing member 3 are made of a variety of materials according to the intended use or application of the heat exchange element 1. For example, a total heat exchange element require that the partition member 2 has moisture permeability. Accordingly, the partition member 2 is generally made of a specially-treated paper prepared by applying a special treatment for improving the moisture permeability or the elasticity to paper with various resins or chemical solutions, a resin having an improved moisture permeability, or a sheet prepared by bonding or depositing the resin onto a nonwoven fabric or any other reinforcing substrate. Sensible heat exchange elements do not require such characteristics, and accordingly allow a wide range of choices in materials. For example, a resin film or a thin metal plate (metal film) can be used instead of paper. The spacing member 3, which maintains the space between the partition members 2, is made of a wide variety of materials, such as a paper subjected to a special treatment for

reducing the elasticity with a resin, a resin film and a reinforced resin film prepared by bonding or depositing the resin film onto a nonwoven fabric or any other reinforcing substrate, a molded resin, a metal, and a metal thin film bonded to paper.

[0028] Preferably, the partition member 2 and the spacing member 3 constituting the heat exchange element 1 are preferably made of materials from which the emission of chemical substances is minimized because the partition member 2 and the spacing member 3 also have very large contact areas with air. However, natural materials, such as paper, may originally contain some of the volatile organic compounds. Thus, it may be difficult to prepare a material completely free from chemical substances. The materials of the partition member 2 and the spacing member 3 are formed into sheets and wound into rolls or cut into rectangular pieces. In this process, the sheets are often brought into sufficient contact with air at relatively high temperature. Consequently, chemical substances or the like may vaporize and completely dissipate or result in a similar state.

Example

[0029] A heat exchange element 1 was prepared as an example of the heat exchange element 1 of the present invention by the above-described method. In the preparation, a specially treated paper with an inorganic agent was used for the partition members 2 and the spacing members 3, and an adhesive from which residual monomers were reduced was used as the bonding agent. The adhesive was prepared by partially introducing ethylene-vinyl acetate polymer (EVA) resin emulsion to vinyl acetate resin aqueous emulsion, instead of adding the above-described plasticizer, so as to exhibit the same characteristics. On the other hand, another heat exchange element was prepared for a comparative example by the above-described method using the same partition members and spacing members as in the example. Only the adhesive was replaced with a vinyl acetate resin aqueous emulsion adhesive which contains a plasticizer and from which the emission of total volatile organic compounds defined by JIS A 1901 and measured in accordance with JIS A 1901 was about 500 $\mu\text{g/hr}$ per gram of the adhesive. The heat exchange elements of the example and the comparative example were installed in the same type of heat exchange ventilators and the chemical emissions from the ventilators were measured and compared with each other. The results are shown in Table 1.

[0030]

[Table 1]

Chemical emission from adhesive (per gram of adhesive)	Chemical emission from heat exchange ventilator
less than or equal to detection limit	$8.7 \times 10^2 \mu\text{g/hr}$
about 500 $\mu\text{g/hr}$	$6.1 \times 10^4 \mu\text{g/hr}$

[0031] Table 1 shows that the chemical emission rates of the heat exchange element and the heat exchange ventilator depend on the chemical emissions from the adhesive. It has also been found from the data that in order to achieve, for example, a total volatile organic compound concentration of 400 $\mu\text{g/m}^3$, which is the provisional target value for total volatile organic compounds in indoor air, currently specified by the Ministry of Health, Labour and Welfare, a preferred chemical emission from the adhesive in general cases is about 50 to 100 $\mu\text{g/hr}$ or less per gram of the adhesive, though depending on the size of the heat exchange element, the volume of the space where the heat exchange ventilator is used, and other factors. Accordingly, by using an adhesive from which the chemical emission is in this range or below to bond the partition member 2 and the spacing member 3 constituting the heat exchange element 1, the heat exchange ventilator including the heat exchange element 1 can provide a good environment to the user.

In addition, it is preferable that the total emission of volatile organic compounds or carbonyl compounds from the entire heat exchange element 1 including the bonding agent bonding the partition member 2 and the spacing member 3 be 100 $\mu\text{g/hr}$ or less per gram.

Industrial Applicability

[0032] The present invention can be applied to any heat exchange ventilator that uses a bonding agent for bonding its components, and can promise to produce an effect.

Also, the heat exchange ventilator of the present invention can be used not only for ventilation of rooms in buildings, but also for ventilation of various spaces, such as automobiles, trains, and other vehicles.

Claims

1. A heat exchange element for ventilation in which heat is exchanged between two flows passing through an air supply space and an air exhaust space partitioned with a plurality of members based on paper or resin,
 wherein in the heat exchange element, whose plurality of members are bonded with a bonding agent
 the bonding agent is an resin emulsion-dispersed adhesive containing water as an principal solvent, selected from
 the group consisting of vinyl acetate resin emulsion adhesives, acrylic resin emulsion adhesives, vinyl acetate-
 acrylic ester copolymer resin emulsion adhesives, ethylene-vinyl acetate copolymer resin (EVA) emulsion adhesives,
 and polyurethane adhesives, or prepared by mixing a plurality of adhesives selected from the same group,
 or the bonding agent is a resin emulsion pressure-sensitive adhesive containing water as a principal solvent, selected
 from the group consisting of epoxy resin pressure-sensitive adhesives, synthetic rubber pressure-sensitive adhe-
 sives, polyurethane pressure-sensitive adhesives, acrylic resin pressure-sensitive adhesives, ethylene-vinyl acetate
 copolymer resin (EVA) pressure-sensitive adhesives, silicone pressure-sensitive adhesives, or prepared by mixing
 a plurality of adhesives selected from the same group, **characterised in that**
 the bonding agent contains a volatile organic compound or a carbonyl compound but from which the total emission
 of such a chemical substance is 100 µg/hr or less per gram.
2. The heat exchanger element for ventilation according to claim 1, wherein the bonding agent is prepared by mixing
 vinyl acetate resin emulsion and ethylene-vinyl acetate copolymer resin (EVA) emulsion.
3. The heat exchange element for ventilation according the proceeding claim, wherein the bonding agent contains no
 plasticizer or organic solvent.
4. The heat exchange element for ventilation according to one of the proceeding claims, wherein the bonding agent
 is water-resistant.
5. The heat exchange element for ventilation according to one of the proceeding claims, wherein the total emission of
 volatile organic compounds or carbonyl compounds from the entire element including the members and the bonding
 agent is 100 µg/hr or less per gram.
6. A heat exchange ventilator including the heat exchange element according to one of the proceeding claims.

Patentansprüche

1. Wärmeaustauschelement zur Belüftung, in welchem Wärme zwischen zwei Strömen ausgetauscht wird, die durch
 einen Luftzuführungsraum und einen Luftabführungsraum hindurchgehen, die durch mehrere Teile auf der Grund-
 lage von Papier oder Harz geteilt sind,
 wobei in dem Wärmeaustauschelement, dessen mehrere Teile mit einem Bindemittel verbunden sind, das Binde-
 mittel ein in einer Harzemulsion dispergierter Klebstoff enthaltend Wasser als ein Hauptlösungsmittel ist, ausgewählt
 aus der Gruppe bestehend aus Vinylacetatharz-Emulsionsklebstoffen, Acrylharz-Emulsionsklebstoffen, Vinylace-
 tatacrylester-Copolymerharz-Emulsionsklebstoffen, Ethylenvinylacetat(EVA)-Copolymerharz-Emulsionsklebstof-
 fen und Polyurethan-Klebstoffen, oder hergestellt durch Mischen mehrerer Klebstoffe, die aus derselben Gruppe
 ausgewählt sind,
 oder das Bindemittel ein druckempfindlicher Harz-Emulsionsklebstoff enthaltend Wasser als ein Hauptlösungsmittel
 ist, ausgewählt aus der Gruppe bestehend aus druckempfindlichen Epoxidharz-Klebstoffen, druckempfindlichen
 Kunstgummi-Klebstoffen, druckempfindlichen Polyurethan-Klebstoffen, druckempfindlichen Acrylharz-Klebstoffen,
 druckempfindlichen Ethylenvinylacetat(EVA)-Copolymerharz-Klebstoffen, druckempfindlichen Silikon-Klebstoffen,
 oder hergestellt durch Mischen mehrerer Klebstoffe, die aus derselben Gruppe ausgewählt sind,
 wobei das Bindemittel eine flüchtige organische Verbindung oder eine Carbonylverbindung enthält, von der die
 Gesamtemission einer derartigen chemischen Substanz 100 µg/h oder weniger pro Gramm beträgt.
2. Wärmeaustauschelement zur Belüftung nach Anspruch 1, bei dem das Bindemittel hergestellt ist durch Mischen
 von Vinylacetatharz-Emulsion und Ethylenvinylacetat(EVA)-Copolymerharz-Emulsion.
3. Wärmeaustauschelement zur Belüftung nach dem vorhergehenden Anspruch, bei dem das Bindemittel keinen
 Weichmacher oder organisches Lösungsmittel enthält.

4. Wärmeaustauschelement zur Belüftung nach einem der vorhergehenden Ansprüche, bei dem das Bindemittel wasserbeständig ist.
5. Wärmeaustauschelement zur Belüftung nach einem der vorhergehenden Ansprüche, bei dem die Gesamtemission von flüchtigen organischen Verbindungen oder Carbonylverbindungen von dem gesamten Element enthaltend die Teile und das Bindemittel 100 µg/h oder weniger pro Gramm beträgt.
6. Wärmeaustauschventilator enthaltend das Wärmeaustauschelement gemäß einem der vorhergehenden Ansprüche.

Revendications

1. Élément d'échange de chaleur pour ventilation dans lequel de la chaleur est échangée entre deux flux passant par un espace d'alimentation en air et un espace d'échappement de l'air avisé par une pluralité d'organes à base de papier ou de résine,
Où, dans l'élément d'échange de chaleur, une pluralité d'organes est liée avec un agent de liaison, l'agent de liaison est un adhésif dispersé par émulsion de résine contenant de l'eau comme solvant principal, choisi dans le groupe consistant en les adhésifs d'émulsion de résine d'acétate de vinyle, les adhésifs d'émulsion de résine acrylique, les adhésifs d'émulsion de résine de copolymère d'acétate de vinyle-ester acrylique, les adhésifs d'émulsion de résine de copolymère d'éthylène-acétate de vinyle (EVA), et les adhésifs de polyuréthane, ou préparé en mélangeant une pluralité d'adhésifs choisis dans le même groupe,
ou l'agent de liaison est un adhésif sensible à la pression d'émulsion de résine contenant de l'eau comme solvant principal, choisi dans le groupe consistant en les adhésifs sensibles à la pression de résine époxy, les adhésifs sensibles à la pression de caoutchouc synthétique, les adhésifs sensibles à la pression de polyuréthane, les adhésifs sensibles à la pression de résine acrylique, les adhésifs sensibles à la pression de résine de copolymère d'éthylène-acétate de vinyle (EVA), les adhésifs sensibles à la pression de silicone, ou préparé en mélangeant une pluralité d'adhésifs choisis dans le même groupe, **caractérisé en ce que** l'agent de liaison contient un composé organique volatil ou un composé carbonyle, mais duquel l'émission totale d'une telle substance chimique est de 100 µg/h ou moins par gramme.
2. Élément d'échange de chaleur pour ventilation selon la revendication 1, dans lequel l'agent de liaison est préparé en mélangeant une émulsion de résine d'acétate de vinyle et une émulsion de résine de copolymère d'éthylène-acétate de vinyle (EVA).
3. Élément d'échange de chaleur pour ventilation selon la revendication précédente, dans lequel l'agent de liaison ne contient aucun plastifiant ou solvant organique.
4. Élément d'échange de chaleur pour ventilation selon l'une des revendications précédentes, dans lequel l'agent de liaison est résistant à l'eau.
5. Élément d'échange de chaleur pour ventilation selon l'une des revendications précédentes, dans lequel l'émission totale de composés organiques volatils ou de composés carbonyle de l'élément entier y compris les organes et l'agent de liaison est de 100 µg/h ou moins par gramme.
6. Ventilateur d'échange de chaleur incluant l'élément d'échange de chaleur selon l'une des revendications précédentes.

FIG. 1


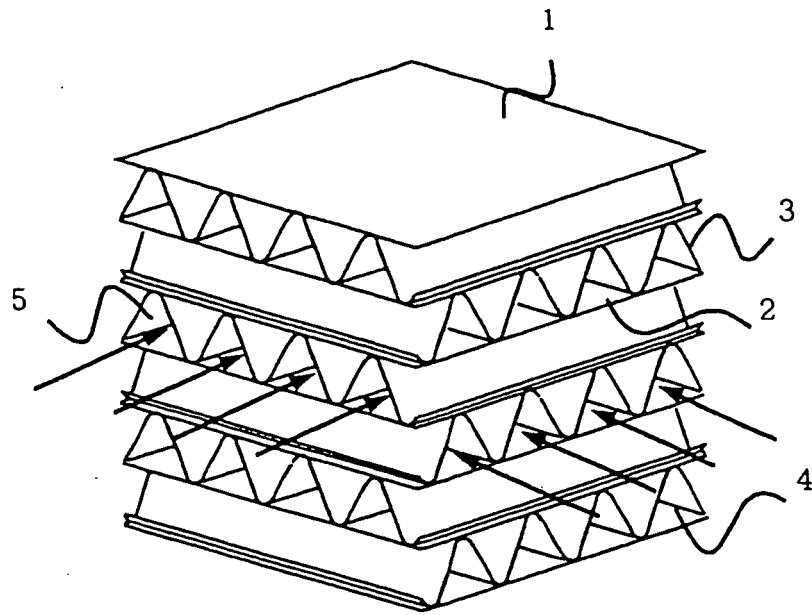


FIG. 2

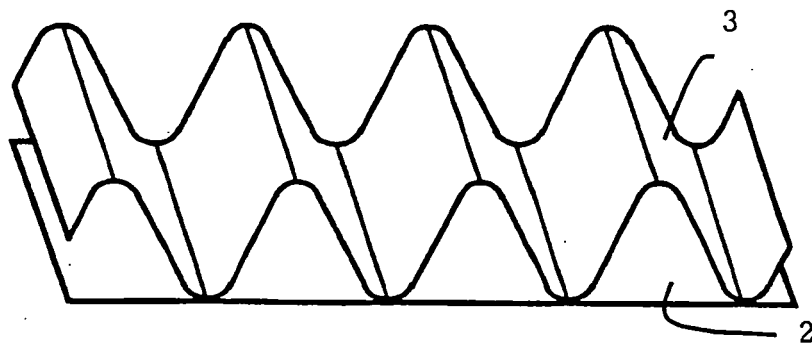

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2004190921 A [0003]
- JP 2004003824 A [0003]
- GB 2407151 A [0009]
- EP 1052458 A2 [0009]
- JP 63280635 A [0009]
- JP 2001241867 A [0009]
- JP 2000502788 A [0009]
- JP 2001152116 A [0009] [0024]
- JP 3299920 B [0024]
- JP 2004155997 A [0024]
- JP 2002179719 A [0024]
- JP 2003171639 A [0024]