(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) **EP 1 830 520 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**
published in accordance with Art. 158(3) EPC
Note: Bibliography reflects the latest situation

(15) Correction information:
Corrected version no 1 (W1 A1)
Bibliography INID code(s) 71

(48) Corrigendum issued on:
13.02.2008 Bulletin 2008/07

(43) Date of publication:
05.09.2007 Bulletin 2007/36

(21) Application number: **06761566.6**

(22) Date of filing: **25.07.2006**

(51) Int Cl.:
H04L 12/28 *(2006.01)*

(86) International application number:
PCT/CN2006/001836

(87) International publication number:
WO 2007/053996 (18.05.2007 Gazette 2007/20)

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI SK TR

(30) Priority: **10.11.2005 CN 200510115885**

(71) Applicant: **Huawei Technologies Co., Ltd.**
Longgang District,
Shenzhen,
Guangdong 518129 (CN)

(72) Inventor: **ZHANG, Tao**
Guangdong 518129 (CN)

(74) Representative: **Collin, Jérôme et al**
Cabinet Régimbeau
20, rue de Chazelles
75847 Paris Cedex 17 (FR)

(54) **METHOD AND SYSTEM FOR REDIRECTING OF THE CLIENT**

(57) A method and system for redirecting of the client, which are used for resolving the problem that when the client is redirecting, the system does not support the client to direct to other realms different from the current realm, with the steps: the client transmits a request message to the redirect agent; the redirect agent returns a first responding message to the client, while the first responding message comprises an identification of the second realm; the client transmits a second request message to the second server of the second realm. This resolution can only maintain and modify the data in the redirect agent and not update and maintain the client, so that the redirect service between different realms can be realized. Furthermore because the number of the clients is less than the number of the redirect agents, the cost of the operation and maintenance is much reduced.

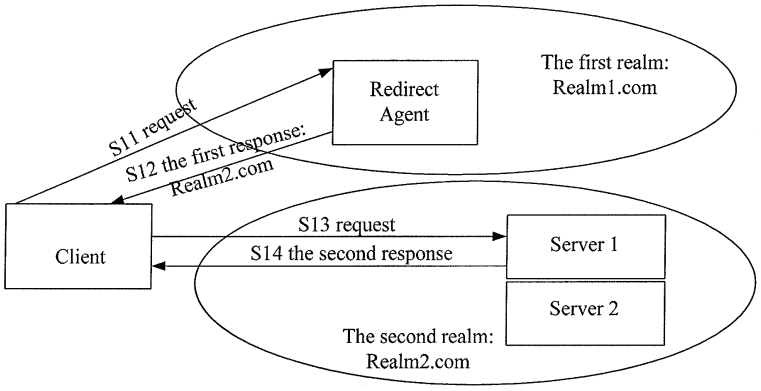

Fig. 2

EP 1 830 520 A8