



(11) **EP 1 831 967 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

(15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see
Claims EN 19, 22-26, 28, 30
Claims FR 23

(51) Int Cl.:
H01R 13/629 (2006.01)

(86) International application number:
PCT/GB2005/004950

(48) Corrigendum issued on:
18.01.2012 Bulletin 2012/03

(87) International publication number:
WO 2006/067422 (29.06.2006 Gazette 2006/26)

(45) Date of publication and mention
of the grant of the patent:
16.02.2011 Bulletin 2011/07

(21) Application number: **05820504.8**

(22) Date of filing: **19.12.2005**

(54) **COUPLER**
KOPPLUNGSVORRICHTUNG
ACCOUPLEMENT

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**

(30) Priority: **21.12.2004 GB 0427932**

(43) Date of publication of application:
12.09.2007 Bulletin 2007/37

(73) Proprietor: **Hydrasun AMC Limited**
Hydrasun House
Aberdeen
AB24 3BU (GB)

(72) Inventor: **LITTLEWOOD, Thomas David Shon**
Aberdeen AB21 0EQ (GB)

(74) Representative: **Brown, James Douglas**
Murgitroyd & Company
Scotland House
165-169 Scotland Street
Glasgow G5 8PL (GB)

(56) References cited:
US-A1- 2001 036 774

EP 1 831 967 B9

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This invention relates to a coupler for joining connections and particularly to a multiway coupler for joining a number of connections, particularly but not exclusively, for use in hostile environments, for example, subsea environments.

[0002] Umbilicals used underwater typically comprise a number of internal cables, hoses or wires carrying, for example electrical wires, hydraulic lines, pneumatic lines, fibre optic cables or other types of wires, lines, cables or the like (hereinafter referred to as "cables") used for transmitting, for example, power, signals, data, etc. At the point where the umbilical connects to a host facility or structure with corresponding cables, it may be necessary to connect each cable within the umbilical separately. Such connections may be difficult and time consuming to effect.

[0003] This problem has been tackled by connecting and locking two parallel plates, each plate comprising mating connector halves mounted on their mating face. However, these plates are difficult to align and connect, and the connectors mounted on them are prone to damage and to dirt ingress. The problems associated with these plates are exacerbated in subsea or other difficult environments.

[0004] US Patent No 6530794 to the present inventor, Thomas David Shon Littlewood, describes a coupler for joining connections and the present invention generally, but not exclusively, relates to improvements to the coupler described therein.

[0005] According to a first aspect of the present invention there is provided an apparatus to connect a first cable to a second cable, the apparatus comprising:-

a male member coupled to the first cable;
a female member coupled to the second cable, and
an actuation mechanism comprising a tapered surface wherein at least a part of one of the first and second cables is connected to the tapered surface by a trapping means such that movement of the tapered surface along a longitudinal axis in a first direction forces, by virtue of the connection therebetween, the said at least part to move in a radially outwards direction substantially transverse to the longitudinal axis and movement of the tapered surface along the longitudinal axis in a second opposite direction forces, by virtue of the connection therebetween, the said at least part to move in a radially opposite direction substantially transverse to the longitudinal axis.

[0006] According to the first aspect of the present invention there is provided a method of connecting a first cable to a second cable, the method comprising the steps of:-

providing a male member having a longitudinal cen-

tral axis coupled to the first cable;
providing a female member coupled to the second cable;
providing an actuation mechanism comprising a tapered surface wherein at least part of one of the first and second cables is connected to the tapered surface by a trapping means;
wherein the tapered surface is capable of moving along the longitudinal central axis of the male member in a first direction such that the said part is forced by virtue of the connection therebetween to move in a first direction substantially transverse to the longitudinal central axis in order to connect the first and second cables together; and
wherein the tapered surface is capable of moving along the longitudinal central axis in an opposite direction to force the said part to move in an opposite direction substantially transverse to the longitudinal central axis in order to disconnect the first and second cables.

[0007] Typically, the trapping means comprises a key provided on one of the said part and the tapered surface and a slot in which the key is trapped provided on the other of the said part and the tapered surface.

[0008] Typically, the male member comprises a mandrel wherein the tapered surface(s) are formed on the mandrel.

[0009] The trapping means preferably forces the said part to move in a first radial direction in response to movement of the tapered surface along the first direction of longitudinal movement of the male member in order to connect the first and second cables together and more preferably the trapping means forces the said part to move in the second radial direction in response to movement of the tapered surface along the second direction of longitudinal movement of the male member in order to disconnect the first and second cables. Most preferably, the first radial direction is outwardly from the longitudinal central axis of the male member and the second radial direction is inwardly toward the longitudinal central axis of the male member.

[0010] Preferably, the trapping means are arranged to permit sliding movement between the said part of the first cable and the tapered surface in either direction along the longitudinal axis of the male member and to deny relative radial movement between the tapered surface and the said part of the first cable.

[0011] Typically it is the part of the first cable that is connected to the tapered surface.

[0012] Preferably, the apparatus is adapted to connect a plurality of first cables to a respective plurality of second cables. Typically, each part of the first cable is connected to a respective tapered surface. Accordingly, there are a plurality of tapered surfaces in preferred embodiments, one tapered surface being provided for each said part of the first cable.

[0013] Optionally, the degree and/or the height of each

tapered surface may be designed or matched with the desired or required length of radial movement required to connect the respective first cable to the respective second cable. Optionally, the height of each of the parts of the first cables may be designed or matched with the desired or required length of radial movement required to connect the respective first cable to the respective second cable, such that a combination of different first cables having different sizes and make up travel lengths are accommodated.

[0014] Preferably, the apparatus further comprises a guide means to prevent rotational movement between the male and female members. Typically, the guide means further prevents non-radial movement of the part of the first cable. Typically, the said part of the first cable comprises a sliding surface adapted to permit longitudinal sliding movement with respect to the tapered surface and cause radial movement of the said part. Preferably, the sliding surface and/or the tapered surface is/are planar and/or linearly shaped. Preferably, the said part of the first cable comprises a guiding/aligning slider plate.

[0015] According to a second aspect of the present invention there is provided an apparatus to connect a first cable to a second cable, the apparatus comprising:-

a male member coupled to the first cable, the male member for connection with a female member coupled to the second cable; and;

an actuation mechanism operable to move at least a part of the first cable relative to a part of the second cable into connection together, characterised in that at least a part of the first cable is connected to the tapered surface by a trapping means such that movement of the tapered surface along a longitudinal axis in a first direction forces, by virtue of the connection therebetween, the said at least part to move in a radially outwards direction substantially transverse to the longitudinal axis and movement of the tapered surface along the longitudinal axis in a second opposite direction forces, by virtue of the connection therebetween, the said at least part to move in a radially opposite direction substantially transverse to the longitudinal axis..

[0016] Preferably wherein the said portion that moves is constrained in its movement by a guide means.

[0017] According to the second aspect of the present invention there is provided a method of connecting a first cable to a second cable, the method comprising the steps of:-

providing a male member having a longitudinal central axis coupled to the first cable, the male member for connection with a female member coupled to the second cable;

wherein actuation of an actuation mechanism comprises a tapered surface moves at least a part of the first cable wherein the tapered surface is capable of

moving along the longitudinal axis of the male member in a first direction such that the said part is forced by virtue of the connection therebetween to move in a first direction substantially transverse to the longitudinal axis in order to connect the first and second cables together; and

wherein the tapered surface is capable of moving along the longitudinal axis in an opposite direction to force the said part to move in an opposite direction substantially transverse to the longitudinal axis in order to disconnect the first and second cables.

[0018] Typically, the said part is constrained by a guide means.

[0019] Preferably, the guide means is arranged to prevent rotational movement between the male and female members. Typically, the guide means further prevents non-radial movement of the said part that moves and preferably, the guide means prevents longitudinal movement of the said part that moves and more preferably prevents rotational movement of the said part that moves.

[0020] Preferably, the guide means comprises a substantially cylindrical member preferably having one or more radially extending slots within which the said part is constrained. Preferably, the said part comprises a flange portion which can act against an outer portion of the guide means surrounding the slot to prevent longitudinal movement of the said part. More preferably, the guide means prevents non-longitudinal movement of the mandrel of the male member, wherein the guide means prevents radial movement of the mandrel. Optionally, one or more cables may pass through apertures formed in the guide means.

[0021] Preferably, more than one first cable may be provided with the same sliding surface such that the said more than one first cable move radially synchronously on the same sliding surface.

[0022] Preferably, at least part of the second cable which is connected to the first cable is compliant, wherein the said at least part of the second cable is arranged to compensate for different tolerances in the length of travel of the said parts of the first cable.

[0023] Embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings, in which:-

Fig. 1 is an exploded perspective view of an apparatus according to the present invention;

Fig. 2 is a more detailed view of Fig. 1 of some of the components which together form a male member of the apparatus shown in Fig. 1;

Fig. 3 is a more detailed view of some of the components shown in Fig. 2;

Fig. 4A is a perspective view of a mandrel which forms part of the male member of the apparatus of Fig. 1;

Fig. 4B is another perspective view of the mandrel of Fig. 4A;

Fig. 4C is an end view of the mandrel of Fig. 4A;
 Fig. 4D is a cross-sectional view along section A of the mandrel of Fig. 4C;
 Fig. 4E is a view along section B of the mandrel of Fig. 4D;
 Fig. 5A is a cross-sectional view of the apparatus of Fig. 1 when assembled in an uncoupled configuration;
 Fig. 5B is a view on section A of the apparatus of Fig. 5A;
 Fig. 6A is an end view of an end or back plate of the apparatus of Fig. 1;
 Fig. 6B is a view on section A of the end of back plate of Fig. 6A;
 Fig. 7A is an end view of a guide plate of the apparatus of Fig. 1;
 Fig. 7B is a view on section A of the guide plate of Fig. 7A;
 Fig. 8A is a side view of a cylinder spacer of the apparatus shown in Fig. 5A;
 Fig. 8B is an end view of the cylinder spacer of Fig. 8A;
 Fig. 9A is a perspective of a block or slider plate of the apparatus of Figs. 1 and 5A;
 Fig. 9B is a cross-sectional view of the slider plate of Fig. 9A;
 Fig. 9C is a plan view of the slider plate of Fig. 9A;
 Fig. 9D is an end view of the slider plate of Fig. 9B;
 Fig. 9E is a view along section C of the slider plate of Fig. 9B;
 Fig. 10A is a side view of a body member of the apparatus of Fig. 1;
 Fig. 10B is a view on section A of the body member of Fig. 10A;
 Fig. 10C is a view on section B of the body member of Fig. 10A;
 Fig. 10D is a detailed view on section C of the body member of Fig. 10A;
 Fig. 10E is a detailed view of a countersunk hole best seen on the body member shown on Fig. 10B;
 Fig. 11A is a side view of a housing of the apparatus of Fig. 5A;
 Fig. 11B is a plan view of the housing of Fig. 11A;
 Fig. 11C is an end view of the housing of Fig. 11A;
 Fig. 11D is a view on section C of the housing of Fig. 11A;
 Fig. 12A is a side view of a sliding plate retainer bar shown in Fig. 5A;
 Fig. 12B is a view on section A of the sliding plate retaining bar of Fig. 12A; and
 Fig. 13 is a perspective view of an alternative embodiment of a slider plate having three connections to that shown in Fig. 2.

[0024] Referring to the drawings there is shown a coupler 30 in accordance with the present invention, comprising a female member or receptacle 31 and a male member 32 which together form a multiway coupler sys-

tem 31, 32. As will be described, the coupler is suitable for joining a number of connections, cables or fluid conduits such as hoses (hereinafter simply referred to as "cables"), and particularly finds application in hostile environments, such as subsea environments.

[0025] The male member 32 comprises a body member or casing 9, a guide plate 36, an end or back plate 12, cables 15, a nose cone 7 and a mandrel 14.

[0026] The cables 15 are provided radially around the back plate 12, and extend axially therefrom, and are coupled to blocks or slider plates 16. The cables 15 may be in the form of hollow rods 15 and are typically flexible and may be displaced radially. Each rod 15 is preferably provided with a coil 23 at a location along its length which provides flexibility to the rods 15 in the radial direction and thus permits movement or bending of the rods 15 in their radial direction.

[0027] Individual cables/hoses (not shown) of a host facility/umbilical (not shown) are attached to bulkhead connectors 20 on the rear side of the back plate 12. Each cable or hydraulic hose for example (not shown) on the male member 32 extends from bulkhead connectors 20 through the back plate 12, through the cable or rod 15, then through the slider plates 16 and into a connector half 13 which travels through an aperture 18 in the body member 9. The connector half 13 is provided at the end of the cable to engage a complementary connector half 6 provided on a cable portion of the female member 31. The female connector halves 6 are preferably compliant in that they may tolerate small variations in the travel experienced by the male connector halves 13; in other words, they 6, 13 will still all be able to connect with one another if one pair 6, 13 connect before the other respective pairs 6, 13 connect, as will be described subsequently. In other words, by providing compliant mountings for the connector halves 6 on the female coupler member 31, any variations in the travel of the connector halves 13 of the male coupler member 32 (which could be due to manufacturing variations/tolerances) can be accommodated without the actuation mechanism being stopped out by the first pair of connector halves 6, 13 to make up fully, before the pairs of remaining connector halves 6, 13 have made up fully.

[0028] The mandrel 14 is coupled at its rear end to a cylinder spacer 45 which in turn is coupled at its rear end to a linear actuation mechanism in the form of a piston (not shown) located within a cylinder 47, where the piston extends co-axially through an aperture 49 formed in the centre of the back plate 12. It should however be noted that the cylinder 47 can be replaced by any suitable linear actuation mechanism which can provide movement in both directions along the longitudinal axis of the mandrel 14.

[0029] The outer circumference of the mandrel 14 is generally cylindrical and a plurality (eight are shown in Fig. 4a) of tapered channels 33 are formed therein, where the channels 33 comprise a square box shaped upper portion 33U and a cylindrical groove lower portion 33L.

Preferably, the lower portion 33L comprises a groove formed with a radius which circumscribes just over half the circumference of a circle such that the lower portion 33L comprises a part, but over half, circular cross section.

[0030] The tapered channels 33 of the mandrel 14 are arranged such that the taper runs substantially linearly from a smaller diameter at the outer most or front end 14F to a greater diameter at an inner most or rear end 14R.

[0031] The slider plates 16 comprise a block portion or upper portion 16U and a slider plate retaining bar or lower portion 16L. The slider plate retaining bar 16L comprises a lower most face in the form of a key having a radius which circumscribes just over half the circumference of a circle such that the slider plate retaining bar 16L comprises a part, but over half, circular cross section. The radius of the slider plate retaining bar 16L is arranged to be slightly smaller than the radius of the lower portion 33L of the tapered channel 33 such that the slider plate retaining bar 16L is a sliding fit in both longitudinal directions within the lower portion 33L of the tapered channel 33; however, as will be appreciated, the slider plate retaining bar 16L is also trapped within the lower portion 33L in the radial direction.

[0032] The slider plate retaining bar 16L is secured to the upper portion 16U with any suitable fixing means such as screws.

[0033] It should however be noted that different connectors 6, 13 with different make up travel lengths may be accommodated on the same mandrel 14 by having tapered channels 33 having different radii and/or different slope of taper and/or by having a different height slider plate 16 in order to suit the particular make up travel of the particular connectors 13; in other words, the tapered channels 33 and/or the slider plates 16 can be varied to suit a combination of different connectors and their particular size and connector "make up" travel lengths.

[0034] The guide plate 36 comprises a cylindrical ring with an aperture 87 formed at its centre, the aperture 87 having a diameter which is slightly greater than the outer diameter of the mandrel 14. A number of radially extending slots 88 are formed from the inner bore partly outwards toward the outer circumference of the guide ring 36, the number of slots 88 being provided being equal to the number of slider plates 16. The mandrel 14 is inserted into the aperture 87 of the guide plate 36 and the two are aligned such that the slots 88 are co-axially arranged with the slider plates 16 and cables 15. The outer diameter of the mandrel 14 is arranged to be a close fit within the aperture 87 of the guide plate 36. The mandrel 14 is therefore constrained from any movement off the couplers 30 longitudinal axis by the closeness of the fit between the outer diameter of the mandrel 14 and the internal diameter of the aperture 87 of the guide plate 36 and the mandrel 14 is therefore able to react to any unbalanced forces from the connectors 13 during their make up or operation.

[0035] The slots 88 in the guide plate 36 thereby permit the slider plates 16 to move radially outwardly, as shown

in Fig. 5A, and prevent unwanted rotational movement of the slider plates 16. The radial slots 88 in the guide plate 36 are aligned rotationally with, but offset axially from, the apertures 18 in the casing 9.

[0036] The taper of each tapered channel 33 is designed to match the radial make up travel of the particular connectors 13 mounted in the particular slider plates 16, with the axial travel or stroke of the mandrel 14/cylinder 47.

[0037] The slider plates 16, cables 15, back plate 12, mandrel 14, guide plate 36 and cables are inserted as a unit into a first end 34 of the casing 9, until screw holes 89F provided around the outer circumference of the guide plate 36 are aligned with screw holes 90F formed through the side wall of the casing 9 and screw holes 89R provided around the outer circumference of the back plate 12 are aligned with screw holes 90R formed through the side wall of the casing 9. At that point, screws are inserted into the screw holes 90F, 90R and are tightened into screw holes 89F, 89R in order to fix the guide plate 36 and back plates 12 in position within the casing 9. The connector halves 13 of each cable are now radially aligned with the apertures 18 in the casing 9. An outwardly extending peg 8 is provided on the outer face of the casing 9 proximate to its rear end 34.

[0038] The nose cone 7 comprises a frusto-conical portion 39 and a cylindrical portion 40, wherein the rear-most end of the cylindrical portion 40 is attached to the front end 35 of the casing 9, and the frusto-conical portion 39 aids location of the male member 32 into the female receptacle 31, as will be described.

[0039] The female receptacle 31 comprises a tubular portion 1 and a frusto-conically shaped receptacle 2. Eight cable connectors 6 are equi-spaced around the outer face of the tubular portion 1.

[0040] The inner bore of the tube 1 has a diameter large enough to allow entry of the casing 9. The frusto-conical receptacle 2 is adapted to engage with the nose cone 7 to guide the male member 32 into the inner bore of the female receptacle 31. A slot 3 extends through the sidewall of a portion of the tubular portion 1 and a portion of the frusto conical receptacle 2 of the female receptacle 31, and is adapted to permit entry of the peg 8 of the casing 9, as described below, in order to rotationally and axially align the male member 32 and female receptacle 31.

[0041] The male 32 and female 31 members are now ready to be transported to their in use location, such as a subsea environment.

[0042] The individual cables/hoses (not shown) of the host facility/umbilical (not shown) not attached to the bulkhead connectors 20 are attached to the outermost ends of the connectors 6.

[0043] When the male 32 and female 31 members are to be connected, the following steps are taken.

[0044] In use, the male member 32 is inserted into the female receptacle 31. The nose cone 7 guides the male member 32 into the female receptacle 31. The peg 8 on

the male member 32 engages with the slot 3 in the female receptacle 31 and so thereby resist rotational movement between the male member 32 and female receptacle 31.

[0045] The casing 9 continues into the tube 1 until the peg 8 on the casing 9 abuts against the front end of the slot 3 of the tube 1. Continued movement of the casing 9 into the tube 1 is thereby resisted.

[0046] At this point the connectors 13 in the apertures 18 of the casing 9 are axially and rotationally aligned with the connectors 6 in the apertures 5 of the housing 1.

[0047] The coupler 30 is now constructed and is in the configuration shown in Figs. 5A and 5B with the connectors 13 rotationally aligned with the connectors 6 but spaced apart therefrom.

[0048] When it is desired that the connectors 13 be connected to the connectors 6, the cylinder 47 is actuated. This causes the piston within the cylinder 47 to move outwardly therefrom (right to left in Fig. 5A). This therefore causes the mandrel 14 to move away from the cylinder 47 and the mandrel 14 is pushed further into the female receptacle 31 since the mandrel 14 moves independently of the casing 9. The slider plates 16 lying within the tapered channels 33 on the mandrel 14 contact a wider (greater radius) portion of the tapered mandrel 14 and are pushed radially outwards. The cables 15 are also displaced radially outwards, with the coil 23 allowing movement of the cables 15. The slider plates 16 in turn push the connectors 13 further outwardly, through respective apertures 18 in the casing 9, such that the connectors 13 mate with the respective connectors 6 of the female receptacle 31.

[0049] The connection between the cables/hoses attached to the connectors 6 and the cables/hoses attached to the connectors 13 is thus formed. The mandrel 14 may be locked in position by continued application of e.g. hydraulic fluid pressure within the cylinder 47. Internal pressure or other environmental forces which may affect the connection are resisted by the slider plates 16 abutting with the tapered channels 14 thereby enhancing the integrity of the connection between the connectors 6 and 13.

[0050] To disengage the connection, the procedure is generally reversed, that is, the mandrel 14 is retracted by reverse operation of the cylinder 47. The slider plates 16 can then rest on a thinner (smaller diameter) portion of the tapered channels 14, and the keying action between the lower portion 33L and the slider plate retaining bar 16L forces the return of the slider plates 16. The connection is broken by the connectors 13 retracting back into the casing 9. If required, the male member 32 is then free to be retracted back out of the female receptacle 31.

[0051] An alternative embodiment of coupler 30A is shown in Fig. 13 where three connectors 13A, 13B, 13C are provided on the one slider plate 16A, for connection with three axially aligned but similarly spaced apart connectors (not shown) provided on the female member 31. The three connectors 13A, 13B, 13C will typically be provided with separate cables 15 containing the fluid or, for

example, electrical signals. The cables 15 can connect into the rear most end of the slider plates 16 as in the first embodiment described above and can be routed through to the individual connectors 13A, 13B, 13C. Alternatively, the front most connector 13A can be provided with a separate pipe or cable 15A which projects out of the side of the slider plate 16 and which passes through an aperture 95 formed in the guide plate 36A.

[0052] The coupler 30 may be used to connect cables conveying any type of signals or power whatsoever including but not limited to pneumatic, electrical, hydraulic or optical signals or power.

[0053] It will be understood that although the embodiment described herein relates to a coupler connecting eight cables, the scope of the invention is not limited to such a coupler, as any number of cables may be connected with a coupler according to the present invention with simple modifications being made to the embodiment hereinbefore described. Furthermore, although the drawings show a generally cylindrically shaped coupler with a connector actuation mechanism aligned to its central axis, the coupler could be another shape such as having a square or rectangular box cross sectional profile with the actuation mechanism (for example the mandrel 14, slider plates 16 and guide plate assembly 36) being either aligned to or offset from the central longitudinal axis.

[0054] Improvements and modifications may be made to the hereinbefore embodiments without departing from the scope of the invention. For example, the slider plate retaining bar 16L and lower portion 33L of the tapered channels need not necessarily be part circular, but could be any matching shape which provides a force to move the slider plates 16 both radially inwardly and radially outwardly. Also, the multiway coupler system 31, 32 is not size dependant and can be utilised for any size of connectors, varying from very small to very large. Furthermore, one or more pairs of connectors 6, 13 mounted on the slider plates 16 and the female coupler body 1 can be modified to form a mechanical locking connection (as well as or instead of a connective connection) in order to lock the male 32 and female 31 coupler bodies together. Indeed, such a pair of modified connectors, as well as providing a mechanical locking mechanism, would aid the final fine alignment of the male 32 and female 31 coupler bodies.

Claims

1. An apparatus to connect a first cable to a second cable, the apparatus comprising:-

- a male member (32) coupled to the first cable (15);
- a female member (31) coupled to the second cable, and
- an actuation mechanism comprising a tapered surface (33);

characterised in that at least a part of one of the first and second cables is connected to the tapered surface (33) by a trapping means (16L; 33L) such that movement of the tapered surface (33) along a longitudinal axis in a first direction forces, by virtue of the connection therebetween, the said at least part to move in a radially outwards direction substantially transverse to the longitudinal axis and movement of the tapered surface (33) along the longitudinal axis in a second opposite direction forces, by virtue of the connection therebetween, the said at least part to move in a radially opposite direction substantially transverse to the longitudinal axis.

2. An apparatus according to claim 1, wherein the trapping means (16L; 33L) comprises a key (16L) provided on one of the said part and the tapered surface (33) and a slot (33L) in which the key is trapped provided on the other of the said part and the tapered surface (33).
3. An apparatus according to any preceding claim, wherein the male member (32) comprises a mandrel (14) wherein the tapered surface(s) (33) are formed on the mandrel (14).
4. An apparatus according to any preceding claim, wherein the taper contact forces the said part to move in the radially outwards direction in response to movement of the tapered surface (33) along the first direction of longitudinal movement of the male member (32) in order to connect the first and second cables together and the trapping means forces (16L) the said part to move in the second radial direction in response to movement of the tapered surface (33) along the second direction of longitudinal movement of the male member (32) in order to disconnect the first and second cables.
5. An apparatus according to any preceding claim, wherein the trapping means (16L) are arranged to permit sliding movement between the said part and the tapered surface (33) in either direction along the longitudinal axis of the male member (32) and to deny relative radial movement between the tapered surface (33) and the said part.
6. An apparatus according to any preceding claim, wherein there are a plurality of tapered surfaces (33) and the degree and/or the height of each tapered surface (33) is arranged to provide the required length of radial movement required to connect the respective first cable (15) to the respective second cable.
7. An apparatus according to any preceding claim, wherein the height of each of the parts of the first cables (15) may be designed or matched with the

desired or required length of radial movement required to connect the respective first cable (15) to the respective second cable, such that a combination of different first cables (15) having different sizes and make up travel lengths are accommodated.

8. An apparatus according to any preceding claim, further comprising a guide means (36) to prevent rotational movement between the male and female members.
9. An apparatus according to claim 8, wherein the guide means (36) further prevents non-radial movement of the said part of the first cable.
10. An apparatus according to either of claims 8 or 9, wherein the guide means (36) prevents longitudinal movement of the said part that moves.
11. An apparatus according to any of claims 8 to 10, wherein the guide means (36) further prevents rotational movement of the said part that moves.
12. An apparatus according to any of claims 8 to 11, wherein the guide means (36) comprises a member having a longitudinal axis and one or more radially extending slots (33U) within which the said part is constrained.
13. An apparatus according to claim 12, wherein the said part comprises a flange portion which can act against an outer portion of the guide means (36) surrounding the slot to prevent longitudinal movement of the said part.
14. An apparatus according to claim 13, wherein the mandrel (14) is adapted to form a close fit within the guide means (36) such that the guide means (36) prevents non-longitudinal movement of the mandrel (14) and the mandrel (14) is able to react to any unbalanced forces from the connectors during make up thereof.
15. An apparatus according to any of claims 8 to 14, wherein one or more cables may pass through apertures formed in the guide means (36).
16. An apparatus according to any preceding claim, wherein the said part of the first cable (15) comprises a sliding surface adapted to permit longitudinal sliding movement with respect to the tapered surface (33) and cause radial movement of the said part.
17. An apparatus according to claim 16, wherein more than one first cable (15) may be provided with the same sliding surface such that the said more than one first cable move radially synchronously on the same sliding surface.

18. An apparatus according to any preceding claim, wherein at least part of the second cable is compliant, wherein the said at least part of the second cable is arranged to compensate for different tolerances in the length of travel of the said part of the first cable (15).

19. A method of connecting a first cable to a second cable, the method comprising the steps of:-

providing a male member (32) having a longitudinal axis coupled to the first cable (15);
providing a female member (31) coupled to the second cable;
providing an actuation mechanism comprising a tapered surface (33),

characterised in that at least part of one of the first and second cables is connected to the tapered surface (33) by a trapping means (16L);
wherein the tapered surface (33) is capable of moving along the longitudinal axis of the male member (32) in a first direction such that the said part is forced by virtue of the connection therebetween to move in a first direction substantially transverse to the longitudinal axis in order to connect the first and second cables together; and
wherein the tapered surface (33) is capable of moving along the longitudinal axis in an opposite direction to force the said part to move in an opposite direction substantially transverse to the longitudinal axis in order to disconnect the first and second cables.

20. An apparatus to connect a first cable to a second cable, the apparatus comprising:-

a male member (32) coupled to the first cable (15), the male member for connection with a female member coupled to the second cable; and
an actuation mechanism operable to move at least a part of the first cable (15) relative to a part of the second cable into connection together,

characterised in that at least a part of the first cable is connected to the tapered surface (33) by a trapping means (16L; 33L) such that movement of the tapered surface (33) along a longitudinal axis in a first direction forces, by virtue of the connection therebetween, the said at least part to move in a radially outwards direction substantially transverse to the longitudinal axis and movement of the tapered surface (33) along the longitudinal axis in a second opposite direction forces, by virtue of the connection therebetween, the said at least part to move in a radially opposite direction substantially transverse to the longitudinal axis.

21. An apparatus according to claim 20, wherein the said portion that moves is constrained in its movement by a guide means (36).

22. An apparatus according to claim 21, wherein the guide means (36) is arranged to prevent rotational movement between the male and female members (32 and 31).

23. An apparatus according to either of claims 21 or 22, wherein the guide means (36) prevents non-radial movement of the said part that moves.

24. An apparatus according to any of claims 21 to 23, wherein the guide means (36) prevents longitudinal movement of the said part that moves.

25. An apparatus according to any of claims 21 to 24, wherein the guide means (36) prevents rotational movement of the said part that moves.

26. An apparatus according to any of claims 21 to 25, wherein the guide means (36) comprises a substantially cylindrical member having one or more radially extending slots within which the said part is constrained such that the said part is aligned with the respective second cable prior to connection.

27. An apparatus according to claim 26, wherein the said part comprises a flange portion which is adapted to act against an outer portion of the guide means (36) surrounding the slot to prevent longitudinal movement of the said part.

28. An apparatus according to any of claims 21 to 27, wherein one or more cables are permitted to pass through apertures formed in the guide means (36).

29. An apparatus according to any of claims 20 to 28, further comprising one or more mechanical locks provided on the male member (32) and adapted to lock with respective one or more mechanical locks provided on the female member (31).

30. A method of connecting a first cable to a second cable, the method comprising the steps of:-

providing a male member (32) having a longitudinal axis coupled to the first cable (15), the male member for connection with a female member coupled to the second cable;

characterised in that actuation of an actuation mechanism comprising a tapered surface (33) moves at least a part of the first cable relative to a part of the second cable, the first cable being connected to the tapered surface by a trapping means (16L),

wherein the tapered surface (33) is capable of moving along the longitudinal axis of the male member (32) in a first direction such that the said part is forced by virtue of the connection therebetween to move in a first direction substantially transverse to the longitudinal axis in order to connect the first and second cables together; and

wherein the tapered surface (33) is capable of moving along the longitudinal axis in an opposite direction to force the said part to move in an opposite direction substantially transverse to the longitudinal axis in order to disconnect the first and second cables.

31. A method according to claim 30, wherein the said part is constrained by a guide means (36).

Patentansprüche

1. Eine Vorrichtung zum Verbinden eines ersten Kabels mit einem zweiten Kabel, wobei die Vorrichtung Folgendes beinhaltet:

ein Innenelement (32), das an das erste Kabel (15) gekoppelt ist;

ein Aufnahmeelement (31), das an das zweite Kabel gekoppelt ist, und

einen Betätigungsmechanismus, der eine sich verjüngende Fläche (33) beinhaltet;

dadurch gekennzeichnet, dass mindestens ein Teil von einem von dem ersten und dem zweiten Kabel durch ein Festhaltemittel (16L; 33L) mit der sich verjüngenden Fläche (33) verbunden ist, so dass die Bewegung der sich verjüngenden Fläche (33) entlang einer Längsachse in einer ersten Richtung den mindestens einen Teil mittels der Verbindung zwischen ihnen zwingt, sich im Wesentlichen transversal zu der Längsachse in einer Richtung radial nach außen zu bewegen, und die Bewegung der sich verjüngenden Fläche (33) entlang der Längsachse in einer zweiten, entgegengesetzten Richtung den mindestens einen Teil mittels der Verbindung zwischen ihnen zwingt, sich im Wesentlichen transversal zu der Längsachse in einer radial entgegengesetzten Richtung zu bewegen.

2. Vorrichtung gemäß Anspruch 1, wobei das Festhaltemittel (16L; 33L) einen Keil (16L), der auf einem von dem Teil und der sich verjüngenden Fläche (33) bereitgestellt ist, und einen Schlitz (33L), in dem der Keil festgehalten wird, welcher auf dem anderen von dem Teil und der sich verjüngenden Fläche (33) bereitgestellt ist, beinhaltet.
3. Vorrichtung gemäß einem der vorhergehenden Ansprüche, wobei das Innenelement (32) einen Dorn

(14) beinhaltet, wobei die sich verjüngende(n) Fläche(n) (33) auf dem Dorn (14) gebildet ist/sind.

4. Vorrichtung gemäß einem der vorhergehenden Ansprüche, wobei der Kontakt mit der Verjüngung den Teil zwingt, sich als Reaktion auf die Bewegung der sich verjüngenden Fläche (33) entlang der ersten Richtung der Längsbewegung des Innenelements (32) in der Richtung radial nach außen zu bewegen, um das erste und das zweite Kabel miteinander zu verbinden, und das Festhaltemittel (16L) den Teil zwingt, sich als Reaktion auf die Bewegung der sich verjüngenden Fläche (33) entlang der zweiten Richtung der Längsbewegung des Innenelements (32) in der zweiten radialen Richtung zu bewegen, um das erste und das zweite Kabel zu trennen.

5. Vorrichtung gemäß einem der vorhergehenden Ansprüche, wobei das Festhaltemittel (16L) eingerichtet ist, um eine Gleitbewegung zwischen dem Teil und der sich verjüngenden Fläche (33) in beiden Richtungen entlang der Längsachse des Innenelements (32) zu ermöglichen und um eine relative radiale Bewegung zwischen der sich verjüngenden Fläche (33) und dem Teil zu verweigern.

6. Vorrichtung gemäß einem der vorhergehenden Ansprüche, wobei eine Vielzahl von sich verjüngenden Flächen (33) vorhanden ist und der Grad und/oder die Höhe jeder sich verjüngenden Fläche (33) eingerichtet ist, um die erforderliche Länge an radialer Bewegung, welche erforderlich ist, um das entsprechende erste Kabel (15) mit dem entsprechenden zweiten Kabel zu verbinden, bereitzustellen.

7. Vorrichtung gemäß einem der vorhergehenden Ansprüche, wobei die Höhe von jedem der Teile der ersten Kabel (15) entworfen sein kann oder der gewünschten oder erforderlichen Länge an radialer Bewegung entsprechen kann, welche erforderlich ist, um das entsprechende erste Kabel (15) mit dem entsprechenden zweiten Kabel zu verbinden, so dass eine Kombination an unterschiedlichen ersten Kabeln (15) mit unterschiedlichen Größen und Montierhublängen untergebracht wird.

8. Vorrichtung gemäß einem der vorhergehenden Ansprüche, die ferner ein Führungsmittel (36) beinhaltet, um eine Drehbewegung zwischen dem Innen- und dem Aufnahmeelement zu verhindern.

9. Vorrichtung gemäß Anspruch 8, wobei das Führungsmittel (36) ferner eine nicht radiale Bewegung des Teils des ersten Kabels verhindert.

10. Vorrichtung gemäß einem der Ansprüche 8 oder 9, wobei das Führungsmittel (36) eine Längsbewegung des Teils, welcher sich bewegt, verhindert.

11. Vorrichtung gemäß einem der Ansprüche 8 bis 10, wobei das Führungsmittel (36) ferner eine Drehbewegung des Teils, welcher sich bewegt, verhindert.
12. Vorrichtung gemäß einem der Ansprüche 8 bis 11, wobei das Führungsmittel (36) ein Element beinhaltet, das eine Längsachse und einen oder mehrere sich radial erstreckende Schlitze (33U) aufweist, innerhalb derer der Teil eingeschränkt wird.
13. Vorrichtung gemäß Anspruch 12, wobei der Teil einen Vorsprungsabschnitt beinhaltet, der gegen einen äußeren Abschnitt des Führungsmittels (36), welcher den Schlitz umgibt, wirken kann, um eine Längsbewegung des Teils zu verhindern.
14. Vorrichtung gemäß Anspruch 13, wobei der Dorn (14) angepasst ist, um innerhalb des Führungsmittels (36) eine Feinpassung zu bilden, so dass das Führungsmittel (36) eine Nicht-Längsbewegung des Dorns (14) verhindert und der Dorn (14) in der Lage ist, auf beliebige unausgeglichene Kräfte von den Verbindungsstücken während der Montage davon zu reagieren.
15. Vorrichtung gemäß einem der Ansprüche 8 bis 14, wobei ein oder mehrere Kabel durch in dem Führungsmittel (36) gebildete Öffnungen gehen können.
16. Vorrichtung gemäß einem der vorhergehenden Ansprüche, wobei der Teil des ersten Kabels (15) eine Gleitfläche beinhaltet, die angepasst ist, um mit Bezug auf die sich verjüngende Fläche (33) eine Längsgleitbewegung zu ermöglichen und eine radiale Bewegung des Teils zu bewirken.
17. Vorrichtung gemäß Anspruch 16, wobei mehr als ein erstes Kabel (15) mit der gleichen Gleitfläche versehen sein kann, so dass sich die mehr als ein erstes Kabel radial synchron auf der gleichen Gleitfläche bewegen.
18. Vorrichtung gemäß einem der vorhergehenden Ansprüche, wobei mindestens ein Teil des zweiten Kabels flexibel ist, wobei der mindestens eine Teil des zweiten Kabels eingerichtet ist, um unterschiedliche Toleranzen bezüglich der Hublänge des Teils des ersten Kabels (15) zu kompensieren.
19. Ein Verfahren zum Verbinden eines ersten Kabels mit einem zweiten Kabel, wobei das Verfahren die folgenden Schritte beinhaltet:
- Bereitstellen eines Innenelements (32) mit einer Längsachse, das an das erste Kabel (15) gekoppelt ist;
- Bereitstellen eines Aufnahmeelements (31), das an das zweite Kabel gekoppelt ist; Bereit-

stellen eines Betätigungsmechanismus, der eine sich verjüngende Fläche (33) beinhaltet, **dadurch gekennzeichnet, dass** mindestens ein Teil von einem von dem ersten und dem zweiten Kabel durch ein Festhaltungsmittel (16L) mit der sich verjüngenden Fläche (33) verbunden ist;

wobei die sich verjüngende Fläche (33) fähig ist, sich entlang der Längsachse des Innenelements (32) in einer ersten Richtung zu bewegen, so dass der Teil aufgrund der Verbindung zwischen ihnen gezwungen wird, sich im Wesentlichen transversal zu der Längsachse in einer ersten Richtung zu bewegen, um das erste und das zweite Kabel miteinander zu verbinden; und wobei die sich verjüngende Fläche (33) fähig ist, sich entlang der Längsachse in einer entgegengesetzten Richtung zu bewegen, um den Teil zu zwingen, sich im Wesentlichen transversal zu der Längsachse in einer entgegengesetzten Richtung zu bewegen, um das erste und das zweite Kabel zu trennen.

20. Eine Vorrichtung zum Verbinden eines ersten Kabels mit einem zweiten Kabel, wobei die Vorrichtung Folgendes beinhaltet:

ein Innenelement (32), das an das erste Kabel (15) gekoppelt ist, wobei das Innenelement zur Verbindung mit einem Aufnahmeelement, das an das zweite Kabel gekoppelt ist, dient; und einen Betätigungsmechanismus, der betriebsfähig ist, um mindestens einen Teil des ersten Kabels (15) relativ zu einem Teil des zweiten Kabels zur Verbindung miteinander zu bewegen,

dadurch gekennzeichnet, dass mindestens ein Teil von dem ersten Kabel durch ein Festhaltungsmittel (16L; 33L) mit der sich verjüngenden Fläche (33) verbunden ist, so dass die Bewegung der sich verjüngenden Fläche (33) entlang einer Längsachse in einer ersten Richtung den mindestens einen Teil mittels der Verbindung zwischen ihnen zwingt, sich im Wesentlichen transversal zu der Längsachse in einer Richtung radial nach außen zu bewegen, und die Bewegung der sich verjüngenden Fläche (33) entlang der Längsachse in einer zweiten, entgegengesetzten Richtung den mindestens einen Teil mittels der Verbindung zwischen ihnen zwingt, sich im Wesentlichen transversal zu der Längsachse in einer radial entgegengesetzten Richtung zu bewegen.

21. Vorrichtung gemäß Anspruch 20, wobei der Abschnitt, welcher sich bewegt, durch ein Führungsmittel (36) in seiner Bewegung eingeschränkt wird.

22. Vorrichtung gemäß Anspruch 21, wobei das Führungsmittel (36) eingerichtet ist, um eine Drehbewegung zwischen dem Innen- und dem Aufnahmeelement (32 und 31) zu verhindern. 5
23. Vorrichtung gemäß einem der Ansprüche 21 oder 22, wobei das Führungsmittel (36) eine nicht radiale Bewegung des Teils, welcher sich bewegt, verhindert. 10
24. Vorrichtung gemäß einem der Ansprüche 21 bis 23, wobei das Führungsmittel (36) eine Längsbewegung des Teils, welcher sich bewegt, verhindert.
25. Vorrichtung gemäß einem der Ansprüche 21 bis 24, wobei das Führungsmittel (36) eine Drehbewegung des Teils, welcher sich bewegt, verhindert. 15
26. Vorrichtung gemäß einem der Ansprüche 21 bis 25, wobei das Führungsmittel (36) ein im Wesentlichen zylinderförmiges Element beinhaltet, das einen oder mehrere sich radial erstreckende Schlitze aufweist, innerhalb derer der Teil eingeschränkt wird, so dass der Teil vor der Verbindung nach dem entsprechenden zweiten Kabel ausgerichtet wird. 20
27. Vorrichtung gemäß Anspruch 26, wobei der Teil einen Vorsprungsabschnitt beinhaltet, der angepasst ist, um gegen einen äußeren Abschnitt des Führungsmittels (36), welcher den Schlitz umgibt, zu wirken, um eine Längsbewegung des Teils zu verhindern. 30
28. Vorrichtung gemäß einem der Ansprüche 21 bis 27, wobei einem oder mehreren Kabeln ermöglicht ist, durch in dem Führungsmittel (36) gebildete Öffnungen zu gehen. 35
29. Vorrichtung gemäß einem der Ansprüche 20 bis 28, das ferner eine oder mehrere mechanische Verriegelungsvorrichtungen beinhaltet, die auf dem Innenelement (32) bereitgestellt und angepasst sind, um mit einem oder mehreren entsprechenden mechanischen Verriegelungsvorrichtungen, die an dem Aufnahmeelement (31) bereitgestellt sind, verriegelt zu werden. 40
30. Ein Verfahren zum Verbinden eines ersten Kabels mit einem zweiten Kabel, wobei das Verfahren die folgenden Schritte beinhaltet: 45
- Bereitstellen eines Innenelements (32) mit einer Längsachse, das an das erste Kabel (15) gekoppelt ist, wobei das Innenelement zur Verbindung mit einem Aufnahmeelement, das an das zweite Kabel gekoppelt ist, dient; 50
- dadurch gekennzeichnet, dass** eine Betätigung eines Betätigungsmechanismus, welcher

eine sich verjüngende Fläche (33) beinhaltet, mindestens einen Teil des ersten Kabels relativ zu einem Teil des zweiten Kabels bewegt, wobei das erste Kabel durch ein Festhaltemittel (16L) mit der sich verjüngenden Fläche verbunden ist, wobei die sich verjüngende Fläche (33) fähig ist, sich entlang der Längsachse des Innenelements (32) in einer ersten Richtung zu bewegen, so dass der Teil aufgrund der Verbindung zwischen ihnen gezwungen wird, sich im Wesentlichen transversal zu der Längsachse in einer ersten Richtung zu bewegen, um das erste und das zweite Kabel miteinander zu verbinden; und wobei die sich verjüngende Fläche (33) fähig ist, sich in einer entgegengesetzten Richtung entlang der Längsachse zu bewegen, um den Teil zu zwingen, sich im Wesentlichen transversal zu der Längsachse in einer entgegengesetzten Richtung zu bewegen, um das erste und das zweite Kabel zu trennen.

31. Verfahren gemäß Anspruch 30, wobei der Teil durch ein Führungsmittel (36) eingeschränkt wird.

Revendications

1. Un appareil pour raccorder un premier câble à un deuxième câble, l'appareil comprenant :
 - un élément mâle (32) couplé au premier câble (15);
 - un élément femelle (31) couplé au deuxième câble, et
 - un mécanisme d'actionnement comprenant une surface effilée (33);

caractérisé en ce qu'une partie au moins de l'un des premier et deuxième câbles est raccordée à la surface effilée (33) par un moyen de coinçage (16L ; 33L) de telle sorte qu'un déplacement de la surface effilée (33) le long d'un axe longitudinal dans une première direction force, grâce au raccordement entre celles-ci, cette dite partie au moins à se déplacer dans une direction radialement vers l'extérieur substantiellement transversale à l'axe longitudinal et un déplacement de la surface effilée (33) le long de l'axe longitudinal dans une deuxième direction opposée force, grâce au raccordement entre celles-ci, cette dite partie au moins à se déplacer dans une direction radialement opposée substantiellement transversale à l'axe longitudinal.
2. Un appareil selon la revendication 1, dans lequel le moyen de coinçage (16L ; 33L) comprend une clé (16L) fournie sur un organe parmi cette dite partie et la surface effilée (33) et une fente (33L) dans laquelle la clé est coincée fournie sur l'autre organe

parmi cette dite partie et la surface effilée (33).

3. Un appareil selon n'importe quelle revendication précédente, dans lequel l'élément mâle (32) comprend un mandrin (14) dans lequel la ou les surfaces effilées (33) sont formées sur le mandrin (14). 5
4. Un appareil selon n'importe quelle revendication précédente, dans lequel le contact en effilement force cette dite partie à se déplacer dans la direction radialement vers l'extérieur en réponse à un déplacement de la surface effilée (33) le long de la première direction de déplacement longitudinal de l'élément mâle (32) afin de raccorder les premier et deuxième câbles ensemble et le moyen de coinçage (16L) force cette dite partie à se déplacer dans la deuxième direction radiale en réponse à un déplacement de la surface effilée (33) le long de la deuxième direction de déplacement longitudinal de l'élément mâle (32) afin de séparer les premier et deuxième câbles. 10 15 20
5. Un appareil selon n'importe quelle revendication précédente, dans lequel le moyen de coinçage (16L) est arrangé pour permettre un déplacement coulissant entre cette dite partie et la surface effilée (33) dans l'une ou l'autre direction le long de l'axe longitudinal de l'élément mâle (32) et pour interdire un déplacement radial relatif entre la surface effilée (33) et cette dite partie. 25 30
6. Un appareil selon n'importe quelle revendication précédente, dans lequel il y a une pluralité de surfaces effilées (33) et le degré et / ou la hauteur de chaque surface effilée (33) est arrangé(e) pour fournir la longueur requise de déplacement radial requis pour raccorder le premier câble respectif (15) au deuxième câble respectif. 35
7. Un appareil selon n'importe quelle revendication précédente, dans lequel la hauteur de chacune des parties des premiers câbles (15) peut être conçue ou mise en correspondance avec la longueur souhaitée ou requise de déplacement radial requis pour raccorder le premier câble respectif (15) au deuxième câble respectif, de telle sorte qu'une combinaison de différents premiers câbles (15) ayant différentes tailles et longueurs de course de montage sont accueillis. 40 45 50
8. Un appareil selon n'importe quelle revendication précédente, comprenant en outre un moyen formant guide (36) pour empêcher un déplacement rotatif entre les éléments mâle et femelle. 55
9. Un appareil selon la revendication 8, dans lequel le moyen formant guide (36) empêche en outre un déplacement non radial de cette dite partie du premier

câble.

10. Un appareil selon l'une ou l'autre des revendications 8 et 9, dans lequel le moyen formant guide (36) empêche un déplacement longitudinal de cette dite partie qui se déplace.
11. Un appareil selon n'importe lesquelles des revendications 8 à 10, dans lequel le moyen formant guide (36) empêche en outre un déplacement rotatif de cette dite partie qui se déplace.
12. Un appareil selon n'importe lesquelles des revendications 8 à 11, dans lequel le moyen formant guide (36) comprend un élément ayant un axe longitudinal et une ou plusieurs fentes qui s'étendent radialement (33U) au sein desquelles cette dite partie est contrainte.
13. Un appareil selon la revendication 12, dans lequel cette dite partie comprend une portion de flasque qui peut agir contre une portion externe du moyen formant guide (36) entourant la fente pour empêcher un déplacement longitudinal de cette dite partie.
14. Un appareil selon la revendication 13, dans lequel le mandrin (14) est adapté pour former un ajustement serré au sein du moyen formant guide (36), de telle sorte que le moyen formant guide (36) empêche un déplacement non longitudinal du mandrin (14) et le mandrin (14) est à même de réagir à toutes forces déséquilibrées provenant des raccords lors du montage de ceux-ci.
15. Un appareil selon n'importe lesquelles des revendications 8 à 14, dans lequel un ou plusieurs câbles peuvent passer à travers d'ouvertures formées dans le moyen formant guide (36).
16. Un appareil selon n'importe quelle revendication précédente, dans lequel cette dite partie du premier câble (15) comprend une surface coulissante adaptée pour permettre un déplacement coulissant longitudinal par rapport à la surface effilée (33) et provoquer un déplacement radial de cette dite partie.
17. Un appareil selon la revendication 16, dans lequel plus d'un premier câble (15) peut être fourni avec la même surface coulissante de telle sorte que ces dits plus d'un premier câble se déplacent de façon synchrone radialement sur la même surface coulissante.
18. Un appareil selon n'importe quelle revendication précédente, dans lequel au moins une partie du deuxième câble est souple, dans lequel cette dite partie au moins du deuxième câble est arrangée pour compenser différentes tolérances dans la lon-

gueur de course de cette dite partie du premier câble (15).

19. Une méthode pour raccorder un premier câble à un deuxième câble, la méthode comprenant les étapes de :

fournir un élément mâle (32) ayant un axe longitudinal couplé au premier câble (15) ;
fournir un élément femelle (31) couplé au deuxième câble ;
fournir un mécanisme d'actionnement comprenant une surface effilée (33),
caractérisée en ce qu'une partie au moins de l'un des premier et deuxième câbles est raccordée à la surface effilée (33) par un moyen de coinçage (16L) ;
dans laquelle la surface effilée (33) est à même de se déplacer le long de l'axe longitudinal de l'élément mâle (32) dans une première direction de telle sorte que cette dite partie soit forcée grâce au raccordement entre celles-ci à se déplacer dans une première direction substantiellement transversale à l'axe longitudinal afin de raccorder les premier et deuxième câbles ensemble ; et
dans laquelle la surface effilée (33) est à même de se déplacer le long de l'axe longitudinal dans une direction opposée pour forcer cette dite partie à se déplacer dans une direction opposée substantiellement transversale à l'axe longitudinal afin de séparer les premier et deuxième câbles.

20. Un appareil pour raccorder un premier câble à un deuxième câble, l'appareil comprenant :

un élément mâle (32) couplé au premier câble (15), l'élément mâle étant destiné à un raccordement avec un élément femelle couplé au deuxième câble ; et
un mécanisme d'actionnement pouvant fonctionner pour déplacer au moins une partie du premier câble (15) relativement à une partie du deuxième câble jusqu'à ce qu'elles soient raccordées ensemble,
caractérisé en ce qu'une partie au moins du premier câble est raccordée à la surface effilée (33) par un moyen de coinçage (16L ; 33L) de telle sorte qu'un déplacement de la surface effilée (33) le long d'un axe longitudinal dans une première direction force, grâce au raccordement entre celles-ci, cette dite partie au moins à se déplacer dans une direction radialement vers l'extérieur substantiellement transversale à l'axe longitudinal et un déplacement de la surface effilée (33) le long de l'axe longitudinal dans une deuxième direction opposée force, grâce

au raccordement entre celles-ci, cette dite partie au moins à se déplacer dans une direction radialement opposée substantiellement transversale à l'axe longitudinal.

21. Un appareil selon la revendication 20, dans lequel cette dite portion qui se déplace est contrainte dans son déplacement par un moyen formant guide (36).
22. Un appareil selon la revendication 21, dans lequel le moyen formant guide (36) est arrangé pour empêcher un déplacement rotatif entre les éléments mâle et femelle (32 et 31).
23. Un appareil selon l'une ou l'autre des revendications 21 ou 22, dans lequel le moyen formant guide (36) empêche un déplacement non radial de cette dite partie qui se déplace.
24. Un appareil selon n'importe lesquelles des revendications 21 à 23, dans lequel le moyen formant guide (36) empêche un déplacement longitudinal de cette dite partie qui se déplace.
25. Un appareil selon n'importe lesquelles des revendications 21 à 24, dans lequel le moyen formant guide (36) empêche un déplacement rotatif de cette dite partie qui se déplace.
26. Un appareil selon n'importe lesquelles des revendications 21 à 25, dans lequel le moyen formant guide (36) comprend un élément substantiellement cylindrique ayant une ou plusieurs fentes qui s'étendent radialement au sein desquelles cette dite partie est contrainte de telle sorte que cette dite partie soit alignée avec le deuxième câble respectif préalablement au raccord.
27. Un appareil selon la revendication 26, dans lequel cette dite partie comprend une portion de flasque qui est adaptée pour agir contre une portion externe du moyen formant guide (36) entourant la fente pour empêcher un déplacement longitudinal de cette dite partie.
28. Un appareil selon n'importe lesquelles des revendications 21 à 27, dans lequel il est permis à un ou plusieurs câbles de passer à travers des ouvertures formées dans le moyen formant guide (36).
29. Un appareil selon n'importe lesquelles des revendications 20 à 28, comprenant en outre un ou plusieurs verrous mécaniques fournis sur l'élément mâle (32) et adaptés pour se verrouiller avec un ou plusieurs verrous mécaniques respectifs fournis sur l'élément femelle (31).
30. Une méthode pour raccorder un premier câble à un

deuxième câble, la méthode comprenant les étapes de :

fournir un élément mâle (32) ayant un axe longitudinal couplé au premier câble (15), l'élément mâle étant destiné à un raccord avec un élément femelle couplé au deuxième câble ;
caractérisée en ce que l'actionnement d'un mécanisme d'actionnement comprenant une surface effilée (33) déplace au moins une partie du premier câble relativement à une partie du deuxième câble, le premier câble étant raccordé à la surface effilée par un moyen de coinçage (16L),
 dans laquelle la surface effilée (33) est à même de se déplacer le long de l'axe longitudinal de l'élément mâle (32) dans une première direction de telle sorte que cette dite partie soit forcée grâce au raccordement entre celles-ci à se déplacer dans une première direction substantiellement transversale à l'axe longitudinal afin de raccorder les premier et deuxième câbles ensemble ; et
 dans laquelle la surface effilée (33) est à même de se déplacer le long de l'axe longitudinal dans une direction opposée pour forcer cette dite partie à se déplacer dans une direction opposée substantiellement transversale à l'axe longitudinal afin de séparer les premier et deuxième câbles.

31. Une méthode selon la revendication 30, dans laquelle cette dite partie est contrainte par un moyen formant guide (36).

5

10

15

20

25

30

35

40

45

50

55

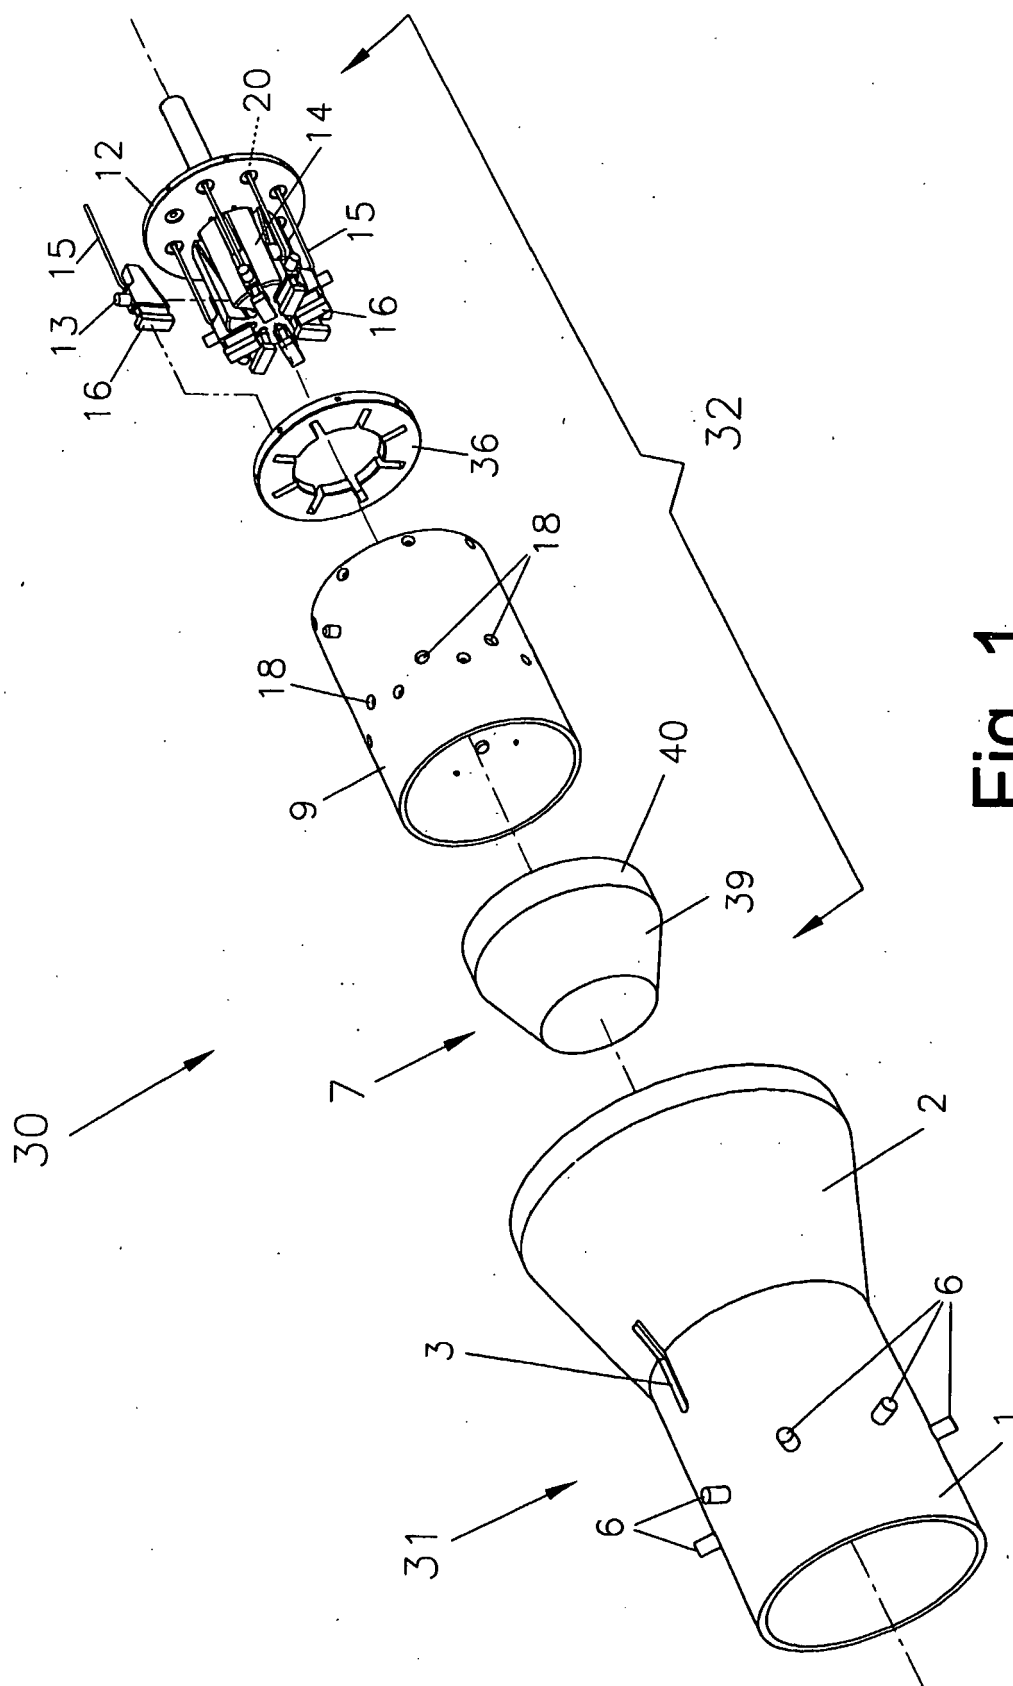


Fig. 1

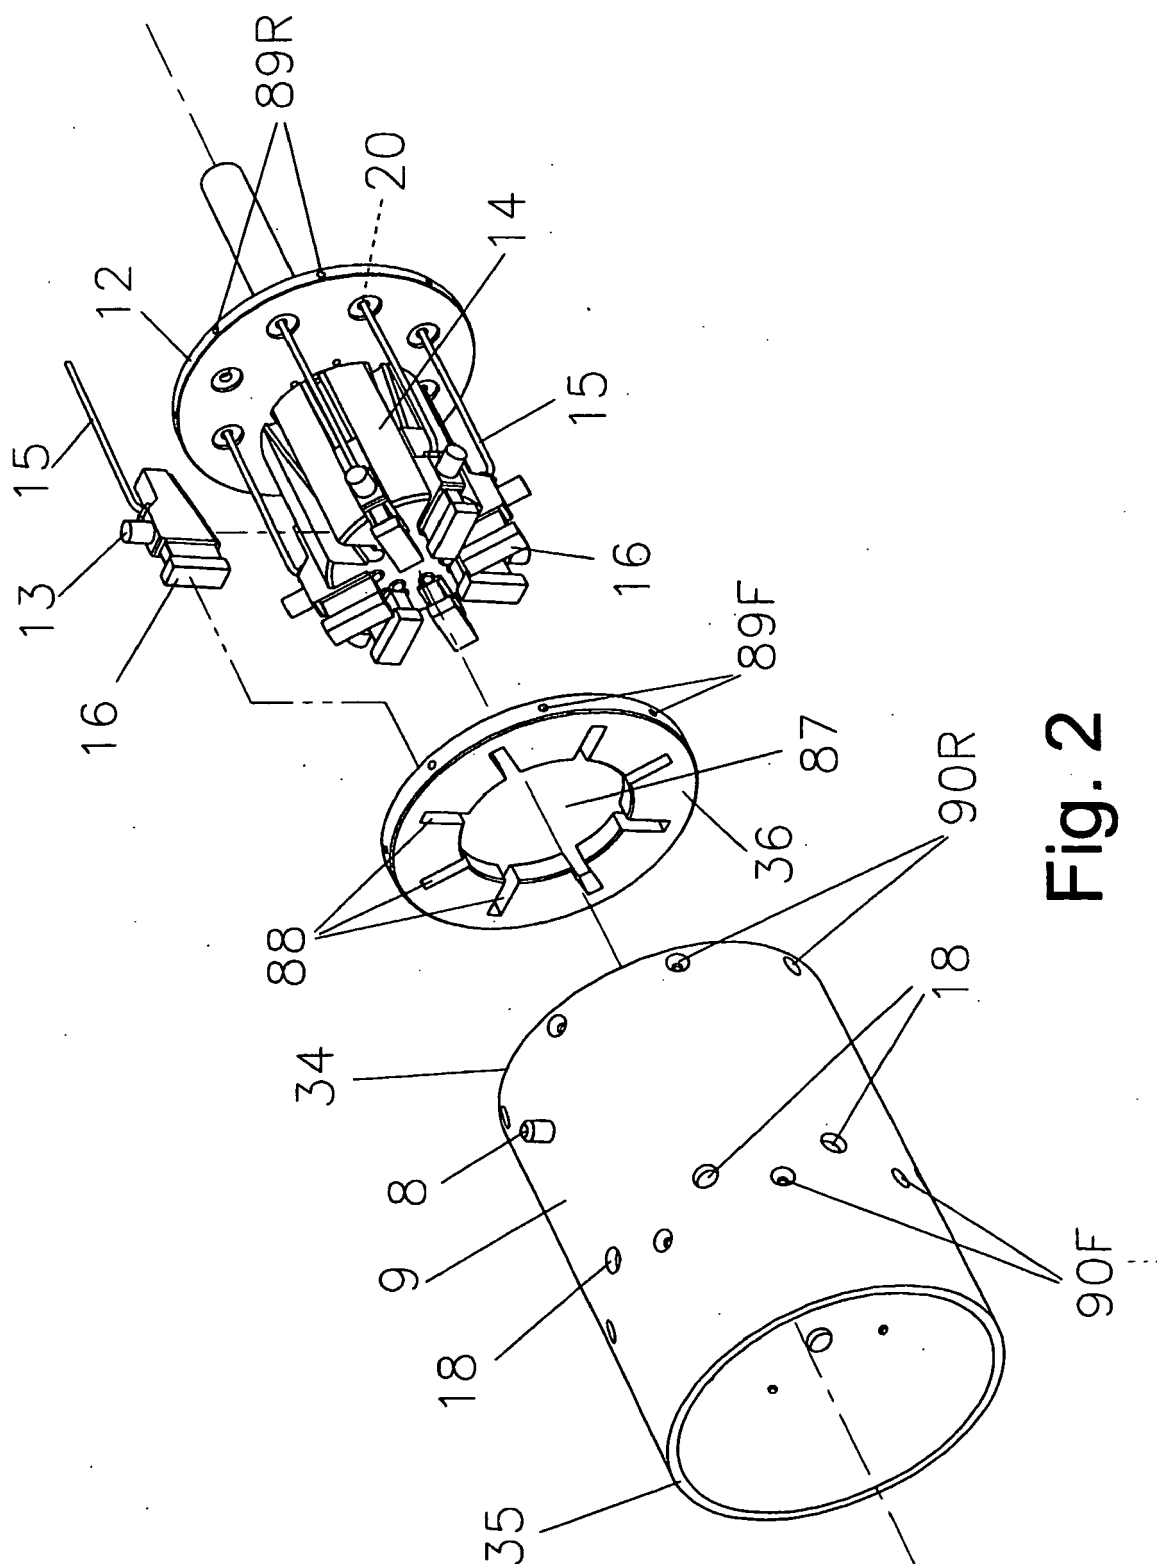


Fig. 2

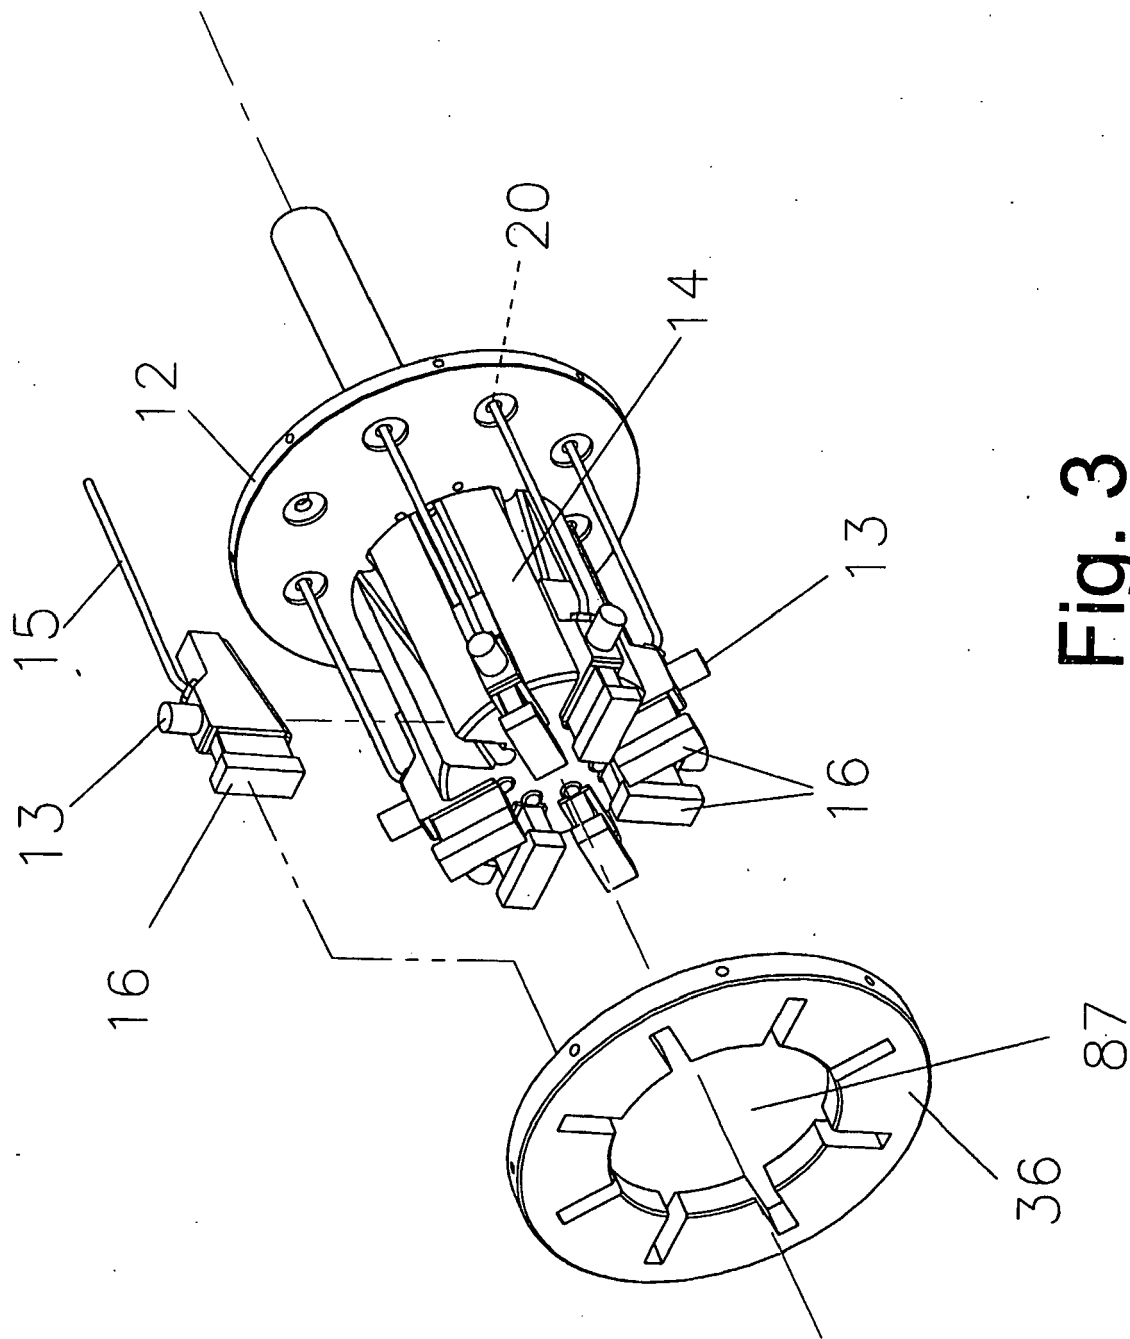


Fig. 3

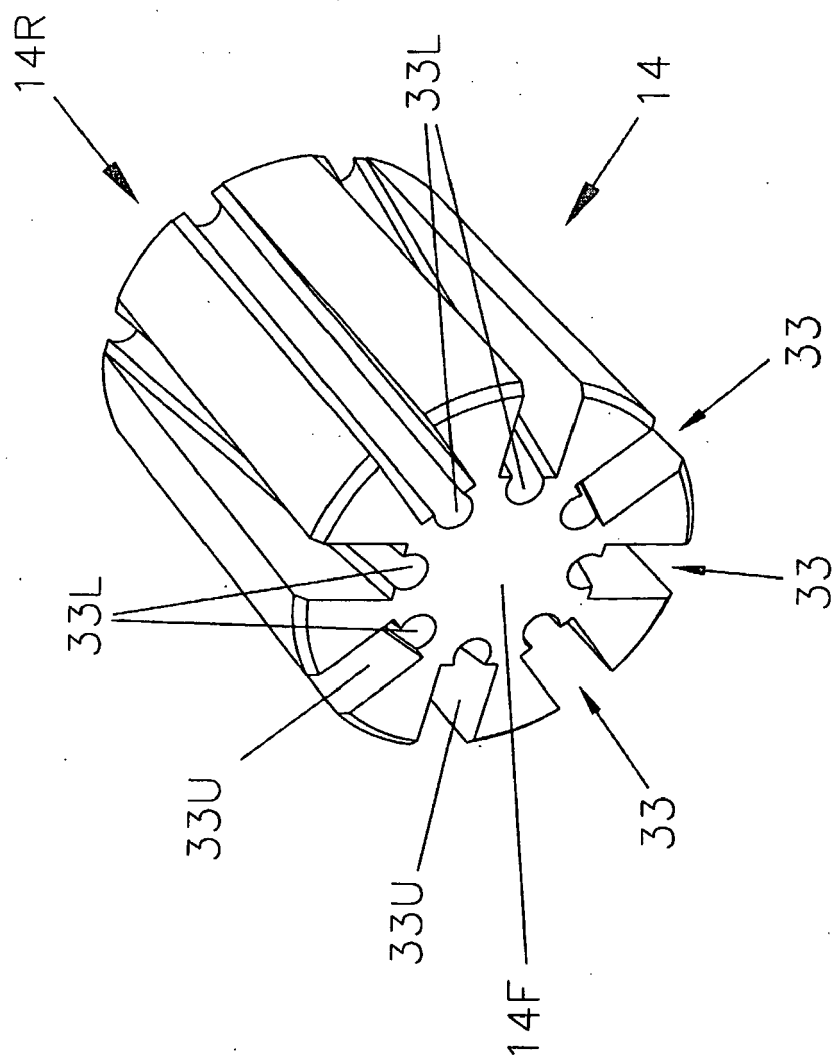


Fig. 4a

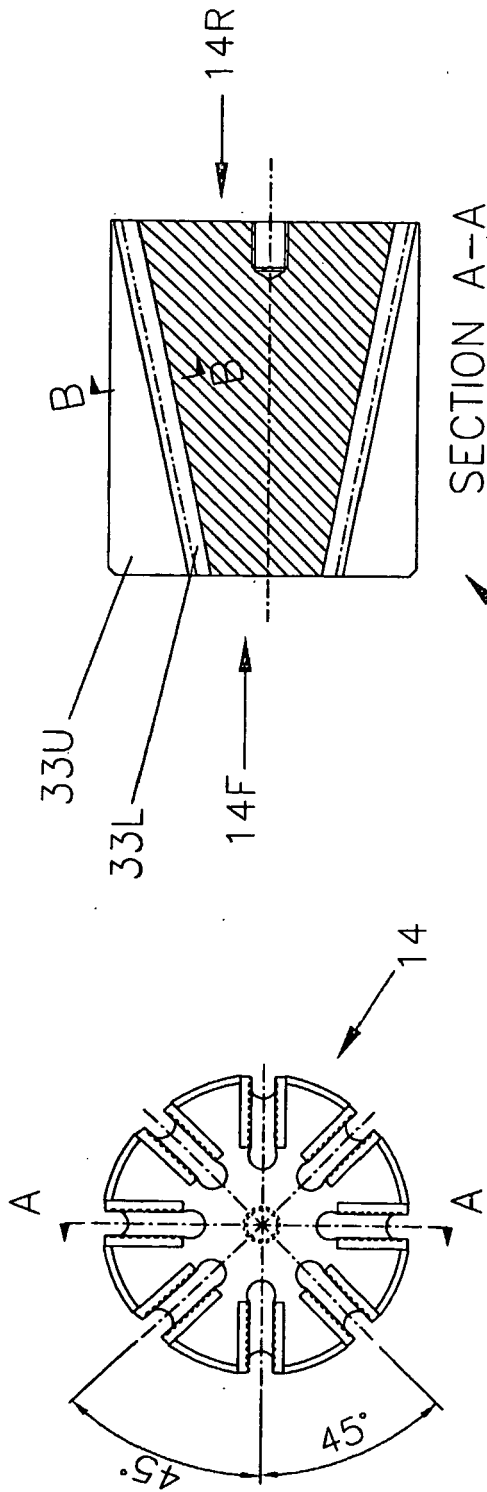


Fig. 4c

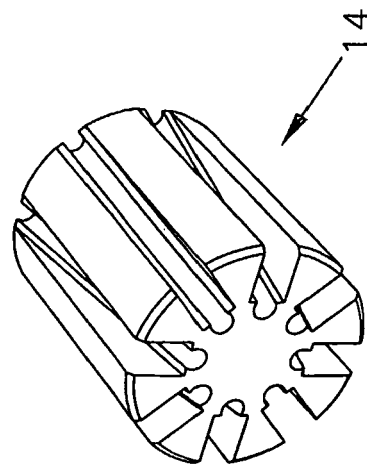


Fig. 4b

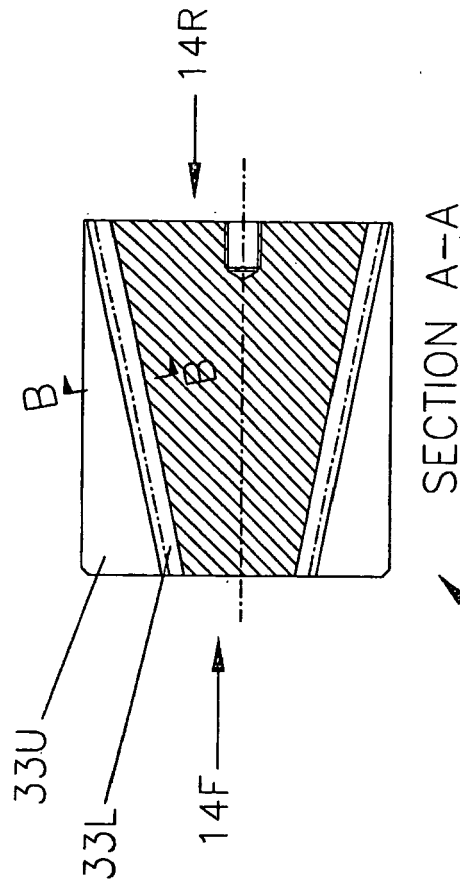


Fig. 4d

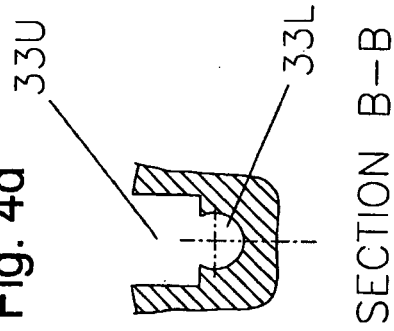


Fig. 4e




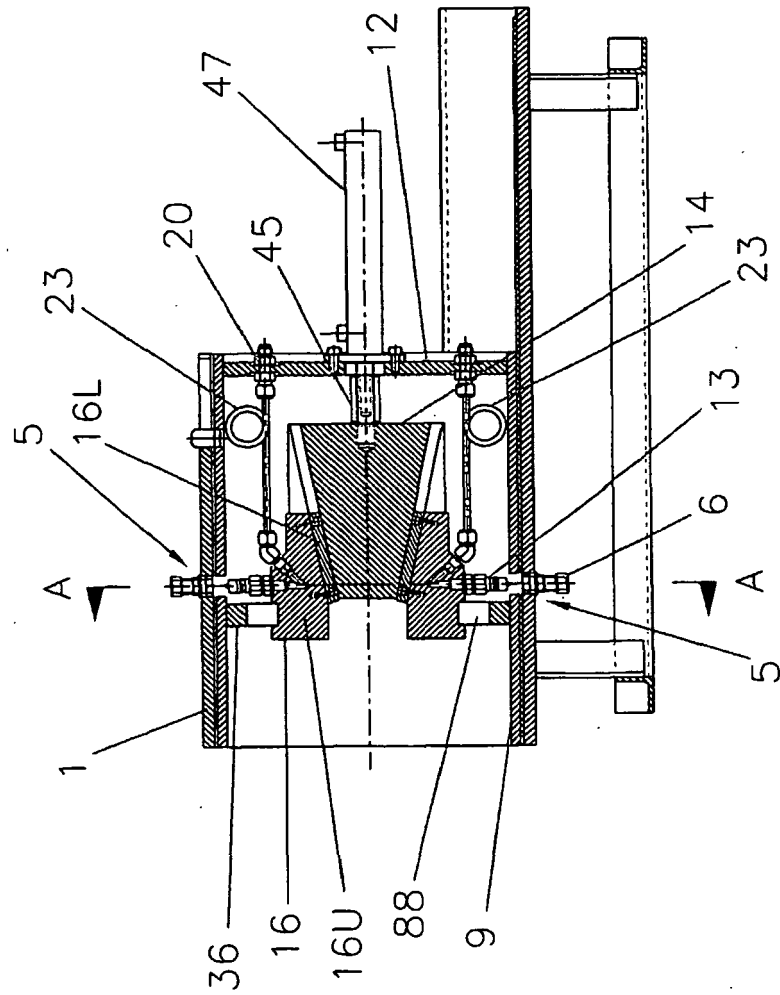


Fig. 5a

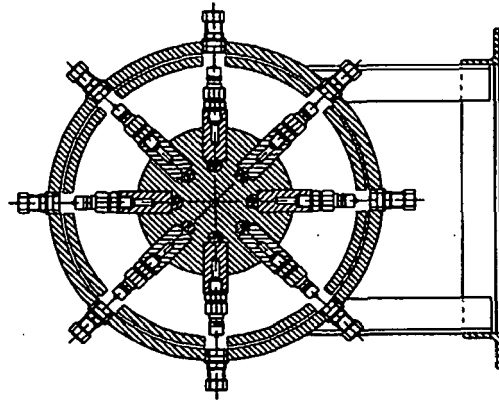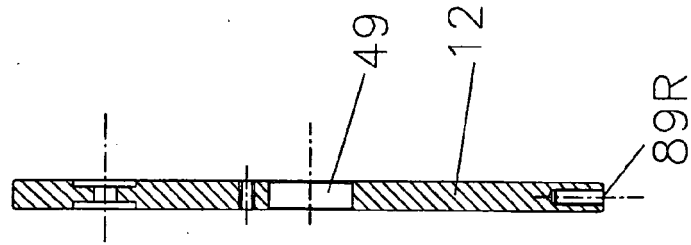


SECTION A-A

Fig. 5b

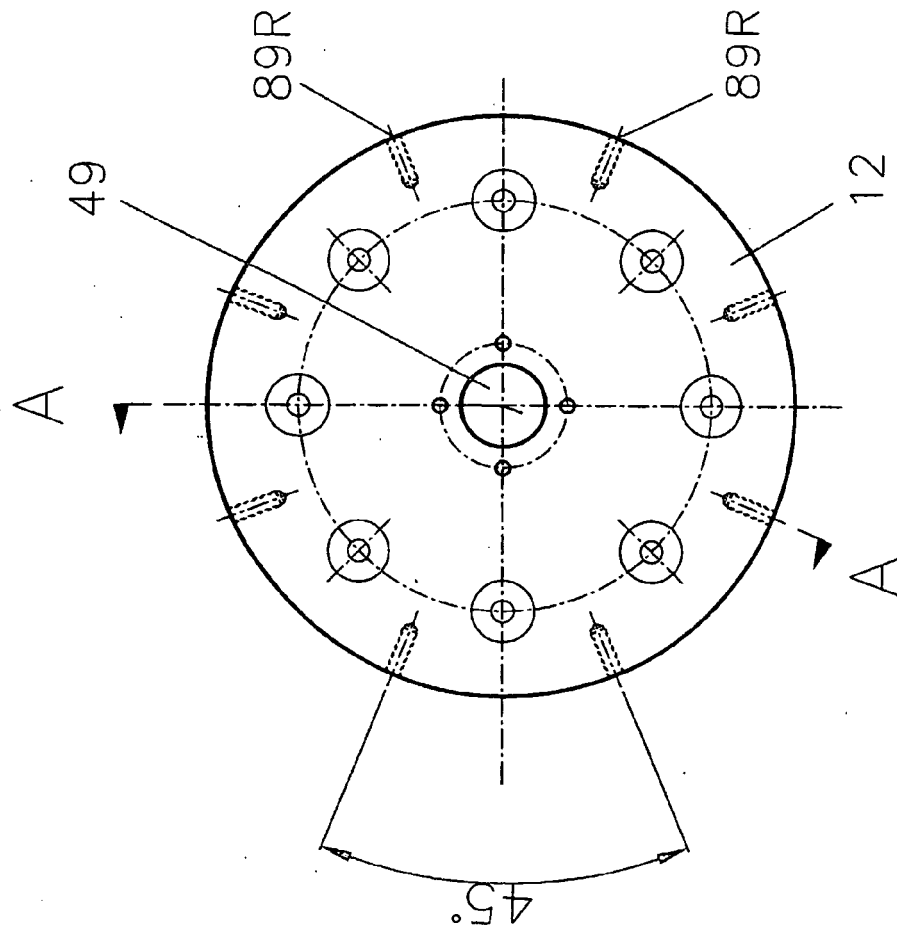

SECTION A--A

Fig. 6a
Fig. 6b

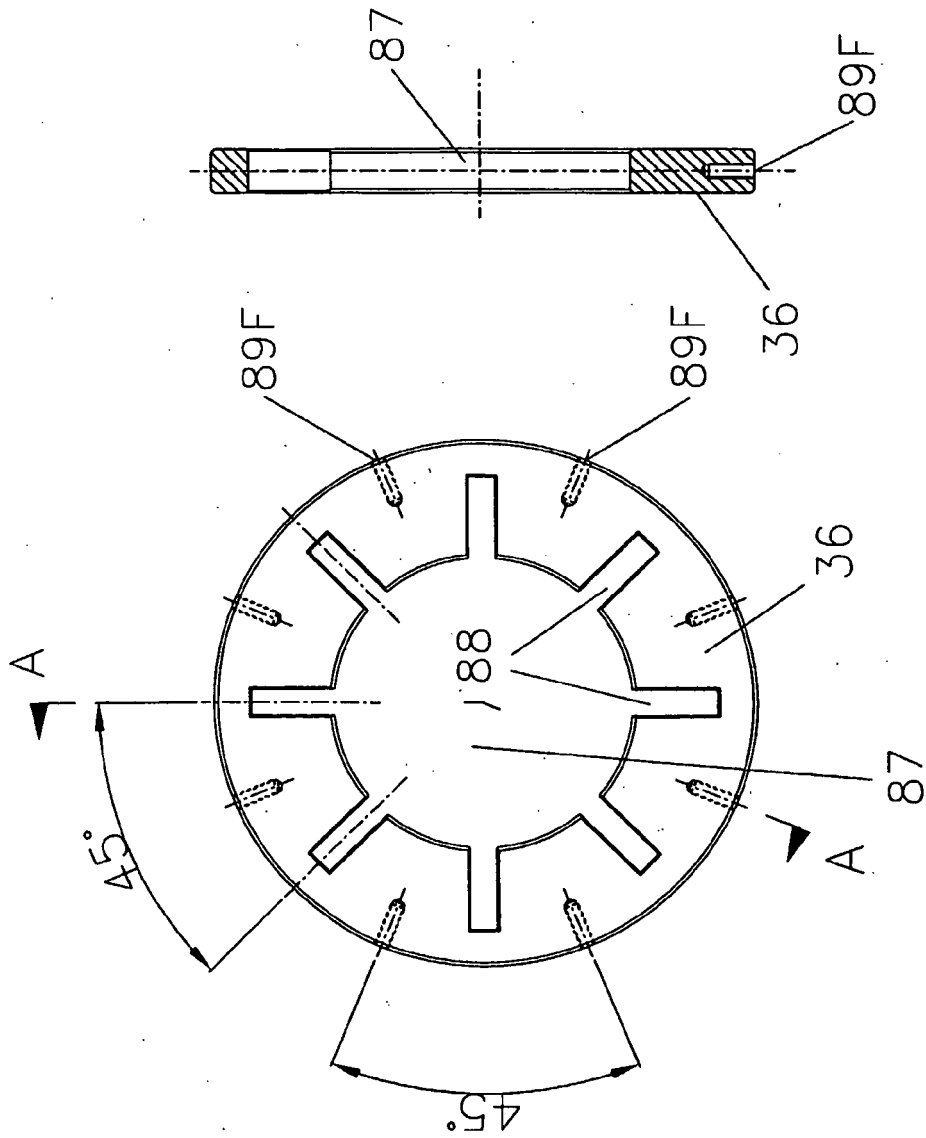

SECTION A-A

Fig. 7b

Fig. 7a

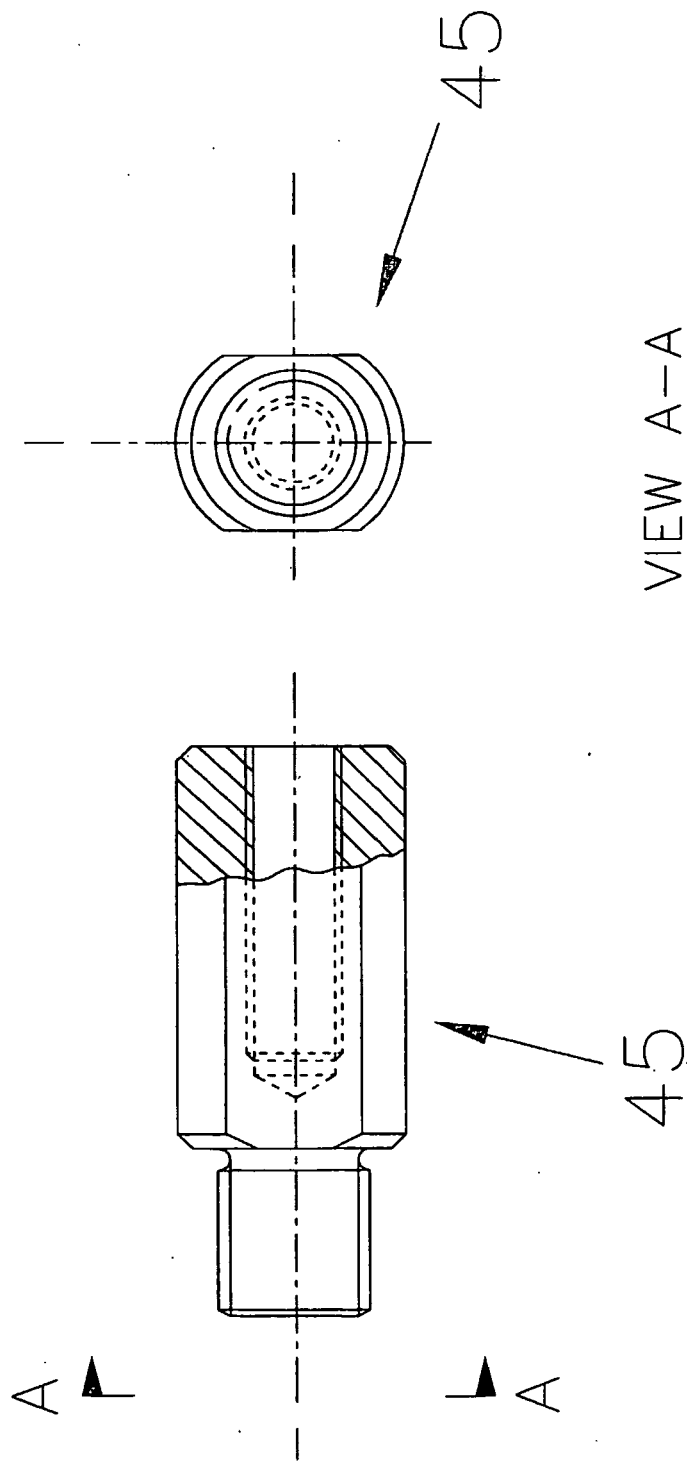
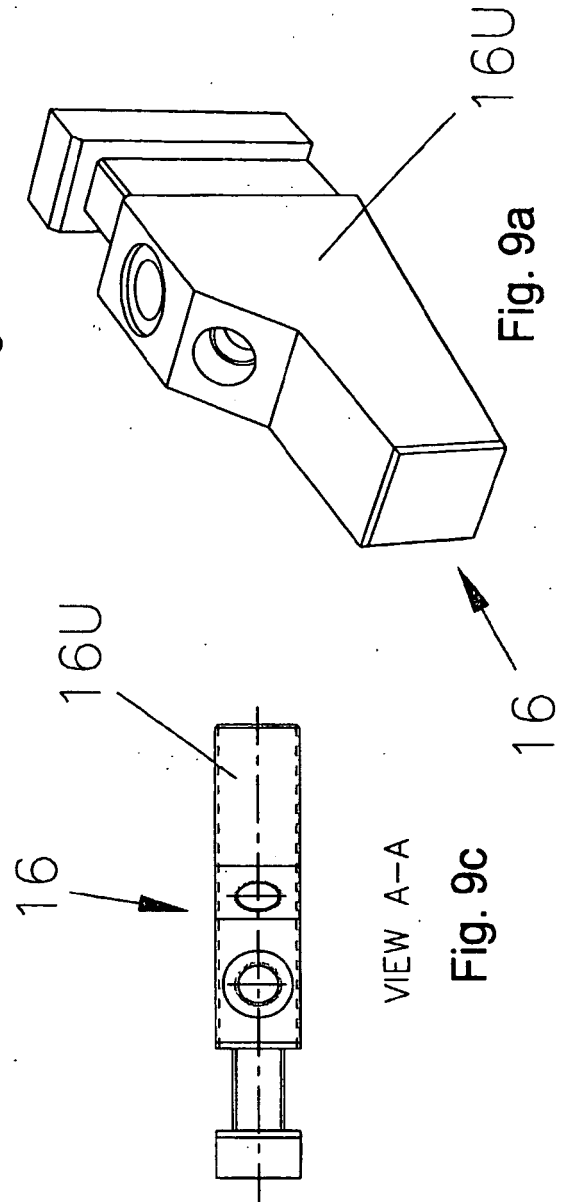
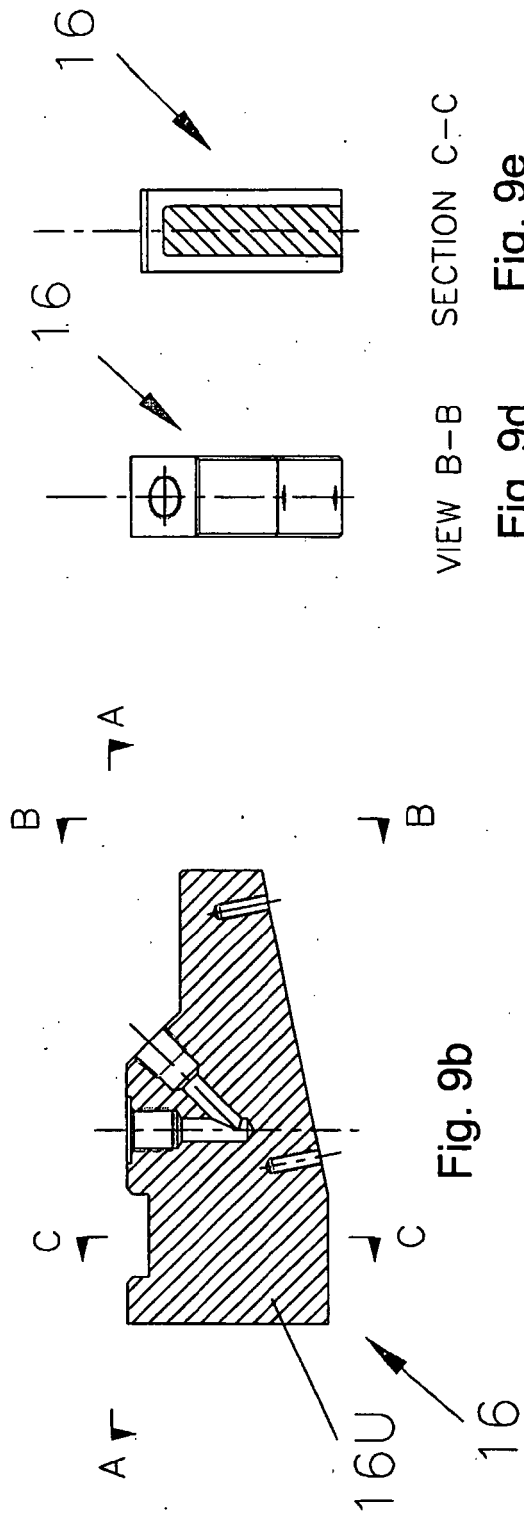
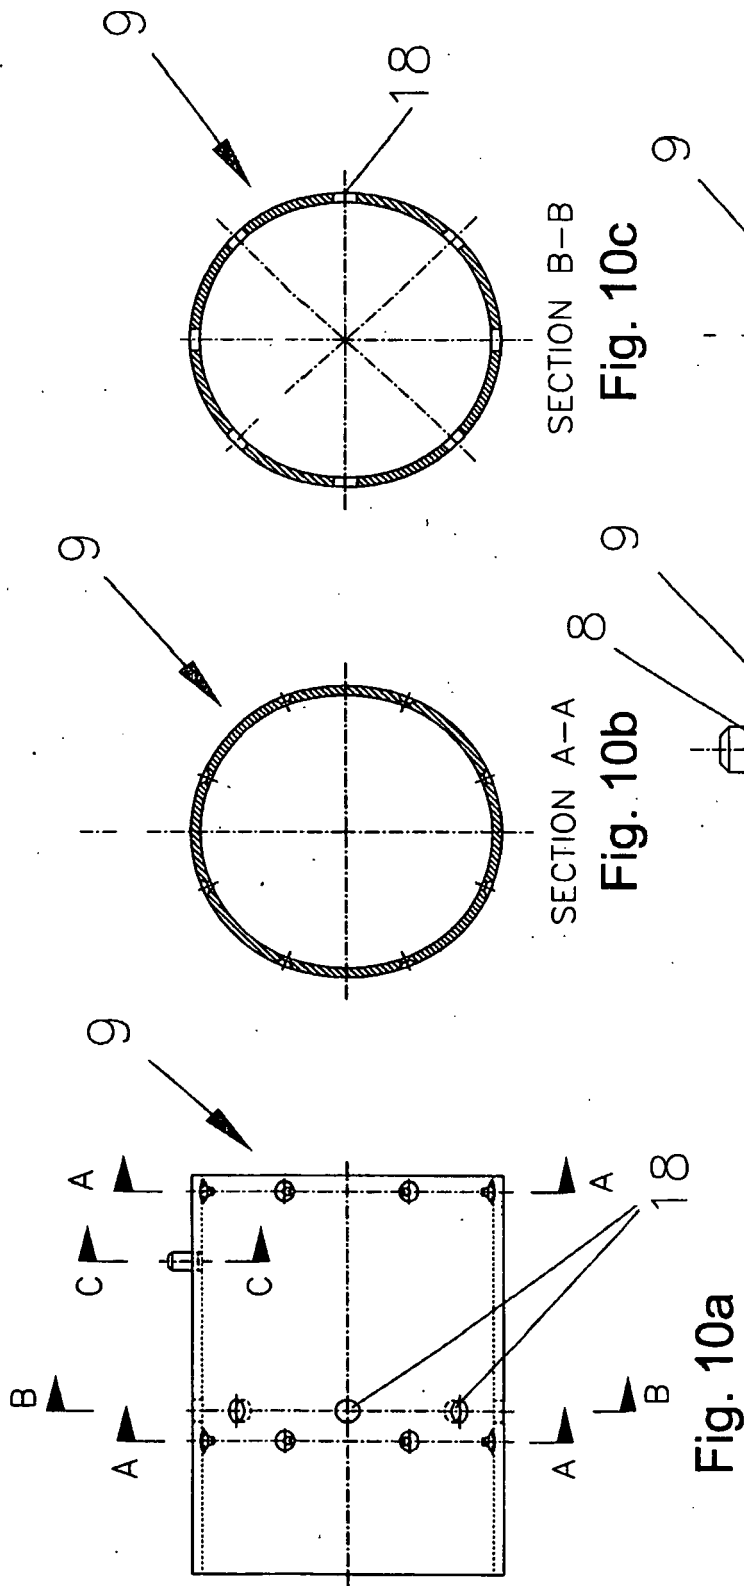


Fig. 8a

Fig. 8b







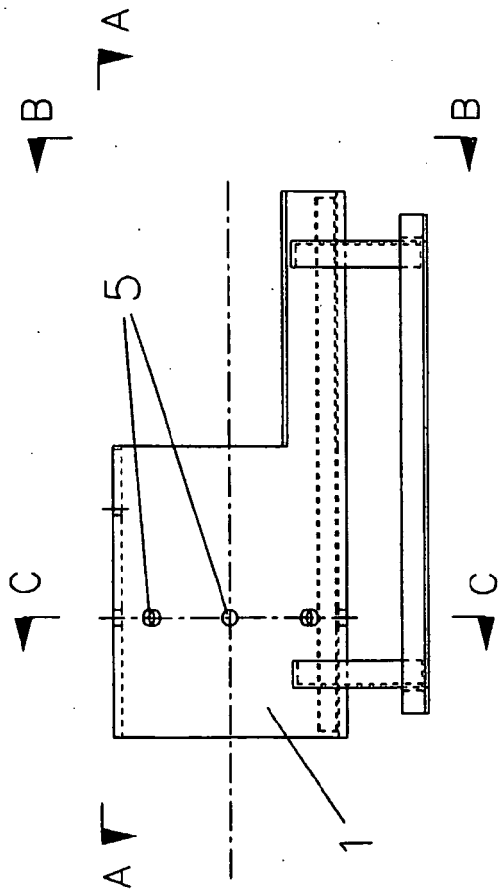


Fig. 11a

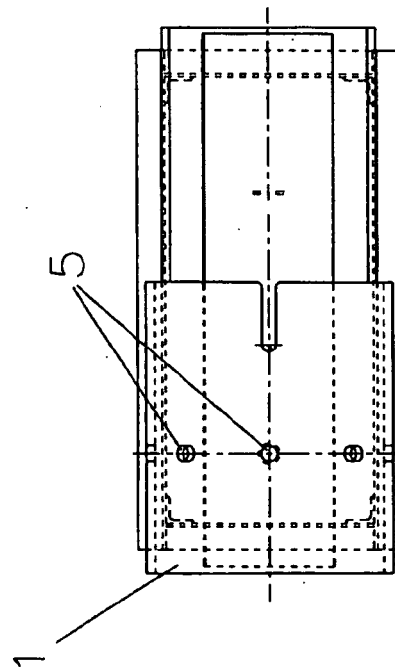


VIEW A-A

Fig. 11b

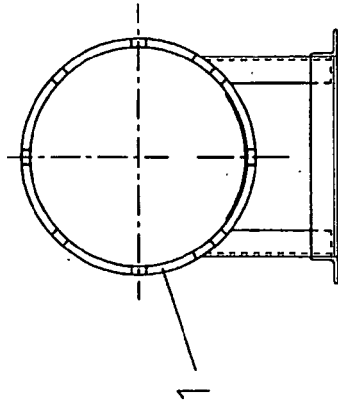

VIEW B-B

Fig. 11c

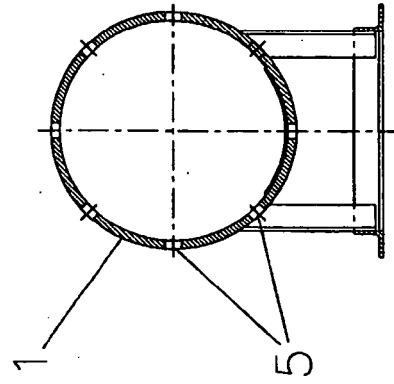

SECTION C-C

Fig. 11d

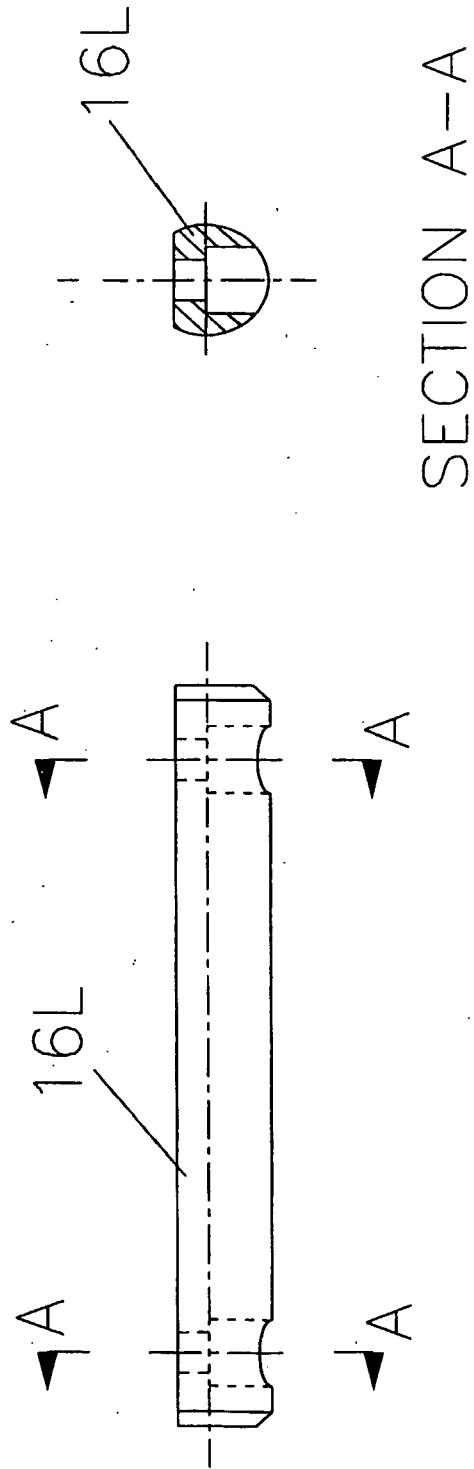


Fig. 12a

Fig. 12b

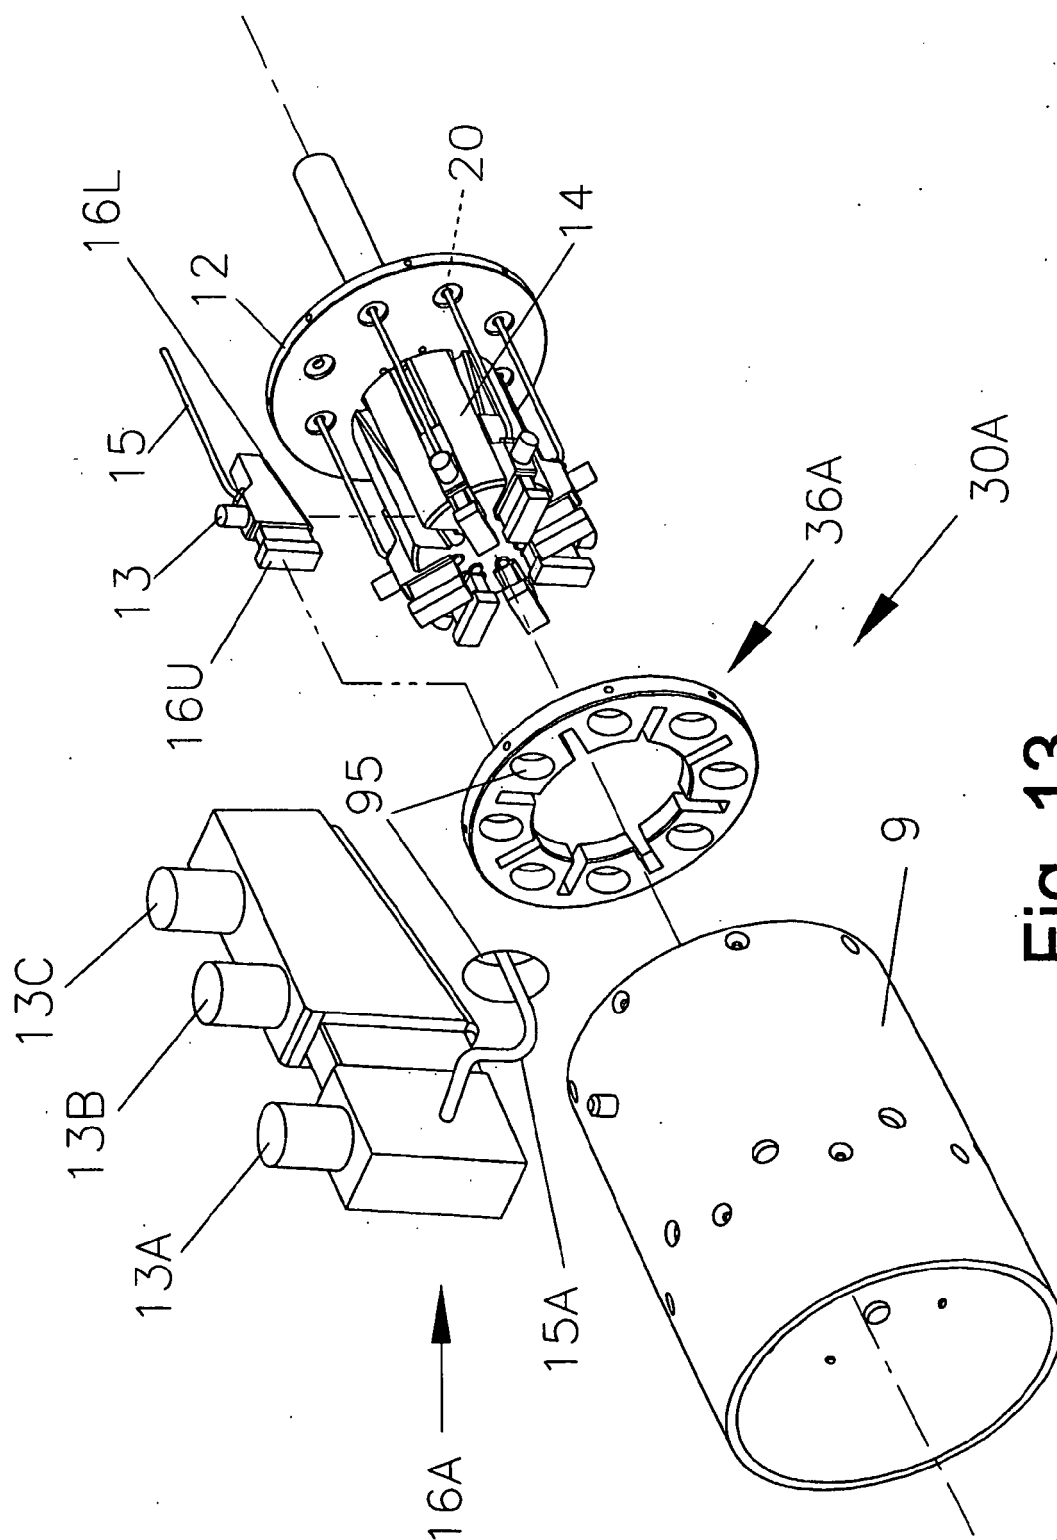


Fig. 13

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6530794 B [0004]