



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
19.09.2007 Bulletin 2007/38

(51) Int Cl.:
H01H 15/10 (2006.01)

(21) Application number: **06005291.7**

(22) Date of filing: **15.03.2006**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI SK TR
Designated Extension States:
AL BA HR MK YU
(71) Applicant: **Seikaku Technical Group Limited**
Kowloon
Hong Kong (HK)

(72) Inventor: **Yang, Ming-Lung**
Ko Fai Rd.
Kowloon
Hong Kong (CN)
(74) Representative: **Becker Kurig Straus**
Patentanwälte
Bavariastrasse 7
80336 München (DE)

(54) **Tuning structure of a sound mixer**

(57) A tuning structure of a sound mixer is disclosed to include a switch set, formed of sliding switches with a respective switching lever, a face panel, which has sliding slots arranged in parallel for the passing of the switching levers of the switch set, a track set, which is mounted in between the switch set and the face panel and has pairs of ribs for guiding movement of the switching levers of the sliding switches stably along the sliding slots of the face panel, and tuning keys respectively fastened to the switching levers of the switch set and suspending above the face panel.

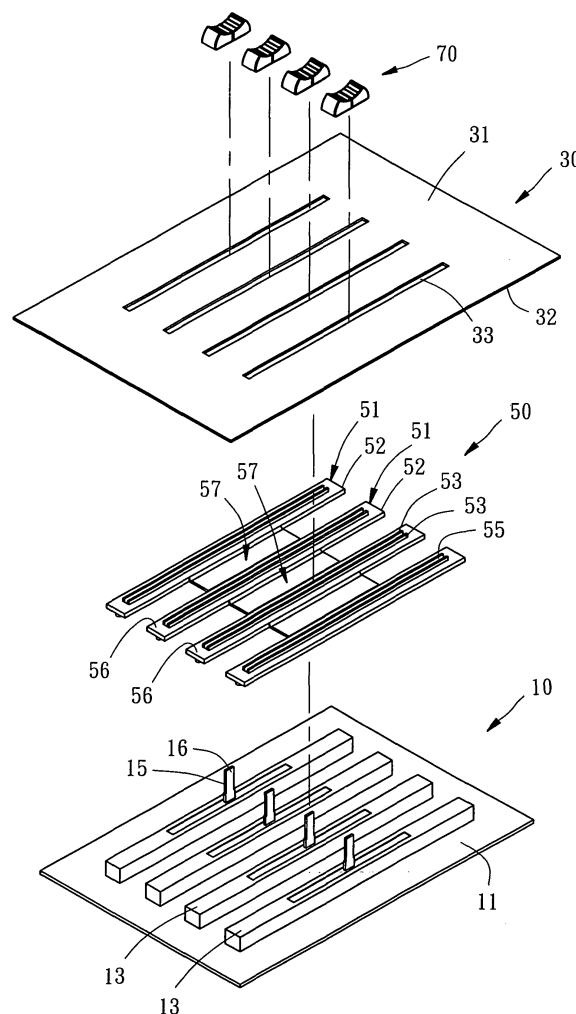


FIG. 1

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The present invention relates to a sound mixer and more specifically, to the tuning structure of a sound mixer.

2. Description of the Related Art

[0002] A sound mixer is commonly used in Hi-Fi stereo. A sound mixer generally has a tuning structure. A commercial tuning structure is known having a plurality of sliding switches for tuning. This design of tuning structure is easy to operate. However, when operating the switching lever of one sliding switch, the switching lever may be biased and damaged accidentally. Further, because the sliding switches are exposed to the outer open side, external objects may fall to the inside of the sliding switches accidentally, causing contact failure or damage to the sliding switches.

SUMMARY OF THE INVENTION

[0003] The present invention has been accomplished under the circumstances in view. It is the main object of the present invention to provide a tuning structure for sound mixer, which guides the switching levers smoothly against vibration and has means to protect the switch set against external object. It is another object of the present invention to provide a tuning structure for sound mixer, which uses a modularized track set, simplifying the structure.

[0004] To achieve these and other objects of the present invention, the tuning structure comprises a switch set, which has a substrate, a plurality of sliding switches mounted on the top side of the substrate and arranged in parallel, and a plurality of switching levers horizontally movable along the sliding switches; a face panel, which has a flat panel body and a plurality of sliding slots cut through the top and bottom sides of the flat panel body for the passing of the switching levers of the switch set; a track set, which is mounted in between the switch set and the face panel, having a plurality of tracks fixedly fastened to the bottom side of the flat panel body of the face panel corresponding to the sliding slots of the face panel, each track having guide means respectively fitted into the sliding slots of the face panel and a longitudinal sliding slot formed in the guide means for the passing of the switching levers of the switch set respectively; and a plurality of tuning keys respectively fastened to the switching levers of the switch set and suspending above the face panel.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005]

5 FIG. 1 is an exploded view of a tuning structure for sound mixer in accordance with a first embodiment of the present invention.

FIG. 2 is a schematic top view of the tuning structure for sound mixer according to the first embodiment of the present invention.

10 FIG. 3 is a side view in section in an enlarged scale of the tuning structure for sound mixer according to the first embodiment of the present invention.

15 FIG. 4 is a front view in section in an enlarged scale of the tuning structure for sound mixer according to the first embodiment of the present invention.

FIG. 5 is a side view in section of a tuning structure for sound mixer in accordance with a second embodiment of the present invention.

20 FIG. 6 is an exploded view of a tuning structure for sound mixer in accordance with a third embodiment of the present invention.

FIG. 7 is a sectional view in an enlarged scale of a part of FIG. 6.

DETAILED DESCRIPTION OF THE INVENTION

[0006] Referring to FIGS. 1-4, a tuning structure in accordance with a first embodiment of the present invention is shown installed in the base of a sound mixer (not shown). The tuning structure is comprised of a switch set 10, a face panel 30, a track set 50, and tuning keys 70.

[0007] The switch set 10 has a substrate 11, a plurality of sliding switches 13 mounted on the substrate 11 and arranged in parallel on the top side of the substrate 11 at an equal pitch, and a plurality of switching levers 15 respectively horizontally movable along the sliding switches 13. The sliding switches 13 are electrically connected to, for example, a circuit board (not shown) to provide a respective control function.

[0008] The face panel 30 has a flat panel body 31, a bonding surface 32, and a plurality of sliding slots 33 cut through the top and bottom sides of the flat panel body 31 and arranged in parallel corresponding to the sliding switches 13 of the switch set 10.

[0009] The track set 50 has a plurality of tracks 51, and a plurality of connecting members 57 each of which is connected between each two adjacent tracks 51 to hold the tracks 51 in parallel. A plurality of breakable portions 58 formed integral between each adjacent track 51 and connecting member 57. The breakable portions 58 can easily be broken to separate the tracks 51 from one another. Each track 51 has a flat elongated rail 52, guide means, for example, two longitudinal ribs 53 arranged in parallel on the rail 52 and extending in direction along the length of the rail 52, a longitudinal sliding slot 55 cut through the top and bottom sides of the rail 52 between the longitudinal ribs 53, a bonding surface 56 formed on

the border area of the longitudinal ribs **53** and bonded to the bonding surface **32** of the face panel **30**. After bonding of the track set **50** to the face panel **30**, the longitudinal sliding slots **55** of the tracks **51** of the track set **50** are respectively aimed at the sliding slots **33** of the face panel **30**, and the switching levers **15** of the sliding switches **13** of the switch set **10** are respectively inserted through the longitudinal sliding slots **55** of the tracks **51** of the track set **50** and the sliding slots **33** of the face panel **30** and respectively supported between the longitudinal ribs **53** of each of the tracks **51** of the track set **50**.

[0010] The tuning keys **70** each have a key body **71**, a key cap **72** capped on the key body **71**, a receptacle **73** downwardly suspending from the bottom side of the key body **71** for receiving the top mounting portion **16** of the switching lever **15** of one sliding switch **13** of the switch set **10**, and two retaining ribs **75** disposed at two sides of the receptacle **73** for clamping the two opposite lateral sides of the top mounting portion **16** of the switching lever **15**.

[0011] The operation of the present invention is outlined hereinafter. When operating one sliding switch **13** of the switch set **10**, the longitudinal ribs **53** of the associating track **51** guide the movement of the sliding switch **13** smoothly in course and prohibit the sliding switch **13** from vibration or sideways displacement, preventing damage of the structure of the sliding switch **13**.

[0012] FIG. 5 shows a part of a tuning structure for sound mixer in accordance with a second embodiment of the present invention. This embodiment is substantially similar to the aforesaid first embodiment with the exception that each rib of the rail of each track of the track set has a retaining lip **54A** for engaging into a respective locating groove on the face panel. By means of engaging the retaining lips **54A** of the track set into the respective locating grooves on the face panel, the track set and the face panel are fastened together without glue.

[0013] FIGS. 6 and 7 show a tuning structure for sound mixer in accordance with a third embodiment of the present invention. This embodiment is substantially similar to the aforesaid first embodiment with the exception of that the tuning structure of this third embodiment further comprises a spacer member **80B**. The spacer member **80B** is formed of a fabric member having a thin body **81B**, a plurality of narrow elongated crevices **82B** cut through the top and bottom sides of the thin body **81B** and arranged in parallel corresponding to the longitudinal sliding slots of the tracks of the track set **50B**, and a plurality of mounting holes **84B** cut through the top and bottom sides of the thin body **81B**. The track set **50B** has a plurality of bottom mounting portions **59B** downwardly protruding from the bottom side thereof and respectively inserted into the mounting holes **84B** of the spacer member **80B** to secure the spacer member **80B** in place.

[0014] When moving the switching lever of one sliding switch of the switch set to a particular position in the associating sliding slot of the track set **50B**, the spacer member **80B** block the other part of the sliding slot.

Therefore, the spacer member **80B** block the sliding slots of the track set **50B**, preventing falling of external objects to the inside of the switch set accidentally that may cause the sliding switches to be covered with rust and jammed.

[0015] As indicated above, the tuning structure of the present invention uses the ribs on the rail of each track to prohibit vibration of the associating switching lever during turning operation, preventing damage of the sliding switches of the switch set. Further, a spacer member is provided to block the longitudinal sliding slots of the tracks of the track set against external objects without interfering with normal operation of the sliding switches of the switch set.

Claims

1. A tuning structure used in a sound mixer, comprising:

a switch set, said switch set having a substrate, a plurality of sliding switches mounted on a top side of said substrate and arranged in parallel, and a plurality of switching levers horizontally movable along said sliding switches;

a face panel, said face panel having a flat panel body and a plurality of sliding slots cut through top and bottom sides of said flat panel body for the passing of said switching levers of said switch set;

a track set mounted in between said switch set and said face panel, said track set having a plurality of tracks fixedly fastened to the bottom side of said flat panel body of said face panel corresponding to the sliding slots of said face panel, said tracks each having guide means respectively fitted into the sliding slots of said face panel and a longitudinal sliding slot formed in said guide means for the passing of said switching levers of said switch set respectively; and

a plurality of tuning keys respectively fastened to said switching levers of said switch set and suspending above said face panel.

2. The tuning structure as claimed in claim 1, wherein the guide means of each of said tracks of said track set has two longitudinal ribs arranged in parallel, and the longitudinal sliding slot of each of said tracks of said track set is defined between the two longitudinal ribs of the respective track.

3. The tuning structure as claimed in claim 2, wherein said the longitudinal ribs of said tracks of said track set are respectively inserted into the sliding slots of said face panel.

4. The tuning structure as claimed in claim 3, wherein said the longitudinal ribs of said tracks of said track set each have a retaining lip engaged into a respec-

tive locating groove on said face panel to secure said track set to said face panel.

5. The tuning structure as claimed in claim 1, wherein said tracks of said track set each have a bonding surface respectively bonded to said face panel. 5
6. The tuning structure as claimed in claim 1, wherein said track set further has a connecting member connected between each two adjacent tracks to join said tracks. 10
7. The tuning structure as claimed in claim 6, wherein said connecting member has a plurality of breakable portions formed integral between each adjacent track and connecting member. 15
8. The tuning structure as claimed in claim 1, wherein said tuning caps each have two retaining ribs respectively clamped on two sides of the associating switching lever. 20
9. The tuning structure as claimed in claim 1, wherein said tuning caps each have at least one rib inserted into the associating sliding slot of said face panel and the associating sliding slot of said track set. 25
10. The tuning structure as claimed in claim 1, further comprising a spacer member mounted in between said track set and said switch set for blocking the sliding slots of said track set against external objects, said spacer member having a plurality of narrow elongated crevices for the passing of said switching levers. 30

35

Amended claims in accordance with Rule 86(2) EPC.

1. A sound mixer comprising a tuning structure, the tuning structure comprising: 40
 - a switch set (10), said switch set (10) having a substrate (11) a plurality of sliding switches (13) mounted on a top side of said substrate (11) and arranged in parallel, and a plurality of switching levers (15) horizontally movable along said sliding switches (13); 45
 - a face panel (30), said face panel (30) having a flat panel body (31) and a plurality of sliding slots (33) cut through top and bottom sides of said flat panel body (31) for the passing of said switching levers (15) of said switch set (10); 50
 - a track set (50) mounted in between said switch set (10) and said face panel (30), said track set (50) having a plurality of tracks (51) fixedly fastened to the bottom side of said flat panel body (31) of said face panel (30) corresponding to the sliding slots (33) of said face panel (30), said 55

tracks (37) each having guide means respectively fitted into the sliding slots (33) of said face panel (30) and a longitudinal sliding slot formed in said guide means for the passing of said switching levers (15) of said switch set (10) respectively wherein the guide means of each of said tracks (51) of said track set (50) has two longitudinal ribs (53) arranged in parallel, and the longitudinal sliding slot (55) of each of said tracks (51) of said track set (50) is defined between the two longitudinal ribs (53) of the respective track (51) wherein said the longitudinal ribs (53) of said tracks (51) of said track set (50) are respectively inserted into the sliding slots (33) of said face panel (30); and a plurality of tuning keys (70) respectively fastened to said switching levers (15) of said switch set (10) and suspending above said face panel.

2. The tuning structure as claimed in claim 1, wherein said the longitudinal ribs (53) of said tracks (51) of said track set (50) each have a retaining lip (54A) engaged into a respective locating groove on said face panel (30) to secure said track set (50) to said face panel (30).

3. The tuning structure as claimed in claim 1, wherein said tracks (51) of said track set (50) each have a bonding surface (56) respectively bonded to said face panel (30).

4. The tuning structure as claimed in claim 1, wherein said track set (50) further has a connecting member (57) connected between each two adjacent tracks (51) to join said tracks (57).

5. The tuning structure as claimed in claim 4, wherein said connecting member (57) has a plurality of breakable portions (58) formed integral between each adjacent track (51) and connecting member (57).

6. The tuning structure as claimed in claim 1, wherein said tuning keys (70) each have two retaining ribs (75) respectively clamped on two sides of the associating switching lever (15).

7. The tuning structure as claimed in claim 1, wherein said tuning keys (70) each have at least one rib inserted into the associating sliding slot of said face panel (30) and the associating sliding slot of said track set.

8. The tuning structure as claimed in claim 1, further comprising a spacer member (803) mounted in between said track (508) set and said switch set for blocking the sliding slots of said track set (508) against external objects, said spacer member having a plurality of narrow elongated crevices for the pass-

ing of said switching levers (15).

5

10

15

20

25

30

35

40

45

50

55

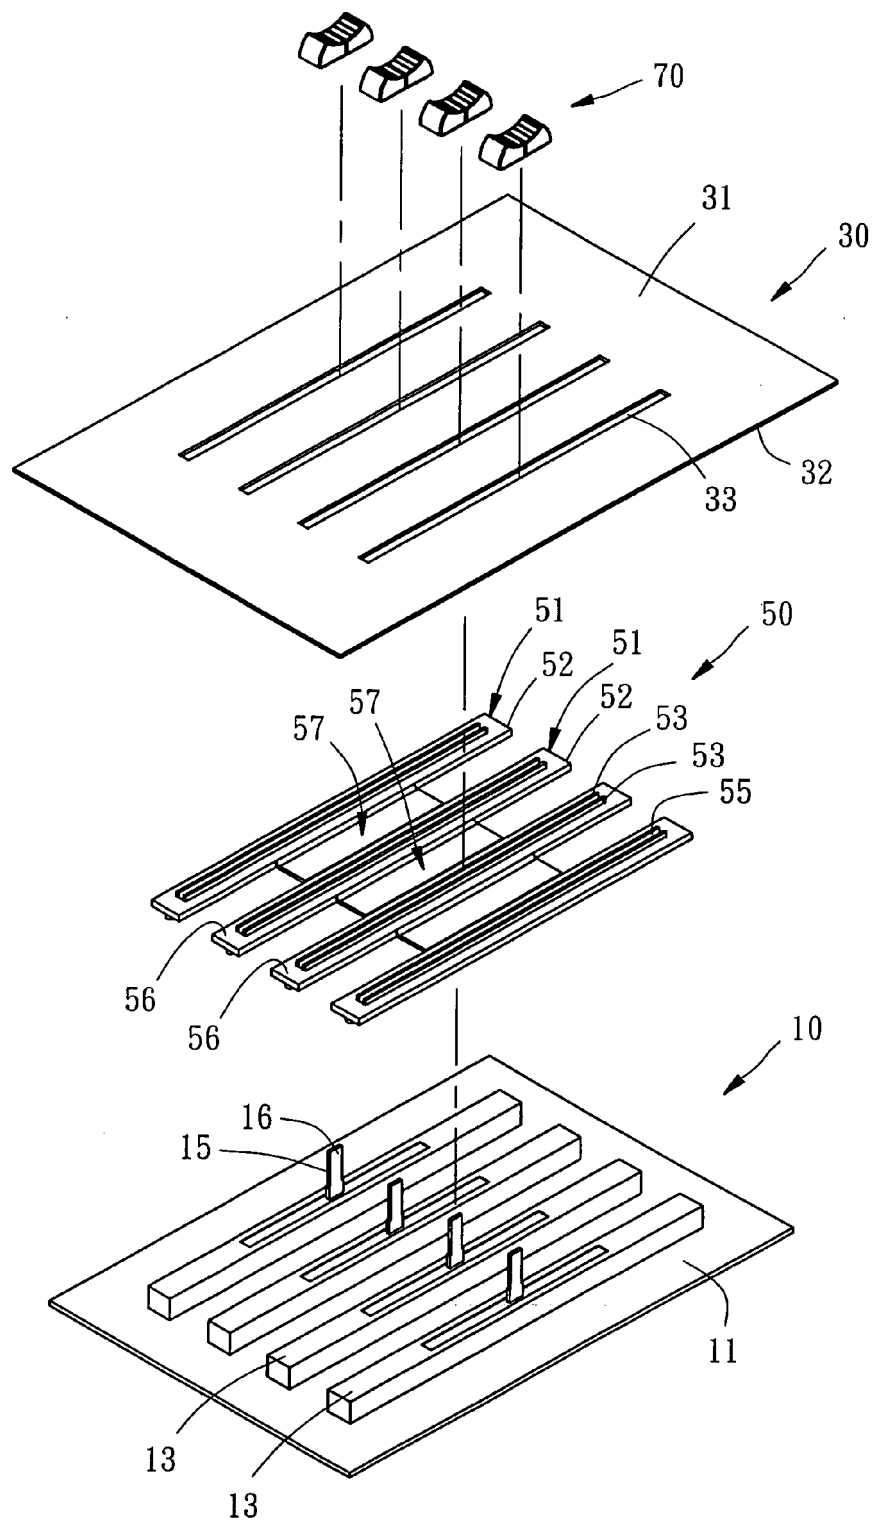


FIG. 1

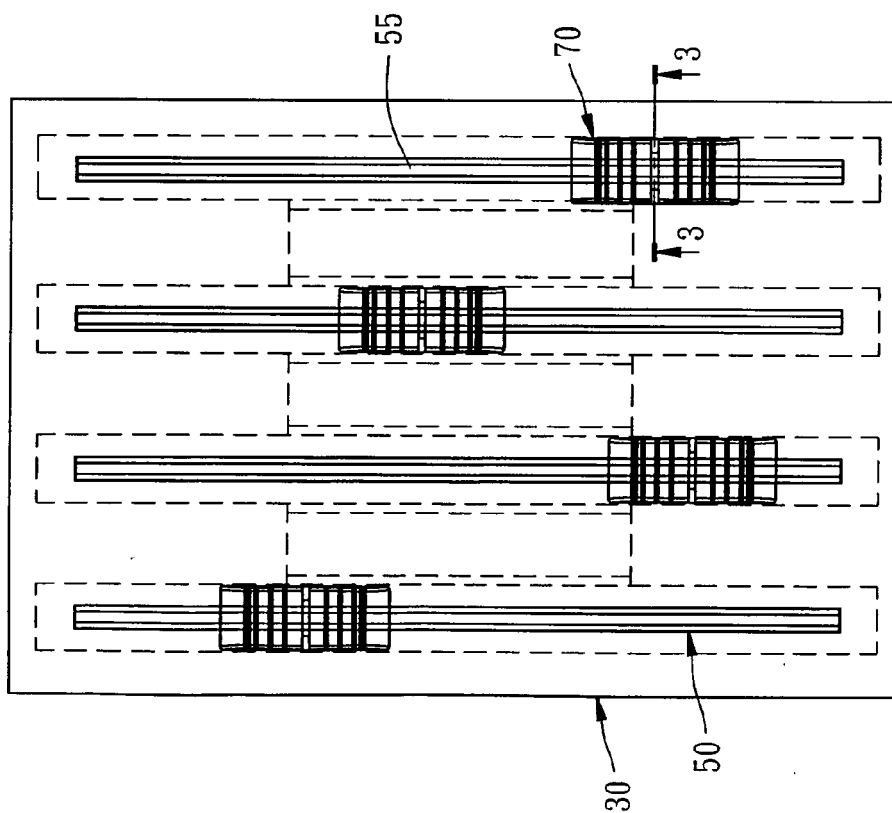


FIG. 2

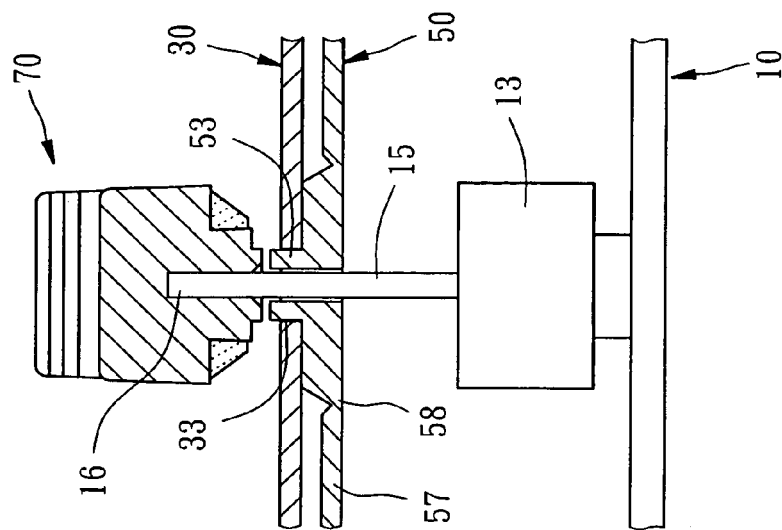


FIG. 3

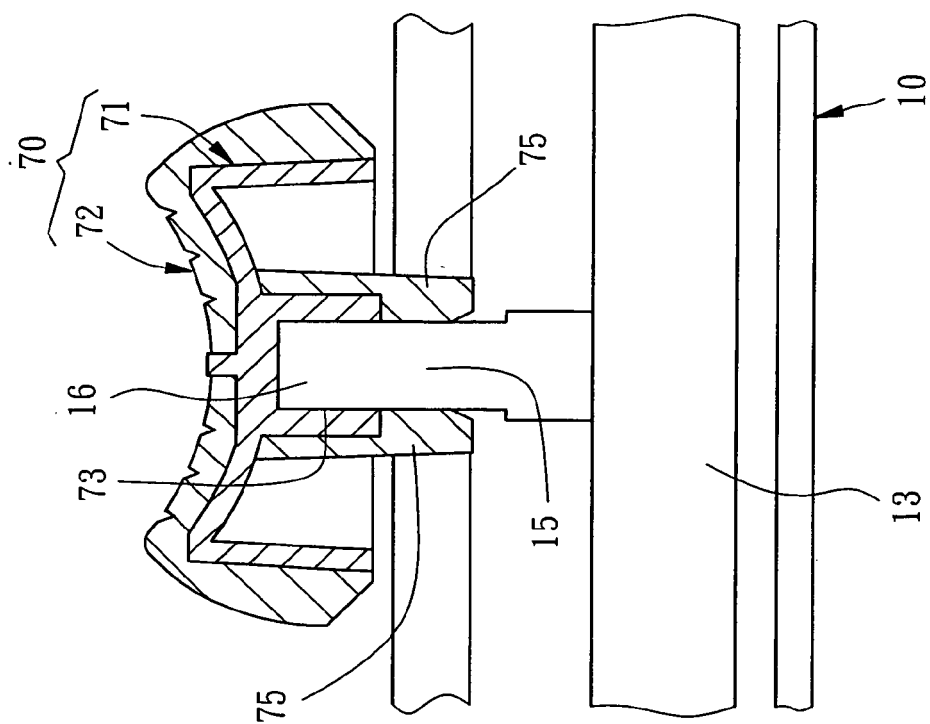


FIG. 4

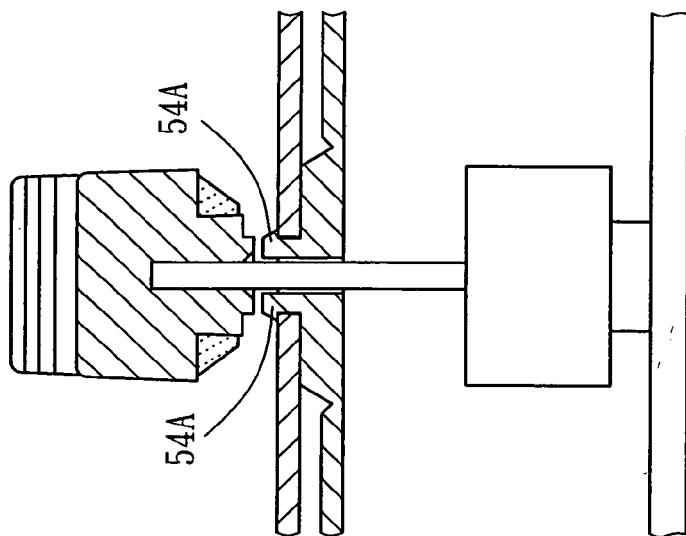


FIG. 5

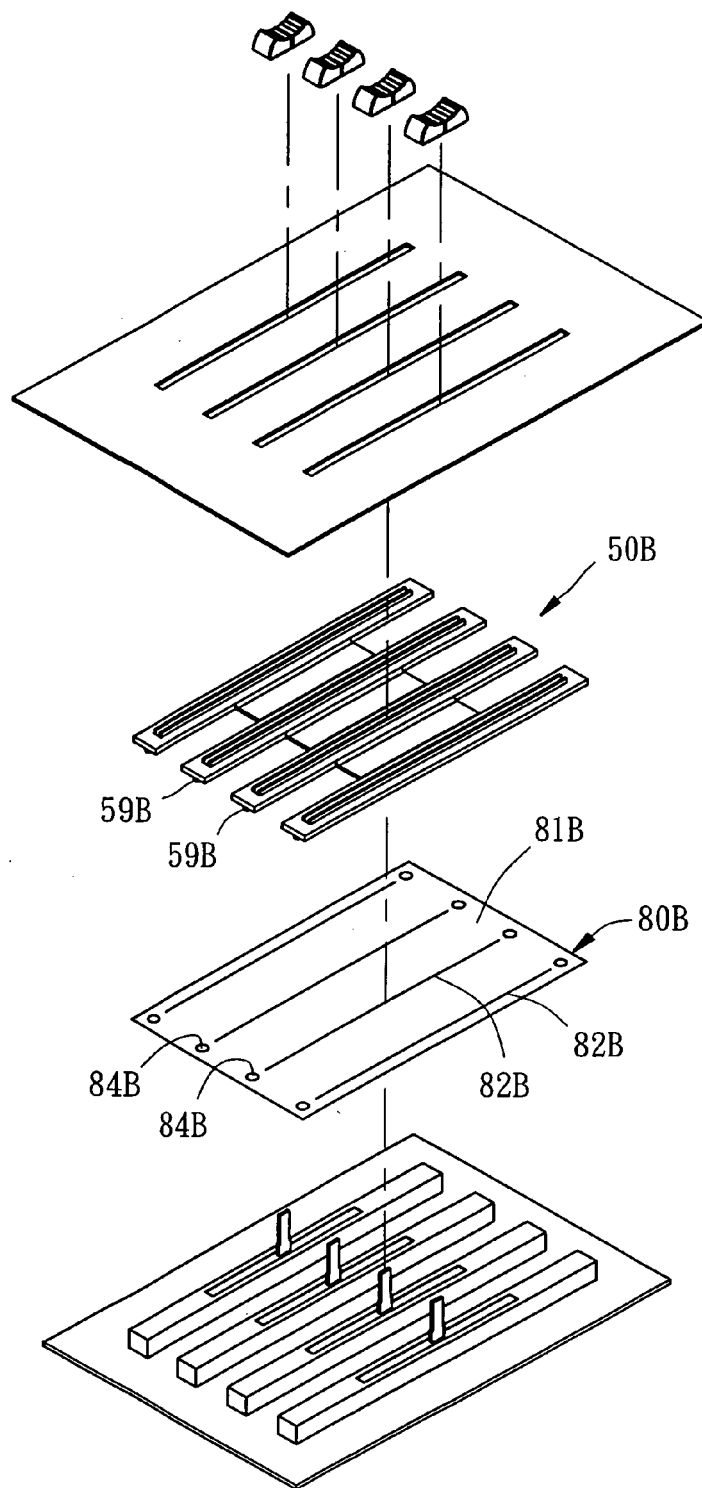


FIG. 6

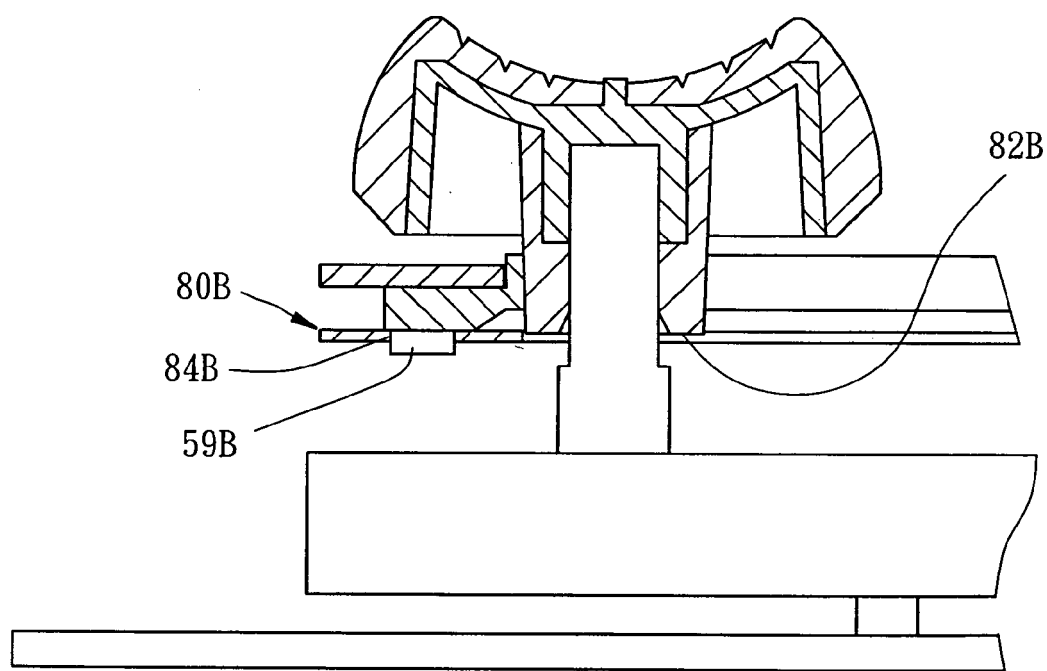


FIG. 7



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 06 00 5291

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 4 731 509 A (MIYAMOTO ET AL) 15 March 1988 (1988-03-15) * the whole document *	1	INV. H01H15/10
X	US 4 750 090 A (ABE ET AL) 7 June 1988 (1988-06-07) * the whole document *	1	
X	DE 36 26 200 A1 (ALPS ELECTRIC CO., LTD) 12 February 1987 (1987-02-12) * the whole document *	1	
X	DE 77 33 099 U1 (LOEWE OPTA GMBH, 1000 BERLIN) 9 February 1978 (1978-02-09) * the whole document *	1	
A	GB 2 296 386 A (* SOUNDTRACS PLC) 26 June 1996 (1996-06-26) * the whole document *	1-4	
			TECHNICAL FIELDS SEARCHED (IPC)
			H04H H01C
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 2 August 2006	Examiner Horn, R
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

3
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 06 00 5291

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-08-2006

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4731509 A	15-03-1988	DE 3703903 A1 KR 9002640 Y1	13-08-1987 31-03-1990
US 4750090 A	07-06-1988	DE 3704240 A1 KR 9006122 Y1	13-08-1987 06-07-1990
DE 3626200 A1	12-02-1987	NONE	
DE 7733099 U1	09-02-1978	NONE	
GB 2296386 A	26-06-1996	NONE	