(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 1 843 636 B1

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
13.10.2010 Bulletin 2010/41

(51) Int Cl.:
H04S 7/00 *(2006.01)*

(21) Application number: **07003712.2**

(22) Date of filing: **23.02.2007**

(54) **Method for automatically equalizing a sound system**

Verfahren zur automatischen Entzerrung eines Tonsystems

Procédé d'égalisation automatique d'un système sonore

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI SK TR

(30) Priority: **05.04.2006 EP 06007213**

(43) Date of publication of application:
10.10.2007 Bulletin 2007/41

(73) Proprietor: **Harman Becker Automotive Systems GmbH**
76307 Karlsbad (DE)

(72) Inventors:
- **Christoph, Markus**
  94315 Straubing (DE)
- **Scholz, Leander**
  94330 Salching (DE)

(74) Representative: **Schmuckermaier, Bernhard**
Westphal, Mussgnug & Partner
Patentanwälte
Herzog-Wilhelm-Strasse 26
80331 München (DE)

(56) References cited:
EP-A2- 0 165 733
WO-A2-01/82650
DE-A1- 19 720 217
US-A- 5 581 621

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 843 636 B1

Description

TECHNICAL FIELD

[0001] The present invention relates to a method for automatically equalizing a sound system.

BACKGROUND

[0002] In the past, the normal practice has been to acoustically optimize dedicated systems such as motor vehicles by hand. Although there have been major efforts in the past to automate this manual process, these methods, for example the Cooper/Bauk method have, however, shown weaknesses in practice. In small, highly reflective areas, such as the interior of a car there were generally no improvements in the acoustics. In most cases, the results are even worse.

[0003] Up to now, major efforts were devoted to analysis and correction of these inadequacies. Methods for equalization of acoustic poles and nulls (= CAP method) occurring jointly at different listening locations are worthy of mention, or those intended to achieve equalization with the aid of a large number of sensors in the area with the assistance, for example of the MELMS (=Multiple Error Least Mean Square) algorithm. Spatial filters or smoothing methods such as complex smoothing according to John N. Mourjopoulos, or else centroid methods have led only to a limited extent to the aim of achieving good acoustics in a poor acoustic environment. However, the fact that it is possible to achieve a good acoustic result even with simple means has been proven by the work by professional acousticians.

[0004] US-A 5 581 621 discloses a system for automatically adjusting an audio system with a programmable parametric equalizer that adjusts the frequency response of the audio system in response to equalizer data stored in the audio system and with an audio analysis unit that generates various reference signals and applies the reference signals selectively to separate channels of the audio system. A microphone picks up audible output of the audio system as the parametric equalizer corrects it and the audio system outputs the reference signal. The audio analysis unit changes the equalizer data, amplifier gain, polarity of speaker connections and other parameters responsively to the microphone output.

[0005] DE 197 20 217 A1 discloses an apparatus for measuring transmission characteristics for converting white noise into analogue signals and reproduction over loudspeakers. The signals from the loudspeakers are picked up by a microphone arrangement at a hearing position, and the microphone signals are used for the calculation of a transmission function between the respective loudspeakers and the hearing position under evaluation of the white noise and the microphone signals. The sound characteristics of the respective sound channels are adjusted to equalized the transmission characteristics.

[0006] In a method and apparatus disclosed in EP 0 165 733 A2, the acoustic transmission characteristics of a sound field are measured by placing microphones at the positions of ears of a dummy mannequin having a sound absorbing characteristics similar to that of a clothed adult human. The transmission characteristics are then corrected, such as with an automatic graphic equalizer, to provide optimized listening conditions inside the sound field for an actual listener.

[0007] However, wave-field synthesis requires very extensive resources such as computation power, memories, loudspeakers, amplifier channels, etc. This technique is thus not suitable at the moment for motor vehicle applications, for cost and feasibility reasons.

SUMMARY

[0008] It is an object of the present invention to provide an automated method for equalizing a sound system, e.g., in a passenger compartment of a motor vehicle, which reliably provides frequency responses of the level and of the phase of the reproduced sound signal at the predetermined seating positions in the vehicle interior which, as most accurately, match the profile of predetermined target functions. Said sound system includes at least two groups of loudspeakers supplied with electrical sound signals to be converted into acoustical sound signals,

[0009] The method according to the present invention for automatically adjusting such sound system to a target sound comprises the steps of: individually supplying each group with the respective electrical sound signal; individually assessing the deviation of the acoustical sound signal from the target sound for each group of loudspeakers in at least one listening position; and adjusting at least two groups of loudspeakers to a minimum deviation from the target sound by equalizing the respective electrical sound signals supplied to said groups of loudspeakers, wherein the assessment step includes receiving in a listening position the acoustical sound signal from a certain group of loudspeakers, wherein a total assessment over all listening positions is derived from the assessments at the at least one listening position weighted with a position specific factor, and wherein each position specific factor comprises an amplitude specific factor and a phase specific factor. The step of adjusting at least two groups of loudspeakers to a minimum deviation from the target sound by equalizing the respective electrical sound signals supplied to said groups of loudspeakers includes limiting an amplitude change and/or a phase change per frequency caused by said equalizing to a given value.

[0010] Accordingly, an automatic, e.g., iterative method for equalizing the magnitude and phase of the transfer function of all of the individual loudspeakers of a sound system, e.g., in a motor vehicle is disclosed which determines all of the necessary parameters for equalizing without any manual actions and thus, e.g., provides appropriate filtering in a digital signal processing system.

[0011] The advantageous effect of the invention results from the completely automatic matching of the transfer function of the sound system to a predetermined target function, in which case the number and frequency range of the loudspeakers which are used for the sound system may be variable.

[0012] Further advantages may result if an automatic algorithm approaches the predetermined target function, by considering each individual loudspeaker of a pair of loudspeakers which form a stereo pair in the sound system individually, and by optimizing each individual loudspeaker with regard to equalizing its transfer function.

[0013] Even further advantages can also be obtained if not only the equalizing of the loudspeakers in the sound system is carried out by means of the automatic algorithm, but also the crossover filters for all of the loudspeakers in the sound system are modelled and implemented in a digital signal signal processing system.

[0014] Even further advantages can likewise result if the automatic algorithm optimizes the equalizing not only for one seat position, for example that of the driver, but allows all of the seat positions in a motor vehicle, and thus listener positions, to be included in the equalizing process with selectable weighting.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] The invention can be better understood with reference to the following drawings and description. The components in the figures are not necessarily to scale, instead emphasis being placed upon illustrating the principles of the invention. Moreover, in the figures, like reference numerals designate corresponding parts. In the drawings:

Figure 1 shows the Blauert direction-determining bands;

Figure 2 shows curves of equal volume for the planar sound field;

Figure 3 shows a transfer function of a broadband loudspeaker and the method for automatically finding the crossover frequencies;

Figure 4 shows transfer function and the level function of a woofer loudspeaker pair or of an individual sub-woofer of a loudspeaker, and the method for automatically finding the crossover frequencies;

Figure 5 shows transfer functions and level functions for the method for automatically finding the crossover frequencies of a sub-woofer loudspeaker while at the same time using a woofer loudspeaker pair;

Figure 6 shows magnitude frequency responses of all the loudspeakers and the resultant overall magnitude frequency response of a sound system including crossover filters after pre-equalizing has been carried out with and without sub-woofer loud-speakers;

Figure 7 shows overall magnitude frequency responses of the sound system before and after equalizing the overall magnitude frequency response;

Figure 8 shows a measurement arrangement in a motor vehicle for determination of the binaural transfer functions for mono signals and stereo signals;

Figure 9 shows the spectral weighting function for the measurement at different positions;

Figure 10 shows the sound pressure levels in the lower frequency range at four listening positions over frequency;

Figure 11 shows the sound pressure distribution of a standing wave in a vehicle interior;

Figure 12 shows phase shift of one channel at certain frequency related to a reference channel;

Figure 13 shows a three-dimensional diagram of phase equalization function with no phase limiting;

Figure 14 shows an equalization phase frequency response for a certain position with respect to a reference signal in the example of figure 13;

Figure 15 shows a three-dimensional diagram of phase equalization function with phase limiting;

Figure 16 shows the equalization phase frequency response for a certain position with respect to a reference signal in the example of figure 15;

Figure 17 shows a modelled equalizing phase frequency response for a certain position with respect to the reference signal;

Figure 18 shows the transfer functions of the sums of all speakers at different positions before phase equalization;

Figure 19 shows the transfer functions of the sums of all speakers at different positions after phase equalization;

Figure 20 shows the transfer functions of the sums of all speakers at different positions after phase equalization and phase shift limiting;

Figure 21 shows the transfer functions of the sums of all speakers at different positions after phase equalization and phase shift limiting;

Figure 22 shows the transfer functions of the sums of all speakers at different positions after phase equalization;

Figure 23 the global amplitude equalization function for the bass management;

Figure 24 shows the transfer functions of the sums of all speakers at different positions after phase and global amplitude equalization; and

Figure 25 shows signal flow diagram of a system for executing a method according to the present invention.

DETAILED DESCRIPTION

[0016] The following example describes the procedure and the investigations in order to create an algorithm which is also referred to in the following text as AutoEQ, for automatically adjusting, e.g., of equalizing filters in accordance with the present invention. Two procedures are investigated which are disclosed in detail further below, together with a sequential method and a method taking account of the maximum interval between a measured level profile and a predetermined target function. The results obtained are used to derive a method, which is then used for automatic equalizing, that is to say without any manual influence on the parameters involved. The major tonal sensitivities to be taken into account in this case which comprise psycho-acoustic parameters of human perception of sounds, are the location capability, the tonality and the staging.

[0017] In this case, the location capability, which is also referred to as localization, denotes the perceived location of a hearing event, as a result, for example from the superimposition of stereo signals. The tonality results from the time arrangement and the harmony of sounds and the ratio of the background noise to the useful signal that is presented, for example, stereophonic audio signals. Staging is used to refer to the effect of perception of the point of origin of a complex hearing event that is composed of individual hearing events, such as that which results from an orchestra, in which case individual hearing events, for example instruments, always have their own location capability.

[0018] In principle, the location capability of phantom sound sources which are produced by stereophonic audio signals depends on a plurality of parameters, the delay-time difference of arriving sound signals, the level difference of arriving sound signals, the inter-aural level difference of an arriving sound between the right and left ear (inter-aural intensity difference IID), the inter-aural delay time difference of an arriving sound between the right and left ear (inter-aural time difference ITD), the head related transfer function HRTF, and on specific frequency bands in which levels have been raised, with the spatial directional localization in terms of front, above and to the rear depending solely on the level of the sound in these frequency bands without their being any delay-time difference or level difference in the sound signals at the same time in the latter case.

[0019] The major parameters for spatial-acoustic perception are the inter-aural time difference ITD, the inter-aural intensity difference IID and the head related transfer function HRTF. The ITD results from delay-time differences between the right and left ear in response to a sound signal arriving from the side, and may assume orders of magnitude of up to 0.7 milliseconds. If the speed of sound is 343 m/s, this corresponds to a difference of about 24 centimetres in the path length of an acoustic signal, and thus to the anatomical characteristics of a human listener. In this case, the hearing evaluates the psycho-acoustic effect of the law of arrival of the first wavefront. At the same time it is evident for a sound signal which arrives at the head at the side, that the sound pressure which is applied to the ear which is spatially further

away is less (IID) owing to sound attenuation.

[0020] It is also known that the auricle of the human ear is shaped such that it represents a transfer function for received audio signals into the auditory system. The auricles thus have a characteristic frequency response and phase response for a given sound signal incidence angle. This characteristic transfer function is convolved with the sound which is entering the auditory system and contributes considerably to the spatial hearing capability. In addition, a sound which reaches the human ear is also changed by further influences. These changes are caused by the environment of the ear, that is to say the anatomy of the body.

[0021] The sound which reaches the human ear has already been changed on its path to the ear not only by the general spatial acoustics but also by shadowing of the head or reflections on the shoulders or on the body. The characteristic transfer function which takes account of all of these influences is in this case referred to as the head related transfer function (HRTF) and describes the frequency dependency of the sound transmission. HRTFs thus describe the physical features which the auditory system uses for localization and perception of acoustic sound sources. In this case, there is also a relationship with the horizontal and vertical angles of the incident sound.

[0022] In the simplest embodiment of a stereo presentation, correlated signals are offered via two physically separated loudspeakers, forming a so-called phantom sound source between the two loudspeakers. The expression phantom sound source is used because a hearing event is perceived where there are no loudspeakers as a result of the superimposition and addition of two or more sound signals produced by different loudspeakers. When two correlated signals at the same level are reproduced by two loudspeakers in a stereo arrangement, then the sound source (phantom sound source) is located as being on the loudspeaker base, that is to say in the centre. This also applies in principle to the presentation of audio signals via sound systems using a large number of loudspeakers, as are normally used nowadays both in domestic stereo systems and in motor vehicle applications.

[0023] A phantom sound source can move between the loudspeakers as a result of delay-time and/or level differences between the two loudspeaker signals. Level differences of between 15 and 20 dB and delay-time differences of between 0.7 and 1 ms, up to a maximum of 2 ms are required to shift the phantom sound source to the extreme on one side, depending on the signal.

[0024] The asymmetric seat position (driver, front-seat passenger, front and rear row or rows of seats) for loudspeaker configuration in a vehicle leads to sounds arriving neither with the same phase nor with the same delay time with respect to the position of a single listener. This primarily changes the spatial sensitivity, although the tonality and localization are also adversely affected. The staging propagates on both sides unequally in front of the listener. Although delay-time correction with respect to an individual listener position would be possible, this is not desirable since this would automatically lead to matching specifically for one individual seat, with a disadvantageous effect on the remaining seats in the motor vehicle.

[0025] As already mentioned above, the spatial directional localization also depends on the level of the sound in specific frequency bands, without there being any delay-time difference or level difference between the sound signals at the same time (for example a mono signal arriving from the front). By way of example, investigations have in this case shown that, for a mid-frequency of 1 kHz and above 10 kHz (narrowband test signal), test subjects locate a signal that is offered as being behind them, while an identical sound event with a mid-frequency of 8 kHz is localized as being above. If a signal contains frequencies of around 400 Hz or 4 kHz, then this enhances the impression that the sound has come from in front, and thus the presence of a signal. These different frequency ranges, which are shown in Figure 1, are referred to as Blauert direction-determining bands (see Jens Blauert, Räumliches Hören, [Spatial listening] S. Hirzel Verlag, Stuttgart, 1974) and the knowledge of the effect of these various frequency bands on the spatial localization of a complex sound signal can be very helpful for filtering or equalizing complex sound signals in order to produce desired hearing sensitivities, since it is possible to determine in advance those frequency ranges in which, by way of example, filtering and equalizing associated with it will best achieve the greatest possible desired effect.

[0026] The influences of the various parameters, such as the level in different frequency ranges, the level differences between loudspeakers and loudspeaker groups, phase differences between the signals on arrival at the right and left ear, have been investigated in the following text with respect to the effect on the localization capability, tonality and staging, in order then to use the knowledge obtained to derive a method for automatic equalizing of sound systems, for example in motor vehicles.

[0027] During the investigations, it was found that the production of stable tonal properties and good location (localization capability) can essentially be achieved only by influencing the phase angle of the arriving sound signals and not by equalizing of the amplitudes. In this case, the matching process was carried out taking into account the Blauert direction-determining bands mentioned above and taking account of individual loudspeaker groups in the sound system. According to the invention, the procedure is in this case similar to the known procedure by acousticians for adjustment of an optimum hearing environment. This procedure is characterized in that groups of mutually associated loudspeakers are processed successively in order to determine their contribution to a desired required frequency response (sequential method).

[0028] The required frequency response, which is used as a reference in this case and is also referred to in the

following text as the target function of the level and phase profile over the frequency, is determined during hearing trials. In this case, a sound system with all of the individual loudspeakers is simulated in laboratory conditions (low-echo room) as in the situation, for example when producing sound in passenger compartments in motor vehicles. A significant group of trial subjects is in this case offered various sound signals which comprise music of different styles, such as classical, rock, pop, etc. The trial subjects reproduce their subjective hearing impression (tonality, localization capability, presence, staging, etc.) for different settings of the parameters of the sound system, such as cut-off frequencies of the crossover filters of the loudspeakers, the level profile in the various spectral ranges and thus loudspeaker groups (woofers, medium-tone speakers, tweeters) or the phase angle of the sound signals arriving at the location of the test subjects. This results in an idealized target function being determined which is used as a reference for the equalizing of sound systems in motor vehicles, and which is intended to be achieved as exactly as possible by these sound systems in actual environmental conditions. In this case, it should be noted that complex sound systems now allow hearing environments to be created which have desired individual features and which thus, for example, can be associated by trained listeners with specific manufacturers of sound systems and/or, for example, loudspeakers.

[0029] The loudspeaker groups which have been mentioned further above and have been mentioned for the equalizing of a sound system in order to achieve an optimum listening environment in this case, by way of example, comprise the groups of sub-woofers, woofers, rear, side, front and centre, and the phases of these loudspeaker groups, for example front left and front right, are matched by the equalizing process such that signals from the respective loudspeaker groups arrive as far as possible in the same phase as the left and right ear, thus making it possible to achieve the best-possible location capability effect.

[0030] Typically, the process of adjustment of the tonality is started once the phases of the individual, independent loudspeaker groups have been matched. For this purpose, the individual loudspeaker groups are first of all equalized separately with respect to the level, corresponding to the sum target function. This results in all of the medium-high-tone loudspeaker pairs sounding similar. Excessive levels in an individual loudspeaker group and/or in an individual spectral range would reduce the so-called sweet spot, that is to say that spatial area in which the listening experience is at its best in terms of the stated parameters, since the localization is fixed on that loudspeaker group which actually produces the highest level for the signal being reproduced at that time.

[0031] Once this process of equalizing the individual loudspeaker pairs has been carried out, the levels of these individual groups are then matched to one another. This is done in a simple form by changing the maxima of the measured sound levels of the individual broadband loudspeaker groups to a common level value. This can be done by reducing the levels of specific loudspeaker groups, increasing the levels of specific loudspeaker groups or by a mixture of these techniques. In each case, care is taken to ensure that none of the loudspeaker groups is overdriven by raising the level, which could result in undesirable effects, such as non-linear distortion, while excessive reduction in the level would no longer ensure adequate transmission of all of the frequency components associated with this loudspeaker group.

[0032] The levels for matching of the bass channels, which are likewise predistorted in the previous equalizing process, are in this case determined using a somewhat modified method, to be precise by relating the sum function of all of the loudspeaker groups for the medium-tone range to a target function. In the broadband case, the levels of the bass channels are dealt with differently during the matching process.

[0033] In a further method step, the level, averaged over the frequency range of the respective loudspeaker group, of this loudspeaker group can also be used as a measure for the extent to which the individual loudspeaker groups must be matched to one another, that is to say must be changed to a common, medium level value. In this case, care is taken, as mentioned above, to ensure that this matching process does not lead to undesirable effects such as excessively high or excessively low sound levels from the individual loudspeaker groups.

[0034] Furthermore, sound levels can be assessed before the matching process, using the so-called A-assessed level. As can be seen from Figure 2, the sensitivity of the human ear depends on the frequency. Tones at very low frequencies and tones at very high frequencies are in this case perceived as being quieter than medium-frequency tones.

[0035] The expressions volume and loudness that are used in this context relate to the same sensitivity variable and differ only in their units. They take account of the frequency-dependent sensitivity of the human ear. The psycho-acoustic variable loudness indicates how loud a sound event at a specific level, with a specific spectral composition and for a specific duration is perceived to be subjectively. The loudness is doubled when a sound is perceived as being twice as loud and thus allows comparison of different sound events with respect to the perceived volume. The unit for assessment and measurement of loudness is in this case the sone. A sone is defined as the perceived volume of a sound event of 40 phons, that is to say the perceived volume of a sound event which is perceived as being equally loud to a sinusoidal tone at the frequency of 1 kHz with a sound pressure level of 40 dB.

[0036] At medium and high volume levels, an increase in the volume by 10 phon leads to the loudness being doubled. At low volume levels, even minor volume increases lead to the perceived loudness being doubled. The volume as perceived by people in this case depends on the sound pressure level, the frequency spectrum and the behaviour of the sound over time and is likewise used for modelling of masking effects. By way of example, standardized measurement methods for loudness measurement also exist according to DIN 45631 and ISO 532 B.

[0037] Figure 2 illustrates curves of equal volume. In this case the frequency is plotted logarithmically on the abscissa, and the level L of the offered narrowband sounds is plotted along the ordinate. For various level volumes L_N whose unit is the phon, and associated loudnesses N whose unit is the sone, it can be seen that tones or noises with the same sound pressure level L are perceived as being quieter at low and high frequencies than at medium frequencies. The illustration in Figure 2 has been taken from E. Zwicker and R. Feldtkeller, Das Ohr als Nachrichtenempfänger [The ear as an information receiver], S. Hirzel Verlag, Stuttgart, 1967.

[0038] This knowledge about the frequency dependency of volume sensitivity can be taken into account according to the invention by subjecting the frequencies contained in the sound to the A-assessment as mentioned above, before matching of the various loudspeaker groups. The A-assessment is a frequency-dependent correction of measured sound levels, by means of which the physiological hearing capability of the human ear is simulated, with the level values which result from this assessment being stated using dB(A) as the units. As generally known, highs and lows are reduced and medium-levels are (slightly) increased by the A-assessment.

[0039] A considerably different matching process is obtained, however, by further subdividing the frequency range into subgroups rather than making use of the relatively coarse subdivision of the offered frequency band, as is initially carried out by means of the individual loudspeaker groups. This prevents any level peaks in closely bounded frequency ranges in a loudspeaker group resulting in a corresponding reduction of all of the frequency ranges represented by this loudspeaker group. This subdivision can, in this case, be carried out in fractions of thirds for example, or in regions which are oriented to the characteristics of the human hearing. This subdivision will be described in more detail further below.

[0040] Since the addition of the level profiles of the individual, equalized frequency ranges or loudspeaker groups does not necessarily correspond to the profile of the desired required frequency response, the sum function itself which is obtained from the addition of the individual, equalized ranges and groups is equalized in a further process step. According to the invention, the procedure is in this case once again similar to the known procedure by acousticians for adjustment of an optimum hearing environment, that is to say the sequential processing of loudspeaker groups.

[0041] During this process, the group with the greatest influence on the profile of the sum level is first of all changed such that this results in a profile that is as close as possible to the required frequency response. This change to the loudspeaker group with the greatest influence is carried out within previously defined limits, which once again ensure that none of the loudspeaker groups is overdriven by raising the level, which could result in undesirable effects such as non-linear distortion, while excessively reducing the level could mean that adequate transmission of all frequency components associated with this loudspeaker group was no longer ensured.

[0042] If the aim of approximating the profile of the required frequency response as exactly as possible with the loudspeaker group which makes the greatest contribution to the change in the sum level is not achieved in the frequency range under consideration in this case, that group which makes the next greater contribution to changing the sum level is then varied. According to the invention, this procedure is continued until either the required frequency response is adequately approximated, or the predetermined limits, as defined in advance, for the permissible level change in the corresponding group are reached.

[0043] The investigations carried out have also shown that staging and spatial sensitivity can be influenced by the change in the sequence of processing of the groups, with desirably good staging being achieved in particular when the volumes of the various loudspeaker groups are changed with respect to one another. If, by way of example, front-seat passengers were to be given the hearing impression that the staging is perceived further in front, the rear and/or the side loudspeakers would have to be reduced and/or the front loudspeakers or the centre loudspeaker would have to have their or its levels raised.

[0044] If, in contrast, the perceived location of the staging is initially too far upwards or downwards, or else too far forwards or backwards, the desired effect can be achieved, that is to say the perceived location of the staging can be optimized as desired, by appropriate moderate level changes in the area of the Blauert direction-determining bands (see Figure 1). However, it is obvious that even in the case of moderate level changes in the area of the Blauert direction-determining bands, or if individual loudspeaker groups are raised or lowered in order to optimize the staging, a subsequent change in the sum level which has already been matched to the required frequency response and thus a renewed, possibly undesirable, discrepancy from the required frequency response, can result.

[0045] In order to keep this undesirable effect, the subsequent changing of the sum level which has already been matched to the required frequency response, as a result of the optimization of the staging as small as possible, the sequential processing is defined in advance in a specific manner, according to the invention. In this case, the procedure according to the invention comprises definition of the sequence of processing of the individual loudspeaker groups for adjustment of the equalizing, in advance, in such a way that this empirically ensures that the discrepancy from the approximation that has already been achieved to the required frequency response is minimized.

[0046] If, by way of example, one wished to move the perceived location of the staging further forwards, which is normally a situation that occurs frequently, it is recommended that the equalizing be carried out in the following sequence of loudspeaker groups: sub-woofer, woofer, rear, side, centre and front. Variations in this fixed predetermined sequence can in this case be defined depending on the situation with regard to the current acoustic environment and the preference

for a specific acoustic configuration. For example, from experience, it is possible in this case to interchange the rear and side as well as the centre and front loudspeakers in the sequence with the desired staging still being produced in this case as well, but allowing variations in the overall impression of the acoustic environment. This allows good staging to be achieved by skilful choice, defined in advance, of the sequence of processing of the loudspeaker groups during the procedure per se, without excessively changing the sum level which has already been matched to the required frequency response.

[0047] In general, the aim is to carry out an equalizing process which is as independent as possible of position, for acoustic presentation in motor vehicles. This means that the aim of the equalizing process should not only result in a sweet spot as such but should also cover the region of optimum presentation, covering as large a spatial area as possible, while providing spatial areas of optimum presentation that are as large as possible at the respective positions of the driver and front-seat passenger as well as in the rear row or rows of seats. If one observes the manual work by acousticians with the same aim in the measurement and equalizing of sound systems for passenger compartments in motor vehicles, then it is evident that these acousticians set the filters for equalizing of each loudspeaker group to be left/right-balanced. This is understandable, because both the arrangement of the loudspeakers of a sound system per se and the interior of the passenger compartment of a motor vehicle, with the exception of the steering wheel and dashboard, are normally designed to be strictly left/right symmetrical. This procedure is also adopted in the method according to the invention for automatic equalizing according to the present invention.

[0048] In order to determine the results achieved by the respective equalizing process by recording of the impulse responses of the regulated sound system, two B & K (Brüel & Kjaer, Denmark) ½" microphones without any separating disc and separated by 150 mm, were introduced, during the course of the investigations, at the four seat positions for the driver, front-seat passenger, rear left and rear right, which corresponds to the normal measurement method for investigation of the transfer functions in sound systems.

[0049] A further aspect of the optimization of the acoustic presentation via a sound system is the setting of the crossover filters, also referred to as frequency filters, for the individual loudspeakers. In principle, these crossover filters must be adjusted as a first step before carrying out any equalizing process on the entire sound system. During the course of the investigations carried out, it was in this case found that it was relatively complicated to develop a suitable algorithm with acceptable computation complexity for automatic adjustment of the crossover filters and, initially, these crossover filters were therefore not adjusted automatically during the course of the further investigations so that, initially, they were adjusted manually (a method for automatic adjustment of crossover filters is described further below). Manual adjustment such as this can be carried out quickly and effectively if, as in the present case, the physical data for the loudspeakers and their installation state are known. FIR filters (finite impulse response filters) or IIR filters (infinite impulse response filters) can also be used as an embodiment for the crossover filters.

[0050] FIR filters are characterized in that they have an extremely linear frequency response in the transmission range, a very high cut-off attenuation, linear phase and constant group delay time, have a finite impulse response and operate in discrete time steps, which are normally governed by the sampling frequency of an analogue signal. An Nth order FIR filter is in this case described by the following differential equation:

$$y(n) = b_0 * x(n) + b_1 * x(n-1) + b_2 * x(n-2) + \ldots + b_N * x(n-N) = \sum_{i=0}^{N} bi * x[n-i]$$

where y(n) is the initial value of the time n and is calculated from the sum, weighted with the filter coefficients b_i, of the N most recently sampled input values x(n-N) to x(n). In this case, the desired transfer function and thus the filtering of the signal are achieved by the definition of the filter coefficients b_i.

[0051] In contrast to FIR filters, IIR filters also use already calculated initial values in the calculation (recursive filters) and they are characterized in that they have an infinite impulse response, no initial oscillations, no level drop and a very high cut-off attenuation. The disadvantage in comparison to FIR filters is that IIR filters do not have a linear phase response, as is often highly desirable in acoustic applications. Since the calculated values in the case of IIR filters become very small after a finite time, however, the calculation can in practice be terminated after a finite number of sample values n, and the computation power complexity is considerably less than that required for FIR filters. The calculation rule for an IIR filter is:

$$y(n) = \sum_{i=0}^{N} b_i * x(n-i) - \sum_{i=0}^{M} a_i * y(n-i)$$

where y(n) is the initial value of the time n and is calculated from the sum, weighted with the filter coefficients b_i, of the sampled input values x(n) added to the sum, weighted with the filter coefficients a_i of the initial values y(n). In this case, the desired transfer function is once again achieved by the definition of the filter coefficients a_i and b_i.

[0052] In contrast to FIR filters, IIR filters may in this case be unstable, but have a higher selectivity for the same implementation complexity. In practice, the filter chosen is that which best satisfies the required conditions taking into account the requirements and computation complexity associated with them.

[0053] In the present case, it is thus preferred that crossover filters in the form of IIR filters be used. The use of FIR filters is advantageous because of the linear profile of the phase in the case of FIR filters, but would lead to an undesirably high level of computation complexity during use owing to the low filter cut-off frequencies required. IIR filters were thus used as the basis for the crossover filters in the following text, in which case these crossover filters are adjusted before carrying out the automatic equalizing process according to the invention (AutoEQ) with their parameters first of all being transferred to the subsequent AutoEQ algorithm so that the phase distortion in the transmitted signals caused by these IIR filters can be taken into account in the calculation of the equalizing filters for phase matching, as described further above, for the location capability, and, if necessary, can be compensated for appropriately.

[0054] The channel gains of the individual loudspeaker groups should likewise also be set before the start of an automatic equalizing process. This may be done manually or automatically. The step-by-step procedure for automatic matching in one preferred embodiment is described, by way of example, as follows:

1. Automatic matching of the maximum values of the magnitudes of the frequency responses of all the broadband loudspeaker groups to the highest value, so that the quieter loudspeaker groups down to the quietest loudspeaker group are raised to the maximum value of the magnitude of the frequency response of the loudest loudspeaker pair.

2. Automatic matching of the averaged levels of the broadband loudspeaker groups, which have already been equalized automatically and individually in advance, to a target function.

3. Formation of the sum of the magnitudes of the frequency responses of the broadband loudspeakers whose levels have in the meantime been matched.

4. Setting of the channel gains of the woofer loudspeakers to the maximum value or to the mean level of the sum of the magnitudes of the frequency responses of the broadband loudspeakers.

5. Formation of the new sum of the magnitudes of the frequency responses of the broadband loudspeakers including the woofer loudspeakers.

6. Setting of the channel gain of the sub-woofer loudspeaker to the new maximum value or to the mean level of the new sum of the magnitudes of the frequency responses of the broadband loudspeakers, including the woofer loudspeakers from 5.

[0055] Furthermore, the maximum values of the levels and/or the mean values of the levels can optionally also be assessed for the method steps 1 to 6 as described above, before matching with the A-assessed level. As described further above, the A-assessment represents a frequency-dependent correction of measured sound levels which simulates the physiological hearing capability of the human ear.

[0056] In contrast to the use of crossover filters, FIR filters, whose advantages have already been described further above, are used in the implementation of the filters as determined for the automatic equalizing (AutoEQ algorithm) in the amplifier of a sound system. Since, depending on the embodiment and in particular when they have a wide bandwidth, these FIR filters can result in stringent requirements for the computation power of a digital signal processor on which they are carried out, the psycho-acoustic characteristics of the human hearing are made use of again in this case, as well. According to the invention this is achieved in that the filtering is carried out by means of FIR filters via a filter bank, with the bandwidth of the filters increasing as the frequency increases, in a manner which corresponds to the frequency-dependent, integrating characteristic of the human hearing.

[0057] The modelling of the psycho-acoustic hearing sensitivities is in this case based on fundamental characteristics of the human hearing, in particular of the inner ear. The human inner ear is incorporated in the so-called petrous bone, and is filled with incompressible lymph fluid. In this case, the inner ear is in the form of a worm (cochlea) with about 2.5 turns. The cochlea in turn comprises channels which run parallel, with the upper and lower channel being separated by the basilar lamina. The cortical organ with the hearing sense cells is located on this lamina. When the basilar lamina is caused to oscillate by sound stimuli, so-called moving waves are formed during this process, that is to say there are no oscillation antinodes or nodes. This results in an effect which governs the hearing process, the so-called frequency/location transformation on the basilar lamina, which can be used to explain psycho-acoustic concealment effects and

the pronounced frequency selectivity of the hearing.

[0058] In this case, the human hearing comprises different sound stimuli which fall in limited frequency ranges. These frequency bands are referred to as critical frequency groups or else as the critical bandwidth CB. The frequency group width has its basis in the fact that the human hearing combines sounds which occur in specific frequency ranges, in terms of the psycho-acoustic hearing sensitivities which result from these sounds, to form a common hearing sensitivity. Sound events which are within a frequency group in this case produce different influences than sounds which occur in different frequency groups. Two tones at the same level within one frequency group are, for example, perceived as being quieter than if they were in different frequency groups.

[0059] Since a test tone within a masker is audible when the energy levels are the same and the masker falls in the frequency band which the frequency of the test tone has as its mid-frequency, it is possible to determine the desired bandwidth of the frequency groups. At low frequencies, the frequency groups have a bandwidth of 100 Hz. At frequencies above 500 Hz, the frequency groups have a bandwidth which corresponds to about 20% of the mid-frequency of the respective frequency group (Zwicker, E.; Fastl, H. Psycho-acoustics - Facts and Models, 2nd edition, Springer-Verlag, Berlin/Heidelberg/New York, 1999).

[0060] If all of the critical frequency groups are arranged in a row over the entire hearing range then this results in a hearing-oriented non-linear frequency scale which is referred to as tonality, with the Bark as the unit. This represents a distorted scaling of the frequency axis, so that frequency groups have the same width of precisely 1 Bark at each point. The non-linear relationship between the frequency and tonality originates from the frequency/location transformation on the basilar lamina. The tonality function has been stated by Zwicker (Zwicker, E.; Fastl, H. Psycho-acoustics - Facts and Models, 2nd edition, Springer-Verlag, Berlin/Heidelberg/New York, 1999) on the basis of monitoring threshold and loudness investigations, in tabular form. As can be seen, 24 frequency groups can actually be arranged in a row in the audibility frequency range from 0 to 16 kHz, so that the associated tonality range is 0 to 24 Bark.

[0061] Transferred to the application in a sound system amplifier according to the invention, this means that a filter bank is preferably formed from individual FIR filters whose bandwidth is in each case 1 Bark or less. Although FIR filters are used for automatic equalizing as investigations progress and in order to produce embodiments, possible alternatives exist which, for example, comprise rapid convolution, the PFDFC algorithm (Partition Frequency Domain Fast Convolution Algorithm), WFIR filters, GAL filters or WGAL filters.

[0062] For automatic equalizing of the levels and/or amplitudes of the sound system, two different methods were investigated, which are referred to in the following text as "MaxMag" and "Sequential". "MaxMag" in this case searches in the manner described further above in all of the available independent loudspeaker groups to find that which, in terms of its maximum or average level, is furthest away from the target function of the frequency profile and thus provides the greatest contribution to approximation to the target function by raising or lowering the level. If the maximum possible level change of the selected loudspeaker group, which is restricted to the region of predefined limit values, is in this case found not to be adequate for complete approximation to the target function, the value which is set for the selected loudspeaker group within the permissible limit values is that which allows the greatest possible approximation to the target function and, following this, the loudspeaker group which is selected and whose level is changed is that which now has the greatest level difference from the target function from the group of loudspeaker groups whose levels have not yet been matched. This method is continued until either the target function is reached with sufficient accuracy or the dynamic limits of the overall system, that is to say the permissible reductions or increases (limit values) by equalizers are exhausted within the respective loudspeaker groups.

[0063] In contrast, as has been described in detail above, the sequential method processes the existing loudspeaker groups successively in a previously defined sequence, in which case the user can produce the described influence on the mapping of the staging by the previous definition of the sequence. In this case the automatic algorithm also attempts to achieve the best approximation to the target function just by the equalizing of the first loudspeaker group within the permissible limits (dynamic range).

[0064] To further improve this method, it was modified in such a way that each group no longer reaches its maximum dynamic limits at each frequency location but may now only act at the restricted dynamic range. The algorithm uses the ratio of the signal vectors of the relevant group to the existing sum signal vector at this frequency location as a weighting parameter. This avoids the first groups provided for processing being excessively (over a broad bandwidth) attenuated. With the introduction of the self-scaling target function, which is oriented on the minimum of the sum function and then scales the target function such that the minimum value of the sum transfer function in a predetermined frequency range is located exactly by the maximum permissible increase below the target function, this indicated the strengths and weaknesses of the two versions "MaxMag" and "Sequential".

[0065] However, this procedure can lead to the level profile of the first loudspeaker group, which is modified by equalizing using the described "sequential" method, being raised or lowered more than proportionally over a broad bandwidth while, in contrast, the other loudspeaker groups which are processed using the "sequential" method, are not subject to any changes, or only to minor changes, since the target function has already been largely approximated by the equalizing of the first loudspeaker group. One possibly disadvantageous effect in this case is that the first loudspeaker

in the defined sequence may experience a major increase or attenuation as the result of this procedure, with the following loudspeaker groups remaining largely unchanged, so that the frequency range which is represented by the first loudspeaker group is more than proportionally amplified or attenuated, which could lead to a considerable discrepancy from the desired sound impression.

[0066] The "sequential" method was thus subsequently modified such that a single loudspeaker group may now no longer be raised or lowered within its theoretical maximum available dynamic range, but only within a dynamic range which is less than this. This reduced dynamic range is calculated from the original maximum dynamic range by weighting this original maximum dynamic range with a factor which is obtained from the ratio of the overall level of the relevant loudspeaker group to the totaled overall level from all of the loudspeaker groups in this frequency range in the relevant loudspeaker group, so that this factor is always less than unity and results in a restriction to the maximum dynamic range which can be regulated out for the relevant loudspeaker group. This reliably avoids the level profiles of the first loudspeaker groups that are processed in the sequence previously determined being undesirably strongly raised or lowered in the course of the automatic equalizing process.

[0067] In order to take account of this restriction to the maximum control range (dynamic range) of the loudspeaker groups, a modification has also been introduced in the target function to be achieved, in order always to ensure reliable approximation to the target function of the desired level and phase profile despite the reduced control range of the loudspeaker groups. In this case, the target function to be achieved is raised or lowered over its entire level profile (parallel shifting of the level profile without changing the frequency response, also referred to in the following text as scaling), such that, in predetermined frequency ranges, the interval between this target function and the sum function of the level profile of all the loudspeaker groups to be considered and to be adjusted by the automatic equalizing process is not greater than the maximum increase or decrease as determined using the above method in the level profile of the individual loudspeaker groups.

[0068] The specified frequency ranges in which the level profiles of the target function and sum function of all the loudspeaker groups are compared, may, for example be oriented to the transmission bandwidths of the loudspeaker groups being used, but preferably to the Bark scale, as explained further above, that is to say in the region of frequency-group wide frequency ranges or partial ranges, thus once again taking account of the physiological hearing capability of the human hearing in this case in particular tone level perception and volume sensitivity (loudness).

[0069] The results of the loudspeaker settings achieved by the two "sequential" and "MaxMag" methods on the basis of the embodiment described above were obtained by hearing trials with suitable subjects, that is to say subjects with experience in the assessment of sound environments produced by sound systems. In this case, these trials were carried out in order to assess the major parameters of the hearing impression, such as location capability, tonality and staging for in each case four seat positions in the passenger compartment of a motor vehicle. These seat positions comprise the driver, front-seat passenger, rear left and rear right.

[0070] For the method based on the "MaxMag" method, these hearing trials showed the tonality of the sound impression was found to be highly positive both on the front seats and on the rear seats. One disadvantage in the assessment of the use of the "MaxMag" method was that a deterioration in the localization and localization clarity and hence also of the staging, was perceived at all of the seat positions.

[0071] Because the process based on the "MaxMag" method for equalizing of the individual loudspeaker groups first of all places the major emphasis on that loudspeaker group whose variation (raising or lowering) approximates the sum function over all the loudspeaker groups with the greatest contribution to a predetermined target function, an automated process can result in an unsuitable processing sequence of the loudspeaker groups. For example, it is possible for a situation to occur in which the automated algorithm for equalizing first of all identifies, in the case of the loudspeaker group for the front loudspeakers, the greatest contribution for the desired approximation to the target function, and correspondingly strongly raises or lowers its level profile.

[0072] As is known from the descriptions provided further above, however, the front loudspeakers in particular contribute a major proportion to, for example, good staging and, furthermore, this relates to their transmission quality, they are relatively unproblematic in comparison to other loudspeaker groups in the sound system by virtue of the installation location and the loudspeaker quality which can thus be used. In a situation such as this, further loudspeaker groups which may have disturbing spectrum components that have an adverse effect on the location capability will no longer be included in the automatic equalizing process, resulting in the parameters becoming worse, in the manner which has been mentioned.

[0073] For the process based on the "sequential" method, the hearing trials resulted in very good channel separation and localization clarity for the offered audio signals in all seat positions. Although very good tonality was also achieved, at the front seat positions using the "sequential" method, this tonality at the rear seat position became considerably worse as a result of the variation of the loudspeaker groups dealt with first according to the method, with the degree of this deterioration increasing in proportion to the respective maximum permissible raising or lowering in the respective loudspeaker groups. This means that the process based on the "sequential" method, despite the already introduced reduction in the maximum decrease or increase in the individual loudspeaker groups, in particular in the first loudspeaker

groups in the predetermined sequence of processing, still results in an automatic algorithm producing excessive variation.

[0074] In the embodiments of the automatic equalizing process investigated so far, neither of the two methods used always produce good results in the hearing tests carried out, although the "sequential" method appeared overall to be advantageous in comparison to the "MaxMag" method. Further modifications to the described methods are investigated in the following text in order to achieve both good localization and good tonality in an automated process, and to achieve both of these at both the front and rear seat positions in the passenger compartment of a motor vehicle.

[0075] The further investigations have shown that, when using the "sequential" method, an even greater restriction to the permissible reduction in the level of the loudspeaker groups, in particular of the first loudspeaker groups in the respective specified sequence, made it possible to achieve a result which was satisfactory for all seat positions even for tonality as the hearing sensitivity. This was not satisfactory at the rear seat positions with the previous embodiment for automatic equalizing. As mentioned further above, the target function to be achieved is raised or lowered over its entire level profile (scaling, parallel shifting of the level profile without variation of the frequency response), such that the interval between this target function and the sum function of the level profile of all the loudspeaker groups to be considered and to be adjusted by the automatic equalizing process is no greater in predetermined frequency ranges than the maximum permissible increase or decrease in the level profile of the individual loudspeaker groups in the respective frequency range.

[0076] This means that the target function to be approximated by the equalizing process is aligned by virtue of this scaling in its absolute position at the minimum level of the sum function of the level profile of all the loudspeaker groups to be considered, which generally leads to a reduction, which in some cases is considerable, in this target function to be approximated, since the sum function of the level profile of all the loudspeaker groups to be considered normally has a highly fluctuating profile with pronounced maxima, and, in particular, minima. It is thus desirable to vary the sum function of the level profile of all the loudspeaker groups to be considered in a previous processing step such that these pronounced maxima and in particular minima, no longer occur and, as a consequence of this, the matching or scaling of the absolute position of the target function to this sum function results in far less reduction in the original specified target function.

[0077] This is achieved in the following text by matching, which is referred to as "pre-equalizing" of the levels of the individual loudspeaker groups (not the sum function) to the target function of the level profile, with this pre-equalizing process being coordinated with the equalizing of the phases as already described further above and as carried out even before the equalizing, in which the phases are matched by equalizing such that signals from the respective loudspeaker groups arrive as far as possible in phase at the left ear and at the right ear. This previous pre-equalizing of the individual loud speaker groups also results in the sum function that results from the level profiles of the individual loudspeaker groups being approximated at this stage to the target function to such an extent that the problem described above of major reduction in the target function as a consequence of pronounced minima in the sum function no longer occurs.

[0078] The equalizing values which are determined in the course of the pre-equalizing process may in this case be used as initial values for the subsequent, final equalizing by means of the "sequential" method. However, before the addition of the level profile over all of the loudspeaker groups, the levels of the loudspeaker groups as approximated to the target function in a first step by means of the pre-equalizing process must, however, be matched to one another within their frequency ranges which are bounded by the respectively associated crossover filters. This matching process is necessary because the efficiency of the various loudspeaker groups may be different, and it is desirable for each loudspeaker group to produce volume sensitivity that is identical as possible, which, when the volume sensitivity is the same for the sound components of the various loudspeaker groups, can lead to these loudspeaker groups being operated at considerably different electrical voltage levels in order to produce these sound components.

[0079] The level difference between the groups is also amplified by the pre-equalizing process, because the dynamic range of the equalizer is designed such that major reductions, but only slight increases, are permitted. If the frequency response of a group differs to a major extent from the target function, a considerable level reduction must therefore be expected. Major level increases are therefore not permissible, because they will be perceived as disturbing, particularly in conjunction with high filter Q factors.

[0080] As it has been possible to verify in appropriate hearing trials and measurements, the desired result of the described method is obtained in that, once the equalizing steps have been carried out, the transmission response of all the loudspeaker groups is maintained over a broad bandwidth and the loudspeaker groups each in their own right make a contribution to the overall sound impression, which leads to good tonality and the largest possible sweet spot at all four passenger locations under consideration.

[0081] Furthermore, the resultant sum transfer function, that is to say the addition of the level profiles over all of the loudspeaker groups, is approximated by the step of pre-equalizing in its own right to the target function of the desired level frequency response to such an extent that this target function need no longer be reduced to such a major extent in the scaling process with respect to the sum function minima, which are in consequence less pronounced. As described above, this is once again a precondition for the use according to the invention of one of the two methods already described ("sequential" and "MaxMag") for automatic equalizing of the sum of the level profiles of all the loudspeaker groups in the sound system, in order, in the end, also to obtain a balanced sound impression at all seat positions.

[0082] So far, the equalizing of the loudspeakers has always been carried out in groups of more than one loudspeaker. However, more extensive investigations have shown that equalizing of each individual loudspeaker in all the loudspeaker groups (forming groups of only one loudspeaker each) on the basis of the magnitude and phase made it possible to achieve even better results, although this process resulted in the previously achieved strict symmetry of the sound field now no longer being obtained. In this case, the advantages of individual equalizing of all the individual loudspeakers was evident not only at one location in the passenger compartment of the motor vehicle, for example the driver's seat position, but also at the other seat positions.

[0083] One precondition for this is that the results of the transfer functions recorded binaurally at different seating positions using the described measurement method are included with appropriate weighting in the definition of the equalizing filters. As expected, it was possible to achieve the best results by equal weighting of the binaurally measured transfer functions. This equated consideration of the spatial transfer functions of the left and right hemisphere leads to quasi-balanced acoustics in the vehicle interior even though the equalizing filters are now set on a loudspeaker-specific basis.

[0084] This equalizing process on an individual loudspeaker basis increases the number of filters to be considered individually by virtually 50%, since a dedicated equalizing filter and thus a dedicated filter coefficient set are now also required in each case in the algorithm for automatic equalizing, per loudspeaker, for the loudspeaker groups which are arranged symmetrically with respect to the longitudinal axis of the vehicle interior and whose transfer function as in the past in each case was equalized by means of a common equalizing filter. The additional complexity which results from this and the consequently more stringent requirements for the computation power of the digital signal processor for provision of the equalizing filters, appear in the opinion of the inventors to be justified, however, since the results of the hearing tests in some cases resulted in considerable and significant improvements in the perceived hearing impression.

[0085] The two-stage procedure described so far, with pre-equalizing followed by equalizing of the sum function of the transfer function of all the loudspeakers, was retained, with both pre-equalizing and equalizing now being carried out on a loudspeaker-specific basis, by virtue of the described advantages. In contrast to the previous sequence of the processing steps, the matching of the channel gain was, however, no longer carried out subsequently but after the pre-equalizing has been carried out. In this case, both the matching of the channel gains and the adjustment of the crossover filters are carried out directly as before, for each loudspeaker group.

[0086] This means that the transfer functions of the individual loudspeakers of a symmetrically arranged pair of stereo loudspeakers in each case have the same channel gain and the same crossover filter applied to them. This stipulation has been made since, in the course of the investigations, situations occurred in which, when using loudspeaker-specific channel gains, particularly in the case of woofer loudspeakers, major differences in some cases occurred in the individual channel gains, which shifted the sound impression in an unnatural and undesirable manner in space. Problems of the same type would also occur if the crossover filters were designed on a loudspeaker-specific basis. A loudspeaker-specific crossover filter would admittedly make it possible for each loudspeaker in a loudspeaker group, normally a loudspeaker pair, to be operated with maximum efficiency in its frequency range, but loudspeaker environments or installation conditions which are not the same can result in situations in which the transmission range of one loudspeaker in a loudspeaker group differs to a major extent from that of another loudspeaker in the same loudspeaker group. If the crossover filters in a situation such as this were designed on a loudspeaker-specific basis, this could likewise lead to undesirable spatial shifts in the resultant sound impression.

[0087] After carrying out the crossover filtering, the loudspeaker-specific pre-equalizing both of the phase response and of the magnitude frequency response, as well as the matching of the channel gain, fine matching of the sum transfer function is now carried out, that is to say of the sum of the level profiles of all the loudspeakers involved, to the target function. In contrast to the previous procedure, the process based on the "MaxMag" method is in this case preferred to the process based on the "sequential" method. Since the pre-equalizing process is now carried out on a loudspeaker-specific basis, only a small number of narrowband frequency ranges of individual loudspeakers now need to be modified by the filter algorithm in order to achieve the desired approximations of the target function, and the broadband and major level changes produced by the equalizing filters, which in the past when using the "MaxMag" method have led to the undesirable results in terms of the location capability, no longer occur. The results of the hearing trials confirm that, for using the loudspeaker-specific pre-equalizing process, a good localization capability is now achieved even with the process for automatic equalizing based on the "MaxMag" method, in which case the tonality was also additionally improved by the previous loudspeaker-specific pre-equalizing process.

[0088] In contrast, the use of the process based on the "sequential" method in conjunction with loudspeaker-specific equalizing may now have considerable disadvantages, which are evident in the form of major spatial shifting of the sound impression. This is due to the fact that the first individual loudspeaker in the processing chain in the sequence defined in the "sequential" method will in the worst case have its transfer function in all of the relevant frequency ranges change, normally by being reduced, by the equalizing filters to such a major extent that the distance from the target function becomes minimal (as is the aim of this method). If this aim has already been achieved adequately by the first individual loudspeaker, all of the subsequent loudspeakers would no longer be processed any further by the automatic algorithm,

in particular and in addition not the partner in the balanced loudspeaker pair with which the individual loudspeaker whose transfer function has been changed is associated. This will result in a broadband and one-sided, for example, reduction in the level profile in the frequency range of the relevant individual loudspeaker, which would lead to undesirable spatial shifting of the location of the perception of the sound events.

[0089] If required, this effect could be counteracted by in each case still applying the process based on the "sequential" method to each of the known loudspeaker groups jointly irrespective of the loudspeaker-specific pre-equalizing. However, investigations have shown that the changed initial situation resulting from the loudspeaker-specific pre-equalizing for the process of the equalizing based on the "sequential" method leads to poorer results in comparison to the "sequential" method with pre-equalizing being carried out in groups so that this method was no longer considered any further subsequently in conjunction with loudspeaker-specific pre-equalizing.

[0090] A renewed investigation of the influence of non-linear smoothing showed that excessive smoothing (for example third averaging) led to a "lifeless", "soft" or "washed-out" sound impression, while in contrast, no smoothing or only excessively weak smoothing (for example third/12 averaging) resulted in an excessively "hard", "piercing" sound impression. Therefore third/8 averaging may be a good compromise.

[0091] As stated further above, the crossover filters were adjusted manually in the course of the previous investigations, for simplicity reasons. In the following, an approach is searched for in order to carry out this adjustment process automatically as well, since the aim of the present invention is to develop automatic equalizing, which is as comprehensive as possible and covers all aspects, of a sound system in a motor vehicle, including the adjustment of the crossover filters in the automatic equalizing process, as well.

[0092] The following disclosure relating to the automatic adjustment of the crossover filters is based on the assumption that Butterworth filters of a sufficient order are, in principle, sufficient for the desired delineation of the respective frequency response of the relevant loudspeaker. The empirical values of acousticians, maintained over many years, for the equalizing of sound systems show that fourth-order filters are adequate both for high-pass and low-pass filters in order to achieve the desired crossover filter quality. A higher-order filter would result in advantages, for example by having a steeper edge gradient, however the amount of computation time required for this purpose for implementation in digital signal processors would rise in a corresponding manner at the same time. Fourth-order Butterworth filters are therefore used in the following text.

[0093] The transfer function of the left rear loudspeaker, measured binaurally using the described measurement method and averaged over the recordings at the driver's seat and the front-seat passenger's seat, is shown in comparison to the target function being used in the top left of Figure 3. As can be seen in this case, it appears from this illustration to be difficult, particularly in the lower frequency range, to define a lower cut-off frequency of the crossover high-pass filter from the profile of the measured transfer function in comparison to the profile of the target function. In contrast, a suitable upper cut-off frequency of a crossover low-pass filter can be determined quite easily in the present case.

[0094] The right-hand upper illustration in Figure 3 shows the same transfer function for the left rear loudspeaker, measured binaurally using the described measurement method and averaged over the recordings at the driver's seat and front-seat passenger's seat in comparison to the target function used, after carrying out the pre-equalizing process according to the invention. As can be seen, the range boundaries of the transfer function of the investigated broadband loudspeaker stand out in a significantly more pronounced manner and can be read from the graph without any difficulties. In this case, personnel who are experienced in this special field are assisted by practice in handling the representation and the meaning of such transfer functions. However, in conjunction with carrying out an automated equalizing process, this raises the question of how the definition of the cut-off frequencies of a crossover filter can be determined sufficiently accurately and reliably with the aid of an algorithm.

[0095] The algorithm which has been developed for this purpose is described in the following. In a first step, the difference is formed between the target function and the transfer function of the respective loudspeaker as determined after the pre-equalizing process. The result associated with the example under discussion is shown in the illustration at the bottom left in Figure 3. This difference transfer function, which is also referred to for short in the following text as the difference, is then investigated in the next step, to determine the frequency of this difference function at which it is within, above, or below a specific, predetermined limit range. The threshold values defined in the illustrated example form a symmetrical limit range with limits at, for example, +/-6 dB around the null point of the difference function which results at all frequencies at which the transfer function as determined after pre-equalizing at a level corresponding to the target function.

[0096] Since, as stated further above, the human hearing inter alia has a frequency resolution related to the frequency, the difference transfer function as calculated from the measured data and the target function was introduced into a level difference function, which had been smoothed by averaging, before evaluation of whether the limit range had been overshot or undershot. The mean value at the respective frequency is in this case preferably calculated from empirical values over a range with a width of 1/8 third octave band (in the following mentioned just as "third"). This means that the frequency resolution of the smoothed level difference function is high at low frequencies and decreases as the frequency increases. This corresponds to the fundamental frequency-dependent behaviour of the human hearing to

whose characteristics the illustration of the level difference function in Figure 3 is thus matched.

[0097] The level difference spectrum is then smoothed once again in a further processing step with the aid of a simple first-order IIR low-pass filter in the direction from low to high frequencies and in the direction from high to low frequencies in order to eliminate bias problems and smoothing-dependent frequency shifts resulting from them. The level difference spectrum processed in this way is now compared by the automatic algorithm with the range limits (in this case +/-6 dB), and this is used to form a value for the trend of the profile of the level difference spectrum. In this case, the value "1" for this trend denotes that the upper range limit has been exceeded at the respective frequency of the level difference spectrum, while the value "-1" indicates that the lower range limit of the level difference spectrum has been undershot at the respective frequency, and the value "0" for the trend indicates level values of the level difference spectrum at the respective frequency which are within the predetermined range limits. The result in evaluations such as this can be seen in the illustration at the bottom right in Figure 3, with the graph in red showing the described and calculated trend of the level difference spectrum at the respective frequency.

[0098] Despite the described smoothing of the signal of the level difference spectrum before evaluation of the trend, if the level difference spectra are initially unknown in an automated method, that is to say when using an automatic algorithm, it is possible for a situation to occur in which predetermined range limits are exceeded within a relatively narrow spectral range when, for example, the loudspeaker and/or the space into which sound is being emitted have/has a narrowband resonance point, and the profile of the level difference spectrum then falls again below the predetermined range limit (situations of the same type can also occur when the predetermined range limits are undershot). In situations such as these, the previously described method cannot determine clear cut-off frequencies for the crossover filters.

[0099] Thus, in a further processing step, the level values determined by averaging using a filter in each case with a width of 1/8 third are thus investigated for the frequency of successive overshoots and undershoots of the predetermined range limits. Only when a specific minimum number (which can be predetermined in the algorithm) of related overshoots and undershoots of the predetermined range limits is overshot at successive frequency points is this interpreted by the algorithm as reliable overshooting or undershooting of the predetermined range limits, and thus as a frequency position of a cut-off frequency of the crossover filter. In the present case, with range limits of +/-6 dB and with smoothing of the level profile using filters with a width of 1/8 third, and a level spectrum resulting from this with discrete level values separated by 1/8 third, this minimum number of associated level values which overshoot or undershoot the range limits (+/-6 dB) is typically about 5-10 level values.

[0100] Depending on whether the respective loudspeakers that are being dealt with by the algorithm are loudspeakers designed to have a broadband or narrowband transmission response, upper and lower frequency ranges are predetermined within which the upper and lower cut-off frequency of the respective loudspeaker type will move, from experience, or on the basis of the characteristic data for that loudspeaker. In this way, the automatic algorithm can be designed to be very robust and appropriate by the addition of parameters or parameter ranges known in advance. In the case of the broadband loudspeakers that are used in the present case, by way of example, a minimum, lower cut-off frequency of f_{gu} = 50 Hz can be assumed, while in the case of narrowband loudspeakers (woofers) used in the low-tone range, an upper cut-off frequency of f_{go} = 500 Hz can be assumed. If the largest found and related level overshoot or level undershoot range is now located within the frequency range delineated in this way, the extreme value of the level overshoot and/or level undershoot is now looked for within this frequency range (maximum and minimum in the level profile).

[0101] If, in this case, this extreme value of the largest found and related level overshoot or level undershoot range is in this case below a specific cut-off frequency (for example about 1 kHz), and if this extreme value furthermore also has a negative value (minimum), then the decision is made to use a high-pass filter for the sought crossover filter. In order to find the cut-off frequency of this high-pass filter, a search is now carried out, starting from the frequency of the minimum, in the direction of higher frequencies within the level difference function as determined after pre-equalizing for its first intersection with the 0 dB line. This frequency denotes the filter cut-off frequency of the crossover high-pass filter.

[0102] If the extreme value of the largest found and related level overshoot or level undershoot range is above a specific cut-off frequency (for example about 10 kHz), and if this extreme value furthermore also has a negative value (minimum), then the decision is made to use a low-pass filter for the sought crossover filter. In order to find the cut-off frequency of this low-pass filter a search is now carried out starting from the frequency of the minimum in the direction of lower frequencies within the level difference function as determined after pre-equalizing, for its first intersection with the 0 dB line. This frequency denotes the filter cut-off frequency of the crossover low-pass filter.

[0103] If a plurality of extreme values exist, in which case at least the two most pronounced must be of a negative nature, and if the first minimum is below a specific cut-off frequency (for example about 1 kHz) and the other minimum is above a specific cut-off frequency (for example about 10 kHz), then the decision is made to use a bandpass filter for the sought crossover filter. In order to find the cut-off frequencies of this bandpass filter, a search is now carried out starting from the frequency of the minimum which is below the cut-off frequency of, for example, about 1 kHz in the direction of higher frequencies within the level difference function determined after the pre-equalizing, for its first intersection with the 0 dB line, and from the other minimum from its frequency in the direction of lower frequencies, for the first intersection with the 0 dB line. These frequencies then denote the filter cut-off frequencies of the crossover bandpass

filter as the result of the automatic algorithm according to the invention. If applied to the example as illustrated in Figure 3, this results in a crossover bandpass filter with a lower cut-off frequency of f_{gu}= 125 Hz and an upper cut-off frequency of f_{go} = 7887 Hz.

[0104] The crossover filter cut-off frequencies for all of the broadband loudspeakers in the medium and high-tone range of the sound system to be regulated and to be equalized are determined and set in the manner described above. The crossover filter cut-off frequencies of the narrowband low-tone loudspeakers must be dealt with separately, in further steps, and are restricted here just to logical range limits which, however, still need not represent final values. In general, the lower range limit of the crossover filters for the low-tone loudspeakers remains after the above processing at its lower cut-off value of f_{gu}= 10 Hz while, in contrast, the upper range limit is generally governed by the lowermost cut-off frequency of all of the broadband loudspeakers, provided that this is greater than the lower cut-off frequency of the broadband loudspeakers (for example about 50 Hz). This prior stipulation is important for the described method because, once all of the crossover filter cut-off frequencies have been set, the complete automatic equalizing process (AutoEQ) is carried out once again in order to achieve a more accurate approximation to the target function, with the crossover filters being taken into account, in a second run. The final range limits of the crossover filters for the low-tone loudspeakers can then be looked for as will be described in the following text.

[0105] Once, as described above, the crossover filters of all of the broadband loudspeakers have been defined and the crossover filters of the narrowband loudspeakers in the low-tone range have been preset to suitable values, the search for better filter cut-off frequency values for the low-tone loudspeakers can be started. This procedure is necessary because the frequency transition from the narrowband loudspeakers for low-tone reproduction to the broadband loudspeakers depends on the nature and number of the low-tone loudspeakers being used and thus cannot easily be determined in a comparable manner.

[0106] In principle, a distinction is drawn between two typical situations for adjustment of the crossover filter cut-off frequencies, with the lower spectral range of the low frequencies being modelled by only one sub-woofer or only one woofer stereo pair in the first situation and with the lower spectral range of the low frequencies being modelled by a woofer stereo pair together with a sub-woofer in the other situation. Irrespective of which of the two situations is appropriate, the crossover filter cut-off frequencies of the woofers are in this case always defined and determined in the same way and a distinction is just drawn in the calculation of the crossover filter cut-off frequencies for the sub-woofer between the two situations mentioned above. The crossover filter cut-off frequencies of the sub-woofer are in this case calculated in the same way as that for the woofer stereo pair in the situation in which only one subwoofer and no woofer stereo pair is used. Only in the situation in which a woofer stereo pair is also present in addition to the sub-woofer is the way in which the crossover filter cut-off frequencies of the sub-woofer are calculated changed.

[0107] As shown in the illustration at the top left in Figure 4, particularly in the case of the transition from the woofer loudspeakers to the broadband loudspeakers in the range from about 50 Hz to about 150 Hz, there is a peak in the sum magnitude frequency response (blue curve in Figure 4, illustration top left) with respect to the target function. In this case, it should be noted that the sum magnitude frequency response was formed only from the level contributions of the broadband loudspeakers and the level contributions of the woofer loudspeakers. Any sub-woofer loudspeaker which may be present is in this case ignored at this stage. In order to keep the peak in the sum magnitude frequency response within the transitional range as small as possible, or in order to match this transitional range to the target function as well as possible, as indicated by the boundary lines in the illustrations in Figure 4, a search for a difference which is as balanced as possible between the sum transfer function after pre-equalizing (blue curve Figure 4, illustration top left) and the target function (black curve in Figure 4, illustration top left) carried out only in an upper and lower spectral range. The upper spectral range within which a search is carried out for a minimum distance in this case results from the upper filter cut-off frequency of the woofer loudspeakers, which has already been determined prior to this, that is to say during the search for the crossover filter cut-off frequencies of the broadband loudspeakers. In this case, the minimum from the double upper filter cut-off frequency and the maximum permissible upper filter cut-off frequency of the low-tone loudspeakers which, as stated above, was defined to be f_{go} = 500 Hz, determines the upper limit of the upper spectral range while half its value determines the associated lower limit of the upper spectral range. The lower limit of the lower spectral range for the search for the cut-off frequency results, in contrast to this, from the maximum of the minimum permissible lower filter cut-off frequency of the low-tone loudspeakers which, as stated above, was set to f_{gu} = 10 Hz, and from half of the lower filter cut-off frequency, as already found. The upper limits of the lower spectral range for searching for the cut-off frequency results from twice the value of the lower limit.

[0108] The decision as to whether the upper or the lower cut-off frequency of the crossover filter for the woofer loudspeakers should be reduced or increased is, however, not made directly from the profile of the difference between the sum magnitude frequency response and the target function (distance) but from the previously smoothed level profile, as is illustrated by way of example in the illustration top right in Figure 4.

[0109] As mentioned further above, the procedure for determination of the crossover filter cut-off frequencies for the relevant loudspeakers or loudspeaker groups is identical in the situation in which the sound system either comprises only a single sub-woofer loudspeaker, or a stereo pair formed from woofer loudspeakers. The following text explains

and describes the transfer functions and level profiles of a single sub-woofer or of a woofer stereo pair, as well as the procedure for determination of the associated crossover filter cut-off frequencies.

[0110] In this case, once again the filter cut-off frequency or the filter cut-off frequencies of the sought crossover filter for the woofer loudspeakers has or have its or their frequency varied within the permissible limits of the lower or upper spectral range, respectively, for as long as it is possible in this way to reduce the magnitude of the mean value, formed from the profile of the difference between the sum magnitude frequency response and the target function (distance). If the magnitude of the mean value of the distance of the upper spectral range is in this case greater than that of the lower spectral range, depending on whether the mean value of the distance of the upper spectral range is positive or negative, the filter cut-off frequency of the upper crossover filter is reduced at most until the filter cut-off frequency of the lower crossover filter is reached, or is increased at most until the maximum permissible filter cut-off frequency of the low-tone loudspeakers (about 500 Hz) is reached. If, in contrast to this, the magnitude of the mean value of the distance in the upper spectral range is less than the mean value of the distance in the lower spectral range then, depending on whether the mean value of the distance of the lower spectral range is positive or negative, the filter cut-off frequency of the lower crossover filter is reduced at most until the minimum permissible filter cut-off frequency of the low-tone loudspeakers (about 10 Hz) of the lower crossover filter is reached or is increased at most until the filter cut-off frequency of the upper crossover filter is reached.

[0111] After the appropriate number of runs, this method leads to crossover filters whose filter cut-off frequencies are set such that they have reached either their minimum or their maximum permissible range limits, or are located within the frequency range predetermined by these range limits and are set such that the magnitude of the mean value of the distance between the lower range limits of the lower spectral range and the upper range limits of the upper spectral range is minimized. This is illustrated, once again by way of example, in the two lower illustrations in Figure 4, with the left-hand illustration once again showing the magnitude frequency responses of the transfer function and the right-hand illustration showing the frequency responses of the level functions. As mentioned further above, this method is used when the sound system either has only a single sub-woofer loudspeaker for low-tone reproduction or has only one stereo pair, formed from woofer loudspeakers.

[0112] The following text describes the procedure for determination of the cut-off frequencies of the crossover filters for the situation in which the sound system comprises not only the stereo pair as described above, formed from woofer loudspeakers, but at the same time, in addition to this, a sub-woofer loudspeaker as well. The method according to the invention is in this case dependent on the filter cut-off frequencies of the crossover filters for the stereo pair that is formed from woofer loudspeakers in this situation being calculated in advance and being already available, since these are used as input variables for determination of the filter cut-off frequencies of the crossover filter for the sub-woofer.

[0113] In order to set the filter cut-off frequencies of the crossover filter for the sub-woofer loudspeaker, its upper cut-off frequency is first of all set as a start value to the value of the upper cut-off frequency of the upper crossover filter of the woofer loudspeakers, and the already previously determined lower filter cut-off frequency is used to determine the new lower and upper range limits for the permissible filter cut-off frequencies in the same way as that which has already been described for the woofer loudspeakers.

[0114] This further restriction to the permissible frequency range of the upper filter cut-off frequencies of the crossover filter for the sub-woofer by means of the algorithm, which generally represents a reduction in the frequency range in the direction of lower frequencies is necessary in order to prevent the sub-woofer from reproducing excessively high frequencies. The major object of a sub-woofer which is optionally used as a single loudspeaker in the sound system is to reproduce a sound component in a frequency range in which the human hearing cannot carry out any spatial location. The range of operation of a sub-woofer in this case ideally covers the frequency range up to about 50 Hz, with this being dependent on the respective installation situation and the characteristics of the area into which sound is intended to be output, so that, in principle, it therefore cannot be defined exactly in advance.

[0115] The filter cut-off frequencies of the crossover filters for the sub-woofer loudspeaker are now found in a different way than would be the case if the sub-woofer were to be the only loudspeaker responsible for reproduction of the low frequencies of the sound system. In a first step, the sum magnitude frequency responses are in each case determined for this purpose with and without inclusion of the subwoofer loudspeaker and the corresponding target functions are determined for each of these two sum magnitude frequency responses, and the respectively associated difference transfer functions are calculated. These are then once again averaged using the described methods and are in each case changed to the appropriate level function.

[0116] The top left illustration in Figure 5 in this case shows the magnitude frequency responses of the target function, of the difference function as well as of the sum function including the sub-woofer and the range limits derived from this for the permissible upper and lower spectral range for the filter cut-off frequencies of the crossover filters for the sub-woofer loudspeaker. The top right illustration in Figure 5 in contrast shows the unaveraged and averaged level functions of the differences, in each case with and without a sub-woofer. As can be seen from this, the difference function is increased by inclusion of the sub-woofer loudspeaker, that is to say the discrepancy is undesirably increased.

[0117] The filter cut-off frequencies of the crossover filters for the sub-woofer loudspeaker must therefore be changed

by the algorithm in order once again to achieve a distance which is at least just as short from the target function, as was the case without consideration of the sub-woofer. This iterative method is continued until the system including the sub-woofer is at a distance from the target function which is at most just as great as was the case previously for the sound system without a sub-woofer. In this case, the difference between the sound system without a sub-woofer loudspeaker, as previously determined in the processing step, and the target function is used as a reference for this iteration.

[0118] The resultant magnitude frequency responses after successful iteration are illustrated in the bottom left illustration of Figure 5, and the associated level frequency responses are illustrated in the bottom right illustration in Figure 5. This shows how the difference functions with the sub-woofer included behave before and after the iteration. After carrying out the iteration, the difference function, particularly in the upper of the two permissible spectral ranges for the filter cut-off frequencies of the crossover filters is considerably reduced, as desired, from the state before processing of the iteration.

[0119] Furthermore, a considerably more uniform profile of the difference function can now also be achieved overall than was previously the case without use of the sub-woofer. The reduction in the upper filter cut-off frequency of the crossover filter for the sub-woofer makes it possible to achieve a sum magnitude frequency response, by carrying out the automatic algorithm, whose distance from the target function is at the same time reduced and which furthermore has a more uniform profile, thus leading to a considerable improvement in the transfer function of the sound system in comparison to a sound system without use of a sub-woofer.

[0120] Once all of the cut-off frequencies of the crossover filters have been determined using the method described above, the complete automatic algorithm of the equalizing process is carried out once again, but with the previously determined cut-off frequencies of the crossover filters remaining fixed, and not being modified again in this repeated run. In this case, the impulse responses are determined using the crossover filters defined in the meantime, first of all for all of the individual loudspeakers in the sound system, as well as for all the loudspeakers jointly - once with and once without a sub-woofer - before running through the algorithm for automatic equalizing (AutoEQ) once again, that is to say once the phase equalizing and loudspeaker-specific pre-equalizing have already been carried out. The associated results are illustrated in Figure 6. In this case, Figure 6 shows the measured transfer functions for the front left and front right individual loudspeakers (Front-Left and FrontRight in Figure 6), for the left side and right side individual loudspeakers (SideLeft and SideRight in Figure 6), for the rear left and rear right individual loudspeakers (RearLeft and RearRight in Figure 6), for the woofer individual loudspeakers on the left and right (WooferLeft and WooferRight in Figure 6), the centre loudspeaker (Center in Figure 6), the sub-woofer loudspeaker (Sub in Figure 6), and for all of the loudspeakers jointly without any sub-woofer loudspeaker (Broadband-Sum+Woofer in Figure 6) and for all of the loudspeakers jointly including a sub-woofer loudspeaker (Complete Sum), in this case all in comparison to the defined target function (Target Function in Figure 6). In this case, the settings and values determined in the first run through the AutoEQ algorithm are likewise used for the loudspeaker-specific pre-equalizing filters and for the phase-equalizing filters.

[0121] In the next step, the process according to the "MaxMag" method is used to form the optimized sum transfer function. The associated result is shown in Figure 7, once again for the frequency range up to about 3 kHz which governs the localization capability and the tonality.

[0122] As can be seen from Figure 7, the equalizing of the sum function which is carried out in this run by the automatic algorithm using the "MaxMag" method once again produces a better approximation to the target function in comparison to the sum function shown in Figure 6. In this embodiment of the algorithm, only the lowest spectral range of the transfer function under consideration up to about 30 Hz exhibits a somewhat poorer approximation to the target function, with discrepancies up to about 3 dB. One major reason for this is the embodiment of the FIR filters that are used for the equalizing, in this case the FIR filter for the sub-woofer loudspeaker, which, in the present example, was limited to a maximum length of 4096 summation steps or sampling points in the calculation, irrespective of the frequency.

[0123] An increase in the number of summation steps for approximation of the FIR filter while at the same time increasing the requirement for memory and computation complexity in the digital signal processor in order to improve the approximation to the target function at very low frequencies is possible at any time, and when desired also for FIR filters at higher frequencies. Since the effect of limiting the length of the FIR filters in the present case slightly affected only the frequency range below 30 Hz, however, this maximum length of 4096 calculation steps was also retained subsequently for all the FIR filters.

[0124] The following text describes the procedure for measurement of the impulse responses of the sound system and the procedure for formation of the sum functions of the transmission frequency responses and of the associated level profiles as a function of the frequency. In this case, the left illustration in Figure 8 shows the principle for the measurements of the binaural transfer functions for the front left and front right positions in the passenger compartment, using the example of the centre loudspeaker C, which in this case represents an example of the presentation of mono signals. Furthermore, the left illustration in Figure 8 shows the two front left FL_Pos and front right FR_Pos measurement positions and, associated with them, the positions simulated by the measurement microphones for the left ear L and the right ear R in each case at these measurement points. In this case, the transfer function from the centre loudspeaker C to the left ear position L of the front left measurement position FL_Pos is annotated H_FL_Pos_CL, and the transfer

function from the centre loudspeaker C to the right ear position R of the front left measurement position FL_Pos is annotated H_FL_Pos_CR, the transfer function from the centre loudspeaker C to the left ear position L of the front right measurement position FR_Pos is annotated H_FR_Pos_CL, and the transfer function from the centre loudspeaker C to the right ear position R of the front right measurement position FR_Pos is annotated H_FR_Pos_CR. As mentioned initially, the localization of mono signals depends essentially on inter-aural level differences IID and inter-aural delay-time differences ITD, which are formed by the transfer functions H_FL_Pos_CL and H_FL_Pos_CR on the left front seat position, and by the transfer functions H_FR_Pos_CL and H_FR_Pos_CR on the right front seat position, respectively.

[0125] In contrast, the right-hand illustration in Figure 8 shows the principle of the measurements of the binaural transfer functions for the front left and front right positions in the passenger compartment, using the example of the front loudspeaker pair FL (front left loudspeaker) and FR (front right loudspeaker), which in this case represent examples of the presentation of stereo signals. Furthermore, the right-hand illustration in Figure 8 once again shows the two measurement positions, front left FL_Pos and front right FR_Pos, as well as the associated positions which are modelled by the measurement microphones respectively for the left ear L and the right ear R at these measurement points. In this case, the transfer function from the front left loudspeaker FL to the left ear position L at the front left measurement position FL_Pos is annotated H_FL_Pos_FLL, the transfer function from the front left loudspeaker FL to the right ear position R at the front left measurement position FL_Pos is annotated H_FL_Pos_FLR, the transfer function from the front left loudspeaker FL to the left ear position L of the front right measurement position FR_ Pos is annotated H_FR_ Pos_FLL, the transfer function from the front left loudspeaker FL to the right ear position R at the front right measurement position FR_Pos is annotated H_FR_Pos_FLR, the transfer function from the front right loudspeaker FR to the left ear position L at the front left measurement position FL_Pos is annotated H_FL_Pos_FRL, the transfer function from the front right loudspeaker FR to the right ear position R at the front left measurement position FL_ Pos is annotated H_FL_ Pos_FRR, the transfer function from the front right loudspeaker FR to the left ear position L of the front right measurement position FR_Pos is annotated H_FR_Pos_FRL, and the transfer function from the front right loudspeaker FR to the right ear position R at the front right measurement position FR_ Pos is annotated H_FR_Pos_FRR. The transfer functions for the further loudspeaker groups, which are arranged in pairs and comprise the woofer, the loudspeakers arranged at the side and the rear loudspeakers, are obtained in a corresponding manner. The addition of the sum transfer functions and sum levels resulting from these transfer functions and the weightings of the measurement points, for the complete sum transfer function of the sound system, can easily be derived from the exemplary description of the situations for mono signals and stereo signals shown in Figure 8, and will therefore not be described in detail here.

[0126] As already mentioned further above, the respective binaural transfer functions in the form of impulse responses of the sound system and of its individual loudspeakers and loudspeaker groups are, however, measured not only at the two front seat positions but also at the two rear positions, in the case of a vehicle which has a second row of seats. The algorithm can be extended to, for example, the seat positions in a third row of seats, for example as in minibuses or vans, by appropriate distribution of the weighting of the components for the seat positions at any time. However, the invention is not restricted to vehicle interior but is also applicable with all kinds of rooms, for example living rooms, concert halls, ball rooms, arenas, railway stations, airports, etc. as well as under open air conditions.

[0127] For all of the embodiments, it can be stated in this case, that the large number of measured transfer functions of a single loudspeaker must be combined at the left and right ear positions at the respective seat positions to form a common transfer function, in order to obtain a single representative transfer function for each individual loudspeaker in the sound system, for processing in the algorithm for automatic equalizing. In particular, the weighting with which the transfer functions at the various seat positions are in each case included in the addition process for the transfer function, can in this case be chosen differently depending on the vehicle interior (vehicle type) and preference for individual seat positions.

[0128] By way of example, the following text describes a procedure which has been used in the course of the investigations relating to the present invention, although the algorithm according to the invention is not restricted to this procedure. As described further above, for the addition of the transfer functions to form the overall transfer function of an individual loudspeaker, the respective components at the various seat position are weighted, to be precise, both for the magnitude frequency response and for the phase frequency response, at the various seat positions. The annotations for a vehicle interior with two rows of seats are in this case as follows:

- α the weighting of the component of the magnitude frequency response at the front left seat position,
- β the weighting of the component of the magnitude frequency response at the front right seat position,
- γ the weighting of the component of the magnitude frequency response at the rear left seat position,
- δ the weighting of the component of the magnitude frequency response at the rear right seat position,
- ε the weighting of the component of the phase frequency response at the front left seat position,
- Φ the weighting of the component of the phase frequency response at the front right seat position,
- φ the weighting of the component of the phase frequency response at the rear left seat position,
- η the weighting of the component of the phase frequency response at the rear right seat position.

[0129] In this case, $\alpha = 0.5$, $\beta = 0.5$, $\gamma = 0$ and $\delta = 0$ are used for the weighting of the components of the magnitude frequency response for the examples described in the following text and $\varepsilon = 1.0$, $\Phi = 0$, $\varphi = 0$ and $\eta = 0$, are used for the weighting for the components of the phase frequency response, that is to say that, in this example, only the measurements of the two front positions are used with the same weighting (in each case 0.5) for the calculation of the resultant magnitude frequency response, and the measurements for the driver position (generally front left, as here) are used on their own for determination of the resultant phase frequency response. The hearing tests carried out showed that it was possible to achieve very good results at all seat positions even with this very rough weighting, but in principle the automatic algorithm is designed for any desired distribution of the weightings and, since hearing tests with a statistically significant number of test subjects at all seat positions are highly time-consuming, the improvements in the hearing impression which can be achieved beyond this will be the subject matter of future investigations. It should be noted that the sum of all the weightings of the transmission frequency responses and of the phase frequency responses at the various seat positions in each case results in the value unity, irrespective of the number of seat positions to be measured.

[0130] The combination of all of the transfer functions for all of the positions in the case of the centre loudspeaker C (mono signal) for the microphone which in each case represents the left ear is accordingly:

$$H_CL = \alpha^* |H_FL_Pos_CL| + \beta^* |H_FR_Pos_CL| + \gamma^* |H_RL_Pos_CL| + \delta^* |H_RR_Pos_CL| * e^{j^* \angle(\varepsilon^* H_FL_Pos_CL + \phi^* H_FR_Pos_CL + \varphi^* H_RL_Pos_CL + \eta^* H_RR_Pos_CL)}$$

and for the microphone which in each case represents the right ear:

$$H_CR = \alpha^* |H_FL_Pos_CR| + \beta^* |H_FR_Pos_CR| + \gamma^* |H_RL_Pos_CR| + \delta^* |H_RR_Pos_CR| * e^{j^* \angle(\varepsilon^* H_FL_Pos_CR + \phi^* H_FR_Pos_CR + \varphi^* H_RL_Pos_CR + \eta^* H_RR_Pos_CR)}$$

[0131] The combined transfer functions determined in this way for the left and right microphones over all seat positions, in this case four seat positions, which correspond to the transfer functions added in a weighted form for the left and right ears, that is to say H_CL and H_CR, are then transformed from the frequency domain to the time domain using an inverse Fourier transform (IFFT) in which case only its real part is of importance here:

$$h_CL = Re\{IFFT\{H_CL\}\} \text{ and } h_CR = Re\{IFFT\{H_CR\}\}$$

[0132] In the next step, these real impulse responses are transformed back from the time domain to the frequency domain using the Fourier transform (FFT), and are then combined to form a transfer function of the H_C of the centre loudspeaker C:

$$H_CL = FFT\{h_CL\} \text{ and } H_CR = FFT\{h_CR\} \rightarrow H_C = H_CL + H_CR$$

[0133] Furthermore, in the case of the loudspeaker pair comprising the front loudspeakers FL and FR (stereo signal), the combination of all the transfer functions of all the positions for the microphone which represents the left ear in each case and for the left front loudspeaker FL is:

$$H_FLL = \alpha^* |H_FL_Pos_FLL| + \beta^* |H_FR_Pos_FLL| + \gamma^* |H_RL_Pos_FLL| + \delta^* |H_RR_Pos_FLL| * e^{j^* \angle(\varepsilon^* H_FL_Pos_FLL + \phi^* H_FR_Pos_FLL + \varphi^* H_RL_Pos_FLL + \eta^* H_RR_Pos_FLL)}$$

and for the microphone which in each case represents the right ear and the left front loudspeaker FL

$$H_FLR = \alpha^* |H_FL_Pos_FLR| + \beta^* |H_FR_Pos_FLR| + \gamma^* |H_RL_Pos_FLR| + \delta^* |H_RR_Pos_FLR|^* e^{j^* \angle(\varepsilon^* H_FL_Pos_FLR + \phi^* H_FR_Pos_FLR + \varphi^* H_RL_Pos_FLR + \eta^* H_RR_Pos_FLR)}$$

and for the microphone which in each case represents the left ear, and the right front loudspeaker FR

$$H_FRL = \alpha^* |H_FL_Pos_FRL| + \beta^* |H_FR_Pos_FRL| + \gamma^* |H_RL_Pos_FRL| + \delta^* |H_RR_Pos_FRL|^* e^{j^* \angle(\varepsilon^* H_FL_Pos_FRL + \phi^* H_FR_Pos_FRL + \varphi^* H_RL_Pos_FRL + \eta^* H_RR_Pos_FRL)}$$

and for the microphone which in each case represents the right ear and the right front loudspeaker FR

$$H_FRR = \alpha^* |H_FL_Pos_FRR| + \beta^* |H_FR_Pos_FRR| + \gamma^* |H_RL_Pos_FRR| + \delta^* |H_RR_Pos_FRR|^* e^{j^* \angle(\varepsilon^* H_FL_Pos_FRR + \phi^* H_FR_Pos_FRR + \varphi^* H_RL_Pos_FRR + \eta^* H_RR_Pos_FRR)}$$

[0134] The combined transfer functions determined in this way for the left and right microphones are then transformed from the frequency domain to the time domain using the inverse Fourier transform (IFFT) over all seat positions, in this case four seat positions, which correspond to the transfer functions added in a weighted form for the left and right ear for the respective FL and FR loudspeakers, that is to say H_FLL, H_FLR, H_FRL and H_FRR, in which case, once again, only their real part is of importance here:

$$h_FLL = Re\{IFFT\{H_FLL\}\}; h_FLR = Re\{IFFT\{H_FLR\}\};$$
$$h_FRL = Re\{IFFT\{H_FRL\}\}; h_FRR = Re\{IFFT\{H_FRR\}\}$$

[0135] In the next step, these real impulse responses are once again transformed from the time domain to the frequency domain using the Fourier transform (FFT), and are then combined to form a respective transfer function H_FL and H_FR for the left loudspeaker FL and for the right loudspeaker FR, respectively:

$$H_FLL = FFT\{h_FLL\} \text{ und } H_FLR = FFT\{h_FLR\} \rightarrow H_FL = H_FLL + H_FLR \text{ and}$$
$$H_FRL = FFT\{h_FRL\} \text{ und } H_FRR = FFT\{h_FRR\} \rightarrow H_FR = H_FRL + H_FRR.$$

[0136] As the above formulae show, both phase components and magnitude components of the transfer function for each seat position in the passenger compartment of a motor vehicle can be included in the formation of the transfer functions which result in the end, depending on the chosen weighting. In this case, a number of different weightings have already been used in the investigations relating to this invention application, and these have led to the following provisional discoveries. Any such weighted superimposition of the phase frequency responses over more than one seat position always resulted in a deterioration, in some cases a considerable deterioration, in the received acoustics in the vehicle. Furthermore, this deterioration was generally evident at every listening position, and was therefore not position-dependent.

[0137] For this reason, in the further investigations so far of the phase frequency response, the resultant, loudspeaker-dependent transfer function was made dependent exclusively on the measurements at the driver's position (generally front left), to be precise by combination of the phase frequency responses of the left and right microphones. None of the other phase frequency responses of the other seat positions were included. This stipulation was made in order initially

to restrict the amount of effort associated with this, and in particular that relating to the hearing tests with a significant number of test subjects. More detailed investigations will have to be carried out relating to this in order to determine whether other constellations (weightings) of the superimposition of the phase frequency responses cannot be found which lead to a further improvement in the hearing impression. For example, one approach would be to use a position in the centre of the passenger compartment or else the position between the two front seats as the only point for recording the impulse responses for calculation of the equalizing filters for the phase response.

[0138] A different impression was gained in the formation of the added magnitude frequency response. Because the AutoEQ algorithm is processed on a loudspeaker-specific basis and no longer in pairs, attention must now be paid to the symmetry between the left and right hemisphere in the formation of the resultant magnitude frequency response, that is to say the weighting values of the left measurement positions must correspond to those of the right measurement positions, in order to maintain this symmetry.

[0139] In this case, although a uniform weighting for all of the measurement positions would produce a good acoustic result, an even better result, however, has been achieved by using only the two front measurement positions in order to form the resultant magnitude frequency response. However, in this case as well, it is possible to achieve an even better result by also including the measurements of the rear positions, by means of suitable weighting in the formation of the resultant magnitude frequency response (for example $\alpha = 0.35$, $\beta = 0.35$, $\gamma = 0.15$ and $\delta = 0.15$).

[0140] Once the measurements as described above have been combined binaurally for each loudspeaker over all of the seat positions, the resultant transfer functions of the individual loudspeakers are split into their real and imaginary parts. For the present examples, this means, in the case of the mono signal from the centre loudspeaker C:

$$ReC = Re\ \{H_C\}\ and\ ImC = Im\ \{H_C\}$$

and for the stereo signal from the loudspeakers FL and FR:

$$ReFL = Re\ \{H_FL\}\ and\ ImFL = Im\ \{H_FL\}\ and$$

$$ReFR = Re\ \{H_FR\}\ and\ ImFR = Im\ \{H_FR\}$$

[0141] The respective phase frequency response of the respective loudspeakers are then determined from the real and imaginary parts, and the real and imaginary parts are then changed such that a desired phase shift of 0° is always achieved, that is to say purely real signals are produced. For the example of the mono signal (loudspeaker C), this means that the phase response of the signal of the loudspeaker C becomes:

$$PhaseC = -\arctan\ (ImC_{old}/ReC_{old})$$

and accordingly

$$\mathrm{Re}\,C_{Neu} = \sqrt{\mathrm{Re}\,C_{Alt}^2 + \mathrm{Im}\,C_{Alt}^2} * \cos(\arctan(\frac{\mathrm{Im}\,C_{Alt}}{\mathrm{Re}\,C_{Alt}}) + PhaseC)$$

$$\mathrm{Im}\,C_{Neu} = \sqrt{\mathrm{Re}\,C_{Alt}^2 + \mathrm{Im}\,C_{Alt}^2} * \sin(\arctan(\frac{\mathrm{Im}\,C_{Alt}}{\mathrm{Re}\,C_{Alt}}) + PhaseC)$$

the new real and imaginary parts are obtained, which now have a phase shift of 0° over a broad bandwidth. A corresponding situation applies to the example of the stereo signal:

$$PhaseFL = -\arctan(ImFL_{old}/ReFL_{old})$$

$$PhaseFR = -\arctan(ImFR_{old}/ReFR_{old})$$

and accordingly

$$\mathrm{Re}\,FL_{Neu} = \sqrt{\mathrm{Re}\,FL_{Alt}^2 + \mathrm{Im}\,FL_{Alt}^2} * \cos(\arctan(\frac{\mathrm{Im}\,FL_{Alt}}{\mathrm{Re}\,FL_{Alt}}) + PhaseFL)$$

$$\mathrm{Im}\,FL_{Neu} = \sqrt{\mathrm{Re}\,FL_{Alt}^2 + \mathrm{Im}\,FL_{Alt}^2} * \sin(\arctan(\frac{\mathrm{Im}\,FL_{Alt}}{\mathrm{Re}\,FL_{Alt}}) + PhaseFL)$$

$$\mathrm{Re}\,FR_{Neu} = \sqrt{\mathrm{Re}\,FR_{Alt}^2 + \mathrm{Im}\,FR_{Alt}^2} * \cos(\arctan(\frac{\mathrm{Im}\,FR_{Alt}}{\mathrm{Re}\,FR_{Alt}}) + PhaseFR)$$

$$\mathrm{Im}\,FR_{Neu} = \sqrt{\mathrm{Re}\,FR_{Alt}^2 + \mathrm{Im}\,FR_{Alt}^2} * \sin(\arctan(\frac{\mathrm{Im}\,FR_{Alt}}{\mathrm{Re}\,FR_{Alt}}) + PhaseFR)$$

[0142] Following these processing steps (equalizing of the phases) of the automatic algorithm, which has been described in more detail above, for equalizing of a sound system (AutoEQ) the pre-equalizing process is now carried out, as before, whose basic procedure is summarized as follows:

1.) Smoothing of the magnitude frequency response (preferably non-linearly with averaging over 1/8 third) of the respective loudspeaker.
2.) Scaling of the target function with respect to the already smooth, individual magnitude frequency response. In this case, the scaling factor of the target function is not calculated over a broad bandwidth, but is determined within a predetermined frequency range which is predetermined by the lower limit of f_{gu} = 10 Hz and the upper limit of f_{go} = 3 kHz and the respective limits for the associated, already determined and adjusted crossover filters.
3.) Determination of the distance between the individual, smoothed magnitude frequency response and the target function scaled onto it, before calculation of the pre-equalizing.
4.) Calculation of the pre-equalizing, which corresponds to the inverse profile of the difference between the scaled target function and the smoothed magnitude frequency response. In this case, the profile of the target function is restricted at the top and bottom ends corresponding to the maximum permissible increase and decrease if some of the values should overshoot or undershoot these range limits.
5.) Renewed calculation of the distance as in 3.), after application, however, of the pre-equalizing, as calculated in 4.), to the magnitude frequency response.
6.) Adoption of the filter coefficients of the pre-equalizing for those frequencies in which the magnitude of the distance after application of pre-equalizing is less than the distance as determined in 3.) before application of the pre-equalizing.
7.) Optional smoothing (preferably non-linearly with, for example, 1/8 third filtering) of the magnitude frequency response determined by the pre-equalizing.
8.) Transformation of the spectral FIR filter coefficient sets from the pre-equalizing to the time domain with the aid of the "frequency sampling" method, and optional restriction of the length of the FIR filter coefficients in the time domain, with subsequent transformation back to the spectral domain.
9.) Determination of the crossover filter cut-off frequencies of the broadband loudspeakers and, optionally, initial allocation of the narrowband crossover filter cut-off frequencies.
10.) Storage of the individual pre-equalizing filter coefficient sets and, as previously determined, of the respective crossover filter cut-off frequencies.

[0143] Once the pre-equalizing filters have been calculated and stored and, if desired, the filter cut-off frequencies of the crossover filters as well as the individual values for the channel gain have been calculated and applied, the sum transfer function is calculated on the basis of the real and imaginary parts before the equalizing of the sum transfer function is then carried out using the "MaxMag" method, as described in the following text:

1.) Smoothing of the sum magnitude frequency response (preferably non-linearly with 1/8 third filtering).
2.) Scaling of the target function with respect to the already smoothed sum magnitude frequency response. In this case, the scaling factor for the target function is not calculated over the entire audio spectral range but is determined within a predetermined frequency range, which is predetermined by the lower limit of f_{gu} = 10 Hz and the upper limit of f_{go} = 3 kHz, and the respective limits for the associated, already determined and adjusted crossover filters.

[0144] The following calculation steps as a loop over the frequency (0<f<=fs/2):

3.) Renewed calculation of the current sum transfer function based on the real and imaginary parts at the frequency f.
4.) Determination of the current distance between the sum transfer function and the target function at the point f.
5.) Resetting of the previous minimum distance, setting the distance to the new distance as determined in 4.), and incrementation of the counter (loop over frequency f).

Iteration:

[0145]

6.) Calculation of all the filters for magnitude equalizing, based on the previously determined filters of the pre-equalizing at the frequency f.
7.) Limiting of the filters for the magnitude equalizing to the permissible raising and lowering range.
8.) Calculation of the individual magnitudes, and of the respective distances to the target function at the frequency f.
9.) After exclusion of all those values from the equalizing which have already reached the predetermined limits for raising or lowering, the search is carried out for that magnitude value with the maximum magnitude and the maximum distance.
10.) The individual loudspeaker which has the greatest distance and which, when its magnitude equalizing is changed at the point f, thus leads to the expectation of the maximum reduction in the distance of the sum transfer function in the direction of the target function, is then selected, and the associated function of the magnitude equalizing is modified at the relevant frequency f so that this leads to the desired reduction in the distance.
11.) The sum transfer function on the basis of the magnitude and phase is then calculated once again using the current parameters for the magnitude equalizing and then the calculation of the new difference between the previous distance and the distance determined in the current iteration step takes place. If the difference between the previous distance and the current distance is below a specific predetermined threshold value in this case, the iteration is finished. In any case, the iteration is terminated at the latest after carrying out a specific, predetermined number of iterations (for example 20), in order to avoid endless loops.
12.) Finally, the newly calculated distance is set as the current distance, and the process continues with the next iteration step.

[0146] Once the iteration of the equalizing of the sum transfer function has been ended, the filters which have been modified in the course of the iteration process are optionally smoothed again for the pre-equalizing (preferably matched to the hearing, non-linearly, for example with 1/8 third filtering), are then transformed to the time domain using the "frequency sampling" method, and finally optionally have their length limited before being transformed back to the spectral domain, in this way resulting in the final filters for the magnitude equalizing. The FIR filters for the equalizing of the phases are in this case determined using the following method.

[0147] The profile of the filters for the equalizing of the phases is calculated individually for each loudspeaker to be:

$$PhaseEQ = -\arctan(Im/Re)$$

[0148] This profile is broken down again, after optional smoothing, into its real and imaginary parts:

$$RePhaseEQ = \cos(PhaseEQ) \text{ and } ImPhaseEQ = \sin(PhaseEQ)$$

[0149] The spectra are then extended symmetrically on their two sideband spectrum, thus resulting in a real FIR filter being produced in the time domain:

$$RePhaseEQ = [RePhaseEQ\ RePhaseEQ(end-1:-1:2)] \text{ and}$$

$$ImPhaseEQ = [ImPhaseEQ\ -ImPhaseEQ(end-1:-1:2)]$$

[0150] The (complex) transfer function is then calculated from the real and imaginary parts:

$$H\ PhaseEQ = RePhaseEQ + j*ImPhaseEQ.$$

[0151] In order to obtain a causal all-pass FIR filter, the filter has to be superimposed with a modelling delay, which ideally has half the FIR filter length:

$$H_PhaseEQ = H_PhaseEQ*H_Delay$$

where H_Delay = FFT(Delay) and Delay= [1, 0, 0, ..., 0] and has a length which corresponds to half the length of the FIR filter for the equalizing of the phases. The transfer function which has been modified in this way is once again transformed to the time domain, with its real part corresponding to the FIR filter coefficients of the filter for the equalizing of the phases:

$$h_PhaseEQ = Re\{IFFT\{H_PhaseEQ\}\}.$$

[0152] Convolution with the previously calculated filters for the equalizing of the magnitude frequency response finally results in the non-linear, loudspeaker-specific FIR filters for the equalizing, which are used both for the equalizing of the phases and for the equalizing of the magnitude frequency response of the sound system.

[0153] For a high symmetry and a high acoustical sound quality for a given listening position, a position specific equalizing may be based only on sound picked up in said position in view of only those loudspeaker positions which are relevant for said listening position. Further, channel (group) specific equalizing is applied in each position to the effect that only adjacent loudspeaker positions are used for the equalization in order to maintain symmetry. Thus, there are separate calculations for the front and rear positions. The front channels may include, e.g., the front left and right channels (FL, FR) as well as the center speaker. Those speakers are only relevant for the front left and front right listening positions with respect to cross-over frequency, gain, amplitude, and phase. Accordingly, the left and right speakers in the rear are only used for the rear listening positions. However, all positions are influenced by the sound from the woover. Figure 9 shows in a diagram an exemplary spectral weighting function for measurements at different positions (FL_Pos+FR_Pos+RL_Pos+RR_Pos)/4 and (FL_Pos+FR_Pos)/2 over frequency.

[0154] As can be seen from figure 10, the sound levels may vary depending on the particular position and frequency. Improvements addressing this situation may be reached by a bass management system. Measurements showed that problems especially with woofers and subwoofers arranged in the rear of a car occur in a frequency range of 40Hz to 90Hz which corresponds to a wave length of one half of the length of a vehicle interior indicating that this is because of a standing wave. In particular, measurements of the unsigned amplitude over frequency showed that the unsigned amplitude at the front seats are different from the ones at the rear seats, i.e., at the rear seats a maximum and at the front seats a minimum may occur. The difference between front and rear seats may be up to 10dB especially if the

subwoofer is arranged in the trunk of a car (see figure 11). Although a different position, e.g., under the front seats, of the subwoofer may provide some improvement, the bass management system according improves the sound even more, not only in view of the front-rear mode but also the left-right mode. The bass management system of the present invention creates the same or at least a similar sound pressure at different locations by, i.a., adapting the phase over frequency for one or more of the low frequency loudspeakers. If this successfully took place, it is no problem to adapt the amplitude over frequency to the target function, since all loudspeakers only have to be weighted with an overall amplitude equalizing function to get amplitude over frequency being equal to the target function at all positions.

[0155] However, it is difficult to adapt the phases such that the sound levels at different positions are almost the same. A major problem is to find an appropriate cost function to be minimized subsequently. For example, the level over frequency of one position or the average level over frequency of all positions may be taken as a reference wherein subsequently the distance of each individual position to the reference is determined. The individual distances are added leading to a first cost function which stands for the overall distance from the reference mentioned above. To minimize the first cost function, it is investigated what phase shift has what influence to the cost function.

[0156] A very simple approach is to choose a first group of loudspeakers (which may be only one loudspeaker) or a first channel serving as the reference to which a second group of loudspeakers (which also may be only one loudspeaker) or a second channel is adapted in terms of phase such that the cost function is minimized. Investigating the influence of the phase shift (0° to 360°) of the second channel to the cost function at an individual frequency, a cost function over phase is derived which shows the dependency of the distance from the phase. Determining the minimum of this cost function leads to the phase shift that has to be applied to the respective group or channel in order to reach a maximum reduction of the cost function and, accordingly, a maximum equalization of the sound levels of all positions.

[0157] However, the steps described above may result in an undesired overall reduction of the sound level. To overcome this problem, another condition is introduced which effects not only the same sound level at each position but also the maximum overall sound level possible. This is achieved by taking the reciprocal function of the mean position sound level for scaling the above-mentioned distance wherein the scaling is adjustable by means of a weighting function.

[0158] As shown in figure 12, with a 0° phase shift at 7o Hz there is a huge difference between the front positions and the rear positions. Introducing an additional phase shift, the level at each position decreases further, however, the levels are equalized. The behaviour of such so-called inner distance, i.e., the cost function for a maximum adaptation of all listening positions, has its minimum at a phase shift of about 180°. The curve depicted as MagMean represents the average level of all positions. Inverting and weighting the MagMean function by, e.g., a factor 0.65, and adding the inner distance weighted by a complementary factor 0.35 (= 1-0.65) leads to a new inner distance InnerDistanceNew which finally is the cost function to be minimized. Figure 12 illustrates how the cost function is changed by changing the mean sound pressure level. In the example of figure 12 the optimum phase shift is not changed since the original cost function and the modified cost function have their overall minimum at the same position. By the modification described above, beside a good amplitude equalization at all positions and a maximum level also a more even phase equalization can be achieved.

[0159] However, the above measures may lead to a very discontinuous phase behaviour which requires a very long FIR filter length. The problem behind can better be seen from a three-dimensional illustration like the one shown in figure 13 where the cost functions of figure 12 are arranged side by side resulting in a "mountain"-like three-dimensional structure representing the cost function of one loudspeaker (or one group of loudspeakers) as inner distance (InnerDistance [db]) over phase [degree] and frequency [Hz]. Figure 14 illustrates the corresponding equalizing phase-frequency response for the front right loudspeaker with respect to the reference signal.

[0160] In order to reach an even more straight, more continuous curve in said "mountains", and in particular to achieve a very continuous phase behaviour, the phase shift per frequency change (e.g., 1Hz) may be restricted to a certain maximum phase shift, e.g., $\pm 10°$. For each such restricted phase shift range the local minimum is determined for each frequency (e.g., 1 Hz steps) which then is used as a new phase value in the phase equalization process. The results can be seen from the three-dimensional illustration in figure 15 where the maximum phase shift per frequency change is restricted to $\pm 10°$ per frequency step. Figure 16 illustrates the corresponding equalizing phase-frequency response for the front right loudspeaker with respect to the reference signal.

[0161] As already mentioned, the restriction of the maximum phase shift per frequency change leads to a flat phase response such that already existing FIR filters as, for example, the one used for the other equalizing purposes, are applicable. Such FIR filter may comprise only 4096 taps at a sample frequency of 44.1 kHz. The results are illustrated in figure 17. As can be seen, even a short filter shows already a good approximation to the desired behaviour (original).

[0162] Upon determining the phase equalizing function for an individual loudspeaker, subsequently a new reference signal is derived through superposition of the old reference signal with the new phase equalized loudspeaker group (or channel). The new reference signal serves as a reference for the next loudspeaker to be investigated. Although each group of loudspeakers (or channel) can be used as a reference the front left position may be preferred since most car stereo systems will have a loudspeaker in this particular position.

[0163] Figure 18 illustrates the sound pressure levels over frequency at four positions in the interior of a vehicle with

the already mentioned difference between front and rear seats. Figure 19 shows the sound pressure levels over frequency upon filtering the respective electrical sound signals according to the above mention method using the phase equalizing function with no phase limitation. Figure 20 illustrates the case of applying such a phase limitation of ±10° per frequency step. Figure 21 shows the performance of the bass management system as sound pressure level over frequency using a FIR filter with 4096 taps.

[0164] Apparently, all kinds of bass management systems discussed above create similar situations for each of the positions with frequencies below 150 Hz with no decrease in the average sound pressure level. Further, only above approximately 100 Hz there is a significant difference between the cases of having a phase limitation or not. Finally, there is no significant difference between the theoretically optimum behaviour (figure 20) and the behaviour of an approximation thereof by a 4096 taps FIR filter (figure 21).

[0165] Upon such phase equalization filtering, a reference is derived from the average amplitude over frequency of all positions under investigation. Said reference is then adapted to a target function by means of an amplitude equalization function which is the same for all positions to be investigated. The target function may be, for example, the manually modified sum amplitude response of the auto equalization algorithm that, in turn, follows automatically its respective target function. The resulting target function for the bass management system is depicted "Target" in figures 22 and 23. By subtracting the target function from the average amplitude response of all positions a global equalizer function (figure 23: "original") is derived. In order to avoid a decrease in the low frequency range by this measure, the global amplitude equalizing function (figure 2: "half wave rectified") is applied to compensate for the decrease. Figure 24 shows as a result the transfer functions of the sums of all speakers at different positions after phase and global amplitude equalization.

[0166] Although FIR filters in general have been used in the examples above, all kind of digital filtering may be used. However, emphasis is put to minimal phase FIR filters which showed the best performance, particularly, in view of the acoustical results as well as the filter length.

[0167] Figure 25 illustrates the signal flow in a system exercising the methods described above. In the system of figure 25, two stereo signal channels, a left channel L and a right channel R, are supplied to a sound processor unit SP generating five channels thereof. Said five channels are a front right channel FR, a rear right channel RR, a rear left RL, a front left channel FL, and a woofer and/or subwoofer channel LOW. Each of said five channels is supplied to a respective equalizer unit EQ_FR, EQ_RR, EQ_RL, EQ_FL, and EQ_LOW for amplitude and phase equalization. The equalizer units EQ_FR, EQ_RR, EQ_RL, EQ_FL, and EQ_LOW are controlled via a equalizer control bus BUS_EQ by a control unit CONTROL which also performs the basic sound analysis for controlling other units of the system. The equalizer units EQ_FR, EQ_RR, EQ_RL, EQ_FL, and EQ_LOW comprise preferably minimal phase FIR filters.

[0168] Such other units are, e.g., controllable crossover filter units CO_FR, CO_RR, CO_RL, and CO_FL having a controllable crossover frequency and being connected downstream of the respective equalizer units EQ_FR, EQ_RR, EQ_RL, and EQ_FL for splitting each respective input signal into two output signals, one in the high frequency range and the other in the mid frequency range. The signals from the crossover filter units CO_FR, CO_RR, CO_RL, and CO_FL are supplied via respective controllable switches S_FR_H, S_RR_H, S_RL_H, S_FL_H, S_FR_M, S_RR_M, S_RL_M, and S_FL_M as well as controllable gain units G_FR_H, G_RR_H, G_RL_H, G_FL_H, G_FR_M, G_RR_M, G_RL_M, and G_FL_M to loudspeakers LS_FR_H, LS_RR_H, LS_RL_H, LS_FL_H, LS_FR_M, LS_RR_M, LS_RL_M, and LS_FL_M. The signal from the equalizer unit EQ_LOW is supplied via two controllable switches S_LOW1 and S_LOW2 as well as respective controllable gain units G_LOW1 and G_LOW2 to (sub-)woofer loudspeakers LS_LOW1 and LS_LOW2. The controllable switches S_FR_H, S_RR_H, S_RL_H, S_FL_H, S_FR_M, S_RR_M, S_RL_M, S_FL_M, S_LOW1, S_LOW2 and the controllable gain units G_FR_H, G_RR_H, G_RL_H, G_FL_H, G_FR_M, G_RR_M, G_RL_M, G_FL_M, G_LOW1, G_LOW2 are controlled by the control unit CONTROL via control bus BUS_S or BUS_G, respectively.

[0169] For sound analysis, two microphones MIC_L and MIC_R are arranged in a dummy head DH which is located in the room where the loudspeakers are located. The signals from the microphones MIC_L and MIC_R are evaluated as described herein further above wherein, during the analysis procedure, a certain group of loudspeakers (including groups having only one loudspeaker) may be switched on while the other groups are switched of by means of the controlled switches S_FR_H, S_RR_H, S_RL_H, S_FL_H, S_FR_M, S_RR_M, S_RL_M, S_FL_M, S_LOW1, S_LOW2. The groups may be switched on sequentially according to a given sequence or dependant on the deviation from a target function.

Claims

1. A Method for adjusting a sound system to a target sound, wherein the sound system having at least two groups of loudspeakers supplied with electrical sound signals to be converted into acoustical sound signals; said method comprising the steps of:

individually supplying each group with the respective electrical sound signal;
individually assessing the deviation of the acoustical sound signal from the target sound for each group of loudspeakers in at least one listening position; and
adjusting at least two groups of loudspeakers to a minimum deviation from the target sound by equalizing the respective electrical sound signals supplied to said groups of loudspeakers, wherein
the assessment step includes receiving in a listening position the acoustical sound signal from a certain group of loudspeakers, wherein
a total assessment over all listening positions is derived from the assessments at the at least one listening position weighted with a position specific factor, and wherein
each position specific factor comprises an amplitude specific factor and a phase specific factor, **characterized in that**
the step of adjusting at least two groups of loudspeakers to a minimum deviation from the target sound by equalizing the respective electrical sound signals supplied to said groups of loudspeakers includes limiting an amplitude change and/or a phase change per frequency caused by said equalizing to a given value.

2. The method of claim 1 wherein each acoustical sound signal comprises a phase and an amplitude; said phase and amplitude are processed and equalized independently from each other.

3. The method of claim 1 or 2 wherein at least one group of loudspeakers comprises only one loudspeaker.

4. The method of claim 1, 2, or 3 wherein at least one group of loudspeakers comprises more than one loudspeaker.

5. The method of one of claims 1-4 wherein each loudspeaker is arranged at a respective position and radiates the respective acoustical sound signal in a respective frequency range; at least one loudspeaker differs from the other loudspeaker(s) by the position and/or the frequency range and/or the electrical sound signal channel; and each group of loudspeakers comprises only a loudspeaker or loudspeakers arranged in a certain area and/or having a certain frequency range.

6. The method of claim 5 wherein at least one group of loudspeakers comprises a loudspeaker or loudspeakers arranged in the front left, front right, rear left, or rear right position.

7. The method of claim 5 or 6 wherein at least one group of loudspeakers comprises a loudspeaker or loudspeakers arranged in a higher or lower position.

8. The method of claim 5, 6, or 7 wherein at least one group of loudspeakers comprises a loudspeaker or loudspeakers radiating the respective acoustical sound signals in a higher frequency range, in a mid-frequency range, a lower frequency range, or a very low frequency range.

9. The method of one of claims 1-8 wherein the step of adjusting a group of loudspeakers to a minimum deviation from the target sound takes place when the respective group is supplied with the respective electrical sound signal.

10. The method of one of claims 1-8 wherein the step of adjusting the groups of loudspeakers to a minimum deviation from the target sound takes place after the deviations of all groups have been assessed.

11. The method of one of claims 1-10 wherein the groups of loudspeakers are adjusted sequentially to minimum deviations from the target sound in a given order.

12. The method of one of claims 1-9 wherein the groups of loudspeakers are adjusted to minimum deviations from the target sound according to a ranking by the deviations of the groups.

13. The method of claim 12 wherein the groups of loudspeakers are ranked such that the group having the largest deviation is adjusted first.

14. The method of claim 12 or 13 wherein the deviation is the integral amplitude difference between the assessed acoustical sound signal and the target sound over frequency.

15. The method of claim 12 or 13 wherein the deviation is the maximum amplitude difference between the assessed acoustical sound signal and the target sound over frequency.

16. The method of one of claims 1-15 wherein, after finishing the adjusting steps for at least two groups of loudspeakers, again the following steps are applied:

    sequentially supplying each group with the respective electrical sound signal;
    sequentially assessing the deviation of the acoustical sound signal from the target sound for each group of loudspeakers; and
    adjusting at least two groups of loudspeakers to a minimum deviation from the target sound by equalizing the respective electrical sound signals supplied to said groups of loudspeakers.

17. The method of one of claims 5-16 wherein at least two groups of loudspeakers have adjacent frequency ranges including a common cross over frequency; said method further comprising the step of adjusting said cross over frequency due to the respective assessments of the deviation of the acoustical sound signal from the target sound for each group of loudspeakers.

18. The method of one of claims 1-17 wherein said method further comprises the steps of assessing the deviation of the acoustical sound signal from the target sound for each group of loudspeakers in at least two different listening positions.

19. The method of claim 18 wherein the deviation of the acoustical sound signal from the target sound for each group of loudspeakers is assessed at the at least two different listening positions.

20. The method of claim 19 wherein the total assessment over all listening positions is derived from the assessments at the at least two different listening positions weighted with a position specific factor.

21. The method of claim 20 wherein each position specific factor comprises an amplitude specific factor and a phase specific factor.

22. The method of one of claims 1-21 wherein the step of assessing the deviation of the acoustical sound signal from the target sound for each group of loudspeakers includes picking up a two-channel acoustical signal, converting said acoustical signal into a two-channel electrical sound signal, and calculating the derivations for each channel.

23. The method of one of claims 1-22 further comprising the step of pre-equalizing all groups of loudspeakers by limiting the respective electrical sound signals to given amplitude maximums and minimums over frequency before assessing the deviation of the acoustical sound signal from the target sound for each group of loudspeakers.

24. The method of one of claims 1-23 wherein a target function is scaled such that the acoustical sound signal upon limited equalization is able to meet the target function.

25. The method of one of claims 1-24 wherein the acoustical sound signal is picked up for processing the deviation from the target sound by means of one microphone.

26. The method of one of claims 1-24 wherein the acoustical sound signal is picked up for processing the deviation from the target sound by means of at least two microphones.

27. The method of claim 26 wherein two microphones are arranged in a dummy head.

28. The method of one of claims 1-27 wherein first the phase for one or more of the low frequency loudspeakers is adapted to a target function and then the amplitude is adapted to the target function for all loudspeakers including weighting with an overall amplitude equalizing function for all positions.

29. The method of one of claims 1-28 wherein the level over frequency of one position or the average level over frequency of all positions is taken as a reference, wherein subsequently a distance between the reference of each individual position and the target function is determined.

30. The method of claim 29 wherein the individual distances are added leading to a cost function which stands for the overall distance from said reference.

31. The method of claim 30 wherein, in order to minimize the cost function, it is investigated what phase shift has what

influence to the cost function.

32. The method of one of claims 29-31 further including the steps of:

determining a function representing the average level of all positions;
inverting and weighting said function representing the average level function by a first factor;
adding the inner distance weighted by a second factor being complementary to the first leading to a new inner distance which represents a modified cost function; and
minimizing the modified cost function.

33. The method of one of claims 1-32 wherein
the phase shift per frequency change is restricted to a certain maximum phase shift, and
for each such restricted phase shift range the local minimum is determined for each frequency which then serves as a new phase value in a phase equalization process.

34. The method of one of claims 1-33 further comprising the steps of:

determining the phase equalizing function for an individual loudspeaker,
subsequently deriving a new reference signal through superposition of the old reference signal with the new phase equalized loudspeaker group.

35. The method of claim 34 wherein the new reference signal serves as a reference for the next loudspeaker to be investigated.

36. The method of claim 34 or 35 further comprising the steps of:

deriving a reference from the average amplitude over frequency of all positions under investigation; and
adapting then said reference to a target function by means of an amplitude equalization function.

37. The method of claim 36 wherein the target function is the same for all positions to be investigated.

38. The method of claim 37 wherein the target function is the modified sum amplitude response of an auto equalization algorithm that follows automatically its respective target function.

39. The method of claim 38 further comprising the step of subtracting the target function from the average amplitude response of all positions in order to derive a global equalizer function.

40. The method of claim 39 wherein the global amplitude equalizing function is applied to all groups.

41. The method of one of claims 1-40 wherein the phase and/or amplitude equalizing is performed by minimal phase FIR filtering.

Patentansprüche

1. Verfahren zum Abstimmen einer Lautsprecheranlage auf einen Zielschall, wobei die Lautsprecheranlage zumindest zwei Gruppen von Lautsprechern aufweist, denen elektrische Schallsignale zugeführt werden, die in akustische Schallsignale umgewandelt werden sollen; wobei das Verfahren die Schritte aufweist:

individuelles Zuführen des entsprechenden elektrischen Schallsignals zu jeder Gruppe;
individuelles Ermitteln der Abweichung des akustischen Schallsignals von dem Zielschall für jede Gruppe von Lautsprechern in zumindest einer Hörposition; und
Abstimmen von zumindest zwei Gruppen von Lautsprechern auf eine minimale Abweichung von dem Zielschall durch Entzerren der entsprechenden elektrischen Schallsignale, die diesen Gruppen von Lautsprechern zugeführt werden, wobei
der Schritt des Ermittelns das Empfangen des akustischen Schallsignals von einer bestimmten Gruppe von Lautsprechern in einer Hörposition umfasst, wobei
eine gesamte Ermittlung über alle Hörpositionen von den Ermittlungen an der zumindest einen Hörposition

gewichtet mit einem positionsspezifischen Faktor abgeleitet wird, und wobei
jeder positionsspezifische Faktor einen amplitudenspezifischen Faktor und einen phasenspezifischen Faktor aufweist, **dadurch gekennzeichnet, dass**
der Schritt des Abstimmens von zumindest zwei Gruppen von Lautsprechern auf eine minimale Abweichung von dem Zielschall durch Entzerren der entsprechenden elektrischen Schallsignale, die diesen Gruppen von Lautsprechern zugeführt werden, das Begrenzen einer Amplitudenänderung und/oder einer Phasenänderung je Frequenz, die durch das Entzerren bewirkt werden, auf einen vorgegebenen Wert aufweist.

2. Verfahren nach Anspruch 1, bei dem jedes akustische Schallsignal eine Phase und eine Amplitude aufweist; wobei diese Phase und Amplitude unabhängig voneinander verarbeitet und entzerrt werden.

3. Verfahren nach Anspruch 1 oder 2, bei dem zumindest eine Gruppe von Lautsprechern nur einen Lautsprecher aufweist.

4. Verfahren nach Anspruch 1, 2 oder 3, bei dem zumindest eine Gruppe von Lautsprechern mehr als einen Lautsprecher aufweist.

5. Verfahren nach einem der Ansprüche 1 bis 4, bei dem jeder Lautsprecher an einer entsprechenden Position angeordnet ist und das entsprechende akustische Schallsignal in einem entsprechenden Frequenzbereich abstrahlt; zumindest ein Lautsprecher sich von dem/den anderen Lautsprecher(n) durch die Position und/oder den Frequenzbereich und/oder den elektrischen Schallsignalkanal unterscheidet; und jede Gruppe von Lautsprechern nur einen Lautsprecher oder mehrere Lautsprecher aufweist, die in einem bestimmten Bereich angeordnet sind und/oder einen bestimmten Frequenzbereich aufweisen.

6. Verfahren nach Anspruch 5, bei dem zumindest eine Gruppe von Lautsprechern einen Lautsprecher oder mehrere Lautsprecher aufweist, die in der vorderen linken, vorderen rechten, hinteren linken oder hinteren rechten Position angeordnet sind.

7. Verfahren nach Anspruch 5 oder 6, bei dem zumindest eine Gruppe von Lautsprechern einen Lautsprecher oder mehrere Lautsprecher aufweist, die in einer höheren oder niedrigeren Position angeordnet sind.

8. Verfahren nach Anspruch 5, 6 oder 7, bei dem zumindest eine Gruppe von Lautsprechern einen Lautsprecher oder mehrere Lautsprecher aufweist, die die entsprechenden akustischen Schallsignale in einem höheren Frequenzbereich, in einem mittleren Frequenzbereich, einem niedrigeren Frequenzbereich, oder einem sehr niedrigen Frequenzbereich abstrahlen.

9. Verfahren nach einem der Ansprüche 1 bis 8, bei dem der Schritt des Abstimmens einer Gruppe von Lautsprechern auf eine minimale Abweichung von dem Zielschall stattfindet, wenn der entsprechenden Gruppe das entsprechende elektrische Schallsignal zugeführt wird.

10. Verfahren nach einem der Ansprüche 1 bis 8, bei dem der Schritt des Abstimmens der Gruppen von Lautsprechern auf eine minimale Abweichung von dem Zielschall stattfindet, nachdem die Abweichungen aller Gruppen ermittelt worden sind.

11. Verfahren nach einem der Ansprüche 1 bis 10, bei dem die Gruppen von Lautsprechern nacheinander in einer vorgegebenen Reihenfolge auf minimale Abweichungen von dem Zielschall abgestimmt werden.

12. Verfahren nach einem der Ansprüche 1 bis 9, bei dem die Gruppen von Lautsprechern gemäß einer Rangfolge nach den Abweichungen der Gruppen auf minimale Abweichungen von dem Zielschall abgestimmt werden.

13. Verfahren nach Anspruch 12, bei dem die Gruppen von Lautsprechern so eingereiht werden, dass die Gruppe die die größte Abweichung aufweist zuerst abgestimmt wird.

14. Verfahren nach Anspruch 12 oder 13, bei dem die Abweichung das Integral der Amplitudendifferenz zwischen dem ermittelten akustischen Schallsignal und dem Zielschall über der Frequenz ist.

15. Verfahren nach Anspruch 12 oder 13, bei dem die Abweichung die maximale Amplitudendifferenz zwischen dem ermittelten akustischen Schallsignal und dem Zielschall über der Frequenz ist.

16. Verfahren nach einem der Ansprüche 1 bis 15, bei dem, nach dem Beenden der Abstimmungsschritte für zumindest zwei Gruppen von Lautsprechern erneut die folgenden Schritte angewendet werden:

sequentielles Zuführen des entsprechenden elektrischen Schallsignals zu jeder Gruppe;
sequentielles Ermitteln der Abweichung des akustischen Schallsignals von dem Zielschall für jede Gruppe von Lautsprechern; und
Abstimmen zumindest zweier Gruppen von Lautsprechern auf eine minimale Abweichung von dem Zielschall durch Entzerren der entsprechenden elektrischen Schallsignale, die diesen Gruppen von Lautsprechern zugeführt werden.

17. Verfahren nach einem der Ansprüche 5 bis 16, bei dem zumindest zwei Gruppen von Lautsprechern benachbarte Frequenzbereiche aufweisen, die eine gemeinsame Übergangsfrequenz aufweisen, wobei das Verfahren weiterhin den Schritt des Abstimmens dieser Übergangsfrequenz auf Grund des entsprechenden Ermittelns der Abweichung des akustischen Schallsignals von dem Zielschall für jede Gruppe von Lautsprechern aufweist.

18. Verfahren nach einem der Ansprüche 1 bis 17, bei dem das Verfahren weiterhin die Schritte des Ermittelns der Abweichung des akustischen Schallsignals von dem Zielschall für jede Gruppe von Lautsprechern in zumindest zwei verschiedenen Hörpositionen aufweist.

19. Verfahren nach Anspruch 18, bei dem die Abweichung des akustischen Schallsignals von dem Zielschall für jede Gruppe von Lautsprechern an den zumindest zwei verschiedenen Hörpositionen ermittelt wird.

20. Verfahren nach Anspruch 19, bei dem die gesamte Ermittlung über alle Hörpositionen von den Ermittlungen an den zumindest zwei verschiedenen Hörpositionen gewichtet mit einem positionsspezifischen Faktor abgeleitet wird.

21. Verfahren nach Anspruch 20, bei dem jeder positionsspezifische Faktor einen amplitudenspezifischen Faktor und einen phasenspezifischen Faktor aufweist.

22. Verfahren nach einem der Ansprüche 1 bis 21, bei dem der Schritt des Ermittelns der Abweichung des akustischen Schallsignals von dem Zielschall für jede Gruppe von Lautsprechern das Aufnehmen eines zweikanaligen akustischen Signals, das Umwandeln dieses akustischen Signals in ein zweikanaliges elektrisches Schallsignal, und das Errechnen der Abweichungen für jeden Kanal aufweist.

23. Verfahren nach einem der Ansprüche 1 bis 22, das weiterhin für jede Gruppe von Lautsprechern den Schritt des Vorentzerrens aller Gruppen von Lautsprechern durch Begrenzen der entsprechenden elektrischen Schallsignale auf vorgegebene Amplitudenmaxima und -minima über der Frequenz vor dem Ermitteln der Abweichung des akustischen Schallsignals von dem Zielschall aufweist.

24. Verfahren nach einem der Ansprüche 1 bis 23, bei dem eine Zielfunktion so skaliert wird, dass das akustische Schallsignal bei begrenzter Entzerrung in der Lage ist, die Zielfunktion zu treffen.

25. Verfahren nach einem der Ansprüche 1 bis 24, bei dem das akustische Schallsignal zur Verarbeitung der Abweichung von dem Zielschall mittels eines Mikrophons aufgenommen wird.

26. Verfahren nach einem der Ansprüche 1 bis 24, bei dem das akustische Schallsignal zur Verarbeitung der Abweichung von dem Zielschall mittels mindestens zweier Mikrophone aufgenommen wird.

27. Verfahren nach Anspruch 26, bei dem zwei Mikrophone in einem Kunstkopf angeordnet sind.

28. Verfahren nach einem der Ansprüche 1 bis 27, bei dem zuerst die Phase für einen oder mehrere der Tieffrequenzlautsprecher auf eine Zielfunktion angepasst wird und dann für alle Lautsprecher die Amplitude auf die Zielfunktion angepasst wird einschließlich des Gewichtens mit einer Gesamtamplitudenentzerrungsfunktion für alle Positionen.

29. Verfahren nach einem der Ansprüche 1 bis 28, bei dem der Pegel über der Frequenz von einer Position oder der durchschnittliche Pegel über der Frequenz von allen Positionen als Referenz herangezogen wird, wobei nachfolgend ein Abstand zwischen der Referenz jeder einzelnen Position und der Zielfunktion bestimmt wird.

30. Verfahren nach Anspruch 29, bei dem die einzelnen Abstände addiert werden und zu einer Kostenfunktion führen,

die für den gesamten Abstand zur Referenz steht.

31. Verfahren nach Anspruch 30, bei dem, um die Kostenfunktion zu minimieren, untersucht wird, welche Phasenverschiebung welchen Einfluss auf die Kostenfunktion aufweist.

32. Verfahren nach einem der Ansprüche 29 bis 31, das weiterhin die Schritte aufweist:

Bestimmen einer Funktion, die den Durchschnittspegel aller Positionen repräsentiert;
Invertieren und Gewichten dieser Funktion, die die Durchschnittspegelfunktion repräsentiert, mit einem ersten Faktor;
Addieren des inneren Abstands gewichtet mit einem zweiten Faktor, der komplementär zu dem ersten ist, was zu einem neuen inneren Abstand führt, der eine modifizierte Kostenfunktion repräsentiert; und
Minimieren der modifizierten Kostenfunktion.

33. Verfahren nach einem der Ansprüche 1 bis 32, bei dem die Phasenverschiebung je Frequenzänderung auf eine bestimmte maximale Phasenverschiebung begrenzt wird, und
für jeden so begrenzten Phasenverschiebungsbereich das lokale Minimum für jede Frequenz bestimmt wird, das dann als ein neuer Phasenwert in einem Phasenentzerrungsvorgang dient.

34. Verfahren nach einem der Ansprüche 1 bis 33, das weiterhin die Schritte aufweist:

Bestimmen der Phasenentzerrungsfunktion für einen einzelnen Lautsprecher,
nachfolgendes Ableiten eines neuen Referenzsignals durch Überlagerung des alten Referenzsignals mit der neuen phasenentzerrten Lautsprechergruppe.

35. Verfahren nach Anspruch 34, bei dem das neue Referenzsignal als eine Referenz für den nächsten zu untersuchenden Lautsprecher dient.

36. Verfahren nach Anspruch 34 oder 35, das weiterhin die Schritte aufweist:

Ableiten einer Referenz von der Durchschnittsamplitude über der Frequenz von allen untersuchten Positionen; und
dann Anpassen der Referenz an eine Zielfunktion mittels einer Amplitudenentzerrungsfunktion.

37. Verfahren nach Anspruch 36, bei dem die Zielfunktion für alle zu untersuchenden Positionen die gleiche ist.

38. Verfahren nach Anspruch 37, bei dem die Zielfunktion der modifizierte Summenamplitudenfrequenzgang eines Auto-Entzerrungsalgorithmus ist, der automatisch seiner entsprechenden Zielfunktion folgt.

39. Verfahren nach Anspruch 38, das weiterhin den Schritt des Subtrahierens der Zielfunktion von dem aller Positionen aufweist, um eine Gesamtentzerrerfunktion abzuleiten.

40. Verfahren nach Anspruch 39, bei dem die Gesamtamplitudenentzerrungsfunktion auf alle Gruppen angewendet wird.

41. Verfahren nach einem der Ansprüche 1 bis 40, bei dem die Phasen- und/oder Amplitudenentzerrung durch Minimalphasen-FIR-Filterung durchgeführt wird.

Revendications

1. Procédé d'ajustement d'un système sonore à un son cible, dans lequel le système sonore possède au moins deux groupes de haut-parleurs recevant des signaux sonores électriques à convertir en signaux sonores acoustiques ; ledit Le procédé comprenant les étapes consistant à :

fournir individuellement à chaque groupe le signal sonore électrique respectif ;
évaluer individuellement l'écart du signal sonore acoustique par rapport au son cible pour chaque groupe de haut-parleurs dans au moins une position d'écoute ; et
ajuster au moins deux groupes de haut-parleurs à un écart minimum par rapport au son cible en égalisant les

signaux sonores électriques respectifs fournis auxdits groupes de haut-parleurs, dans lequel
l'étape d'évaluation inclut la réception, dans une position d'écoute, du signal sonore acoustique provenant d'un certain groupe de haut-parleurs, dans lequel
une évaluation totale concernant toutes les positions d'écoute est obtenue à partir des évaluations dans au moins une position d'écoute pondérée par un facteur de position spécifique, et dans lequel
chaque facteur de position spécifique comprend un facteur d'amplitude spécifique et un facteur de phase spécifique,
caractérisé en ce que
l'étape d'ajustement d'au moins deux groupes de haut-parleurs à un écart minimum par rapport au son cible en égalisant les signaux sonores électriques spécifiques fournis auxdits groupes de haut-parleurs inclut la limitation d'un changement d'amplitude et/ou d'un déphasage par fréquence provoqué par ladite égalisation à une valeur donnée.

2. Le procédé de la revendication 1, dans lequel chaque signal sonore acoustique comprend une phase et une amplitude ; ladite phase et ladite amplitude sont traitées et égalisées indépendamment l'une de l'autre.

3. Le procédé de la revendication 1 ou 2, dans lequel au moins un groupe de haut-parleurs ne comprend qu'un haut-parleur.

4. Le procédé de la revendication 1, 2 ou 3, dans lequel au moins un groupe de haut-parleurs comprend plus d'un haut-parleur.

5. Le procédé de l'une des revendications 1 à 4, dans lequel chaque haut-parleur est disposé dans une position respective et émet le signal sonore acoustique respectif dans une plage de fréquences respectives ;
au moins un haut-parleur diffère de l'autre (des autres) haut-parleur(s) par la position et/ou la plage de fréquences et/ou le canal des signaux sonores électriques ; et chaque groupe de haut-parleurs comprend uniquement un haut-parleur ou des haut-parleurs disposés dans une certaine zone et/ou ayant une certaine plage de fréquences.

6. Le procédé de la revendication 5, dans lequel au moins un groupe de haut-parleurs comprend un haut-parleur ou des haut-parleurs disposés dans la position avant gauche, avant droite, arrière gauche ou arrière droite.

7. Le procédé de la revendication 5 ou 6, dans lequel au moins un groupe de haut-parleurs comprend un haut-parleur ou des haut-parleurs disposés dans une position plus élevée ou plus basse.

8. Le procédé de la revendication 5, 6 ou 7, dans lequel au moins un groupe de haut-parleurs comprend un haut-parleur ou des haut-parleurs émettant les signaux sonores acoustiques respectifs dans une plage de plus hautes fréquences, dans une plage de moyennes fréquences, dans une plage de plus basses fréquences ou dans une plage de très basses fréquences.

9. Le procédé de l'une des revendications 1 à 8, dans lequel l'étape d'ajustement d'un groupe de haut-parleurs à un écart minimum par rapport au son cible s'effectue quand le groupe respectif reçoit le signal sonore électrique respectif.

10. Le procédé de l'une des revendications 1 à 8, dans lequel l'étape d'ajustement des groupes de haut-parleurs à un écart minimum par rapport au son cible s'effectue après l'évaluation des écarts de tous les groupes.

11. Le procédé de l'une des revendications 1 à 10, dans lequel les groupes de haut-parleurs sont ajustés séquentiellement à des écarts minimums par rapport au son cible dans un ordre donné.

12. Le procédé de l'une des revendications 1 à 9, dans lequel les groupes de haut-parleurs sont ajustés à des écarts minimums par rapport au son cible selon un classement en fonction des écarts des groupes.

13. Le procédé de la revendication 12, dans lequel les groupes de haut-parleurs sont classés de telle sorte que le groupe ayant l'écart le plus grand est ajusté en premier.

14. Le procédé de la revendication 12 ou 13, dans lequel l'écart est la différence d'amplitude intégrale entre le signal sonore acoustique évalué et le son cible sur une fréquence.

15. Le procédé de la revendication 12 ou 13, dans lequel l'écart est la différence d'amplitude maximale entre le signal

sonore acoustique évalué et le son cible sur une fréquence.

16. Le procédé de l'une des revendications 1 à 15, dans lequel, une fois que les étapes d'ajustement d'au moins deux groupes de haut-parleurs sont terminées, les étapes suivantes sont à nouveau appliquées, à savoir :

fournir séquentiellement à chaque groupe le signal sonore électrique respectif ;
évaluer séquentiellement l'écart du signal sonore acoustique par rapport au son cible pour chaque groupe de haut-parleurs ; et ajuster au moins deux groupes de haut-parleurs à un écart minimum par rapport au son cible en égalisant les signaux sonores électriques respectifs fournis auxdits groupes de haut-parleurs.

17. Le procédé de l'une des revendications 5 à 16, dans lequel au moins deux groupes de haut-parleurs possèdent des plages de fréquences adjacentes incluant une fréquence de transfert commune ; ledit procédé comprend en outre l'étape d'ajustement de ladite fréquence de transfert en raison des évaluations respectives de l'écart du signal sonore acoustique par rapport au son cible pour chaque groupe de haut-parleurs.

18. Le procédé de l'une des revendications 1 à 17, dans lequel ledit procédé comprend en outre les étapes d'évaluation de l'écart du signal sonore acoustique par rapport au son cible pour chaque groupe de haut-parleurs dans au moins deux positions d'écoute différentes.

19. Le procédé de la revendication 18, dans lequel l'écart du signal sonore acoustique par rapport au son cible pour chaque groupe de haut-parleurs est évalué dans au moins deux positions d'écoute différentes.

20. Le procédé de la revendication 19, dans lequel l'évaluation totale concernant toutes les positions d'écoute est obtenue à partir des évaluations dans au moins deux positions d'écoute différentes pondérées par un facteur de position spécifique.

21. Le procédé de la revendication 20, dans lequel chaque facteur de position spécifique comprend un facteur d'amplitude spécifique et un facteur de phase spécifique.

22. Le procédé de l'une des revendications 1 à 21, dans lequel l'étape d'évaluation de l'écart du signal sonore acoustique par rapport au son cible pour chaque groupe de haut-parleurs inclut la réception d'un signal acoustique à deux canaux, la conversion dudit signal acoustique en un signal sonore électrique à deux canaux et le calcul des dérivations pour chaque canal.

23. Le procédé de l'une des revendications 1 à 22 comprenant en outre l'étape d'égalisation préalable de tous les groupes de haut-parleurs en limitant les signaux sonores électriques respectifs à des maximums et des minimums d'amplitude donnés sur une fréquence avant d'évaluer l'écart du signal sonore acoustique par rapport au son cible pour chaque groupe de haut-parleurs.

24. Le procédé de l'une des revendications 1 à 23, dans lequel une fonction cible est étalonnée de telle sorte que le signal sonore acoustique lors d'une égalisation limitée puisse remplir la fonction cible.

25. Le procédé de l'une des revendications 1 à 24, dans lequel le signal sonore acoustique est reçu pour traiter l'écart par rapport au son cible au moyen d'un microphone.

26. Le procédé de l'une des revendications 1 à 24, dans lequel le signal sonore acoustique est reçu pour traiter l'écart par rapport au son cible au moyen d'au moins deux microphones.

27. Le procédé de la revendication 26, dans lequel deux microphones sont disposés dans une tête artificielle.

28. Le procédé de l'une des revendications 1 à 27, dans lequel la phase pour un ou plusieurs des haut-parleurs à basse fréquence est d'abord adaptée à une fonction cible et l'amplitude est ensuite adaptée à la fonction cible pour tous les haut-parleurs incluant une pondération avec une fonction d'égalisation d'amplitude totale pour toutes les positions.

29. Le procédé de l'une des revendications 1 à 28, dans lequel le niveau sur une fréquence d'une position ou le niveau moyen sur une fréquence de toutes les positions est pris comme référence, la distance entre la référence de chaque position individuelle et la fonction cible étant ensuite déterminée.

30. Le procédé de la revendication 29, dans lequel les distances individuelles sont ajoutées pour aboutir à une fonction de coût qui représente la distance totale à partir de ladite référence.

31. Le procédé de la revendication 30, dans lequel, afin de minimiser la fonction de coût, on recherche quel déphasage a telle influence sur la fonction de coût.

32. Le procédé de l'une des revendications 29 à 31 comprenant en outre les étapes consistant à :

déterminer une fonction représentant le niveau moyen de toutes les positions ;
inverser et pondérer ladite fonction représentant la fonction du niveau moyen par un premier facteur ;
ajouter la distance interne pondérée par un second facteur qui est complémentaire du premier pour aboutir à une nouvelle distance interne qui représente une fonction de coût modifiée ; et minimiser la fonction de coût modifiée.

33. Le procédé de l'une des revendications 1 à 32, dans lequel le déphasage par changement de fréquence est limité à un certain déphasage maximum, et
pour chacune de ces plages de déphasage limitées, le minimum local est déterminé pour chaque fréquence qui sert ensuite de nouvelle valeur de phase dans un processus d'égalisation de phase.

34. Le procédé de l'une des revendications 1 à 33 comprenant en outre les étapes consistant à :

déterminer la fonction d'égalisation de phase pour un haut-parleur individuel,
obtenir ensuite un nouveau signal de référence par superposition de l'ancien signal de référence au groupe de haut-parleurs doté de la nouvelle phase égalisée.

35. Le procédé de la revendication 34, dans lequel le nouveau signal de référence sert de référence pour le haut-parleur suivant qui doit faire l'objet d'une recherche.

36. Le procédé de la revendication 34 ou 35 comprenant en outre les étapes consistant à :

obtenir une référence à partir de l'amplitude moyenne sur une fréquence de toutes les positions faisant l'objet d'une recherche ; et
adapter ensuite ladite référence à une fonction cible au moyen d'une fonction d'égalisation d'amplitude.

37. Le procédé de la revendication 36, dans lequel la fonction cible est la même pour toutes les positions qui doivent faire l'objet d'une recherche.

38. Le procédé de la revendication 37, dans lequel la fonction cible est la réponse en amplitude totale modifiée d'un algorithme d'égalisation automatique qui exécute automatiquement sa fonction cible respective.

39. Le procédé de la revendication 38 comprenant en outre l'étape consistant à soustraire la fonction cible de la réponse en amplitude moyenne de toutes les positions afin d'obtenir une fonction d'égalisation globale.

40. Le procédé de la revendication 39, dans lequel la fonction d'égalisation d'amplitude globale est appliquée à tous les groupes.

41. Le procédé de l'une des revendications 1 à 40, dans lequel l'égalisation de phase et/ou d'amplitude est effectuée par un filtrage FIR (à réponse impulsionnelle finie) de phase minimale.

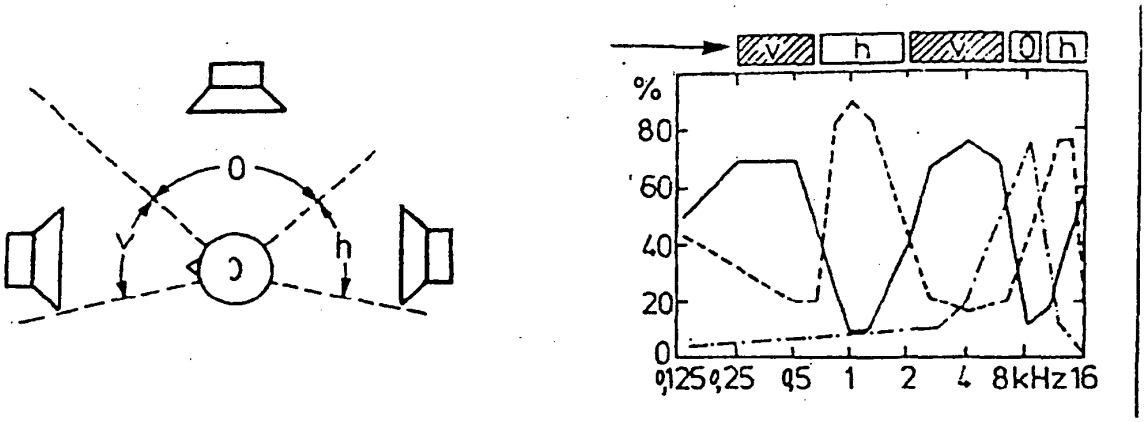

0
v
h
%
80
60
40
20
0
0,125
0,25
0,5
1
2
4
8kHz
16

Fig. 1

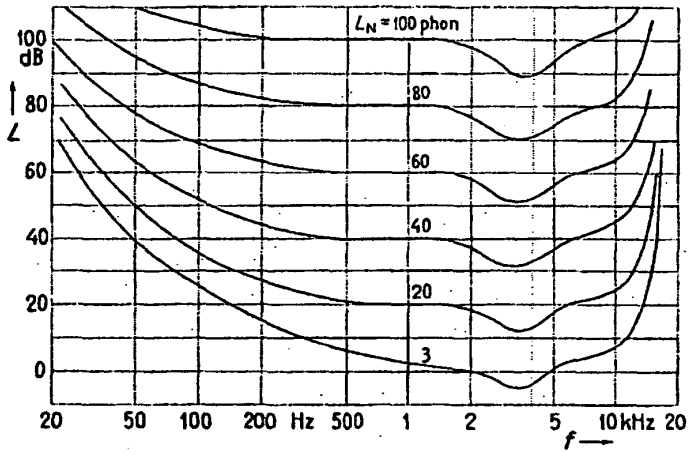

L_N = 100 phon
100
dB
80
L
60
40
20
0
80
60
40
20
3
20
50
100
200 Hz
500
1
2
5
10 kHz
20
f

Fig. 2

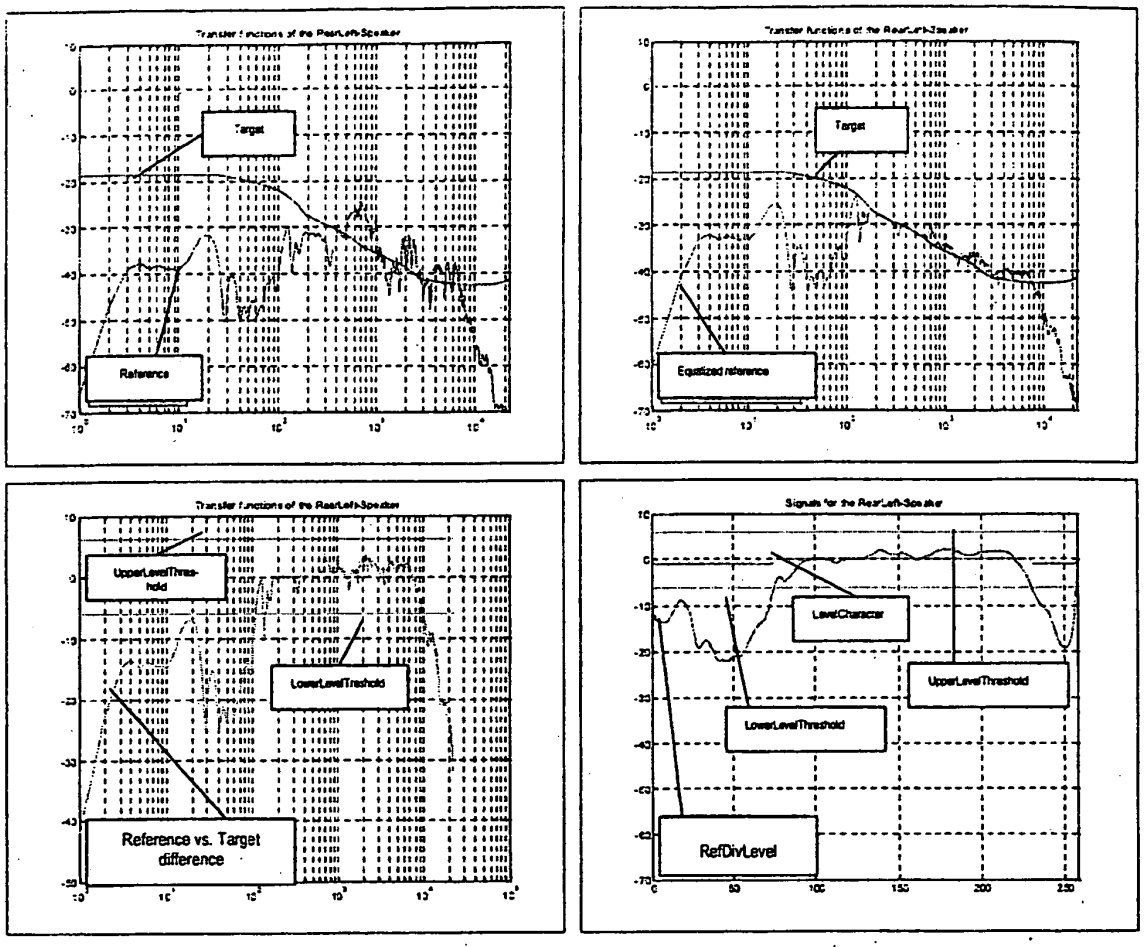

Target
Reference
Target
Equalized reference
UpperLevelThreshold
LowerLevelThreshold
Reference vs. Target difference
LevelCharacter
UpperLevelThreshold
LowerLevelThreshold
RefDivLevel

Fig. 3

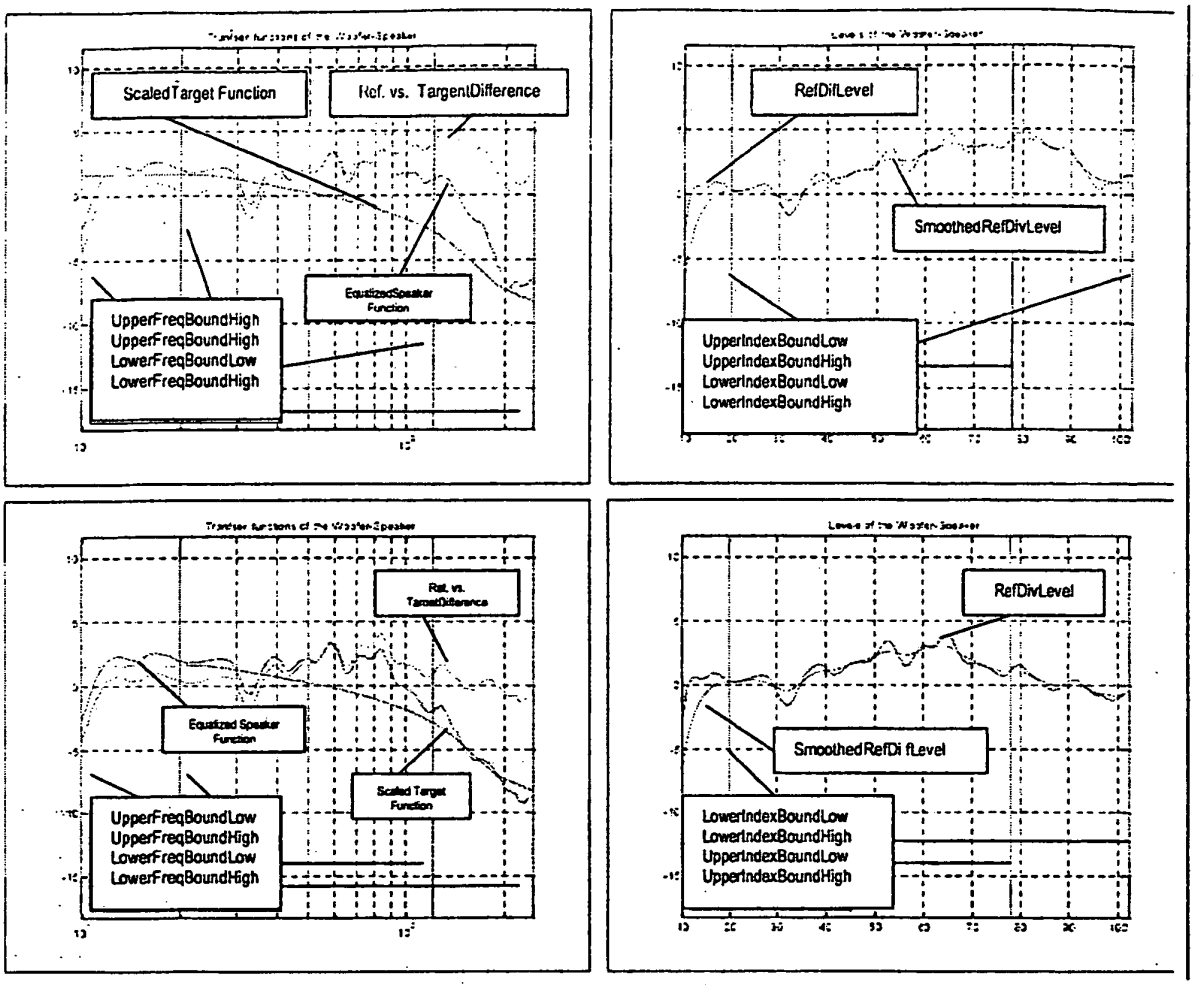

ScaledTarget Function
Ref. vs. TargentDifference
EqualizedSpeaker Function
UpperFreqBoundHigh
UpperFreqBoundHigh
LowerFreqBoundLow
LowerFreqBoundHigh
RefDifLevel
SmoothedRefDivLevel
UpperIndexBoundLow
UpperIndexBoundHigh
LowerIndexBoundLow
LowerIndexBoundHigh
Ref. vs. TargetDifference
Equalized Speaker Function
Scaled Target Function
UpperFreqBoundLow
UpperFreqBoundHigh
LowerFreqBoundLow
LowerFreqBoundHigh
RefDivLevel
SmoothedRefDi fLevel
LowerIndexBoundLow
LowerIndexBoundHigh
UpperIndexBoundLow
UpperIndexBoundHigh

Fig. 4

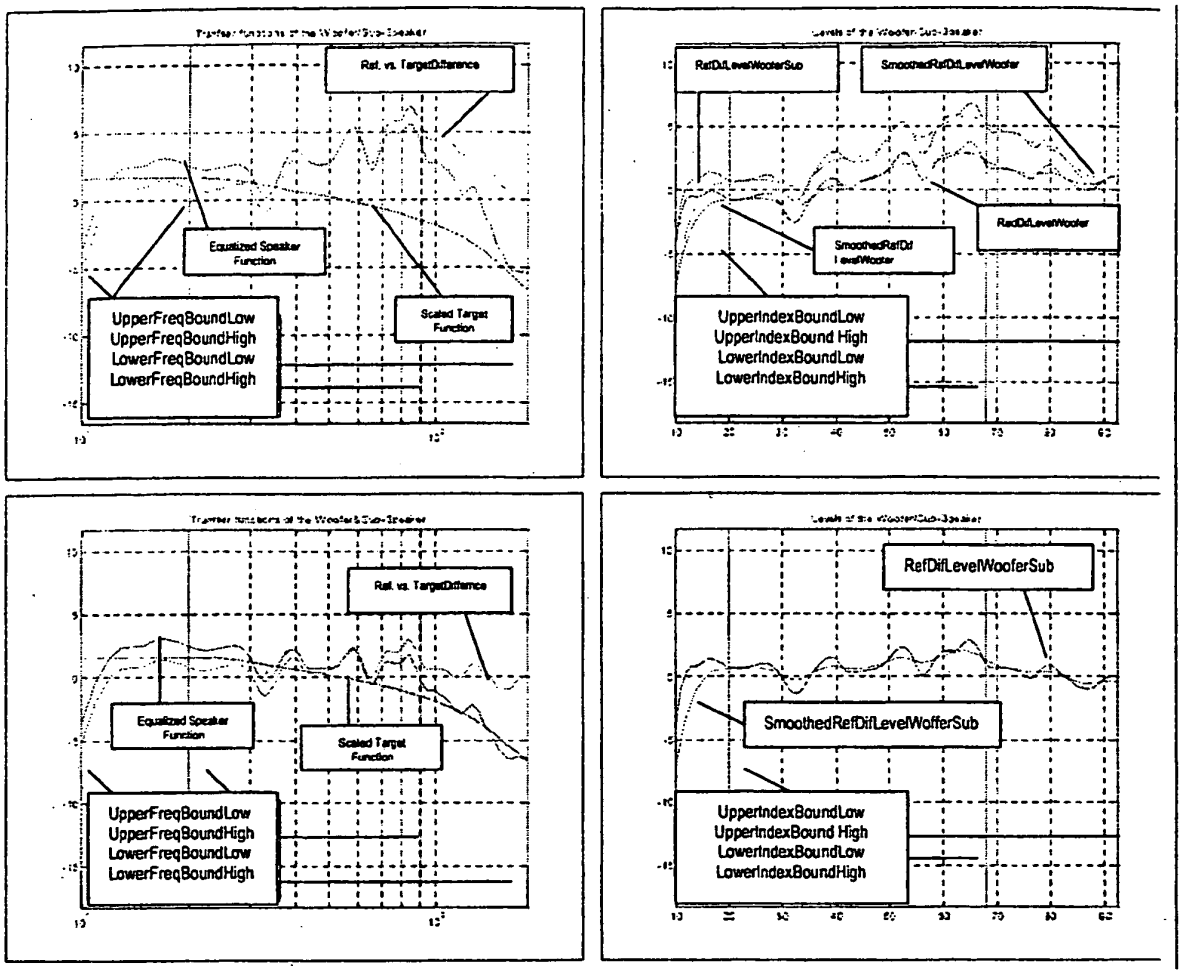

Ref. vs. TargetDifference
Equalized Speaker Function
Scaled Target Function
UpperFreqBoundLow
UpperFreqBoundHigh
LowerFreqBoundLow
LowerFreqBoundHigh
RefDifLevelWooferSub
SmoothedRefDifLevelWoofer
UpperIndexBoundLow
UpperIndexBound High
LowerIndexBoundLow
LowerIndexBoundHigh

Fig. 5

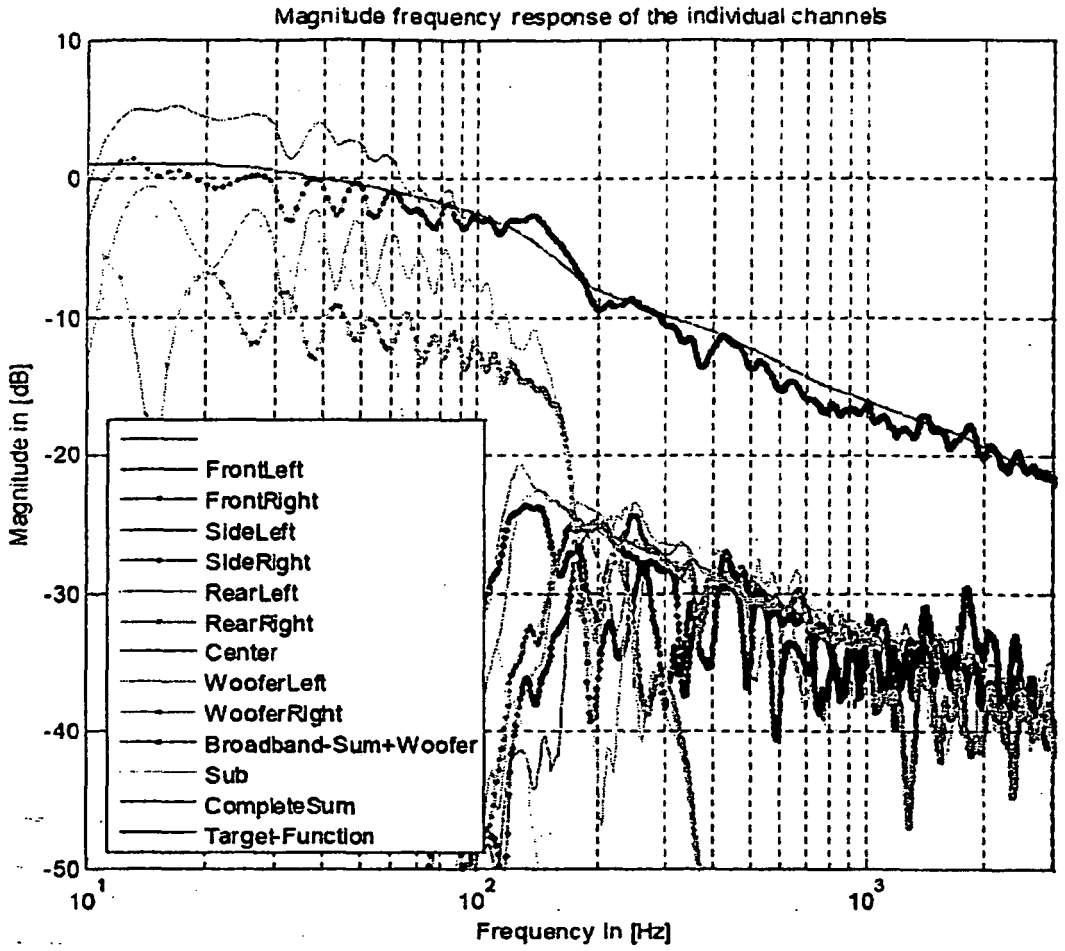

Magnitude frequency response of the individual channels
Magnitude in [dB]
Frequency in [Hz]
10
0
-10
-20
-30
-40
-50
10^1
10^2
10^3
FrontLeft
FrontRight
SideLeft
SideRight
RearLeft
RearRight
Center
WooferLeft
WooferRight
Broadband-Sum+Woofer
Sub
CompleteSum
Target-Function

Fig. 6

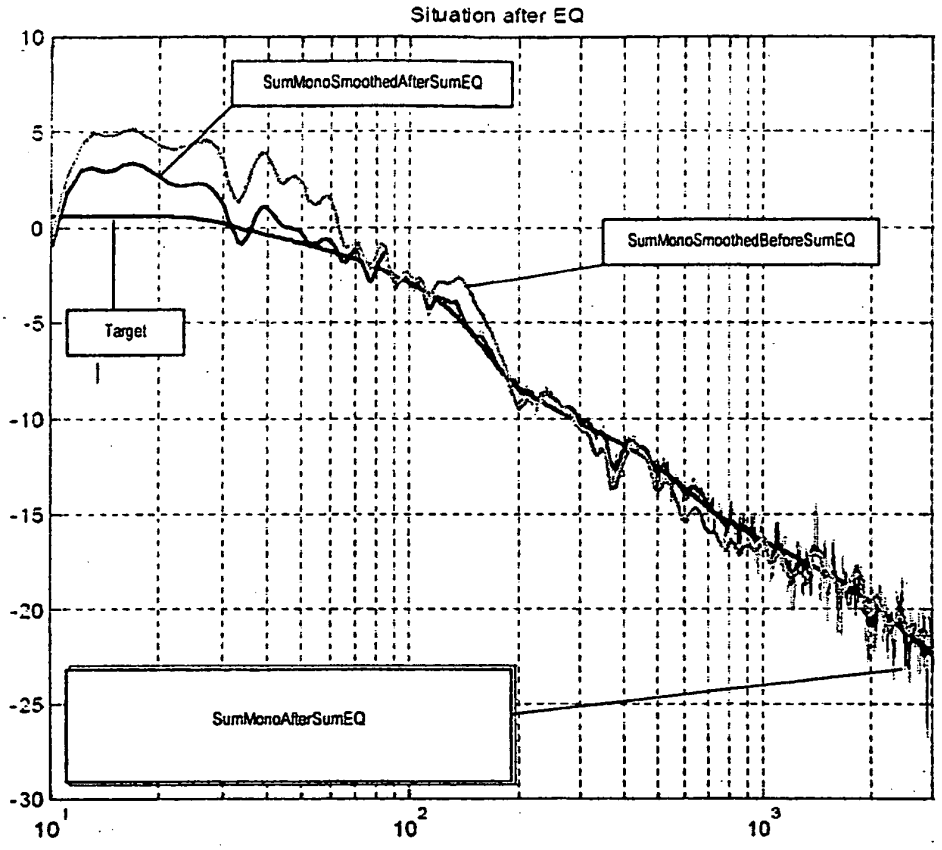

Situation after EQ
SumMonoSmoothedAfterSumEQ
SumMonoSmoothedBeforeSumEQ
Target
SumMonoAfterSumEQ
10
5
0
-5
-10
-15
-20
-25
-30
10^1
10^2
10^3

Fig. 7

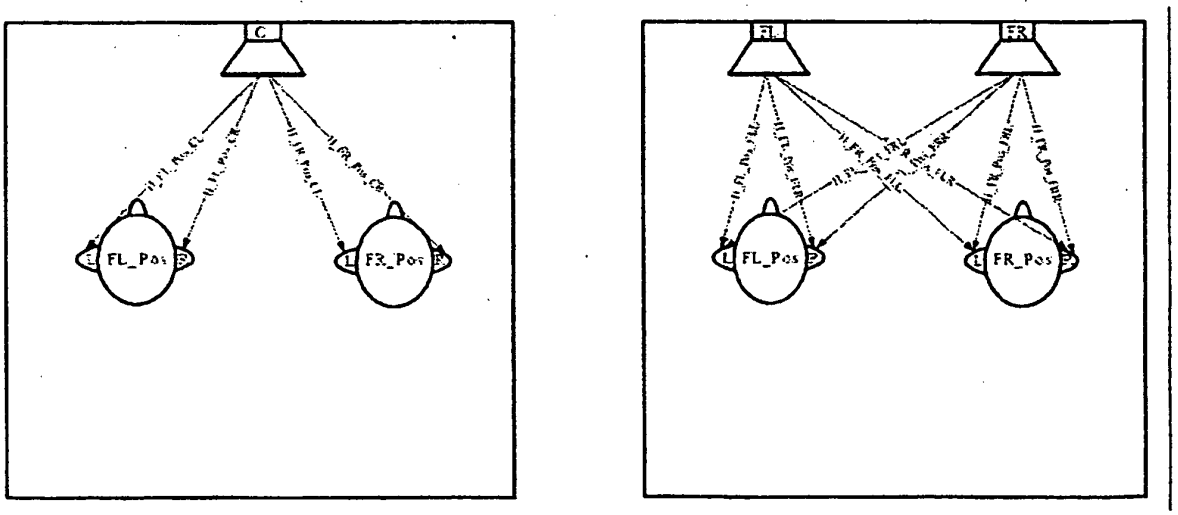

C
FL_Pos
FR_Pos
FL
FR
FL_Pos
FR_Pos

Fig. 8

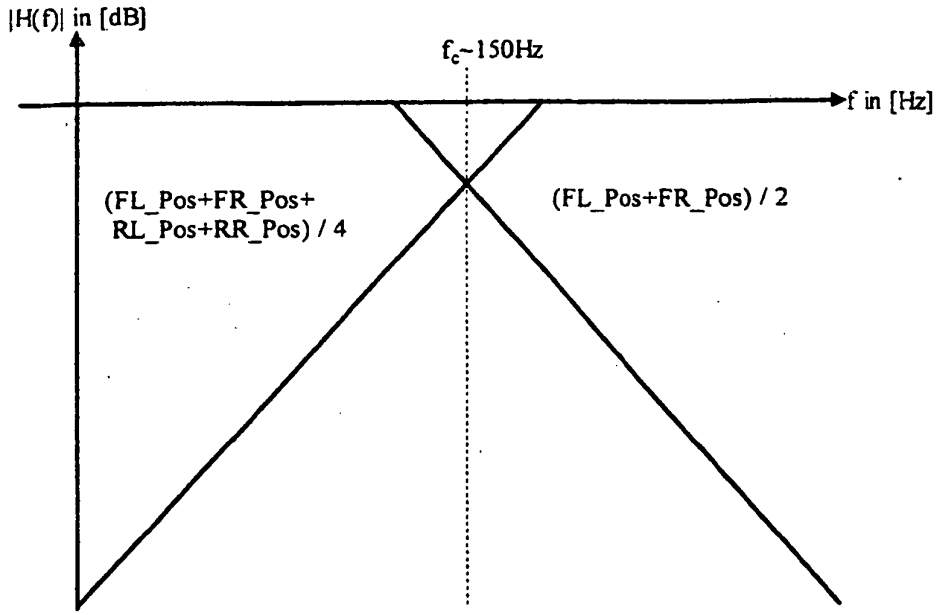

|H(f)| in [dB]
f_c~150Hz
f in [Hz]
(FL_Pos+FR_Pos+
RL_Pos+RR_Pos) / 4
(FL_Pos+FR_Pos) / 2

Fig. 9

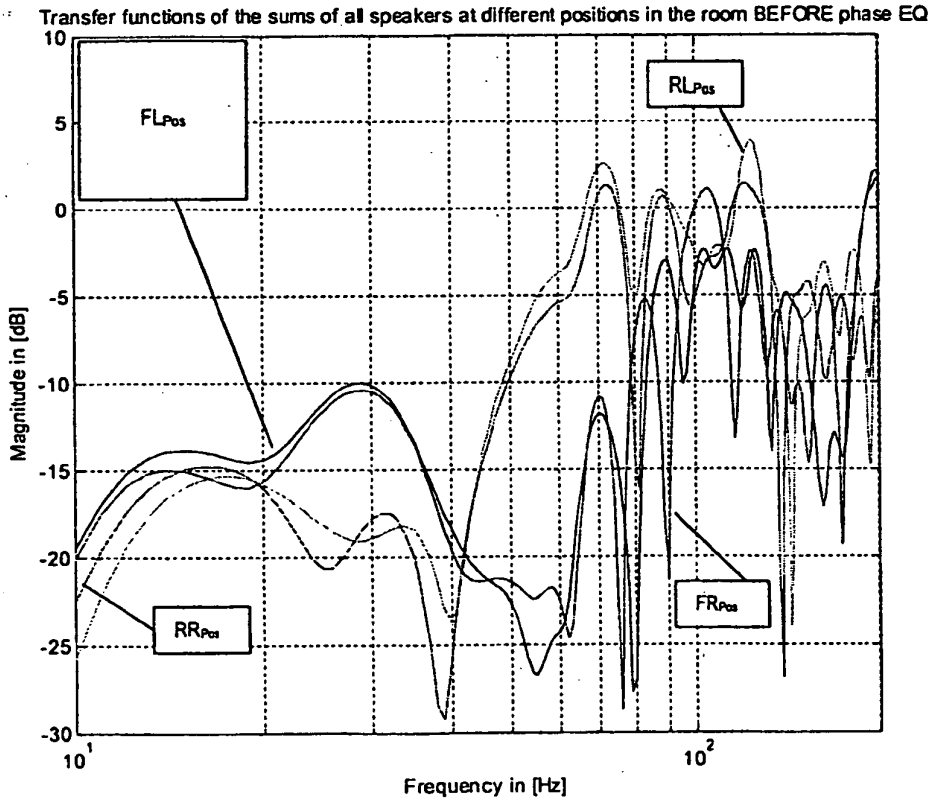

Transfer functions of the sums of all speakers at different positions in the room BEFORE phase EQ
FLPos
RLPos
RRPos
FRPos
Magnitude in [dB]
Frequency in [Hz]
10
5
0
-5
-10
-15
-20
-25
-30
10^1
10^2

Fig. 10

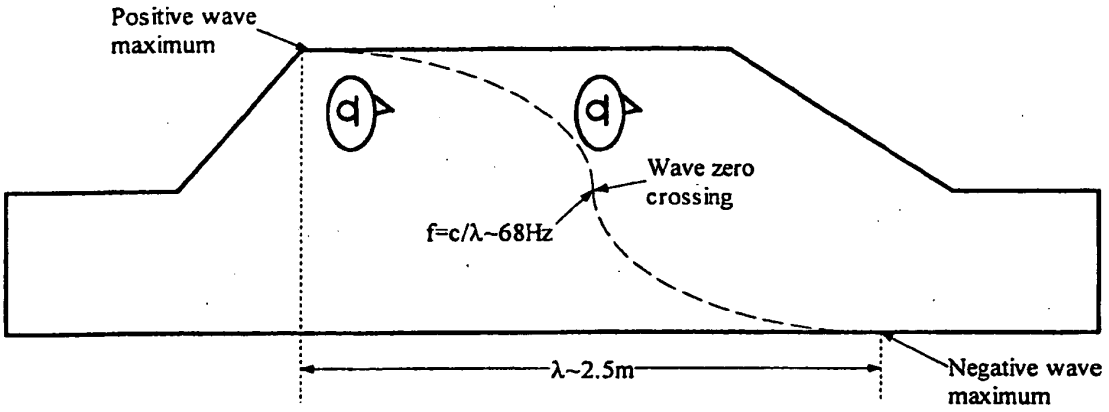

Positive wave maximum
Wave zero crossing
f=c/λ~68Hz
λ~2.5m
Negative wave maximum

Fig. 11

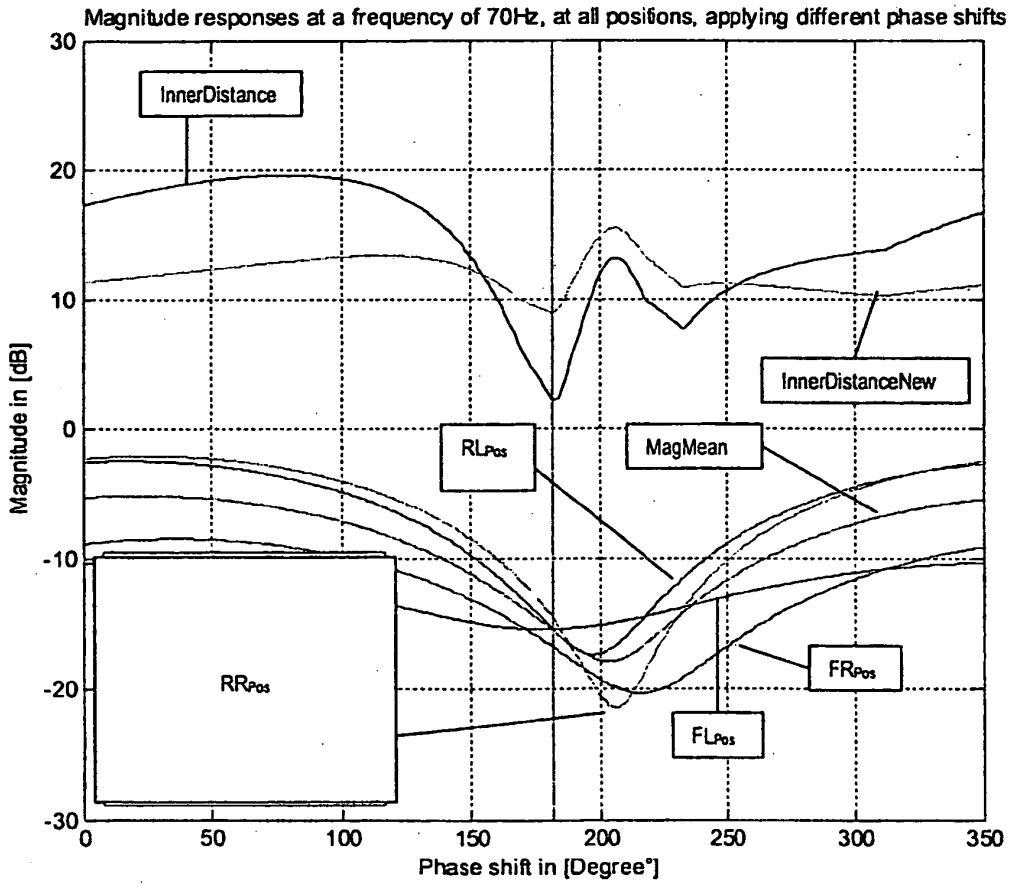

Magnitude responses at a frequency of 70Hz, at all positions, applying different phase shifts
InnerDistance
InnerDistanceNew
RLPos
MagMean
RRPos
FRPos
FLPos
Magnitude in [dB]
Phase shift in [Degree°]
30
20
10
0
-10
-20
-30
0
50
100
150
200
250
300
350

Fig. 12

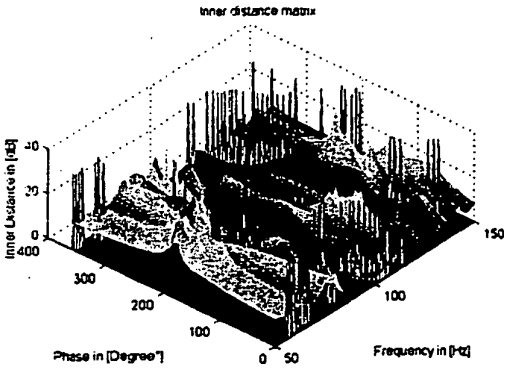


Fig. 13

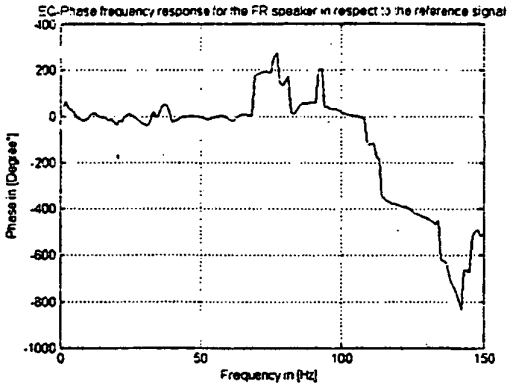


Fig. 14

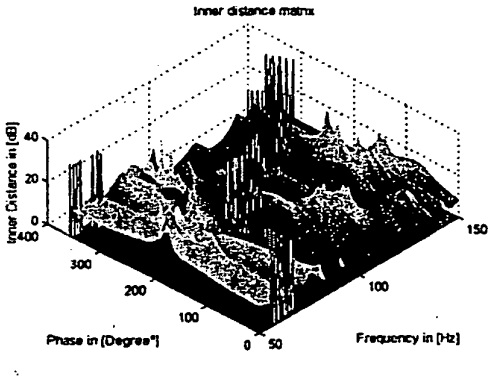


Fig. 15

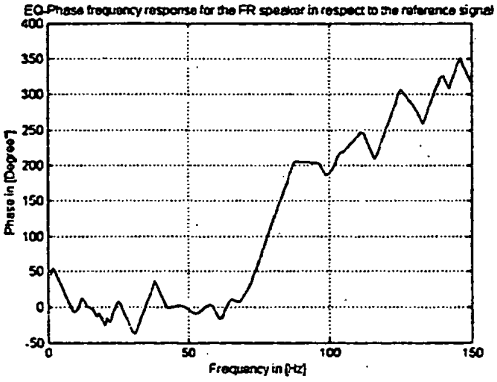


Fig. 16

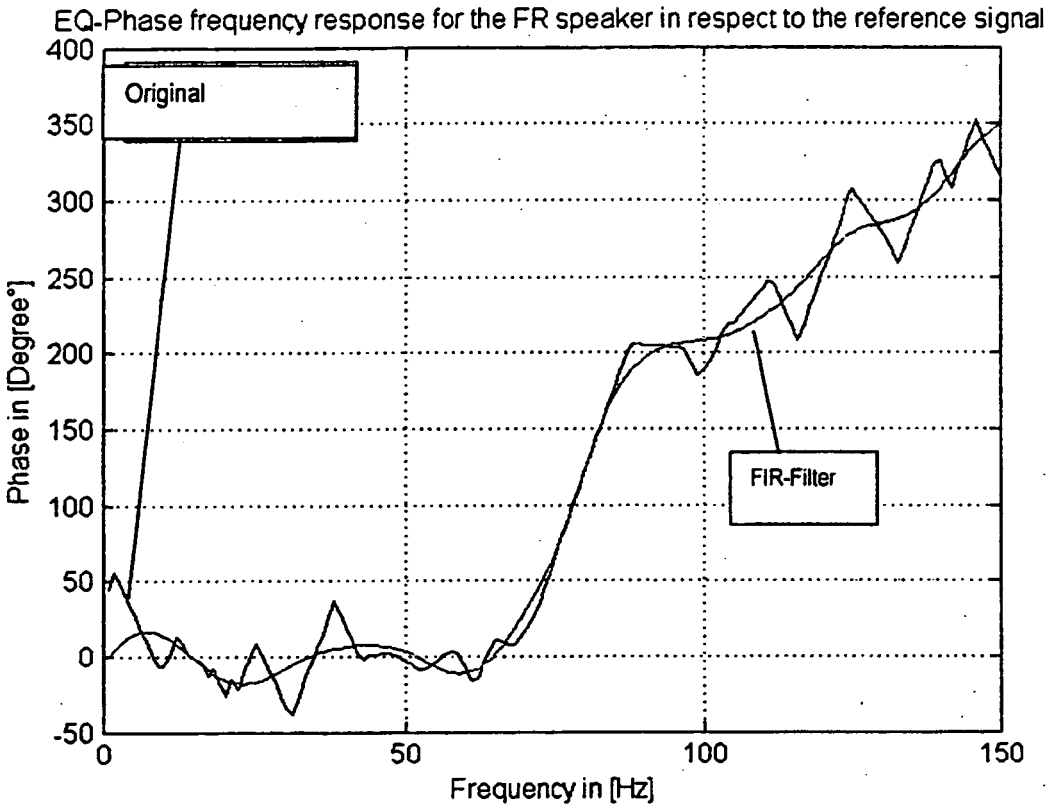

EQ-Phase frequency response for the FR speaker in respect to the reference signal
Original
FIR-Filter
Phase in [Degree°]
Frequency in [Hz]
400
350
300
250
200
150
100
50
0
-50
0
50
100
150

Fig. 17

Fig. 18

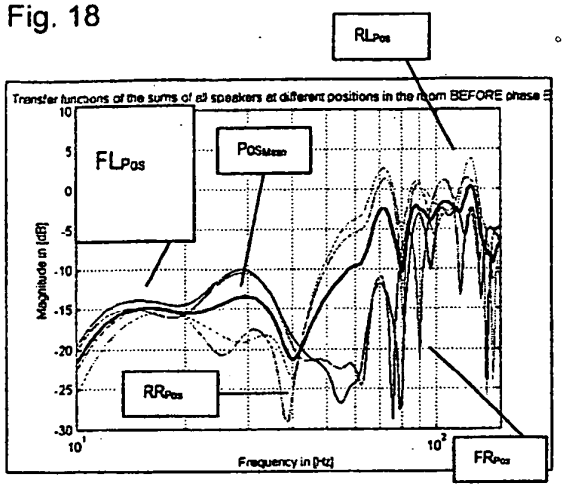
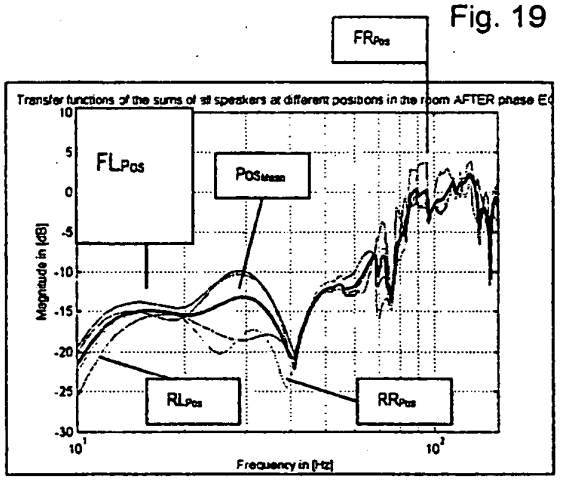
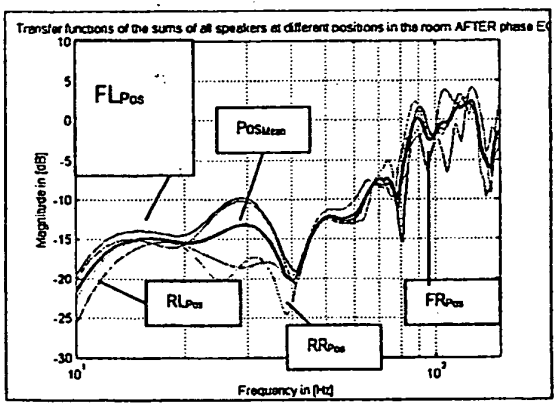


Fig. 19





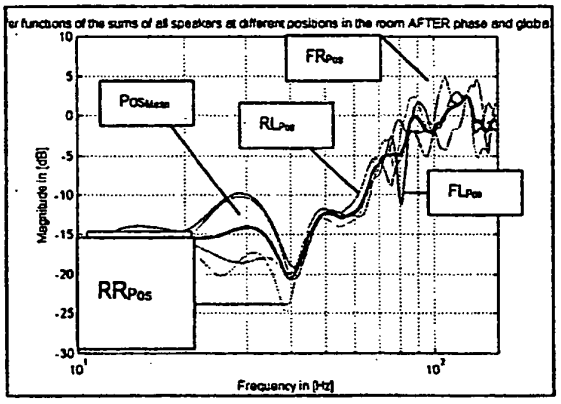


Fig. 20

Fig. 21

Fig. 22

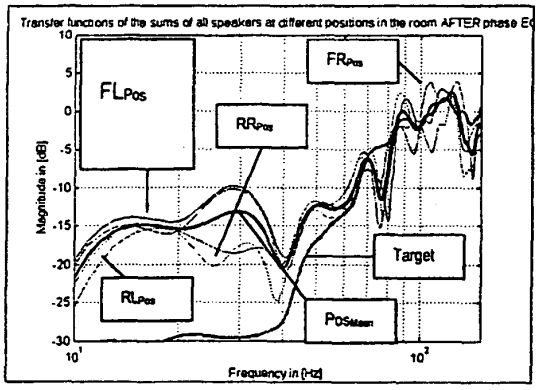
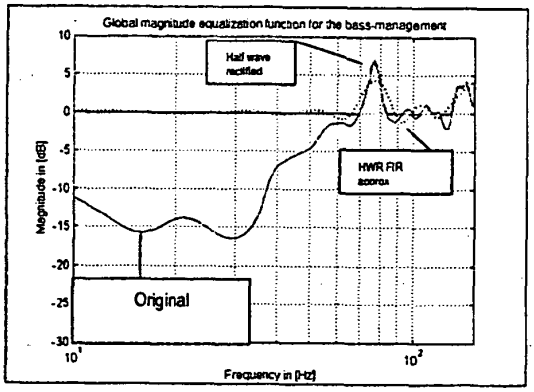


Fig. 23



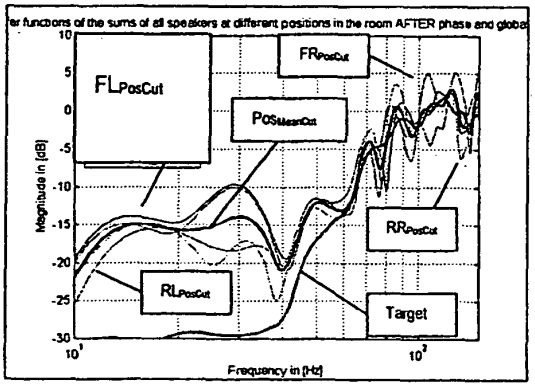


Fig. 24

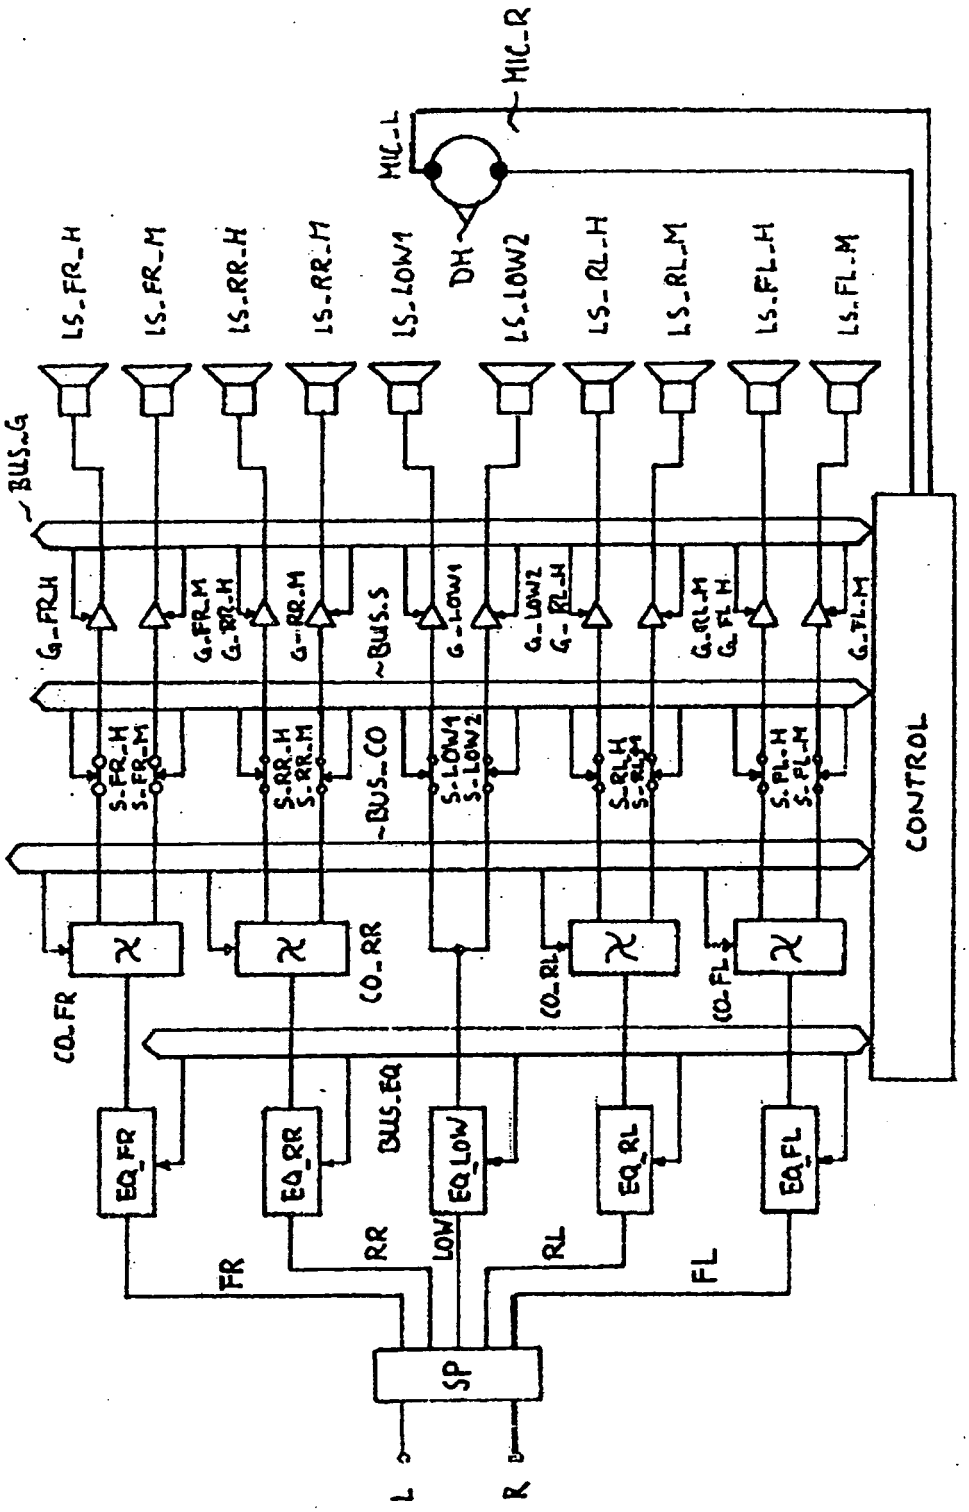

MIC_R
MIC_L
DH
LS_FR_H
LS_FR_M
LS_RR_H
LS_RR_M
LS_LOW1
LS_LOW2
LS_RL_H
LS_RL_M
LS_FL_H
LS_FL_M
BUS_G
G_FR_H
G_FR_M
G_RR_H
G_RR_M
G_LOW1
G_LOW2
G_RL_H
G_RL_M
G_FL_H
G_FL_M
BUS_S
S_FR_H
S_FR_M
S_RR_H
S_RR_M
S_LOW1
S_LOW2
S_RL_H
S_RL_M
S_FL_H
S_FL_M
BUS_CO
CONTROL
CO_FR
CO_RR
CO_RL
CO_FL
BUS_EQ
EQ_FR
EQ_RR
EQ_LOW
EQ_RL
EQ_FL
FR
RR
LOW
RL
FL
SP
L
R

Fig. 25

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5581621 A **[0004]**
- DE 19720217 A1 **[0005]**
- EP 0165733 A2 **[0006]**

Non-patent literature cited in the description

- **JENS BLAUERT.** Räumliches Hören, [Spatial listening. S. Hirzel Verlag, 1974 **[0025]**
- **E. ZWICKER ; R. FELDTKELLER.** Das Ohr als Nachrichtenempfänger [The ear as an information receiver. S. Hirzel Verlag, 1967 **[0037]**
- **ZWICKER, E. ; FASTL, H.** Psycho-acoustics - Facts and Models. Springer-Verlag, 1999 **[0059] [0060]**