



(11) **EP 1 852 562 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
01.05.2013 Bulletin 2013/18

(51) Int Cl.:
E04D 13/10 ^(2006.01) **E04D 13/12** ^(2006.01)
E04G 21/32 ^(2006.01)

(21) Application number: **07445019.8**

(22) Date of filing: **04.05.2007**

(54) **Bracket for roof equipment and roof protection system with that bracket**

Halterung für eine Dacheinrichtung und Dachschutzsystem mit dieser Halterung

Support pour équipement de toiture et système de protection de toit avec ce support

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE
SI SK TR**

(30) Priority: **05.05.2006 SE 0601005**

(43) Date of publication of application:
07.11.2007 Bulletin 2007/45

(73) Proprietor: **CW Lundberg Industri AB
792 36 Mora (SE)**

(72) Inventor: **Hedlund, Rolf
792 00 Mora (SE)**

(74) Representative: **Janson, Ronny
Ehrner & Delmar Patentbyrå AB
Box 10316
100 55 Stockholm (SE)**

(56) References cited:
**DE-C- 560 391 DE-U1- 9 103 193
DE-U1-202005 000 694 SE-L- 0 202 706
SE-L- 0 203 782**

EP 1 852 562 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Field of the invention

[0001] The invention concerns a bracket for roof equipment according to the preamble of claim 1. The invention also concerns a roof protection system.

Background of the invention

[0002] Roof equipment in the form of snow racks which are intended to comprise blockings against roof avalanches are typically mounted as close to the base of the roof as possible. A known bracket for such a roof equipment consists of a metal plate bent in L-shape, which is fastened to the roof in a way which depends on the type of roofing and which comprises a number of holes for snow rack pipes.

[0003] The known bracket has also been possible to use for fastening holding profiles in the form of so called profile boards, which are comprised of metal plate profiles which, by having a more considerable covering in vertical direction than three rack pipes (which is a common equipment) provide a more effective protection against roof avalanches. For fastening, these holding profiles are equipped with special fittings, which are inserted sideways of the holding profile and fixed by screw fasteners in holes in each bracket positioned along the base of the roof. Prior Art document DE560351 C shows such a described bracket.

[0004] Mounting of holding profiles in this way is, however, laborious and requires accurate fitting work, i.a. since the spacing between the holes of the holding profile not always corresponds to the position of the brackets.

[0005] Further, provision of special fittings adapted to the holding profiles are required as well as individual fastening at the respective bracket which altogether results in a costly and laboriously applicable solution.

Aim and most important features of the invention

[0006] It is an aim of the present invention to provide a bracket as stated initially wherein the problems of the background art are avoided or at least reduced.

[0007] In particular it is an aim to provide an economically more advantageous solution which furthermore is safe and easily mounted.

[0008] These aims are obtained in a bracket of the kind mentioned above through the features of the characterising portion of claim 1.

[0009] Hereby is achieved that a holding profile can be simply inserted into the receiving holes in the brackets mounted on the roof with good fit. This solution results in that besides the fact that the mounting will be fast, in that the holding profile is secured against forces in the direction of the roof pitch, also if the holding profile is not individually fixed to each bracket, since the fact that the construction with a slot-shaped hole portion of the receiv-

ing hole such that it closely connects to the shape of the holding profile results in that the latter is secured over its width.

[0010] Further is allowed use of simple fastening means for fixing the holding profile to a bracket, for example ordinary angle-irons and metal plate screws.

[0011] The construction of the receiving hole should further connect as close as possible (connect) to the shape of the holding profile, such that unnecessary play is avoided without for that sake the insertion through a plurality of brackets positioned after one another is made difficult.

[0012] In a preferred embodiment of the invention, the widened hole portions are dimensioned for receiving and cooperation with conventional rack pipes. This way it is achieved that the bracket will become a combination bracket which can be used for different applications with further improved economy.

[0013] It is preferable if the bracket has a weakened deformation portion for the reception of loads over a pre-determined level. This is an essential advantage when using a roof protection system for anchoring life lines for roof workers.

[0014] By the bracket and/or the holding profile being made in a metal plate material, the use of simple and economic machining methods and low manufacturing costs are possible.

[0015] The invention also concerns a roof protection system including a plurality of brackets and at least one holding profile.

Brief description of drawings

[0016] The invention will now be described in more detail by way of embodiments and with reference to the annexed drawings, wherein:

Fig. 1 shows a roof protection system including two brackets and a holding profile,

Fig. 2 shows the roof protection system in Fig. 1 during the process of inserting a holding profile into a bracket,

Fig. 3 shows a bracket according to the invention in larger scale, and

Fig. 4 shows in a side view the roof protection system with, besides the holding profile, a roof bridge mounted to the bracket over a holder.

Description of embodiments

[0017] The roof protection system in Fig. 1 includes two brackets 1 and 1' and a holding profile 4. Each bracket is made from a shaped and bent metal plate detail and includes a fastening portion 2 for fastening to a substrate in the form of a roof and a portion bent upwardly to an angle of essentially 90° thereto in the form of an engagement portion 3 which is constructed for cooperation with different types of roof equipment.

[0018] For that purpose the bracket 1 has a receiving hole 5 for receiving the holding profile 4. The holding profile 4 has a shallow U-shape with a web 7 and two, essentially in a right angle thereto, upstanding legs 8 and 9, which each one ends in rounded portions 10. These rounded portions are directed upwardly in the direction along the roof and through the rounded configuration the holding profile 4 comprises a good and gentle anchoring point for a life line for a roof worker.

[0019] In Fig. 2 is shown, for explanatory purposes, the roof protection system in Fig. 1 in the process of inserting the holding profile 4 into the receiving hole 5 in the bracket 1'. The bracket 1 in Fig. 3 is shown in a larger scale, whereof is shown the fastening portion 2 and the engagement portion 3, whereof the latter comprises the receiving hole 5.

[0020] The receiving hole 5 has a slot-shaped hole portion 11 with a central web portion 12 and two leg portions 15 and 16 at an angle to the web portion 12. The leg portions 15 and 16 widen from the web portion 12 and are terminated in widened hole portions 13 and 14, which are formed with such dimensions that they, on a one hand, are capable of receiving rack pipes, when the bracket is to be used for fastening one or more roof racks, on the other hand, be adapted to with good fit receive the rounded portions 10 of the holding profile 4.

[0021] 17 indicates a an additional hole for receiving rack pipes, which is positioned between the widened hole portions 13 and 14, however without being positioned such that it any way interferes with the slot-shaped hole portion 11 of the receiving hole 15.

[0022] The bracket 1 further comprises a deformation portion 6, which allows deformation and tearing apart, respectively, at loads exceeding pre-determined values for the purpose of preventing inelastic pull from a falling person having a life line fastened in a rack pipe or a holding profile which is arranged a the bracket 1.

[0023] The bracket 1 also comprises a support 18 for fastening a per se known holder for a roof/walking bridge.

[0024] When using the bracket for rack pipes or a rolled profile in the hole portion 13, at a certain load on the pipe in the direction in a downward direction, in the direction of the roof pitch, (downwardly to the right as seen in Fig. 3), the bracket will be deformed in such a way that the pipe is pressed down into the web portion 12 down against the fastening portion 2 of the bracket. This happens by the pipe being brought down into the leg portion 15 which becomes evenly narrower in the direction from the widened hole portion 13, which results in that the bracket is given a possibility to stay with its fasteners in a roof despite a strong pull-load. This is because the lever, which the force on the bracket acts upon, this way will be displaced from the top of the hole portion 13 in the direction against the bottom of the bracket, which results in that there will occur essentially shear forces acting on the fastenings which results in that a pull out from the roof can be avoided.

[0025] Fig. 4 shows a bracket 21 mounted on a roof

with a roof plane indicated with interrupted line at 22. A holding profile 25 is inserted into the receiving hole of the bracket. Further, a roof bridge 24 is mounted on the bracket 21 over a holder 23. The holder 23 is formed as an arch of a circle in order to adjoin to a contacting surface against a corresponding support surface 26 which is formed as an arch of a circle on the bracket. This construction results in that the holder can be fixed in different positions such that the roof bridge 24 can be mounted horizontally, essentially irrespective of the prevailing roof pitch. With 28 is indicated a fastener (corresponding to the fastener 18 in Fig. 3) for fastening the holder 23. At (one of) the positions marked with F_1 the holder is fixed to the bracket by for example screw fasteners. At the positions marked with F_2 , the roof bridge is fixed to the holder by for example screw fasteners.

[0026] It is an advantage to be able to combine the different functions of the inventive bracket into one single unit. On the one hand are achieved advantages with respect to handling such as simpler storage, simpler mounting on site on a roof, reduced tampering on the roof. Further is achieved the advantage that the holding profile can be positioned on an optimal position on a roof as seen from a snow protection point of view without this being a bar against the positioning of the roof bridge in the same place. During work on the roof it can be an advantage having the holding profile mounted close to the roof bridge, since the latter can prevent that certain tools and certain work material used by a roof worker falls down from the roof. Further it is easy for the roof worker to apply his life line (see above).

[0027] The invention can be modified within the scope of the following claims. It is preferred that the bracket and the holding profile are manufactured as bent metal plate details, but also other solutions such as welded details can come into question.

[0028] The receiving hole in the bracket can be shaped differently for adapting to a holding profile with different configuration. It is, however, an advantage to shape the bracket with widened hole portions that can be used for more than one purpose.

Claims

1. Bracket (1) for roof equipment including a fastening portion (2) for fastening on a roof and an engagement portion (3) for cooperation with said roof equipment, wherein the engagement portion (3) extends in a direction upwardly from the fastening portion (2), at an angle to the roof, as seen in a using position, wherein the engagement portion (3) has a receiving hole (5) for receiving roof equipment, wherein said receiving hole (5) includes a hole portion (11) which connects to widening hole portions (13,14) for forming of a continuous and closed cut-out for a holding profile (4) of the roof equipment, said cut-out comprising said receiving hole (5), **characterised in**

- **that** said hole portion (11) which connects to widened hole portions (13,14) is a slot shaped hole portion (11) and
- **that** the slot shaped hole portion (11) has a shallow U-shaped configuration with a web portion (12) essentially extending in said direction and a leg portion (15,16) adjoining to each end of the web portion, each one with an extension at an angle thereto, and each one adjoining to a widened hole portion (13, 14),

whereby the form of the receiving hole, in use of the bracket, closely connects to a shape of the holding profile (4).

2. Bracket (1) according to claim 1, **characterised in that** the receiving hole (5) has an extension essentially in said direction.
3. Bracket (1) according to claim 1 or 2, **characterised in that** said widened hole portions (13,14) are dimensioned for receiving and cooperating with rack pipes.
4. Bracket (1) according to any one of the previous claims, **characterised in that** it has a fastener (18,28) for fastening a holder (23) for a roof/walking bridge (24).
5. Bracket (1) according to any one of the previous claims, **characterised in that** it has a weakened deformation portion (6) for receiving loads above a predetermined level.
6. Bracket (1) according to any one of the previous claims, **characterised in that** it is comprised of a metal plate detail with the engagement portion (3) bent in an essentially right angle to the fastening portion (2).
7. Bracket (1) according to any one of the previous claims, **characterised in that** it has additional hole (17) for rack pipes.
8. Bracket (1) according to any one of the previous claims, **characterised in that** at least one outer leg portion (15) evenly transforms narrowing in the direction from an outer hole portion (13).
9. Roof protection system including a plurality of brackets (1,1') according to any one of the previous claims, and at least one holding profile (4), which has a web (7) and two legs (8,9) which are terminated with rounded chute-shaped profile portions (10), wherein the holding profile (4) has a transversal sectional shape which is adapted for insertion into the receiving holes (5) of the brackets (1), such that the form of the re-

ceiving hole (5) closely connects to the shape of the holding profile (4).

10. Roof protection system according to claim 9, **characterised in that** the web (7) of the holding profile along its length exhibits distributed holes (19) having collared edges.

10 Patentansprüche

1. Halterung (1) für eine Dacheinrichtung mit einem Befestigungsabschnitt (2) zum Befestigen auf einem Dach sowie einem Eingriffsabschnitt (3) zum Zusammenwirken mit der Dacheinrichtung, wobei sich der Eingriffsabschnitt (3), von einer Gebrauchsposition aus betrachtet, in einer vom Befestigungsabschnitt (2) aus nach oben verlaufenden Richtung in einem Winkel zum Dach erstreckt, wobei der Eingriffsabschnitt (3) ein Aufnahmeloch (5) zum Aufnehmen der Dacheinrichtung hat, wobei das Aufnahmeloch (5) einen Lochabschnitt (11) beinhaltet, der sich an erweiternde Lochabschnitte (13, 14) anschließt, um einen kontinuierlichen und geschlossenen Ausschnitt für ein Halteprofil (4) der Dacheinrichtung zu bilden, wobei der Ausschnitt das Aufnahmeloch (5) umfasst, **dadurch gekennzeichnet**,

- **dass** der Lochabschnitt (11), der sich an erweiterte Lochabschnitte (13, 14) anschließt, ein schlitzförmiger Lochabschnitt (11) ist, und
- **dass** der schlitzförmige Lochabschnitt (11) eine flache U-förmige Konfiguration mit einem Stegabschnitt (12), der sich im Wesentlichen in der genannten Richtung erstreckt, sowie einen Schenkelabschnitt (15, 16) hat, der an jedes Ende des Stegabschnitts angrenzt, wobei jeder davon eine Erstreckung in einem Winkel dazu aufweist und jeder an einen erweiterten Lochabschnitt (13, 14) angrenzt,

wobei sich die Form des Aufnahmelochs, im Gebrauch der Halterung, eng an eine Form des Halteprofils (4) anschließt.

2. Halterung (1) nach Anspruch 1, **dadurch gekennzeichnet, dass** das Aufnahmeloch (5) eine Erstreckung im Wesentlichen in der genannten Richtung hat.
3. Halterung (1) nach Anspruch 1 oder 2, **dadurch gekennzeichnet, dass** die erweiterten Lochabschnitte (13, 14) so dimensioniert sind, dass sie Schneefangrohre aufnehmen und damit zusammenwirken.
4. Halterung (1) nach einem der vorstehend aufgeführten Ansprüche, **dadurch gekennzeichnet, dass** sie ein Befestigungselement (18, 28) zum Befestigen ei-

nes Halters (23) für eine Dach-/Begehungsbrücke (24) hat.

5. Halterung (1) nach einem der vorstehend aufgeführten Ansprüche, **dadurch gekennzeichnet, dass** sie einen geschwächten Verformungsabschnitt (6) hat, um Lasten über einem vorbestimmten Niveau aufzunehmen.
6. Halterung (1) nach einem der vorstehend aufgeführten Ansprüche, **dadurch gekennzeichnet, dass** sie aus einem Blechelement gebildet ist, wobei der Eingriffsabschnitt (3) in einem im Wesentlichen rechten Winkel zum Befestigungsabschnitt (2) gebogen ist.
7. Halterung (1) nach einem der vorstehend aufgeführten Ansprüche, **dadurch gekennzeichnet, dass** sie ein zusätzliches Loch (17) für Schneefangrohre hat.
8. Halterung (1) nach einem der vorstehend aufgeführten Ansprüche, **dadurch gekennzeichnet, dass** mindestens ein äußerer Schenkelabschnitt (15) in der Richtung von einem äußeren Lochabschnitt (13) aus gleichmäßig enger werdend verläuft.
9. Dachschutzsystem mit mehreren Halterungen (1, 1') nach einem der vorstehend aufgeführten Ansprüche, und mit mindestens einem Halteprofil (4) mit einem Steg (7) und zwei Schenkeln (8, 9), die in gerundeten rutschenförmigen Profilabschnitten (10) enden, wobei das Halteprofil (4) eine transversale Querschnittsform hat, die so angepasst ist, dass das Profil in die Aufnahmelöcher (5) der Halterungen (1) eingefügt werden kann, so dass sich die Form des Aufnahmelochs (5) eng an die Form des Halteprofils (4) anschließt.
10. Dachschutzsystem nach Anspruch 9, **dadurch gekennzeichnet, dass** der Steg (7) des Halteprofils entlang seiner Länge verteilte Löcher (19) mit Bundkanten aufweist.

Revendications

1. Console (1) pour équipement de toit comportant une portion de fixation (2) pour la fixation à un toit et une portion d'engagement (3) pour la coopération avec ledit équipement de toit, la portion d'engagement (3) s'étendant dans une direction vers le haut depuis la portion de fixation (2), suivant un certain angle par rapport au toit, vu dans une position d'utilisation, la portion d'engagement (3) ayant un trou de réception (5) pour recevoir un équipement de toit, ledit trou de réception (5) comportant une portion de trou (11) qui se raccorde à des portions de trou s'élargissant (13, 14) pour former une découpe continue et fermée pour un profilé de retenue (4) de l'équipement de

toit, ladite découpe comprenant ledit trou de réception (5),

caractérisée en ce que

- 5 - ladite portion de trou (11) qui se raccorde à des portions de trou élargies (13, 14) est une portion de trou (11) en forme de fente et
- 10 - la portion de trou (11) en forme de fente a une configuration en forme de U peu profond avec une portion d'âme (12) s'étendant essentiellement dans ladite direction et une portion de patte (15, 16) adjacente à chaque extrémité de la portion d'âme, chacune s'étendant suivant un certain angle par rapport à celle-ci, et chacune étant adjacente à une portion de trou élargie (13, 14),

la forme du trou de réception, pendant l'utilisation de la console, étant étroitement associée à une forme du profilé de retenue (4).

2. Console (1) selon la revendication 1, **caractérisée en ce que** le trou de réception (5) s'étend essentiellement dans ladite direction.
- 25 3. Console (1) selon la revendication 1 ou 2, **caractérisée en ce que** lesdites portions de trou élargies (13, 14) sont dimensionnées de manière à recevoir et à coopérer avec des tubes de barrière.
- 30 4. Console (1) selon l'une quelconque des revendications précédentes, **caractérisée en ce qu'elle** présente une attache (18, 28) pour fixer un support (23) pour un pont de toit / une passerelle (24).
- 35 5. Console (1) selon l'une quelconque des revendications précédentes, **caractérisée en ce qu'elle** a une portion de déformation affaiblie (6) pour recevoir des charges au-dessus d'un niveau prédéterminé.
- 40 6. Console (1) selon l'une quelconque des revendications précédentes, **caractérisée en ce qu'elle** est constituée d'un détail de plaque métallique avec la portion d'engagement (3) recourbée suivant un angle essentiellement droit par rapport à la portion de fixation (2).
- 45 7. Console (1) selon l'une quelconque des revendications précédentes, **caractérisée en ce qu'elle** a un trou supplémentaire (17) pour des tubes de barrière.
- 50 8. Console (1) selon l'une quelconque des revendications précédentes, **caractérisée en ce qu'au moins** une portion de patte extérieure (15) est modifiée de manière uniforme en rétrécissant dans la direction depuis une portion de trou externe (13).
- 55 9. Système de protection de toit comportant une pluralité de consoles (1, 1') selon l'une quelconque des

revendications précédentes, et au moins un profilé de retenue (4) qui présente une âme (7) et deux pattes (8, 9) qui se terminent par des portions profilées (10) arrondies en forme de goulotte, le profilé de retenue (4) ayant une forme en coupe transversale qui est prévue pour être insérée dans les trous de réception (5) des consoles (1), de telle sorte que la forme du trou de réception (5) soit étroitement associée à la forme du profilé de retenue (4).

5

10

10. Système de protection de toit selon la revendication 9, **caractérisé en ce que** l'âme (7) du profilé de retenue présente, le long de sa longueur, des trous répartis (19) ayant des bords colletés.

15

20

25

30


35


40



45

50

55

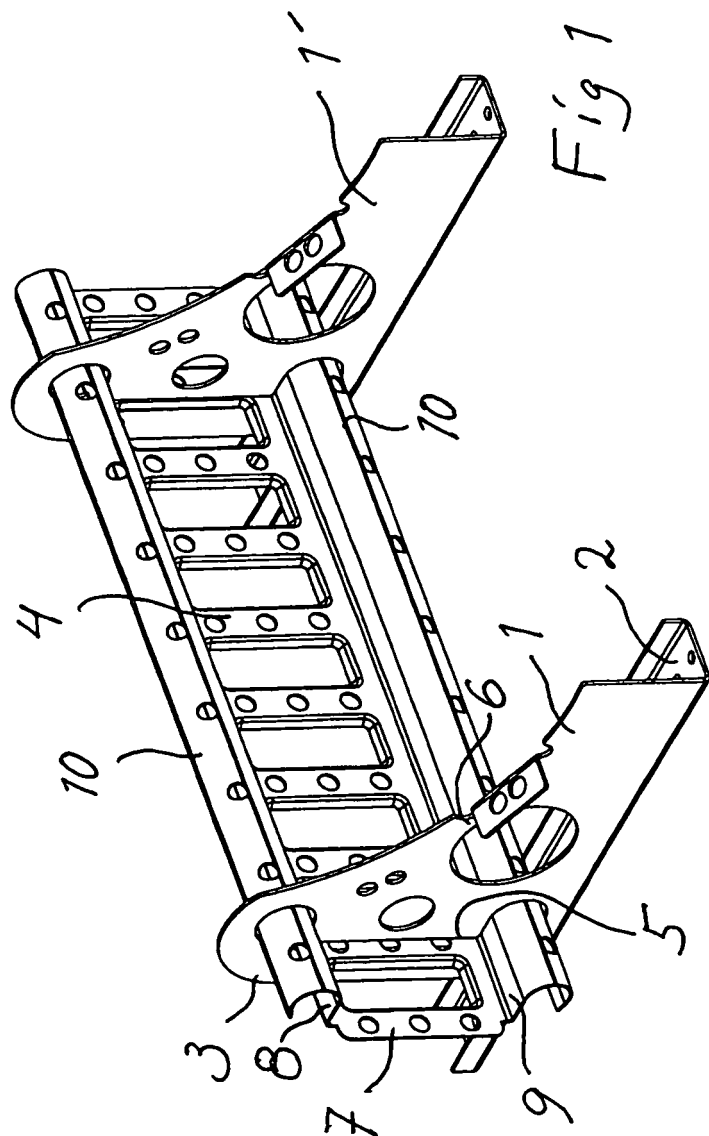

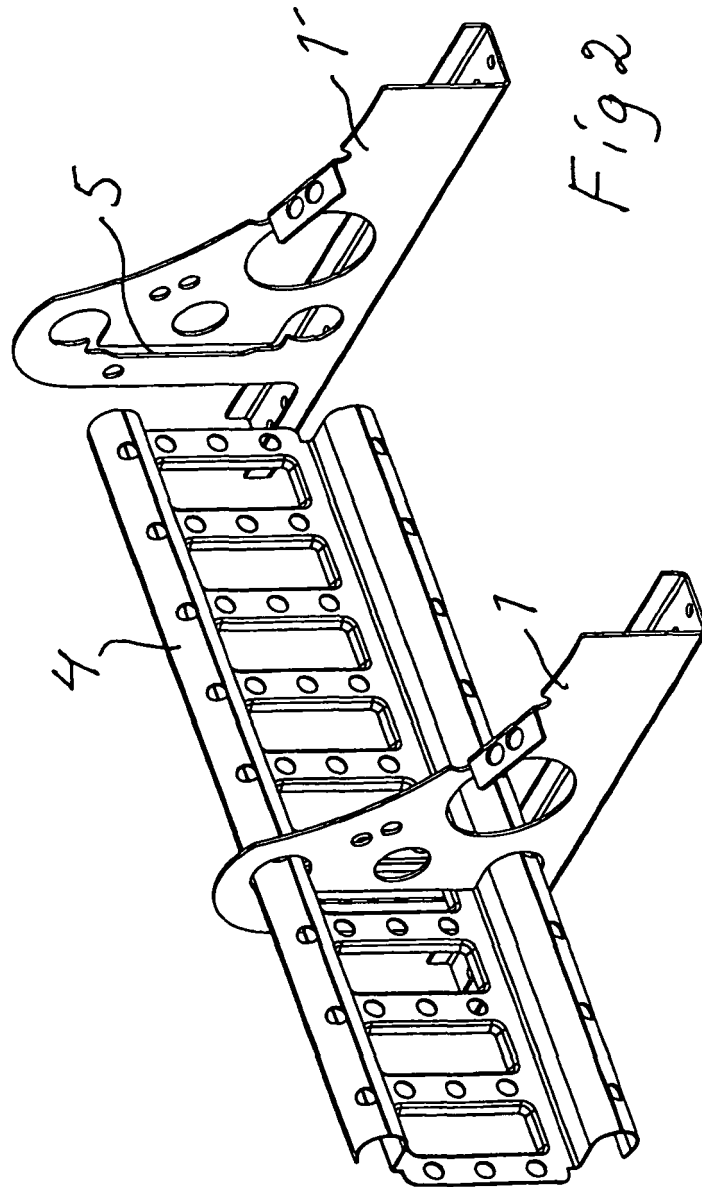

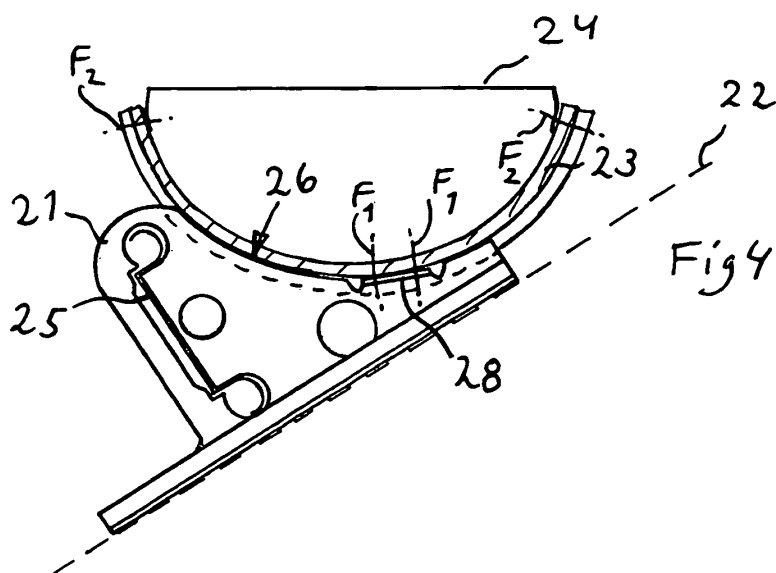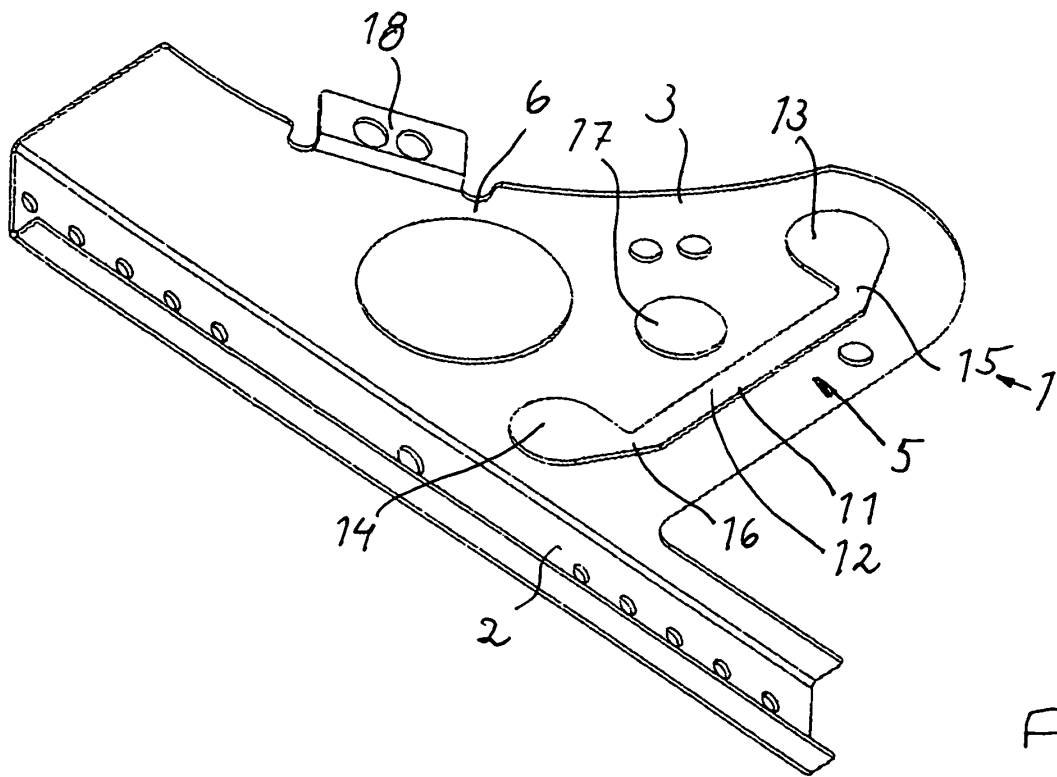

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 560351 C [0003]