



(11) **EP 1 854 721 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**

published in accordance with Art. 158(3) EPC

Note: Bibliography reflects the latest situation

(15) Correction information:

Corrected version no 1 (W1 A1)

Bibliography INID code(s) 72

(51) Int Cl.:

B65B 1/30 (2006.01)

A61J 3/00 (2006.01)

(86) International application number:

PCT/JP2006/302152

(48) Corrigendum issued on:

09.01.2008 Bulletin 2008/02

(87) International publication number:

WO 2006/087954 (24.08.2006 Gazette 2006/34)

(43) Date of publication:

14.11.2007 Bulletin 2007/46

(21) Application number: **06713295.1**

(22) Date of filing: **08.02.2006**

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**

(72) Inventors:

- **YUYAMA, Hiroyuki**
c/o Yuyama Mfg. Co., Ltd.
Toyonaka-shi, Osaka, 561-0841 (JP)
- **CHIHARA, Hirokazu**
c/o Yuyama Mfg. Co., Ltd.
Toyonaka-shi, Osaka, 561-0841 (JP)

(30) Priority: **16.02.2005 JP 2005039197**

(71) Applicant: **Yuyama Mfg. Co., Ltd.**

**Toyonaka-shi,
Osaka 561-0841 (JP)**


(74) Representative: **Flutter, Paula et al**

**EIP
Fairfax House
15 Fulwood Place
London WC1V 6HU (GB)**

(54) **TABLET FILLING DEVICE**

(57) Provided is a tablet filling device capable of continuing an operation without stopping the supply of the tablet container, filling with tablets, etc. even when the prescribed operations cannot be performed at the operating positions. The tablet filling device includes: a tablet supply unit (3) that fills a tablet container (12) with tablets; a carrying component (41) which carries the tablet cassette (12) from the tablet supply unit (3) to a standby position; a container holding component (65) provided at a delivery position and having a plurality of holding parts (67, 68) capable of holding the tablet container (12) according to a difference in an outer diameter dimension; and another carrying component (52) which carries the tablet container (12) held by a container holding component (65) to an operating position.

Figure 1

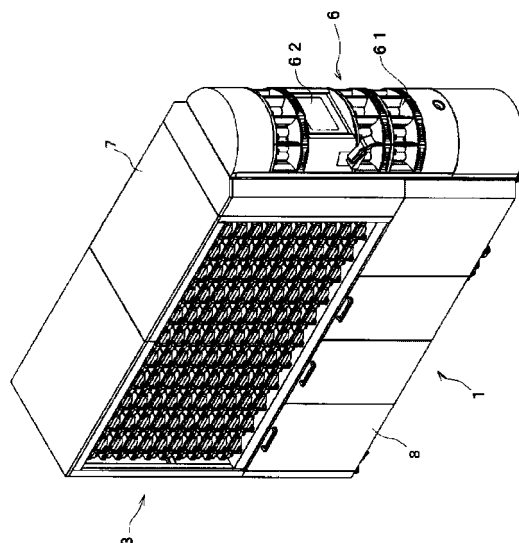

EP 1 854 721 A8