



(19)

(11)

EP 1 862 597 B1

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:  
09.12.2009 Bulletin 2009/50

(51) Int Cl.:  
**E02D 29/02 (2006.01)**

(21) Application number: **07075353.8**(22) Date of filing: **07.05.2007**(54) **"Combination of a structural block and a facing element attached thereto".**

Kombination aus einem Strukturblock und einem daran angebrachten Verblendungselement

Combinaison d'un bloc structurel et d'un élément de garniture fixé dessus

## (84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE  
SI SK TR**

(30) Priority: **18.05.2006 CA 2547415**

(43) Date of publication of application:  
**05.12.2007 Bulletin 2007/49**

## (73) Proprietors:

- **Risi, Angelo**  
Richmond Hill, ON L4S 1K6 (CA)
- **Matys, Tyler**  
Aurora ON L4G 7Y1 (CA)

## (72) Inventors:

- **Risi, Angelo**  
Richmond Hill, ON L4S 1K6 (CA)
- **Matys, Tyler**  
Aurora ON L4G 7Y1 (CA)

(74) Representative: **Donné, Eddy**

Bureau M.F.J. Bockstaal nv  
Arenbergstraat 13  
2000 Antwerpen (BE)

## (56) References cited:

**CA-C- 2 244 348 JP-A- 2000 064 244**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**Description****FIELD OF THE INVENTION**

**[0001]** The present invention relates to the combination of a structural block and a facing element attached thereto by means of a hanger.

**BACKGROUND OF THE INVENTION**

**[0002]** Facing elements can be added to the exterior of a structure for any number of reasons. For example, a facing element may be chosen for its aesthetic attributes, or alternatively, it could be chosen based on the resilience, sound dampening ability, or reflective properties of its material.

**[0003]** The structures discussed herein can include buildings, steel reinforced concrete block retaining walls and parapets, segmental retaining walls, and fences or acoustical barriers. The facing element can include any architectural or building material the designer wishes to incorporate into the aesthetic or physical properties of the structure. Examples include pre-cast concrete, marble, glass, steel, granite and other natural stone, plastics, or fabrics.

**[0004]** Structures can be broadly classified as either rigid or flexible structures. Rigid structures are those which are not designed to allow significant deflection or movement during or following construction. Deflections larger than those within a very narrow limit constitute a failure of the structure. Examples of such structures include most buildings, bridges, reinforced concrete block retaining walls, and pre-cast concrete culverts. Flexible structures are those structures which, despite undergoing movements, deflections, or settlements beyond the allowable limits of a rigid structure, continue to perform their intended structural function and are not considered to have failed. Examples of this type of structure are conventional and geogrid-reinforced segmental retaining walls. In this type of structure, blocks are dry-stacked (no mortar or adhesive is used) and the integrity of the structure is maintained by the structure's own weight in order to resist soil pressure and other loads applied through the earth they are retaining. The joints in a segmental retaining wall allow the units to move relative to one another within a much greater range without affecting the structural stability of the wall as a whole. An advantage of this type of system is that it does not require the foundation of the wall be buried below the frost line, or can be constructed on foundation soils where settlement is anticipated.

**[0005]** Currently, facings and building veneers are secured to the underlying structure in a number of ways. However, facing elements are not generally incorporated into flexible structures (i.e. segmental retaining walls) due to the limitations in existing techniques. Elements such as brick and stone are mortared and/or tied mechanically to the underlying structure. Coating elements such as

stucco can be applied directly to the underlying structure with the addition of a supporting layer such as metal lath. Panels, such as those composed of reinforced pre-cast concrete, granite or marble, are generally fastened to the underlying structure with structural fasteners such as steel dowels and bolts, but can also be chemically bonded. In order to ensure a strong bond, it is however usually preferred to perform the bonding in a controlled environment rather than in the field where chemical agents are more prone to contamination.

**[0006]** In general, the facing material is meant to be more aesthetically pleasing than the structural block it is covering, and is therefore generally more expensive. The look of the structure is significantly more economical than attempting to use the facing material as the entire structural element.

**[0007]** However, the use of mortar, steel lathing, and other adhesive compounds to apply a facing material to a structure requires skilled labour, is dependent on the craftsmanship of the installer, is dependent on climatic and moisture conditions, and long term adherence is subject to degradation (mortar under freeze thaw cycles). All of these elements add variability to the installation and may increase costs, installation time, and adversely effect long term performance (reliance on contractor for good workmanship and proper application of bonding/adhesive materials).

**[0008]** In addition, the use of coating elements such as stucco or other compounds that are applied directly on to the structure are known for poor long term performance under severe weather conditions (spalling of stucco or mortar due to freeze thaw cycles in Canada). The bond of mortar to concrete or brick, and the use of other adhesives, is vulnerable to environmental conditions such as temperature, moisture, pollutants, etc.

**[0009]** Another common problem associated with segmental retaining walls is the staining cause by efflorescence. Efflorescence is a phenomenon wherein water passing through the earth behind a retaining wall, enters the concrete block, dissolves the natural salts therein and evaporates from the outer surface of the retaining wall leaving behind the dissolved salts. These salts cause the white/grey/black staining commonly seen on masonry products, which has been a major problem for precast concrete manufacturers as the look of their walls is significantly diminished by the staining. Various concrete admixtures, face treatments and other techniques have been employed to help control the negative effects of efflorescence. However, most have little effect and are costly.

**[0010]** Furthermore, the practice of securing facings to flexible structures, such as segmental retaining walls, is not commonplace. Generally, structures such as segmental retaining walls are constructed of pre-cast concrete blocks, which allow the manufacturer to create various finishes on the face of the actual structural block (split rock, smooth with chamfers, exposed aggregate,

etc). Architects are becoming more and more demanding with respect to the appearance of such structures, ultimately wanting these exterior landscape walls and structural retaining walls to better compliment and blend into the surrounding natural and built environment. As such, the addition of a more attractive facing element would provide the manufacturer a competitive advantage in the marketplace.

**[0011]** Canadian Patent 2,244,348, titled Block Retaining Wall with Attached Facing Panels provides a segmental retaining wall block with a vertical slot in the face to be used in conjunction with a matching facing panel for securing the facing panel to the segmental retaining wall block. The vertical slot in the face of this segmental retaining wall block accepts a vertical tongue protruding from the back of the facing panel. To secure the facing panel to the structural block, the facing panel is slid vertically into the groove on the face of the block, and rests on the unit below, thereby supporting the panel vertically. As the facing element itself is resting on the facing element below, no space is provided between panels for movement or expansion. Contact between panels that are subject to movement or settlement, as with a flexible segmental retaining wall, creates stress on the panels as they attempt to move relative to each other. Furthermore, panels that rest on each other must be load bearing, as they take the load of all the other panels above. This greatly restricts the type of material that may be used as a facing.

**[0012]** This design requires that the panel be slid into the opening at the top of the block and pushed down to rest on the block underneath it. In order to install a facing panel on a block, the top of the block must be unobstructed. This can only be accomplished in one of two ways: either each course of blocks must be setback considerably to expose the entrance to the slot on the top of the block or, alternatively, the facing panels must be installed as the wall is being built, with each row of panels being secured prior to the stacking the successive course or blocks. Both these scenarios present serious drawbacks to a designer.

**[0013]** Given that most rigid reinforced concrete block walls are essentially vertical, and that flexible segmental retaining walls are constructed either vertical or near vertical (batter on most segmental retaining walls varies between 0° and 12°), the first of the above-mentioned scenarios is clearly impractical.

**[0014]** The second scenario, in which the facing panels are installed as the structural portion of the wall is being constructed, greatly increases the potential for damage to the facing panels since they are being placed during a time of "heavy construction". Large machines, bigger crews, and more activity in general cause a greater exposure to potentially damaging circumstances. In addition, the risk of theft or vandalism further increase with the length of time left on site.

**[0015]** Additionally, the placement of the panels during construction may slow progress on the actual structure,

which may be under a specific timeline in many cases the completion of one structure is required to support other related structural elements. Furthermore, the necessity of adding the facing panels during construction limits the designer's flexibility to change or modify the facing at later stages in construction or try different facings on the finished structure prior to choosing the final one.

**[0016]** Furthermore, installing the facing panels as the structure is being constructed means installing the facing panels before the structure has settled, a situation particularly important for flexible structures. With specific reference to the wall structure disclosed in CA 2,244,348, the facing units bear directly on each other, or on the structural unit below. If these panels are subject to movements or settlements, as they are in direct contact with each other and/or the structural block, they will be vulnerable to additional stresses and loads caused by differential movement. This may result in fractures or breakage of the facing panels due to expansion forces or differential settling of the structure.

**[0017]** As such, there exists a need for a system for attaching a facing element to a structural block which overcomes some of the afore-mentioned problems found in the prior art.

## **SUMMARY OF THE INVENTION**

**[0018]** The object of the present invention is to provide a system for attaching a facing element to a structural block which apparatus overcomes the above-identified deficiencies found in existing techniques.

**[0019]** More specifically, the invention is directed to the combination of a structural block with a facing element hung thereto for at least partially covering a longitudinal face of the structural block,

- wherein the facing element is hung to the structural block by means of a hanger affixed to the facing element, the hanger comprising a tab extending from the facing element for engaging the structural block; and
- wherein the tab and the block are engaged by engagement means comprising:
  - at least one substantially vertical post; and
  - at least one aperture for receiving the at least one substantially vertical post;
  - the at least one substantially vertical post being part of either the tab or the structural block, while the at least one aperture is part of the other, wherein said engagement means provide a non-rigid floating attachment of the facing element onto the structural block.

**[0020]** Preferably, the structural block comprises the at least one substantially vertical post and the tab comprises the at least one aperture.

**[0021]** Preferably also, the combination comprises two of substantially vertical posts and two apertures, the two substantially vertical posts being aligned with the two apertures.

**[0022]** With architects, designers, and consumers constantly looking for new and more appealing textures, colours, and aesthetic elements to incorporate into and enhance the built environment, the integration of a wide variety of materials is becoming increasingly popular. The present invention provides a means through which attractive facing materials can be incorporated into both rigid and flexible structures with better economics, better performance, and greater ease than existing methods and systems. The present invention further provides a means of controlling the negative effects of efflorescence.

**[0023]** The invention will be better understood upon reading the following non-restrictive description of preferred embodiments thereof, made with reference to the accompanying drawings.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

**[0024]**

Figures 1 and 2 are exploded perspective views of a system for attaching a facing element to a structural block according to a first preferred embodiment of the invention.

Figure 3 is an unexploded perspective view of the system for attaching a facing element to a structural block shown in Figures 1 and 2.

Figure 4 is a side view of the embodiment shown in Figures 1 to 3 with portions of the hanger being shown in phantom lines.

Figure 5 is a perspective view of the structural block according to the first preferred embodiment of the present invention.

Figure 6 is a side view of the structural block according to the first preferred embodiment of the present invention with portions of the hanger being shown in phantom lines.

Figures 7 and 8 are perspective views of the hanger according to the first preferred embodiment of the present invention.

Figures 9 and 10 are top and side views, respectively, of the hanger according to the first preferred embodiment of the present invention.

Figures 11 to 16 are side views illustrating the steps to be carried out for applying facing elements to two vertically disposed structural blocks, with portions of

the hanger being shown in phantom lines.

Figures 17 to 22 are perspective views illustrating the steps to be carried out for applying facing elements to a retaining wall in accordance with the present invention.

Figures 23 is a partially exploded plan view of a system for attaching a facing element to a structural block according to a second preferred embodiment of the present invention.

Figure 24 is a side view of the partially exploded system shown in Figure 23.

Figure 25 is a perspective view of the partially exploded system shown in Figures 23 and 24.

Figures 26, 27 and 28 are top, perspective and side views of a hanger insert according to the second preferred embodiment of the present invention.

Figures 29 and 30 are perspective views of a hanger according to the second preferred embodiment of the present invention.

Figure 31 is a side view of stacked structural blocks and facing elements of varying sizes according to the second preferred embodiment of the present invention.

#### **DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT**

**[0025]** Figures 1 to 4 illustrate a combination 10 comprising a structural block 12, a facing hanger 14 and a facing element 16 according to a first preferred embodiment of the invention.

**[0026]** Generally, structural blocks or units such as structural block 12 are designed to bear the load of the structure (compression, shear, etc) either on their own or by being combined with other structural materials. Such structural materials include, but are not limited to, reinforcing steel, geosynthetic reinforcements, mortar/grout, and concrete. Examples of such structural blocks, which have been in use for many years, include typical masonry building blocks, concrete, clay bricks, and segmental retaining wall units.

**[0027]** Blocks may range in size considerably. Typically masonry building blocks are manufactured in dimensions that allow a bricklayer or mason to place them by hand (i.e. weighing less than 20 kg) with typical dimensions of 190 mm (h) x 390 mm (l) x 100 mm (w). Such manually placed blocks often have hollow cores to decrease their weight and allow for the placement of grout and/or steel reinforcement.

**[0028]** For the construction of segmental retaining walls, the blocks may either be hand-placed pre-cast

blocks (weighing less than 35 kg) with typical dimensions of 150 mm (h) x 200 mm (l) x 300 mm (w), or machine-placed pre-cast blocks (weighing up to and including 750 kg) with typical dimensions of 300 mm (h) x 1830 mm (l) x 610 mm (w). Such blocks can also have hollow cores to decrease their weight and allow for the placement of grout and/or steel reinforcement.

**[0029]** Hanger 14 serves to hang facing element 16 from block 12, which provides a façade for an exposed, longitudinal face 20 of block 12. Hanger 14 can be machined from metal stock or fabricated from bent sheet metal, but is preferably a moulded plastic.

**[0030]** Facing element 16 is composed of a material or materials that have a preferred physical property or attribute, but are, for example, more expensive or less structurally sound than the material of structural block 12. The physical property can be an electrical, chemical or mechanical. Facing element 16 may be chosen for aesthetic reasons, or alternatively, facing element 16 could be chosen, for example, based on its resilience, sound dampening ability, or reflective properties. Facing element 16 could be made of pre-cast concrete, steel, marble, granite or other cut stone, glass, or wood panels.

**[0031]** Hanger 14 can be secured to facing element 16 mechanically, chemically, or, preferably, by placing it into a mould and allowing it to set into the facing material while the facing material is in a non-solid form, such as pouring wet concrete or plastic into a mould with the hanger 14 already inserted, thereby enveloping a portion of the hanger 14 within the facing material, as seen in Figures 4 and 11 to 16.

**[0032]** Preferably, facing element 16 is attached or integrated with hanger 14 at the place of manufacture. In the case of using a cast concrete facing panel, which is usually manufactured using a wet-cast mould with shapes/textures resembling natural stone or brick, the body 22 of hanger 14 is set into the facing element mould prior to pouring the concrete. Tabs 24 and a lower bumper portion 26 are left out of the mould, allowing the wet concrete to surround and/or bond to the majority of the hanger body, covering it in the process. It is to be noted that presence of a bumper portion, like bumper 26, is not essential to the functioning of the present invention. A hanger 14 which is stabilised and aligned only by the engagement of tab, or tabs, 24 and structural block 12 is within the scope of the invention.

**[0033]** In the case where a marble facing element 16 is preferred, hanger 14 is preferably glued to the marble element 16. For yet other types of facings 16, it may be preferable to otherwise mechanically or chemically bond hanger 14 to facing element 16.

**[0034]** Block 12 and tabs 24 are engagable by engagement means 13 including a post and an aperture located on one or the other of block 12 and tabs 24.

**[0035]** In the illustrated embodiment, block 12 is provided with at least one inset mounting post 28, incorporated into the top of block 12 and from which facing element 16 is hung along longitudinal side 20 of block 12.

Posts 28 can be manufactured as part of the block mould, in the case of a block 12 made of concrete, or can be added later through machining. Posts 28 can further be manufactured separately and attached to block 12 thereafter.

**[0036]** In the present example, which is to be considered in no way limiting, block 12 comprises two mounting posts 28. It is to be noted, however, that the numbers of posts 28 can vary according to the wide variety of applications of the present invention. Additional mounting posts 28 could be located on the opposite side of block 12 for use in a structure that has two exposed faces and requires a facing on both the front and back of the structure. For larger blocks, there may be a larger number of mounting posts 28, so as ensure an even hanging and ensure that the allowable spanning distance of the panel is not exceeded.

**[0037]** Preferably, a post 28 is formed entirely within the walls of block 12, i.e. no part of post 28 extends beyond the six sides of block 12. In this way, each post 28 comprises five exposed surfaces: a front longitudinal surface 30 which is co-planar with front surface 20, lateral surfaces 32 which are parallel to the lateral surfaces of block 12, a back surface which tapers downward away from longitudinal faces 20 and 30, and a top surface 34 which is parallel to upper face 36 of block 12.

**[0038]** As seen in the Figures, the block 12 is cut-out around in order to form post 28, leaving a horseshoe-shaped groove 33 with the longitudinal surface 30 being flush with the exposed face 20 of block 12. In a first embodiment, top surface 34 of post 28 is lower than upper face 36, creating a space 38 therebetween. This space 38 allows the hanger 14 to be inserted horizontally into the top of block 12, without being obstructed by the next course of blocks 12 stacked above it. As such, facing elements 16 can be placed after the wall/structure is built, regardless of whether the structure is vertically aligned or is battered back.

**[0039]** In an alternate embodiment, top surface 34 and upper face 36 are co-planar. In order to allow the placement of a facing element 16 on a post 28, an additional cut out is provided along the lower face of block 12 (and therefore any corresponding blocks 12 positioned above) in line with post 28, in order to allow create an equivalent space 38, this time above the lower block 12 in the bottom side of the block 12 above it and provide access to post 28.

**[0040]** As discussed above, hanger 14 comprises tabs 24 and a bumper 26 that protrude from facing element 16. In addition, each tab 24 comprises an aperture 40 which is slightly larger in size than a post 28. Hanger 14 slips over the mounting posts 28, ultimately resting in the horseshoe-shaped groove 33 set in the top of the block 12. Body 22 or hanger 14 is slightly smaller than facing panel 16 and longitudinal face 20. Tabs 24 extend from the top of the hanger 14 at a 90 degree angle to a distance roughly equivalent with the depth of groove(s) 33 inset into the top of block 12. Hanger 14 also comprises gus-

sets 42 extending between tab 24 and body 22. The vertical thickness of tab 24 is slightly less than the vertical space 30 between top surface 42 of post 28 and top face 44 of block 12. This ensures that tab 24 can be inserted horizontally into the face of block 12, and, once inside, be slipped down over mounting post 28. As such, facing element 16 can be placed after the wall or structure is built, even if the block 12 is positioned below another block 12.

**[0041]** In yet another alternate embodiment, the locations of post 28 and aperture 40 are reversed within engagement means 13. In this embodiment, tab (or tabs) 24 of hanger comprises a downwardly extending vertical post at its outer edge. A corresponding aperture is then provided in block 12 to receive the downward facing post. The functionality of this alternative is maintained by similarly providing space 38 below the upper 36 face of block 12 in which tab 24 is inserted horizontally without being obstructed by the next course of blocks stacked above it. The aperture in block 12 should be about the same size as the downwardly extending vertical post, or could be part of a much larger void, as in a hollow block. In either case, hanger 14 allows facing element 16 to be hung from block 12.

**[0042]** With reference now to Figures 11 to 22, the method of installing facing panels 16 to a wall 50 of blocks 12 will be described. The following method can also be applied to any of the above-mentioned alternate embodiments.

**[0043]** Retaining wall 50 which is illustrated comprises four courses of structural blocks 12a, 12b, 12c and 12d stacked alternatingly one atop the other. A first facing element 16a is aligned with a first block 12a from the bottommost course, so that tab 24 is aligned with space 38. Hanger 14 is then inserted, in direction 52, into the space between post 28 and the bottom face of the block above of course 12b. When bumper 26 engages the longitudinal face 20 of block 12a, facing element 16 is lowered in direction 54. Once lowered, tab 24 fully surrounds post 28, and the bottom side of tab 24 rests on the bottom of the horseshoe-shaped groove 33, including gusset 42.

**[0044]** This process is then repeated for each block 12a in the bottom most course, and then similarly for the blocks 12b in the course above that, and so on until each block 12 has a facing element affixed thereto, as seen in Figure 21.

**[0045]** Note that it is important to start from the bottommost course and work upwards because, as seen most clearly in figure 16, first facing element 12a cannot be raised enough to withdraw it from block 12 if a second facing element 12b is positioned above.

**[0046]** Lastly, finishing blocks 56 are fixed on top of each block 12 whose upper face 36 is exposed, thereby preventing the top course of finishing elements 16d from being removed.

**[0047]** As such, the structural elements of wall 50 can be erected, allowing the remainder of the construction to continue, while allowing the facing panels to be installed

at a later date.

**[0048]** Figures 23 to 31, illustrate another preferred embodiment of the invention.

**[0049]** This other combination 100 comprises a structural block 112, a hanger 114, a facing element 116 and at least one hanger insert 118. In this embodiment, hanger inserts 118 are inserted into block 112 via vertical a vertical slots 120. The slots 120 have a larger cavity set back from the face of block 112.

**[0050]** As pictured, a pair of hanger inserts 118 fit into vertical slots 120 in block 112, which extend from upper face 122 to lower face 124 of block 112 and have a complementary shape to that of insert 118. The larger back-side of insert 118 and slot 120 prevents insert 118 from any frontward or backward movement. Once insert 118 is placed inside block 112 and the following course of blocks 112 are laid thereabove, insert 118 is locked in place.

**[0051]** With specific reference to Figures 26 to 28, each insert 118 comprises a shaft 126 and a substantially vertical post 128 extending outwards and upwards from shaft 126. Shaft 126 comprises straight section 130 and flanges 132 extending laterally outwards from therefrom, the combination of which creates a tapered cross-section

which is of substantially constant over the length of shaft 126. Opposite to flanges 132, post 128 projects from straight section 130 and forms a groove 134 therebetween comprising vertical surface 138, bottom surface 140 and outer surface 142 of straight section 130. Angled surface 136 is further provided to ease placing of hanger 114 within groove 134, which is equivalent to above-mentioned groove 33.

**[0052]** The complementary shape of each slot 120 takes the form of shaft 126 (i.e. straight section 130 and flanges 132), but of slightly greater dimensions so as to allow movement of insert 118 within slot 120 and forms an opening down the longitudinal face of block 112 the width of straight section 130. In this way, shaft 126 can slide freely in a vertical direction within slot 120 with post 128 outside slot 120. Furthermore, because the widths of flanges 132 and post 128 are greater than that of straight section 130, insert 118 is constrained to move in the vertical direction only.

**[0053]** The height of insert 118 is less than the height of block 112, i.e. the distance between upper face 122 and lower face 124.

**[0054]** The embodiment illustrated in the preceding Figures describes a block 112 with two slots 120 and a corresponding two inserts 118, however it is to be noted that embodiments involving a single slot 120 and corresponding insert 118, as well as more than two of each, are within the scope of the present invention.

**[0055]** As shown in Figures 29 to 31, tabs 144 of hanger 114 comprise rails 144 projecting from body 146. Each rail 144 comprises one or more apertures 148 dimensioned to receive a post 128 of insert 118 and rest in groove 134. As pictured, the two rails 144 are identical and either one is capable of engage posts 128, while the

remaining rail functions as a bumper stabilising hanger 114 and ensuring that facing element 116 is properly aligned with the longitudinal face of block 112. This versatility advantageously enables the installation of each facing element 116 in one of two distinct orientations, effectively doubling the options available to an architect or designer. Furthermore, apertures 148 are considerably wider than posts 128, enabling a user to slide the facing back and forth a certain distance.

**[0056]** As with the above-described hanger 16, hanger 116 is preferably attached or integrated with hanger 114 at the place of manufacture. In the case of a cast facing panel, body 146 is set in the facing panel mould material prior to setting. Rails 144 are left outside the mould, while the wet concrete material is allowed to flow around body 146, through casting apertures 150 and around the C-shape created by outer rails 152, thereby securing the facing material to hanger 114 when hardened.

**[0057]** Figure 31 shows four structural blocks 112a, 112b, 112c and 112d stacked on top of each other. Facing element 116a is hung from insert 118a which is vertically supported by the upper face of block 112b. It is important to note that, in this case, blocks 112a, 112b, 112c and 112d are stacked such that respective slots 120a, 120b, 120c and 120d (not shown) are not in alignment. Were this the case, each insert 118 could fall into the lower block's slot 120 as each insert 118 is shorter than each corresponding slot 120.

**[0058]** Alternatively, a slot 120 could be provided which does not extend completely through block 112, but rather from upper face 122 to somewhere above lower face 124, thereby creating a surface to vertically support insert 118. Alternatively again, a small plate of greater dimension than the cross-section of slot 120 could be inserted between two vertically stacked blocks 112, and positioned so as to prevent an insert 118 from falling into the slot 120 of a lower block.

**[0059]** Facing element 116a is dimensionally smaller than corresponding block 112a, which leaves an opening 154 between facing element 112a and any adjacent facing elements. This opening 154 is particularly important in situations where some movement or settling is expected from the structure. An opening 154 between facing element 116a and a laterally adjacent facing element 116 (not shown) allows for small adjustments of the position of element 116a relative to block 112a.

**[0060]** Providing a facing system which "floats", rather than being rigidly fixed or resting on a lower block, allows the use of facing panels that can extend over one and a half, or two courses of structural blocks. As further seen in Figure 31, facing element 116b, hung from insert 118b, and facing element 116d, hung from insert 118d, can combine to provide facing to block 116c. This feature is advantageous in that it visually interrupts up the unnatural horizontal lines in the face of the wall. This interruption of horizontal lines reduces the look of a manufactured "dimensional" facing, and creates a more natural, aesthetically pleasing look as the eye does not pick up the

horizontal joints as easily. Furthermore, this system has the ability to hide slight variances in the horizontal alignment of the wall, which are often caused by differential settlement or an uneven base. The less continuous the lines are, the more difficulty the eye has in picking up these variances.

**[0061]** Combinations 10 and 100 are simple and do not require skilled labour as would the use of mortar, steel lathing, and other adhesive compounds. Thus, combinations 10 and 100 are not subject to expensive labour costs or the craftsmanship and/or knowledge of the installer. As well, combinations 10 and 100 require no mortar or other chemical adhesives to secure them, removing any vulnerability to non-ideal weather conditions or long term degradation.

**[0062]** Similarly, combinations 10 and 100 do not require chemical bonds to secure them, and therefore are not subject to the spalling or degradation often found with stucco and other coatings in extreme weather environments. When a marble facing element 16 or 116 is favoured, and it remains necessary to glue the marble facing element to hanger 14 or 114, such gluing can be performed off-site and at any time prior to final installation. This represents a major improvement over prior art systems which would otherwise necessitate non-ideal fabrication conditions and be at the mercy of varying weather conditions and work schedules.

**[0063]** Combinations 10 and 100 are "floating systems", allowing the facing to hang from the structural block with no part of the facing contacting or bearing on any other facing element. This structural independency allows for the settlement or movement between adjacent units and expansion or contraction of the various elements relative to one another. Being structurally independent ensures each individual facing panel 16 will not rely on or be effected by other surrounding panels. This also allows for replacement of damaged panels without having to remove all of the surrounding panels 16.

**[0064]** In addition, the use of the "floating panel" system described herein provides a space between body 22 or 146 of hanger 14 or 144, respectively, and structural block 12 or 112, ensuring that water does not continue through to the facing and essentially severing the efflorescence process. This is a clear advantage over existing facing panel systems which place facing elements flush with the face of the structural block to which they're attached.

**[0065]** Lastly, by allowing the user to place the facing elements at any time after construction, the more expensive, delicate facing can be stored off-site and installed at a time when the "heavy construction" is not taking place, thereby significantly lowering exposure potentially damaging conditions, and reducing the risk of theft or vandalism.

**[0066]** The above description of a preferred embodiment of the present invention should not be read in a limitative manner as refinements and variations are possible without departing from the scope of the invention.

The scope of the invention is defined in the appended claims and their equivalents.

## Claims

1. The combination of a structural block (12,112) with a facing element (16,116) hung thereto for at least partially covering a longitudinal face (20) of said structural block (12,112),
  - wherein said facing element (16,116) is hung to said structural block (12,112) by means of a hanger (14,114) affixed to said facing element (16,116), said hanger (14,114) comprising a tab (24,144) extending from said facing element (16,116) for engaging said structural block (12,112); and
  - wherein said tab (24,144) and said block (12,112) are engaged by engagement means comprising:
    - at least one substantially vertical post (28,128); and
    - at least one aperture (40,148) for receiving said at least one substantially vertical post (28,128);
    - said at least one substantially vertical post (28,128) being part of either said tab (24,144) or said structure block (12,112), while said at least one aperture (40,148) is part of the other;
    - wherein said engagement means provide a non-rigid floating attachment of the facing element onto the structural block.
2. The combination of claim 1 wherein the structural block (12,112) comprises said at least one substantially vertical post (28,128) and the tab (24,144) comprises said at least one aperture (40,148).
3. The combination of claim 2 wherein the structural block (12) comprises at least one opening (38) in its longitudinal face (20) for horizontal receiving said tab (24) and enabling engagement of said at least one aperture (40) on the corresponding at least one substantially vertical post (28).
4. The combination of claim 3 wherein said at least one substantially vertical post (28) is inset in said structural block (12) and creates a groove (33) in an upper face (36) of said structural block (12) surrounding said at least one substantially vertical post (28) and said opening (38) in said longitudinal face (20).
5. The combination of claim 4 wherein said at least one substantial vertical post (28) has an upper surface (34) lower than the upper face (36) of said structural block (12).
6. The combination of any one of claims 2 to 5 wherein said at least one substantially vertical post (28) further comprises a longitudinal surface (30) which is flush with the longitudinal surface (20) of said structural block (12) whereby said groove (33) extends to said longitudinal face (20).
7. The combination of claim 2 wherein said structural block (112) further comprises a substantially vertical slot opening (120) along said longitudinal face (20) of said structural block (112) and a complementary insert (118) comprising a shaft portion (126) for engagement with said substantially vertical slot (120), said complementary insert (118) comprising said at least one substantially vertical post (128).
8. The combination of claim 7 wherein said slot portion (120) comprises a generally tapered cross-section tapering outwardly from said longitudinal face (20) and said complementary insert (118) has a corresponding generally tapered cross-section.
9. The combination of claim 8 wherein said generally tapered cross-section comprises a straight section (130) and a flange (132), said straight section (130) being proximate to said at least one opening along said longitudinal face (20).
10. The combination of claim 9 wherein said substantially vertical post (128) extends outwards from said straight section (130).
11. The combination of any one of claims 7 to 10 wherein said substantially vertical slot (120) extends from an upper face (122) of said structural block (112) to a lower face (124) of said structural block (112).
12. The combination of claim 11 wherein said insert (118) is shorter in length than the distance between said upper (122) and lower faces (128) of the structure block (112).
13. The combination of claim 1 wherein said structural block comprises said at least one aperture and said tab comprises said at least one substantially vertical post.
14. The combination of claim 13 wherein said at least one substantially vertical post extends downward from said tab and said at least one aperture comprises a downwardly extending void area in said structural block.
15. The combination of claim 14 wherein said structural block comprises an opening in said longitudinal face for horizontally receiving said tab and said at least one substantially vertical post.

one substantially vertical post, and for enabling engagement of said at least one aperture into at least one substantially vertical post.

16. The combination of any one of claims 1 to 15 wherein said hanger (14,114) comprises a body portion (22,146) extending along, and substantially parallel to, said longitudinal face (20) of said structural block (12,112) and wherein said tab (24,144) extends substantially perpendicularly from said body portion (22,146). 5

17. The combination of claim 16 wherein said hanger (14,114) is affixed to said facing element (16,116) by moulding said facing element (16,116) around said body portion (22,146). 15

18. The combination of claim 16 or 17 wherein said hanger (14,114) further comprises a bumper portion (26) extending from said body portion (22,146) in the same direction as said tab (24,144) so as to abut said said longitudinal face (20) of said structural block (12,112). 20

19. The combination of claim 18 wherein said tab (144) and said bumper portion (26) are both in the form of rails that extend longitudinally across said body portion (146) and are interchangeable. 25

20. The combination of any one of claims 1 to 19 wherein said facing element (16,116) is made of a pre-cast concrete. 30

21. The combination of any one of claims 1 to 20 wherein said structural (12,112) block has a lower face (124) and the said upper and lower faces of said structural block (12,112) comprise complementary shapes for allowing said structural block (12,112) to be stacked upon another structural block (12,112). 35

22. The combination of any one of claims 1 to 21, comprising two of said at least one substantially vertical post (28,128) and two of said at least one aperture (40,148), said two substantially vertical posts (28,128) being aligned with said at least two apertures (40,148), respectively. 45

#### Patentansprüche

1. Kombination eines Strukturblocks (12, 112) mit einem daran aufgehängten Verblendungselement (16, 116) zum mindestens teilweise Bedecken einer Längsseite (20) des Strukturblocks (12, 112), 55  
 - wobei das Verblendungselement (16, 116) mittels eines an dem Verblendungselement (16, 116) befestigten Hängelements (14, 114) an

dem Strukturblock (12, 112) aufgehängt ist, wobei das Hängelement (14, 114) eine sich von dem Verblendungselement (16, 116) erstreckende Lasche (24, 144) zum Eingriff an dem Strukturblock (12, 112) aufweist; und  
 - wobei die Lasche (24, 144) und der Block (12, 112) durch Eingriffsmittel in Eingriff sind, umfassend:

- mindestens einen im Wesentlichen vertikalen Pfeiler (28, 128); und
- mindestens eine Öffnung (40, 148) zur Aufnahme des mindestens einen im Wesentlichen vertikalen Pfeilers (28, 128);
- wobei der mindestens eine im Wesentlichen vertikale Pfeiler (28, 128) entweder Teil der Lasche (24, 144) oder des Strukturblocks (12, 112) ist, während die mindestens eine Öffnung (40, 148) Teil des anderen ist;
- wobei die Eingriffsmittel eine nicht starre, schwimmende Befestigung des Verblendungselements an dem Strukturblock bereitstellen.

2. Kombination nach Anspruch 1, wobei der Strukturblock (12, 112) mindestens einen im Wesentlichen vertikalen Pfeiler (28, 128) aufweist und die Lasche (24, 144) mindestens eine Öffnung (40, 148) aufweist.

3. Kombination nach Anspruch 2, wobei der Strukturblock (12) mindestens eine Öffnung (38) in seiner Längsseite (20) zur horizontalen Aufnahme der Lasche (24) und Ermöglichung des Eingriffs der mindestens einen Öffnung (40) an dem entsprechenden mindestens einen im Wesentlichen vertikalen Pfeiler (28) aufweist.

4. Kombination nach Anspruch 3, wobei mindestens eine im Wesentlichen vertikale Pfeiler (28) in den Strukturblock (12) eingesetzt ist und eine Nut (33) in einer Oberseite (36) des Strukturblocks (12) erzeugt, die mindestens einen im Wesentlichen vertikalen Pfeiler (28) und die Öffnung (38) in der Längsseite (20) umgibt.

5. Kombination nach Anspruch 4, wobei mindestens eine im Wesentlichen vertikale Pfeiler (28) eine Oberseite (34) aufweist, die niedriger als die Oberseite (36) des Strukturblocks (12) ist.

6. Kombination nach einem der Ansprüche 2 bis 5, wobei mindestens eine im Wesentlichen vertikale Pfeiler (28) weiter eine Längsseite (30) umfasst, die bündig zu der Längsseite (20) des Strukturblocks (12) ist, wobei die Nut (33) sich zu der Längsseite (20) erstreckt.

7. Kombination - nach Anspruch 2, wobei der Strukturblock (112) weiter eine im Wesentlichen vertikale Schlitzöffnung (120) entlang der Längsseite (20) des Strukturblocks (112) und einen komplementären Einsatz (118), der einen Schafteil (126) zum Eingriff mit dem im Wesentlichen vertikalen Schlitz (120) besitzt, umfasst, wobei der komplementäre Einsatz (118) mindestens einen im Wesentlichen vertikalen Pfeiler (128) umfasst.

8. Kombination nach Anspruch 7, wobei der Schlitzteil (120) einen allgemein verjüngten Querschnitt umfasst, der sich in Bezug zu der Längsseite (20) nach außen verjüngt, und der komplementäre Einsatz (118) einen entsprechenden allgemein verjüngten Querschnitt aufweist.

9. Kombination nach Anspruch 8, wobei der generell verjüngte Querschnitt einen geraden Abschnitt (130) und einen Flansch (132) aufweist, wobei der gerade Abschnitt (130) nächst mindestens einer Öffnung entlang der Längsseite (20) gelegen ist.

10. Kombination nach Anspruch 9, wobei der im Wesentlichen vertikale Pfeiler (128) sich von dem geraden Abschnitt (130) nach außen erstreckt.

11. Kombination nach einem der Ansprüche 7 bis 10, wobei der im Wesentlichen vertikale Schlitz (120) sich von einer Oberseite (122) des Strukturblocks (112) zu einer Unterseite (124) des Strukturblocks (112) erstreckt.

12. Kombination nach Anspruch 11, wobei der Einsatz (118) von der Länge her kürzer als der Abstand zwischen der Oberseite (122) und der Unterseite (124) des Strukturblocks (112) ist.

13. Kombination nach Anspruch 1, wobei der Strukturblock die mindestens eine Öffnung aufweist und die Lasche den mindestens einen im Wesentlichen vertikalen Pfeiler aufweist.

14. Kombination nach Anspruch 13, wobei der mindestens eine im Wesentlichen vertikale Pfeiler sich von der Lasche nach unten erstreckt und mindestens eine Öffnung einen sich nach unten erstreckenden Leerbereich in dem Strukturblock umfasst.

15. Kombination nach Anspruch 14, wobei der Strukturblock eine Öffnung in der Längsseite zur horizontalen Aufnahme der Lasche und des mindestens einen im Wesentlichen vertikalen Pfeilers und zur Ermöglichung des Eingriffs der mindestens einen Öffnung in mindestens einen im Wesentlichen vertikalen Pfeiler aufweist.

16. Kombination nach einem der Ansprüche 1 bis 15,

5 wobei das Hängeelement (14, 114) einen Rumpfteil (22, 146) umfasst, der sich entlang und im Wesentlichen parallel zu der Längsseite (20) des Strukturblocks (12, 112) erstreckt, und wobei die Lasche (24, 144) sich im Wesentlichen senkrecht von dem Rumpfteil (22, 146) erstreckt.

10 17. Kombination nach Anspruch 16, wobei das Hängeelement (14, 114) durch Anformen des Verblendungselement (16, 116) um den Rumpfteil (22, 146) herum an dem Verblendungselement (16, 116) befestigt ist.

15 18. Kombination nach Anspruch 16 oder 17, wobei das Hängeelement (14, 114) weiter ein Anschlagteil (26) aufweist, das sich von dem Rumpfteil (22, 146) in der gleichen Richtung wie die Lasche (24, 144) erstreckt, um an der Längsseite (20) des Strukturblocks (12, 112) anzuliegen.

20 19. Kombination nach Anspruch 18, wobei die Lasche (144) und das Anschlagteil (26) beide in Form von Schienen vorliegen, die sich in Längsrichtung über den Rumpfteil (146) erstrecken und gegeneinander auswechselbar sind.

25 20. Kombination nach einem der Ansprüche 1 bis 19, wobei das Verblendungselement (16, 116) aus einem zuvor gegossenen Beton besteht.

30 21. Kombination nach einem der Ansprüche 1 bis 20, wobei der Strukturblock (12, 112) eine Unterseite (124) aufweist und die Oberseite und Unterseite des Strukturblocks (12, 112) komplementäre Formen aufweisen, um ein Stapeln des Strukturblocks (12, 112) auf einen anderen Strukturblock (12, 112) zu gestatten.

35 22. Kombination nach einem der Ansprüche 1 bis 21, welche zwei des mindestens einen im Wesentlichen vertikalen Pfeilers (28, 128) und zwei der mindestens einen Öffnung (40, 148) umfasst, wobei die zwei im Wesentlichen vertikalen Pfeiler (28, 128) jeweils zu den mindestens zwei Öffnungen (40, 148) ausgerichtet sind.

40

45

50

55

## Revendications

- La combinaison d'un bloc structural (12, 112) avec un élément de revêtement (16, 116) suspendu pour couvrir au moins partiellement la face longitudinale dudit bloc structural (12, 112):
  - dans laquelle ledit élément de revêtement (16, 116) est suspendu audit bloc structural (12, 112) par le moyen d'un suspensoir (14, 114) apposé sur ledit élément de revêtement (16, 116), ledit

suspensoir (14, 114) comprenant une patte (24, 144) qui s'étend dudit élément de revêtement (16, 116) pour accoupler ledit bloc structural (12, 112); et

- dans laquelle ladite patte (24, 144) et ledit bloc sont accouplés par un moyen d'accouplement comprenant:
  - au moins un montant substantiellement vertical (28, 128); et
  - au moins un orifice (40, 148) pour recevoir ledit au moins un montant substantiellement vertical (28, 128);
  - ledit au moins un montant substantiellement vertical (28, 128) faisant partie soit de ladite patte (24, 144) ou dudit bloc structural (12, 112), alors que ledit au moins un orifice (40, 148) fait partie de l'autre; et
  - dans laquelle, ledit moyen d'accouplement fournit une attache flottante non-rigide de l'élément de revêtement (16, 116) sur le bloc structural (12, 112).

2. La combinaison de la revendication 1 dans laquelle le bloc structural (12, 112) comprend ledit au moins un montant substantiellement vertical (28, 128) et la patte (24, 144) comprend ledit au moins un orifice (40, 148).

3. La combinaison de la revendication 2 dans laquelle le bloc structural (12) comprend au moins une ouverture (38) dans sa face longitudinale (20) pour recevoir horizontalement ladite patte (24) et permettant l'accouplement dudit au moins un orifice (40) se trouvant sur ledit au moins un montant substantiellement vertical (28) correspondant.

4. La combinaison de la revendication 3 dans laquelle ledit au moins un montant substantiellement vertical (28) est posé dans ledit bloc structural (12) et crée une rainure (33) dans une face supérieure (36) dudit bloc structural (12) entourant ledit au moins un montant substantiellement vertical (28) et ladite ouverture (38) dans ladite face longitudinale (20).

5. La combinaison de la revendication 4 dans laquelle ledit au moins un montant substantiellement vertical (28) a une surface supérieure (34) qui est inférieure à ladite face supérieure (36) dudit bloc structural (12).

6. La combinaison selon l'une quelconque des revendications 2 à 5 dans laquelle ledit au moins un montant substantiellement vertical (28) comprend en outre une surface longitudinale (30) qui est affleurée à la surface longitudinale (20) dudit bloc structural (12) dans laquelle ladite rainure (33) s'étend vers

5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100 105 110 115 120 125 130 135 140 145 150 155 160 165 170 175 180 185 190 195 200 205 210 215 220 225 230 235 240 245 250 255 260 265 270 275 280 285 290 295 300 305 310 315 320 325 330 335 340 345 350 355 360 365 370 375 380 385 390 395 400 405 410 415 420 425 430 435 440 445 450 455 460 465 470 475 480 485 490 495 500 505 510 515 520 525 530 535 540 545 550 555 560 565 570 575 580 585 590 595 600 605 610 615 620 625 630 635 640 645 650 655 660 665 670 675 680 685 690 695 700 705 710 715 720 725 730 735 740 745 750 755 760 765 770 775 780 785 790 795 800 805 810 815 820 825 830 835 840 845 850 855 860 865 870 875 880 885 890 895 900 905 910 915 920 925 930 935 940 945 950 955 960 965 970 975 980 985 990 995 1000 1005 1010 1015 1020 1025 1030 1035 1040 1045 1050 1055 1060 1065 1070 1075 1080 1085 1090 1095 1100 1105 1110 1115 1120 1125 1130 1135 1140 1145 1150 1155 1160 1165 1170 1175 1180 1185 1190 1195 1200 1205 1210 1215 1220 1225 1230 1235 1240 1245 1250 1255 1260 1265 1270 1275 1280 1285 1290 1295 1300 1305 1310 1315 1320 1325 1330 1335 1340 1345 1350 1355 1360 1365 1370 1375 1380 1385 1390 1395 1400 1405 1410 1415 1420 1425 1430 1435 1440 1445 1450 1455 1460 1465 1470 1475 1480 1485 1490 1495 1500 1505 1510 1515 1520 1525 1530 1535 1540 1545 1550 1555 1560 1565 1570 1575 1580 1585 1590 1595 1600 1605 1610 1615 1620 1625 1630 1635 1640 1645 1650 1655 1660 1665 1670 1675 1680 1685 1690 1695 1700 1705 1710 1715 1720 1725 1730 1735 1740 1745 1750 1755 1760 1765 1770 1775 1780 1785 1790 1795 1800 1805 1810 1815 1820 1825 1830 1835 1840 1845 1850 1855 1860 1865 1870 1875 1880 1885 1890 1895 1900 1905 1910 1915 1920 1925 1930 1935 1940 1945 1950 1955 1960 1965 1970 1975 1980 1985 1990 1995 2000 2005 2010 2015 2020 2025 2030 2035 2040 2045 2050 2055 2060 2065 2070 2075 2080 2085 2090 2095 2100 2105 2110 2115 2120 2125 2130 2135 2140 2145 2150 2155 2160 2165 2170 2175 2180 2185 2190 2195 2200 2205 2210 2215 2220 2225 2230 2235 2240 2245 2250 2255 2260 2265 2270 2275 2280 2285 2290 2295 2300 2305 2310 2315 2320 2325 2330 2335 2340 2345 2350 2355 2360 2365 2370 2375 2380 2385 2390 2395 2400 2405 2410 2415 2420 2425 2430 2435 2440 2445 2450 2455 2460 2465 2470 2475 2480 2485 2490 2495 2500 2505 2510 2515 2520 2525 2530 2535 2540 2545 2550 2555 2560 2565 2570 2575 2580 2585 2590 2595 2600 2605 2610 2615 2620 2625 2630 2635 2640 2645 2650 2655 2660 2665 2670 2675 2680 2685 2690 2695 2700 2705 2710 2715 2720 2725 2730 2735 2740 2745 2750 2755 2760 2765 2770 2775 2780 2785 2790 2795 2800 2805 2810 2815 2820 2825 2830 2835 2840 2845 2850 2855 2860 2865 2870 2875 2880 2885 2890 2895 2900 2905 2910 2915 2920 2925 2930 2935 2940 2945 2950 2955 2960 2965 2970 2975 2980 2985 2990 2995 3000 3005 3010 3015 3020 3025 3030 3035 3040 3045 3050 3055 3060 3065 3070 3075 3080 3085 3090 3095 3100 3105 3110 3115 3120 3125 3130 3135 3140 3145 3150 3155 3160 3165 3170 3175 3180 3185 3190 3195 3200 3205 3210 3215 3220 3225 3230 3235 3240 3245 3250 3255 3260 3265 3270 3275 3280 3285 3290 3295 3300 3305 3310 3315 3320 3325 3330 3335 3340 3345 3350 3355 3360 3365 3370 3375 3380 3385 3390 3395 3400 3405 3410 3415 3420 3425 3430 3435 3440 3445 3450 3455 3460 3465 3470 3475 3480 3485 3490 3495 3500 3505 3510 3515 3520 3525 3530 3535 3540 3545 3550 3555 3560 3565 3570 3575 3580 3585 3590 3595 3600 3605 3610 3615 3620 3625 3630 3635 3640 3645 3650 3655 3660 3665 3670 3675 3680 3685 3690 3695 3700 3705 3710 3715 3720 3725 3730 3735 3740 3745 3750 3755 3760 3765 3770 3775 3780 3785 3790 3795 3800 3805 3810 3815 3820 3825 3830 3835 3840 3845 3850 3855 3860 3865 3870 3875 3880 3885 3890 3895 3900 3905 3910 3915 3920 3925 3930 3935 3940 3945 3950 3955 3960 3965 3970 3975 3980 3985 3990 3995 4000 4005 4010 4015 4020 4025 4030 4035 4040 4045 4050 4055 4060 4065 4070 4075 4080 4085 4090 4095 4100 4105 4110 4115 4120 4125 4130 4135 4140 4145 4150 4155 4160 4165 4170 4175 4180 4185 4190 4195 4200 4205 4210 4215 4220 4225 4230 4235 4240 4245 4250 4255 4260 4265 4270 4275 4280 4285 4290 4295 4300 4305 4310 4315 4320 4325 4330 4335 4340 4345 4350 4355 4360 4365 4370 4375 4380 4385 4390 4395 4400 4405 4410 4415 4420 4425 4430 4435 4440 4445 4450 4455 4460 4465 4470 4475 4480 4485 4490 4495 4500 4505 4510 4515 4520 4525 4530 4535 4540 4545 4550 4555 4560 4565 4570 4575 4580 4585 4590 4595 4600 4605 4610 4615 4620 4625 4630 4635 4640 4645 4650 4655 4660 4665 4670 4675 4680 4685 4690 4695 4700 4705 4710 4715 4720 4725 4730 4735 4740 4745 4750 4755 4760 4765 4770 4775 4780 4785 4790 4795 4800 4805 4810 4815 4820 4825 4830 4835 4840 4845 4850 4855 4860 4865 4870 4875 4880 4885 4890 4895 4900 4905 4910 4915 4920 4925 4930 4935 4940 4945 4950 4955 4960 4965 4970 4975 4980 4985 4990 4995 5000 5005 5010 5015 5020 5025 5030 5035 5040 5045 5050 5055 5060 5065 5070 5075 5080 5085 5090 5095 5100 5105 5110 5115 5120 5125 5130 5135 5140 5145 5150 5155 5160 5165 5170 5175 5180 5185 5190 5195 5200 5205 5210 5215 5220 5225 5230 5235 5240 5245 5250 5255 5260 5265 5270 5275 5280 5285 5290 5295 5300 5305 5310 5315 5320 5325 5330 5335 5340 5345 5350 5355 5360 5365 5370 5375 5380 5385 5390 5395 5400 5405 5410 5415 5420 5425 5430 5435 5440 5445 5450 5455 5460 5465 5470 5475 5480 5485 5490 5495 5500 5505 5510 5515 5520 5525 5530 5535 5540 5545 5550 5555 5560 5565 5570 5575 5580 5585 5590 5595 5600 5605 5610 5615 5620 5625 5630 5635 5640 5645 5650 5655 5660 5665 5670 5675 5680 5685 5690 5695 5700 5705 5710 5715 5720 5725 5730 5735 5740 5745 5750 5755 5760 5765 5770 5775 5780 5785 5790 5795 5800 5805 5810 5815 5820 5825 5830 5835 5840 5845 5850 5855 5860 5865 5870 5875 5880 5885 5890 5895 5900 5905 5910 5915 5920 5925 5930 5935 5940 5945 5950 5955 5960 5965 5970 5975 5980 5985 5990 5995 6000 6005 6010 6015 6020 6025 6030 6035 6040 6045 6050 6055 6060 6065 6070 6075 6080 6085 6090 6095 6100 6105 6110 6115 6120 6125 6130 6135 6140 6145 6150 6155 6160 6165 6170 6175 6180 6185 6190 6195 6200 6205 6210 6215 6220 6225 6230 6235 6240 6245 6250 6255 6260 6265 6270 6275 6280 6285 6290 6295 6300 6305 6310 6315 6320 6325 6330 6335 6340 6345 6350 6355 6360 6365 6370 6375 6380 6385 6390 6395 6400 6405 6410 6415 6420 6425 6430 6435 6440 6445 6450 6455 6460 6465 6470 6475 6480 6485 6490 6495 6500 6505 6510 6515 6520 6525 6530 6535 6540 6545 6550 6555 6560 6565 6570 6575 6580 6585 6590 6595 6600 6605 6610 6615 6620 6625 6630 6635 6640 6645 6650 6655 6660 6665 6670 6675 6680 6685 6690 6695 6700 6705 6710 6715 6720 6725 6730 6735 6740 6745 6750 6755 6760 6765 6770 6775 6780 6785 6790 6795 6800 6805 6810 6815 6820 6825 6830 6835 6840 6845 6850 6855 6860 6865 6870 6875 6880 6885 6890 6895 6900 6905 6910 6915 6920 6925 6930 6935 6940 6945 6950 6955 6960 6965 6970 6975 6980 6985 6990 6995 7000 7005 7010 7015 7020 7025 7030 7035 7040 7045 7050 7055 7060 7065 7070 7075 7080 7085 7090 7095 7100 7105 7110 7115 7120 7125 7130 7135 7140 7145 7150 7155 7160 7165 7170 7175 7180 7185 7190 7195 7200 7205 7210 7215 7220 7225 7230 7235 7240 7245 7250 7255 7260 7265 7270 7275 7280 7285 7290 7295 7300 7305 7310 7315 7320 7325 7330 7335 7340 7345 7350 7355 7360 7365 7370 7375 7380 7385 7390 7395 7400 7405 7410 7415 7420 7425 7430 7435 7440 7445 7450 7455 7460 7465 7470 7475 7480 7485 7490 7495 7500 7505 7510 7515 7520 7525 7530 7535 7540 7545 7550 7555 7560 7565 7570 7575 7580 7585 7590 7595 7600 7605 7610 7615 7620 7625 7630 7635 7640 7645 7650 7655 7660 7665 7670 7675 7680 7685 7690 7695 7700 7705 7710 7715 7720 7725 7730 7735 7740 7745 7750 7755 7760 7765 7770 7775 7780 7785 7790 7795 7800 7805 7810 7815 7820 7825 7830 7835 7840 7845 7850 7855 7860 7865 7870 7875 7880 7885 7890 7895 7900 7905 7910 7915 7920 7925 7930 7935 7940 7945 7950 7955 7960 7965 7970 7975 7980 7985 7990 7995 8000 8005 8010 8015 8020 8025 8030 8035 8040 8045 8050 8055 8060 8065 8070 8075 8080 8085 8090 8095 8100 8105 8110 8115 8120 8125 8130 8135 8140 8145 8150 8155 8160 8165 8170 8175 8180 8185 8190 8195 8200 8205 8210 8215 8220 8225 8230 8235 8240 8245 8250 8255 8260 8265 8270 8275 8280 8285 8290 8295 8300 8305 8310 8315 8320 8325 8330 8335 8340 8345 8350 8355 8360 8365 8370 8375 8380 8385 8390 8395 8400 8405 8410 8415 8420 8425 8430 8435 8440 8445 8450 8455 8460 8465 8470 8475 8480 8485 8490 8495 8500 8505 8510 8515 8520 8525 8530 8535 8540 8545 8550 8555 8560 8565 8570 8575 8580 8585 8590 8595 8600 8605 8610 8615 8620 8625 8630 8635 8640 8645 8650 8655 8660 8665 8670 8675 8680 8685 8690 8695 8700 8705 8710 8715 8720 8725 8730 8735 8740 8745 8750 8755 8760 8765 8770 8775 8780 8785 8790 8795 8800 8805 8810 8815 8820 8825 8830 8835 8840 8845 8850 8855 8860 8865 8870 8875 8880 8885 8890 8895 8900 8905 8910 8915 8920 8925 8930 8935 8940 8945 8950 8955 8960 8965 8970 8975 8980 8985 8990 8995 9000 9005 9010 9015 9020 9025 9030 9035 9040 9045 9050 9055 9060 9065 9070 9075 9080 9085 9090 9095 9100 9105 9110 9115 9120 9125 9130 9135 9140 9145 9150 9155 9160 9165 9170 9175 9180 9185 9190 9195 9200 9205 9210 9215 9220 9225 9230 9235 9240 9245 9250 9255 9260 9265 9270 9275 9280 9285 9290 9295 9300 9305 9310 9315 9320 9325 9330 9335 9340 9345 9350 9355 9360 9365 9370 9375 9380 9385 9390 9395 9400 9405 9410 9415 9420 9425 9430 9435 9440 9445 9450 9455 9460 9465 9470 9475 9480 9485 9490 9495 9500 9505 9510 9515 9520 9525 9530 9535 9540 9545 9550 9555 9560 9565 9570 9575 9580 9585 9590 9595 9600 9605 9610 9615 9620 9625 9630 9635 9640 9645 9650 9655 9660 9665 9670 9675 9680 9685 9690 9695 9700 9705 9710 9715 9720 9725 9730 9735 9740 9745 9750 9755 9760 9765 9770 9775 9780 9785 9790 9795 9800 9805 9810 9815 9820 9825 9830 9835 9840 9845 9850 9855 9860 9865 9870 9875 9880 9885 9890 9895 9900 9905 9910 9915 9920 9925 9930 9935 9940 9945 9950 9955 9960 9965 9970 9975 9980 9985 9990 9995 10000 10005 10010 10015 10020 10025 10030 10035 10040 10045 10050 10055 10060 10065 10070 10075 10080 10085 10090 10095 10100 10105 10110 10115 10120 10125 10130 10135 10140 10145 10150 10155 10160 10165 10170 10175 10180 10185 10190 10195 10200 10205 10210 10215 10220 10225 10230 10235 10240 10245 10250 10255 10260 10265 10270 10275 10280 10285 10290 10295 10300 10305 10310 10315 10320 10325 10330 10335 10340 10345 10350 10355 10360 10365 10370 10375 10380 10385 10390 10395 10400 10405 10410 10415 10420 10425 10430 10435 10440 10445 10450 10455 10460 10465 10470 10475 10480 10485 10490 10495 10500 10505 10510 10515 10520 10525 10530 10535 10540 10545 10550 10555 10560 10565 10570 10575 10580 10585 10590 10595 10600 10605 10610 10615 10620 10625 10630 10635 10640 10645 10650 10655 10660 10665 10670 10675 10680 10685 10690 10695 10700 10705 10710 10715 10720 10725 10730 10735 10740 10745 10750 10755 10760 10765 10770 10775 10780 10785 10790 10795 10800 10805 10810 10815 10820 10825 10830 10835 10840 10845 10850 10855 10860 10865 10870 10875 10880 10885 10890 10895 10900 10905 10910 10915 10920 10925 10930 10935 10940 10945 10950 10955 10960 10965 10970 10975 10980 10985 10990 10995 11000 11005 11010 11015 11020 11025 11030 11035 11040 11045 11050 11055 11060 11065 11070 11075 11080 11085 11090 11095 11100 11105 11110 11115 11120 11125 11130 11135 11140 11145 11150 11155 11160 11165 11170 11175 11180 11185 11190 11195 11200 11205 11210 11215 11220 11225 11230 11235 11240 11245 11250 11255 11260 11265 11270 11275 11280 11285 11290 11295 11300 11305 11310 11315 11320 11325 11330 11335 11340 11345 11350 11355 11360 11365 11370 11375 11380 11385 11390 11395 11400 11405 11410 11415 11420 11425 11430 11435 11440 11445 11450 11455 11460 11465 11470 1

moins un montant substantiellement vertical (28, 128), et pour permettre l'accouplement dudit au moins un orifice (40, 148) dans au moins un montant substantiellement vertical (28, 128).

5

16. La combinaison selon l'une quelconque des revendications 1 à 15 dans laquelle ledit suspensoir (14, 114) comprend une section corps (22, 146) qui s'étend le long, et substantiellement parallèle à, ladite face longitudinale (20) dudit bloc structural (12, 112) et dans laquelle ladite patte (24, 144) s'étend d'une façon substantiellement perpendiculaire de la section corps (22, 146). 10

17. La combinaison de la revendication 16 dans laquelle ledit suspensoir (14, 114) est affixé audit élément de revêtement (16, 116) en moultant ledit élément de revêtement (16, 116) autour de ladite section corps (22, 146). 15

18. La combinaison de la revendication 16 ou 17 dans laquelle ledit suspensoir (14, 114) comprend en outre une section pare-choc (26) qui s'étend de ladite section corps (22, 146) dans la même direction que ladite patte (24, 144) pour se juxtaposer à ladite face longitudinale (20) dudit bloc structural (12, 112). 20

19. La combinaison de la revendication 18 dans laquelle ladite patte (144) et ladite section pare-choc (26) sont toutes les deux dans la forme de rails qui s'étendent longitudinalement à travers ladite section corps (146) et qui sont interchangeables. 25

20. La combinaison selon l'une quelconque des revendications 1 à 19 dans laquelle ledit élément de revêtement (16, 116) est fait de béton préfabriqué. 30

21. La combinaison selon l'une quelconque des revendications 1 à 20 dans laquelle ledit bloc structural (12, 112) a une face inférieure (124) et lesdites faces supérieure et inférieure dudit bloc structural (12, 112) comprennent des formes complémentaires pour permettre ledit bloc structural (12, 112) à être empilé sur un autre bloc structural (12, 112). 40

22. La combinaison selon l'une quelconque des revendications 1 à 21 comprenant deux au moins un montant substantiellement vertical (28, 128) et deux au moins un orifice (40, 148), lesdits deux montants substantiellement verticaux étant alignés avec lesdits au moins deux orifices (40, 148), respectivement. 45

50

55

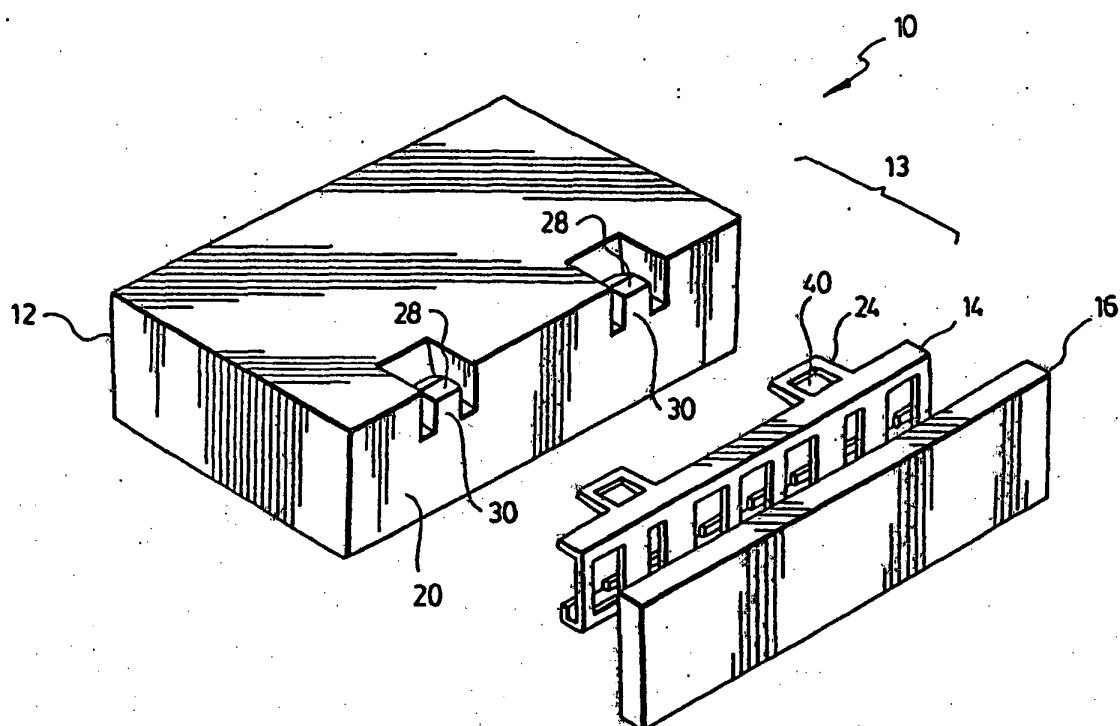


FIG. 1

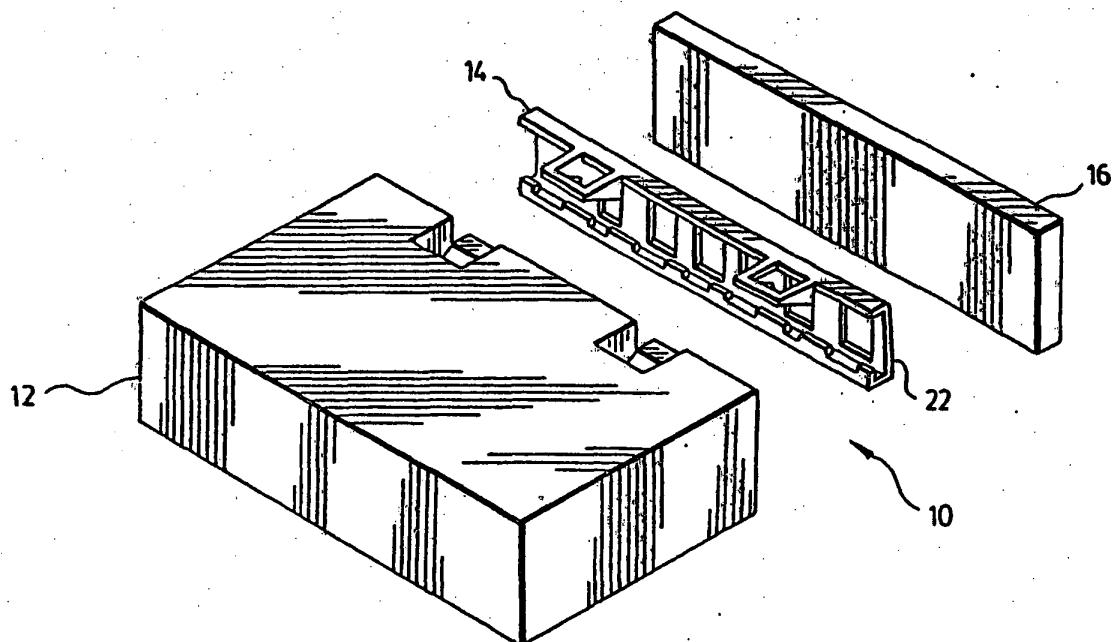


FIG. 2

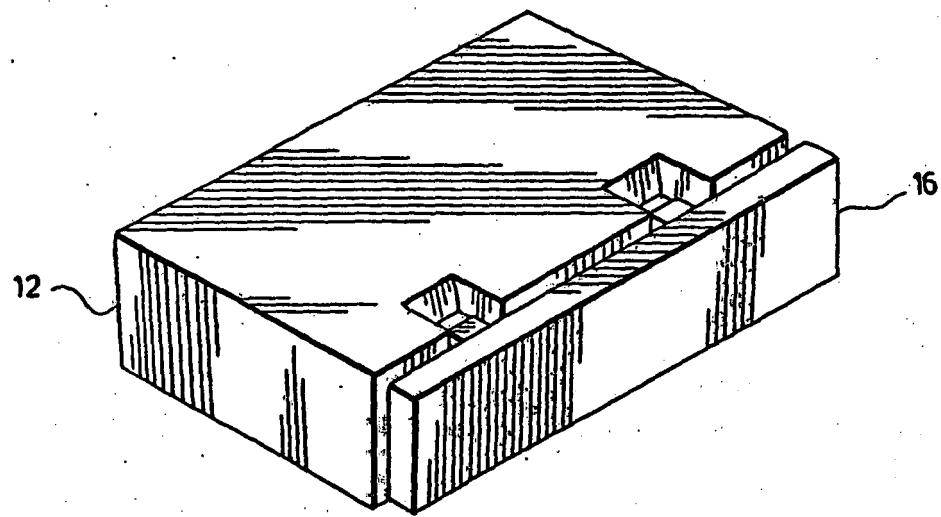


FIG. 3

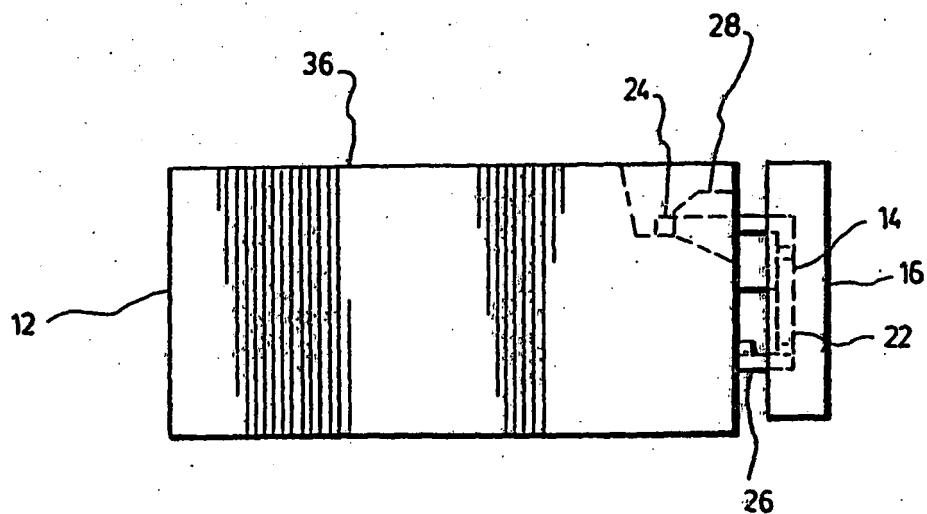


FIG. 4

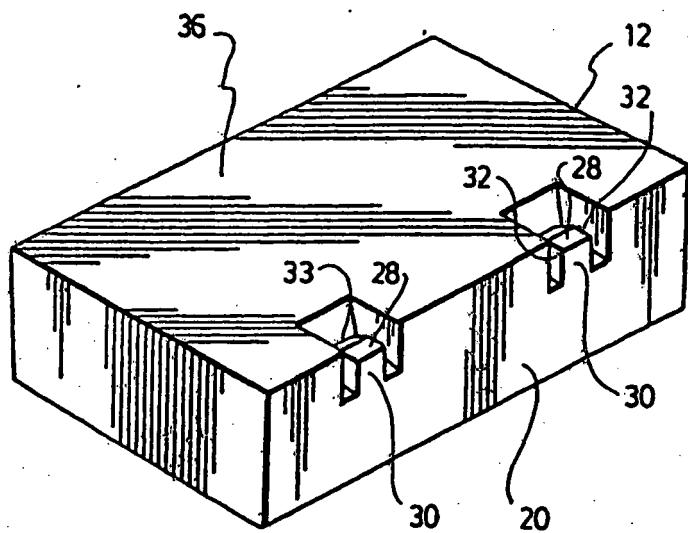


FIG. 5

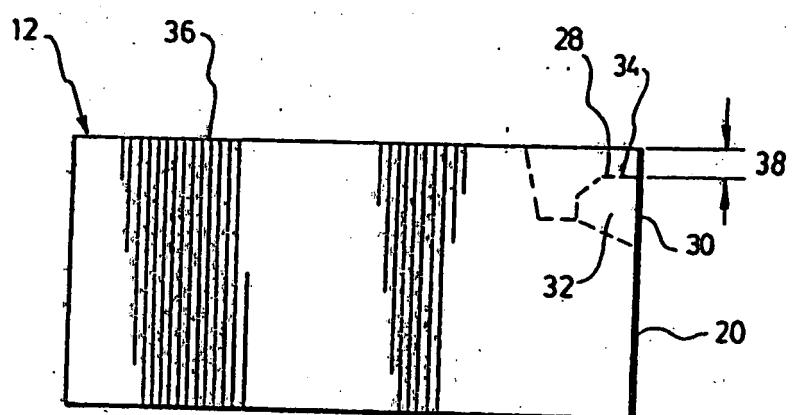
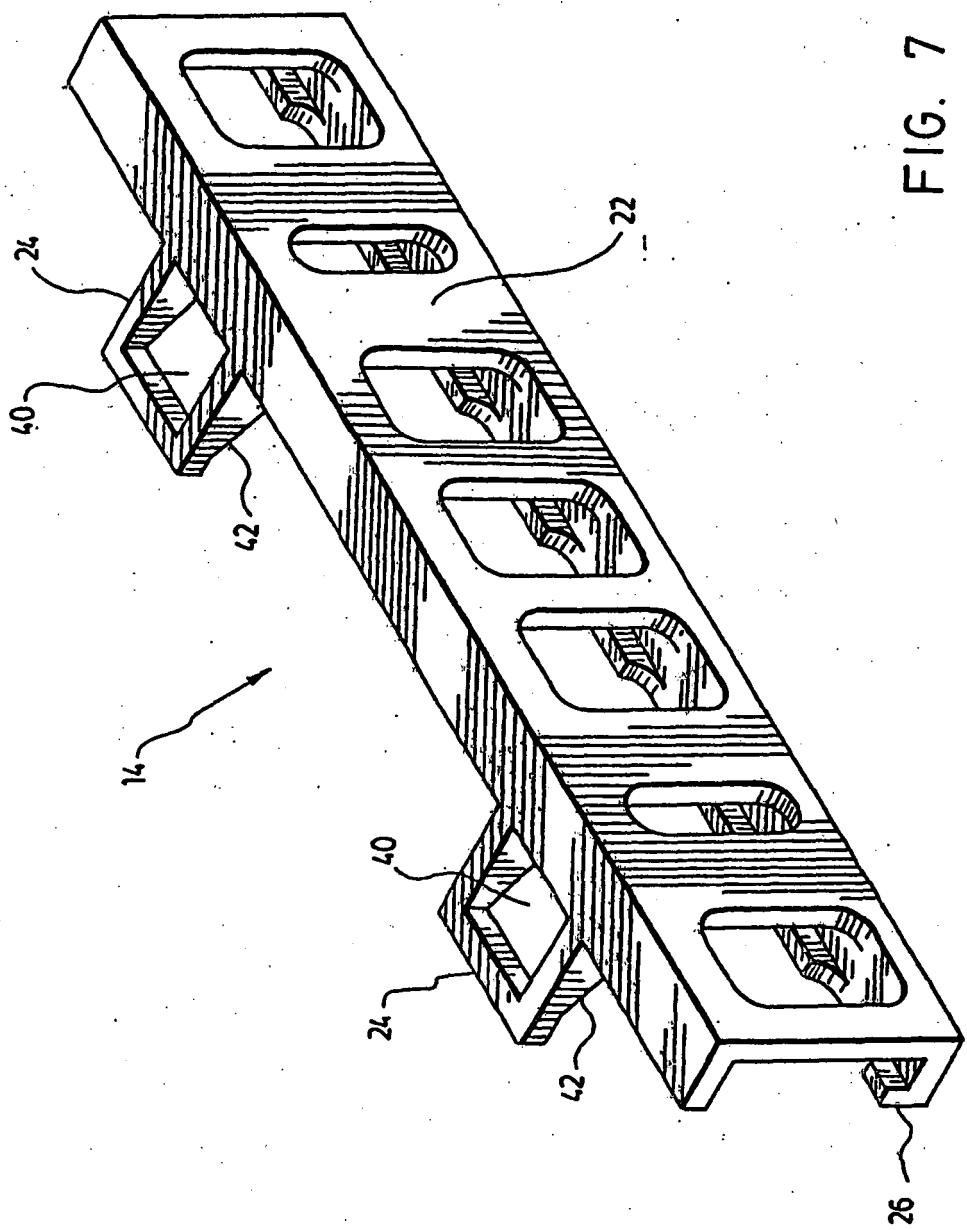


FIG. 6

FIG. 7



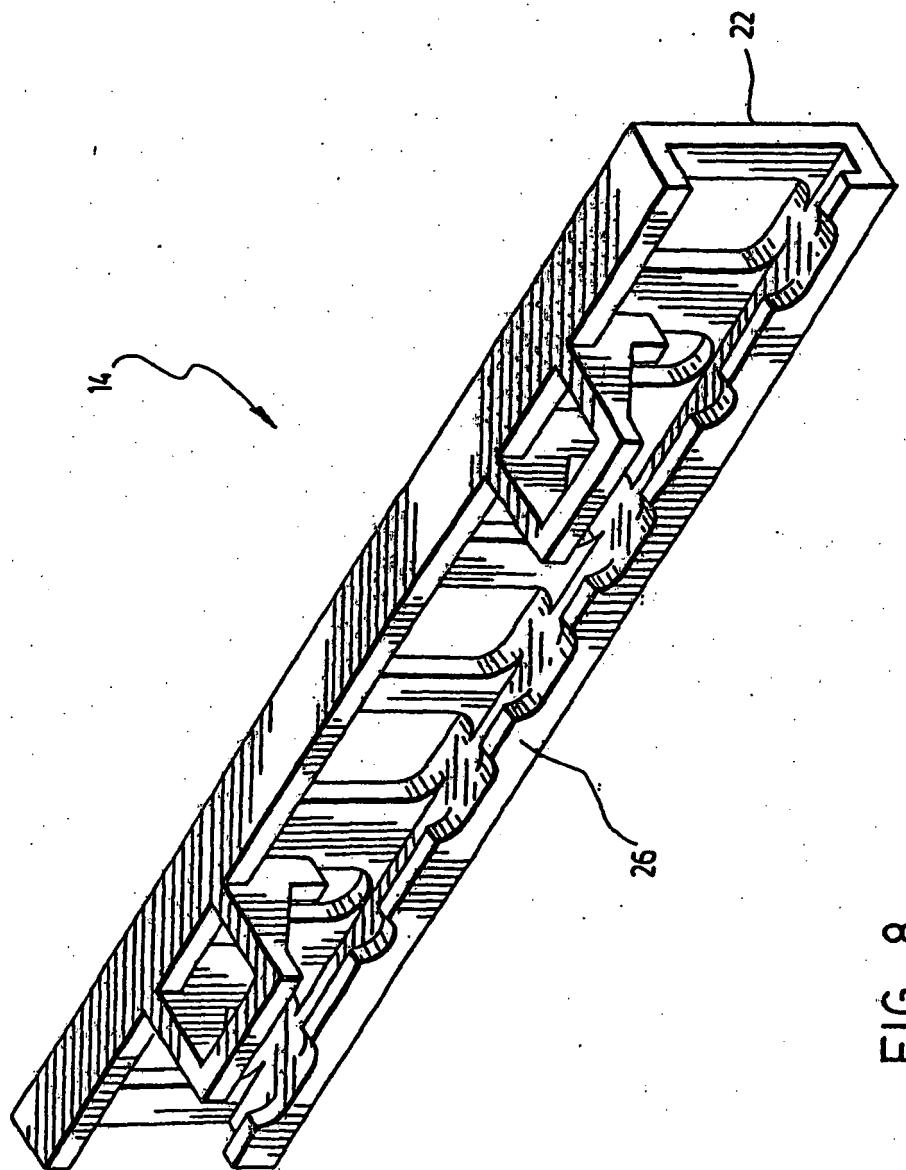


FIG. 8

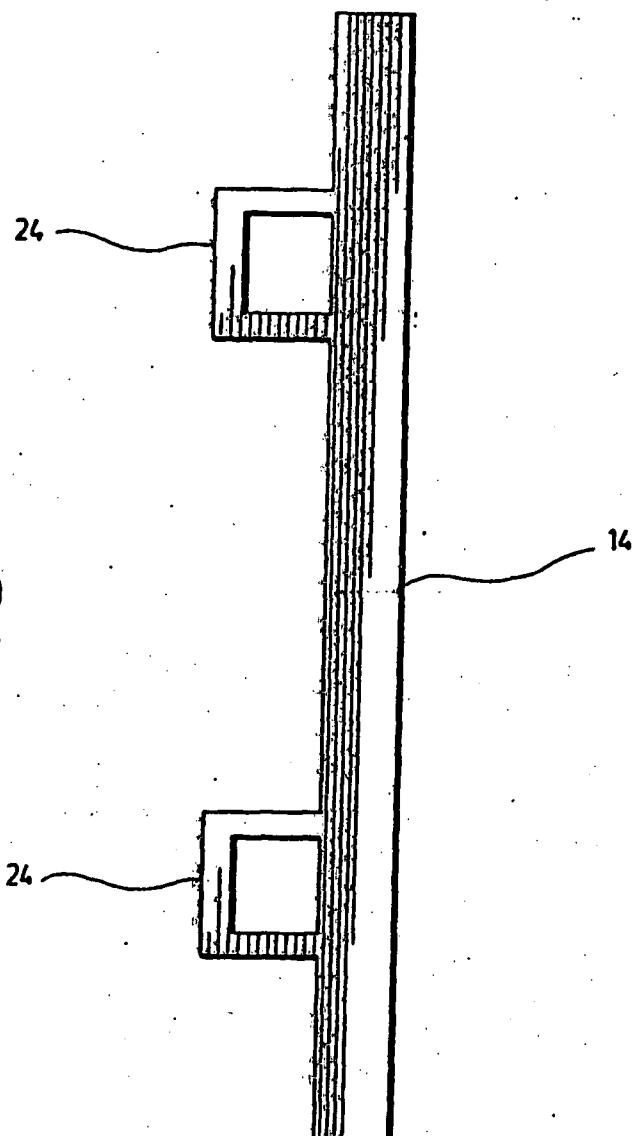


FIG. 9

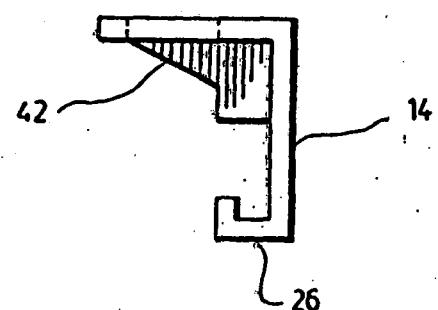


FIG. 10

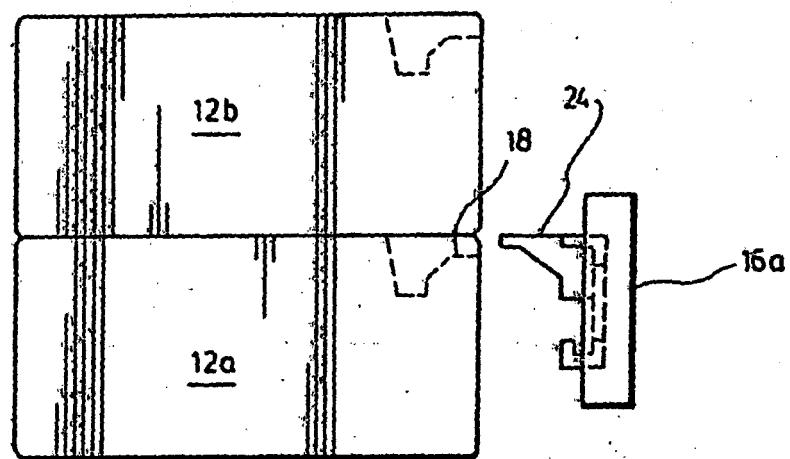


FIG. 11

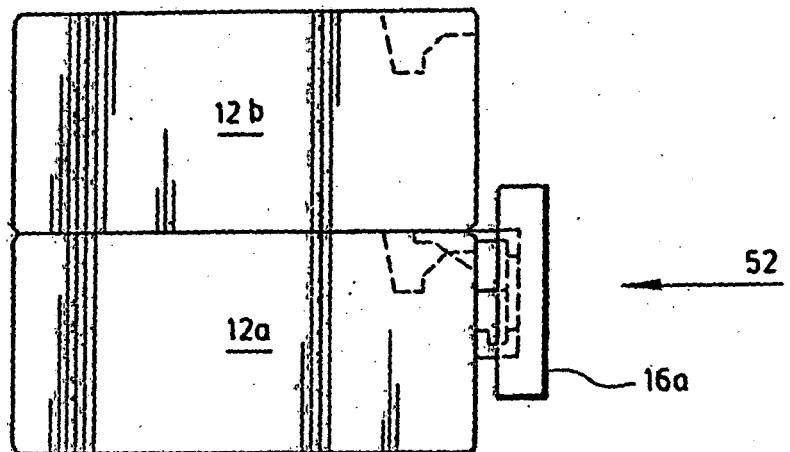


FIG. 12

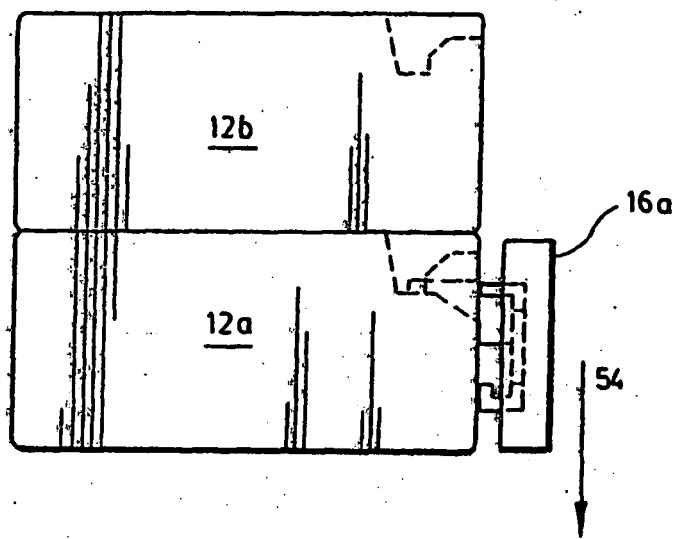


FIG. 13.

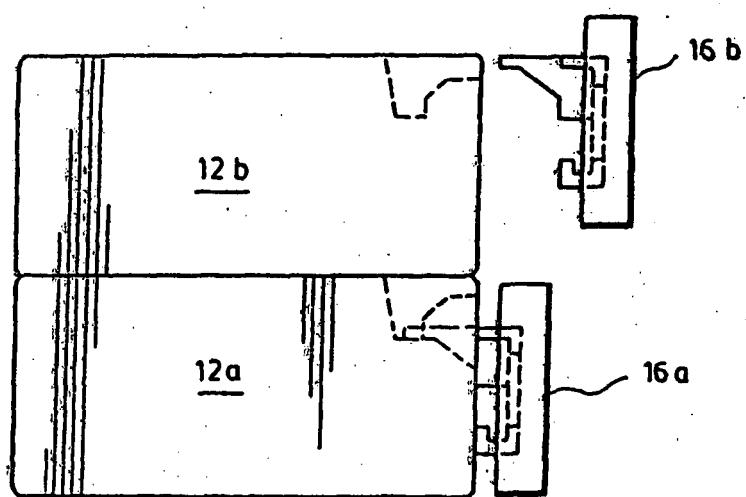


FIG. 14

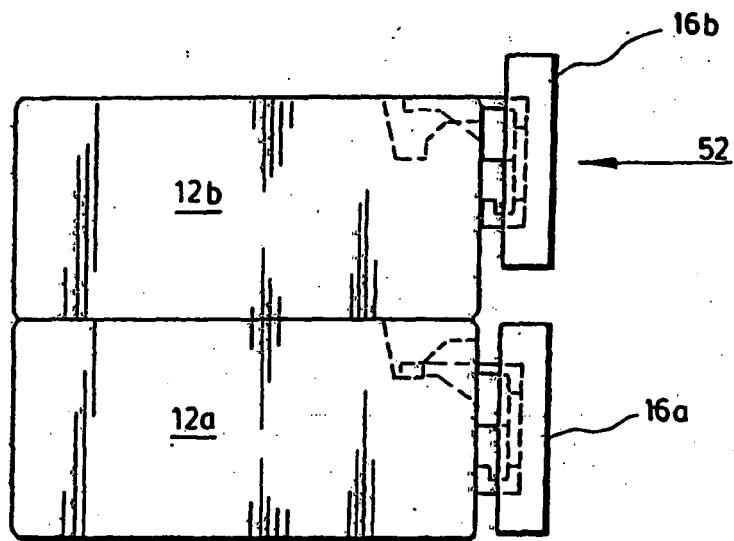


FIG. 15

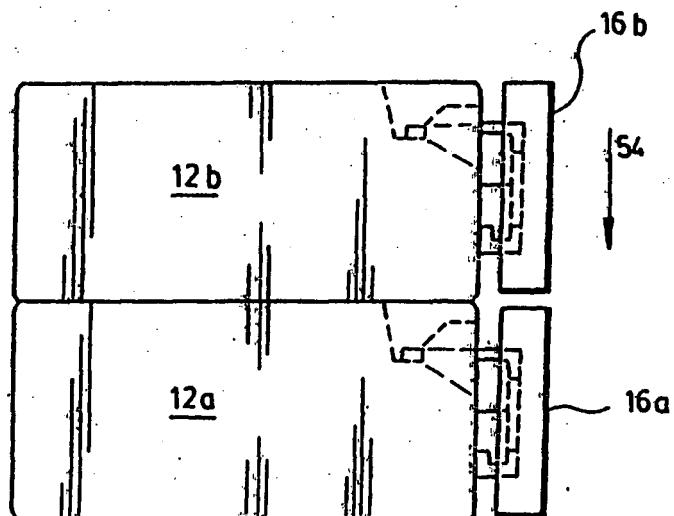
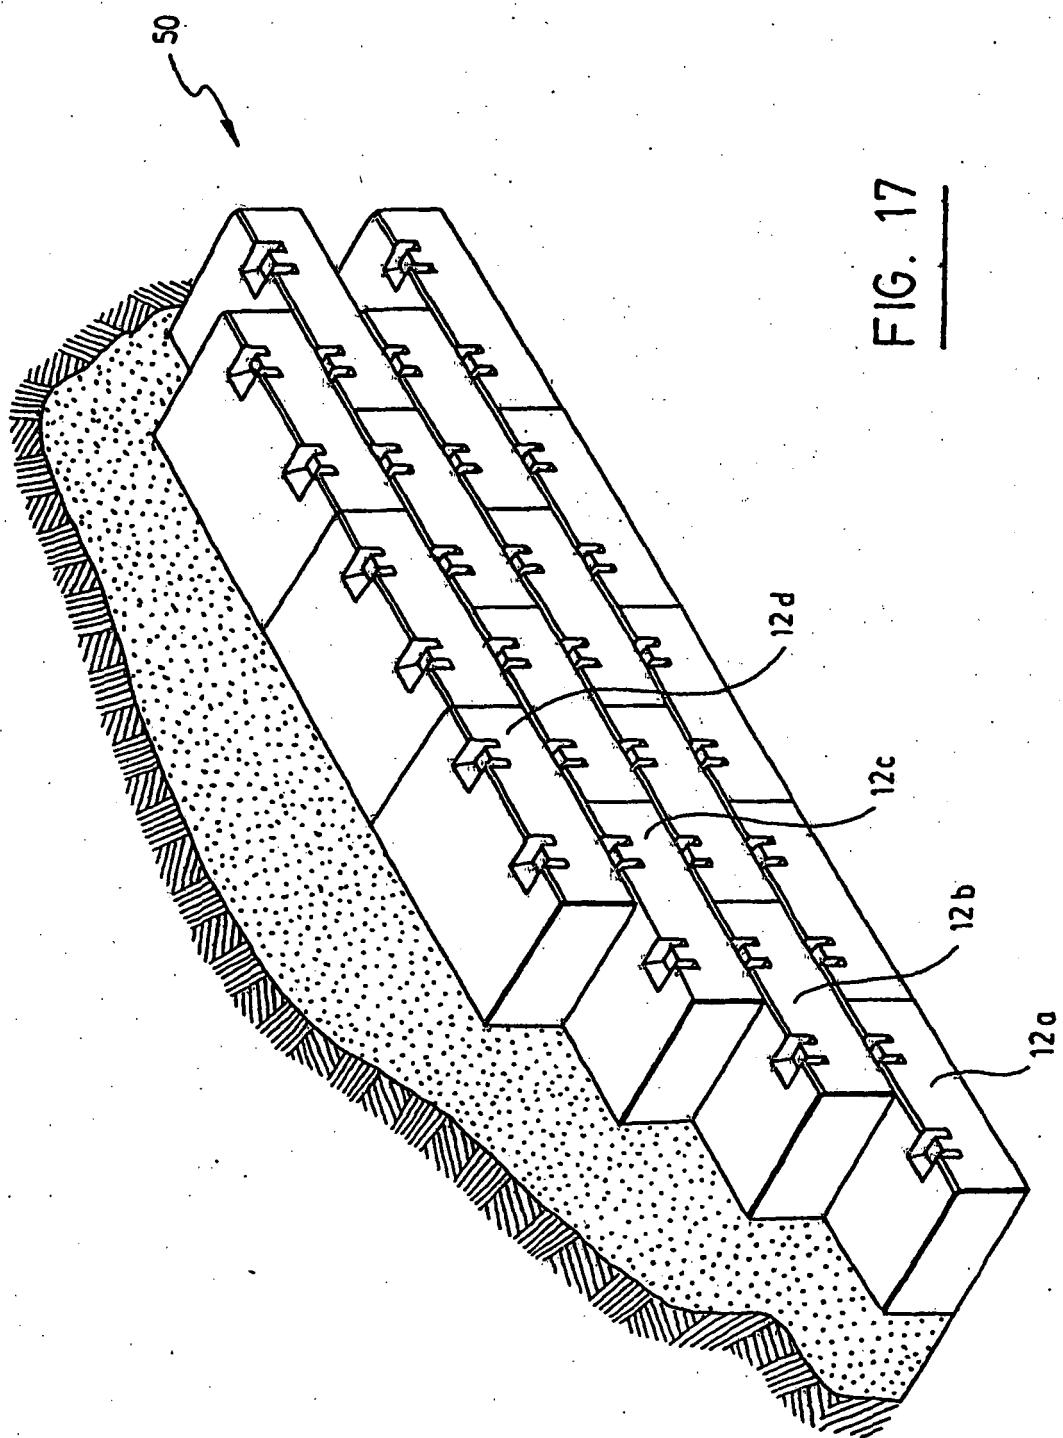


FIG. 16

FIG. 17



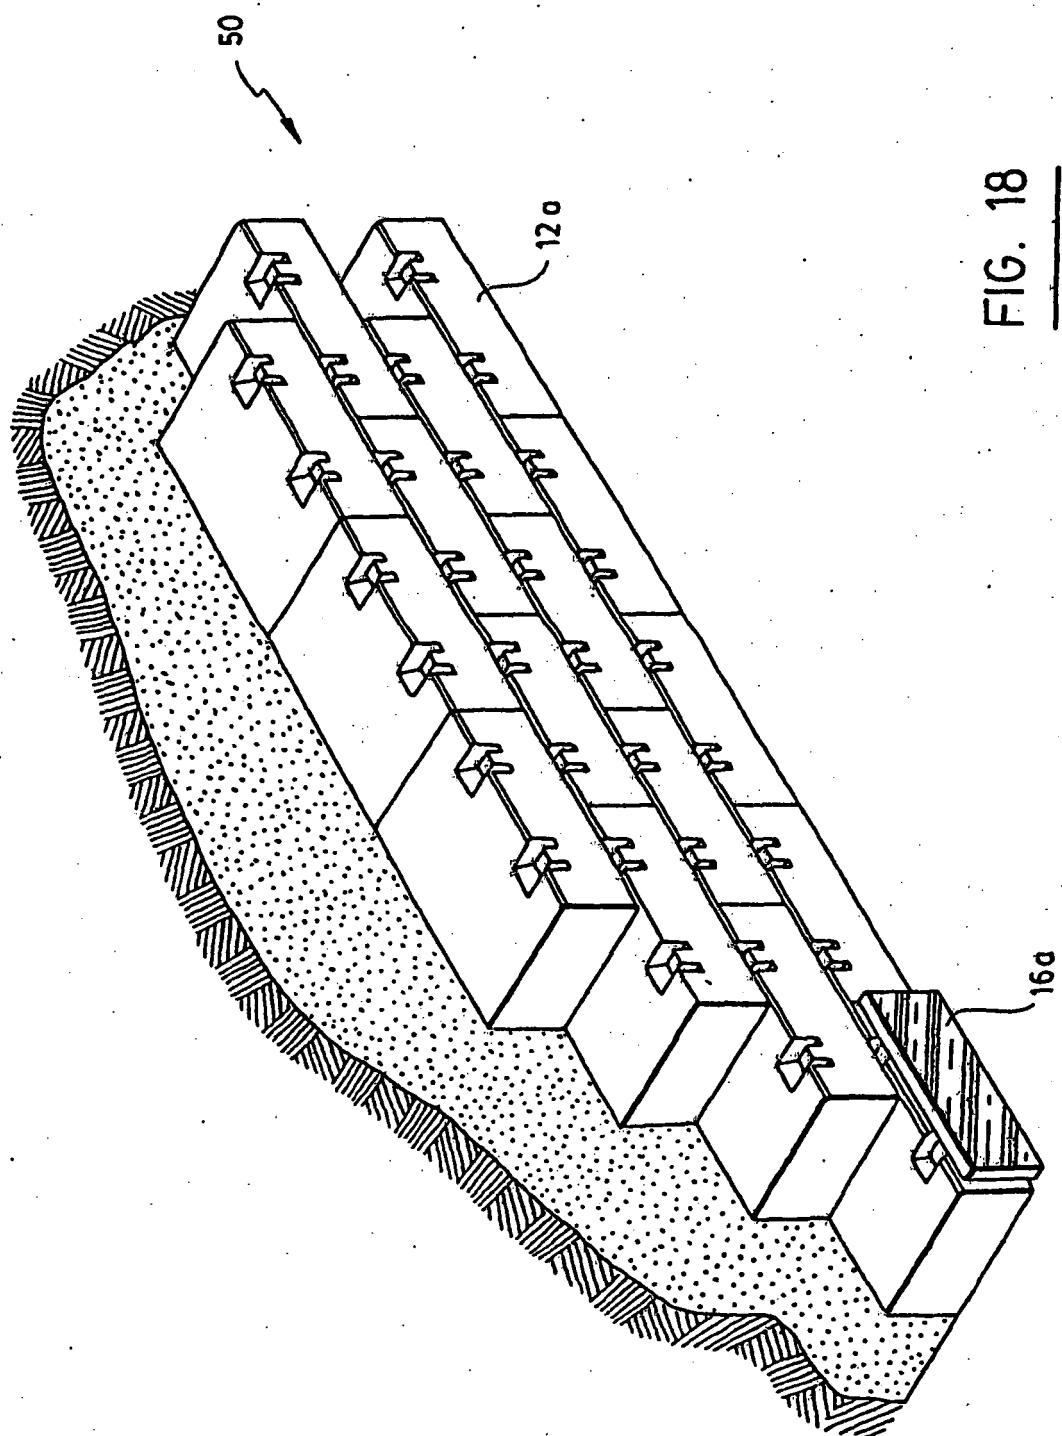


FIG. 18

FIG. 19

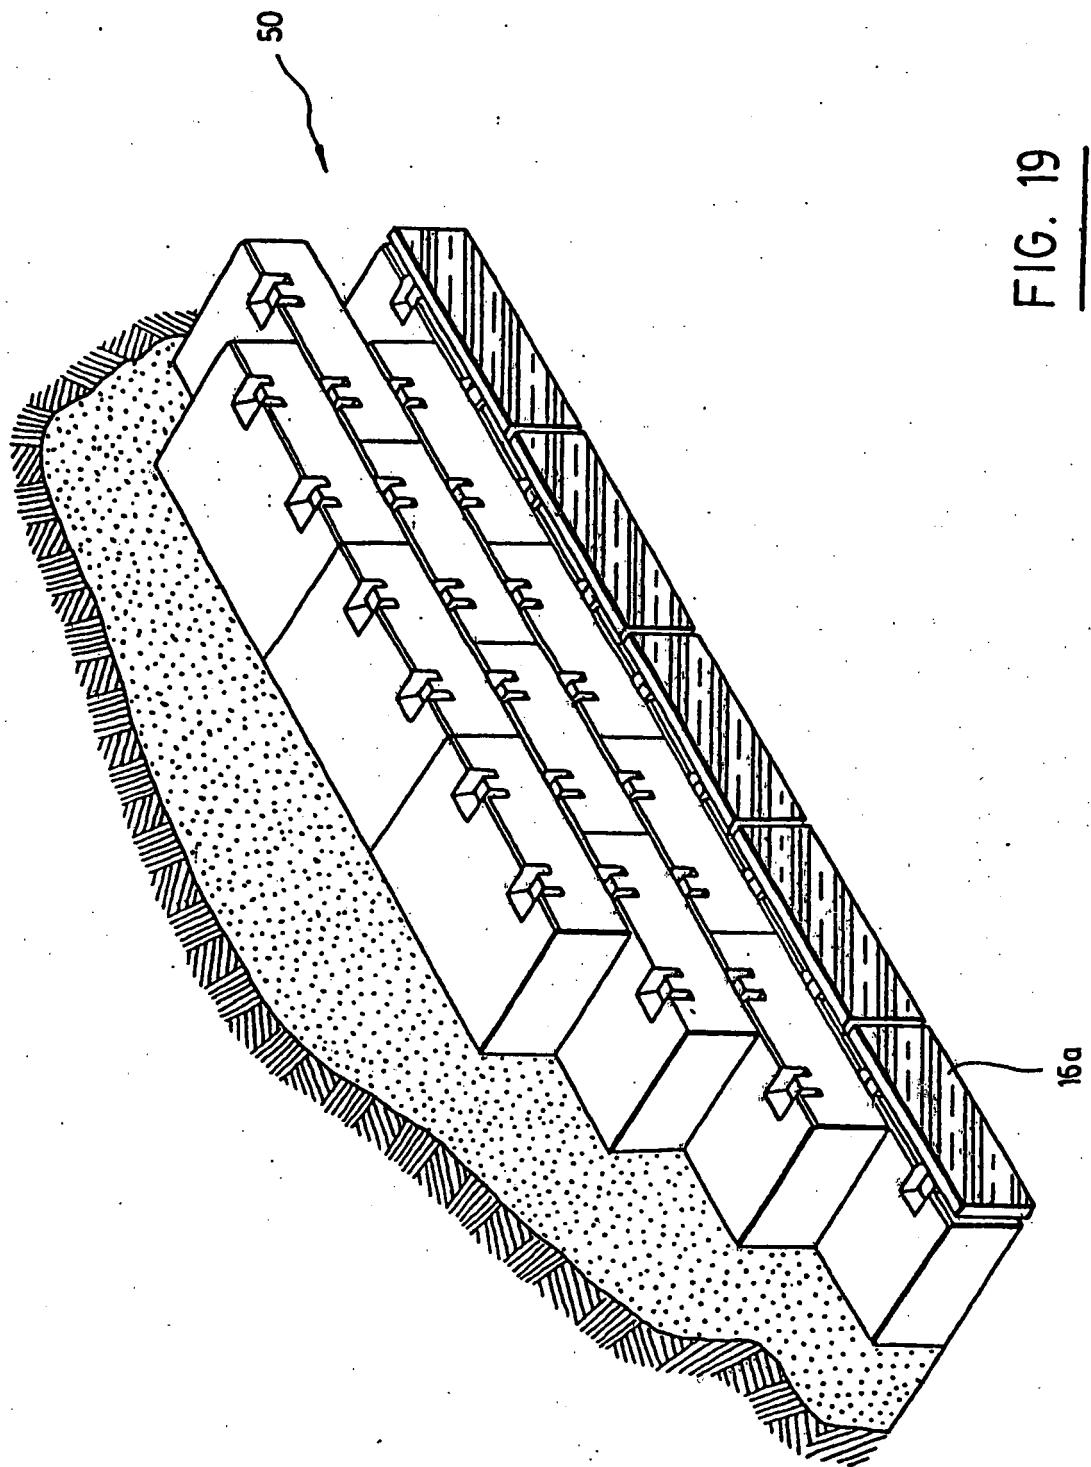
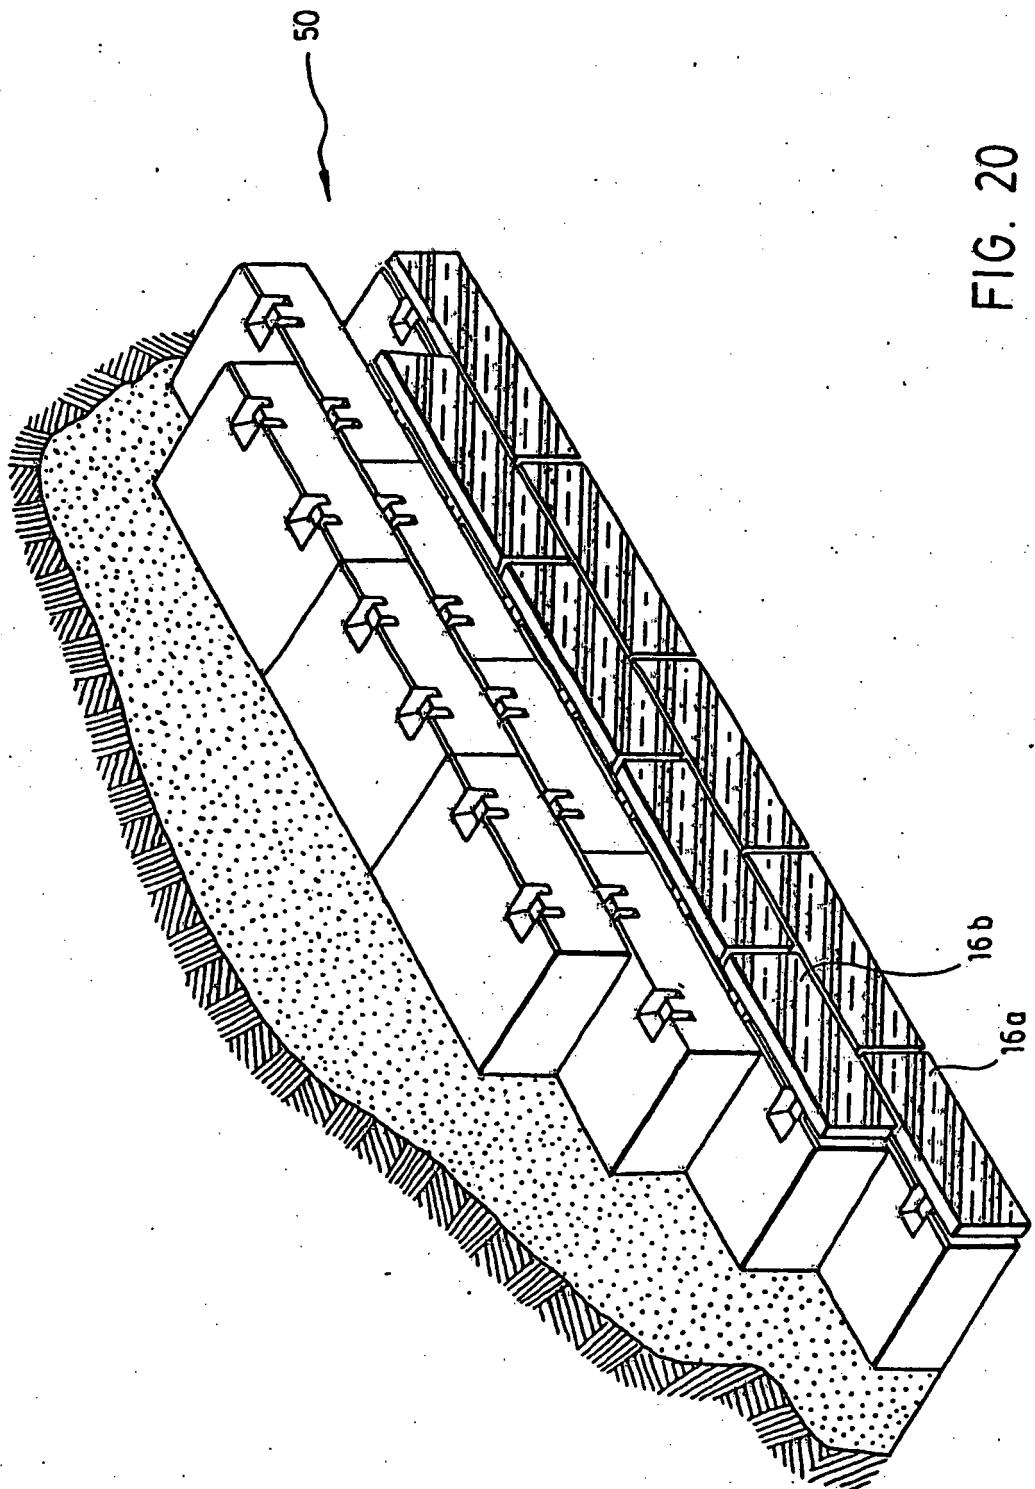


FIG. 20



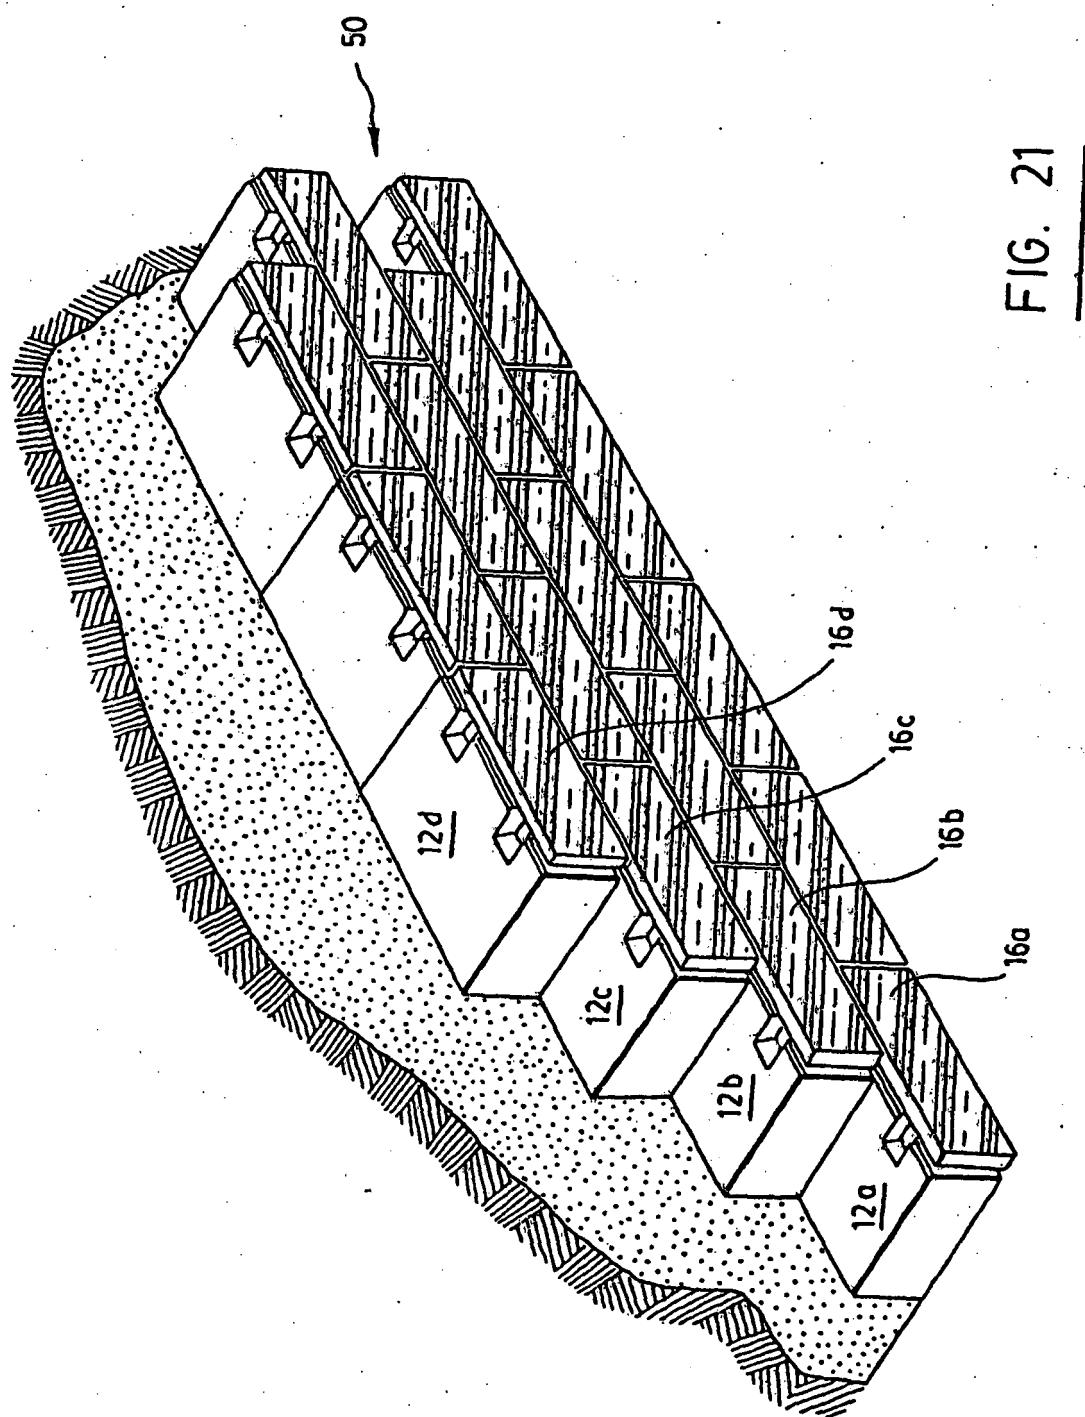
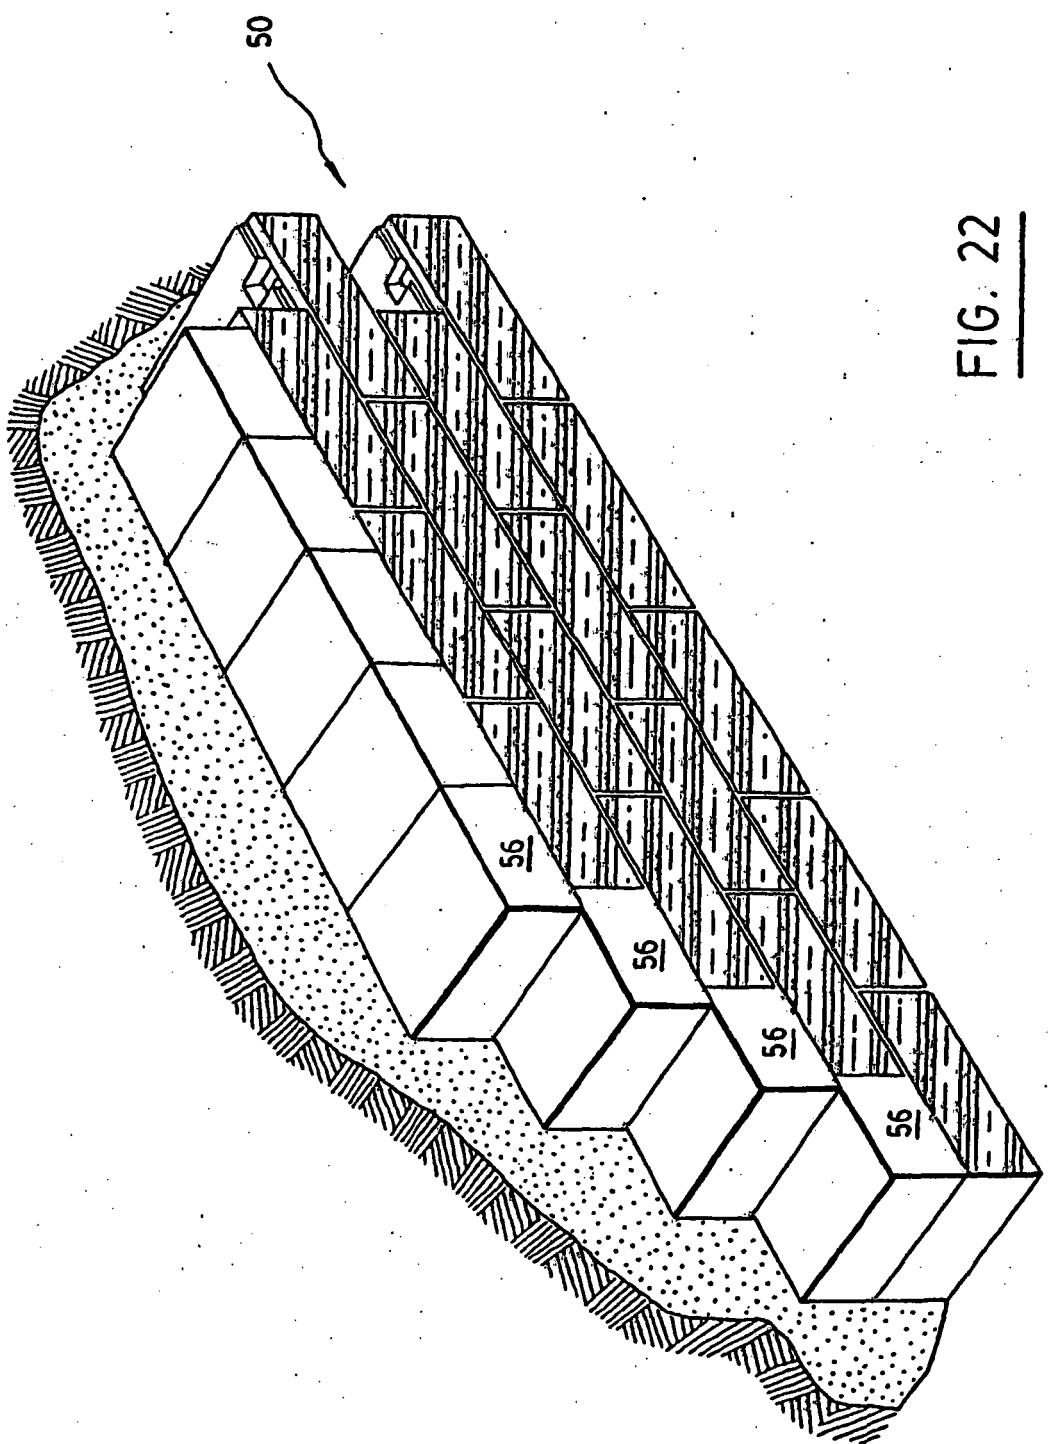


FIG. 21

FIG. 22



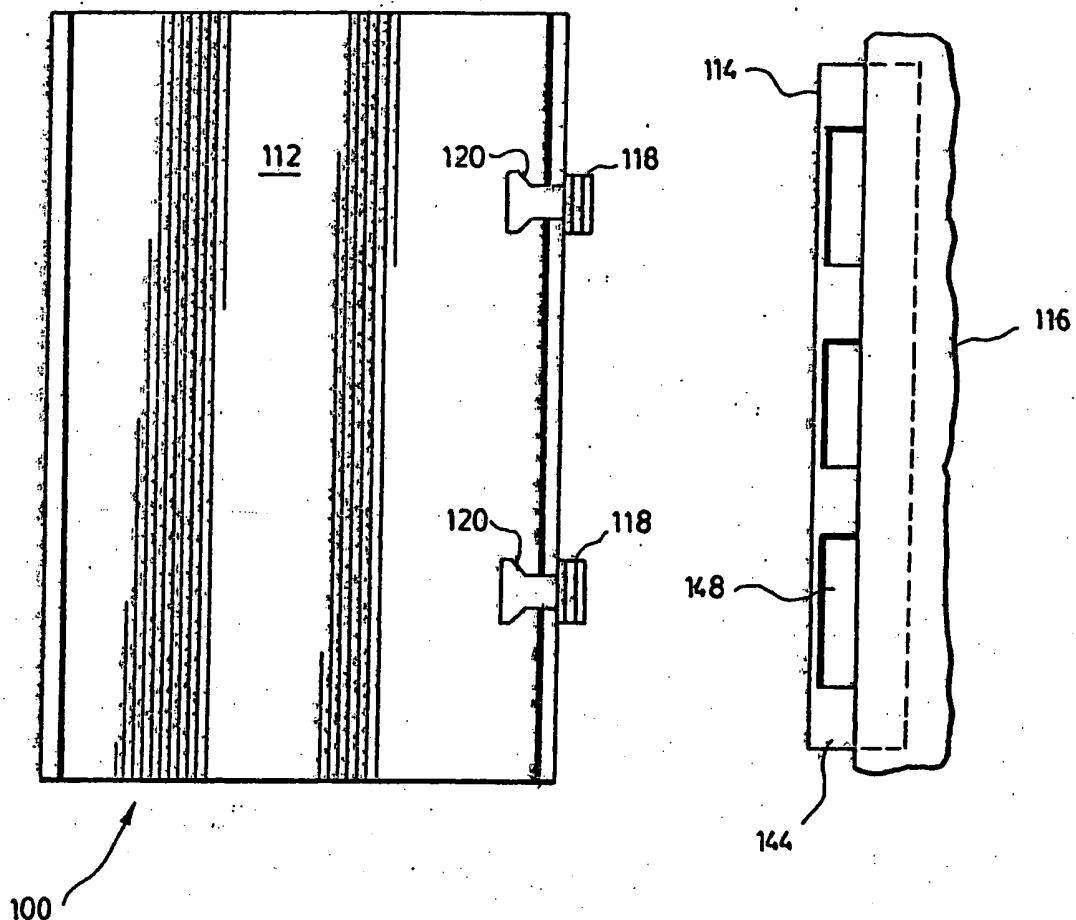


FIG. 23

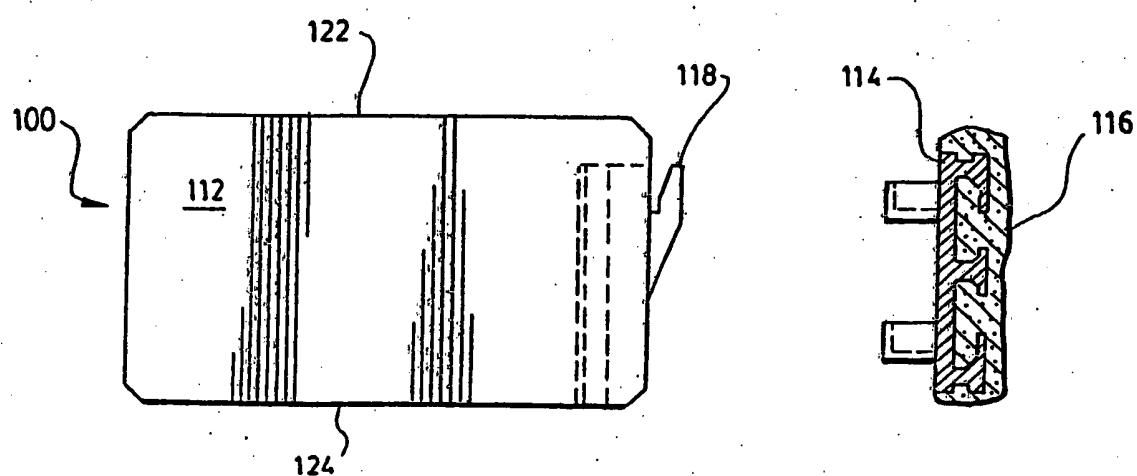


FIG. 24

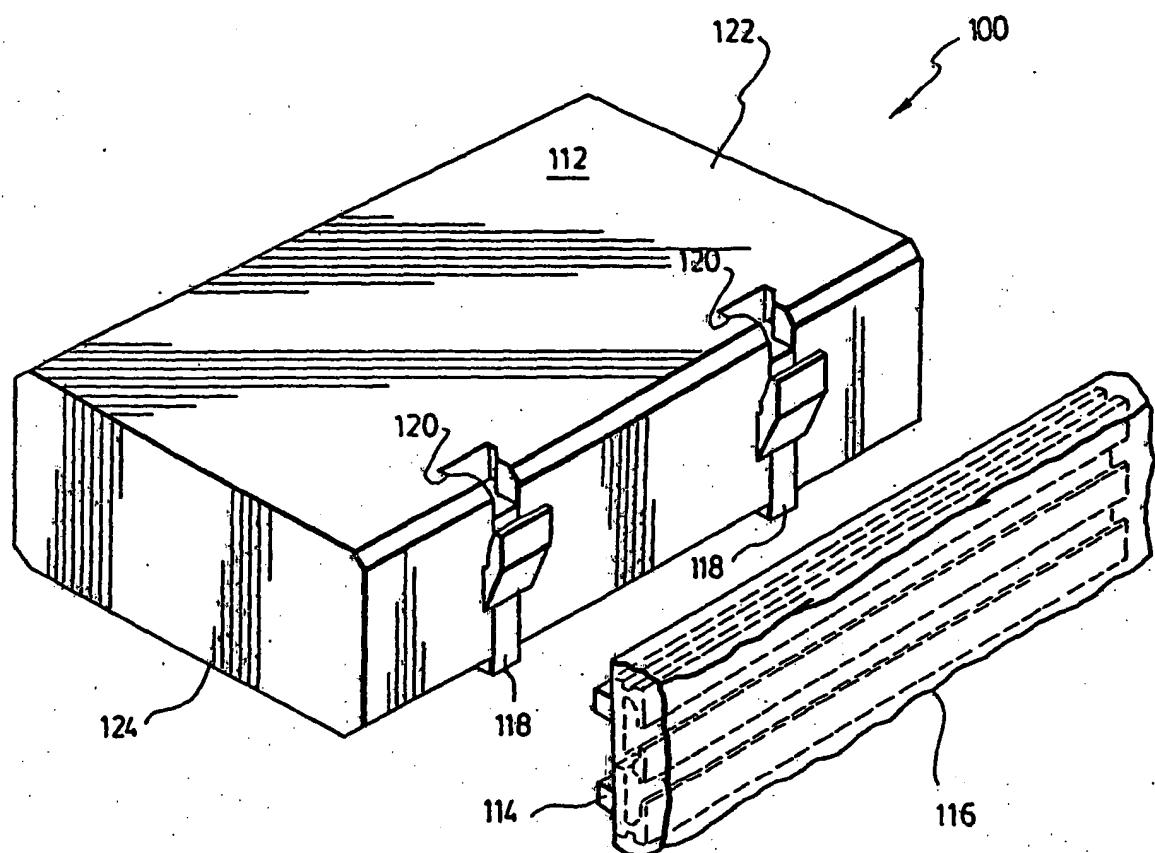


FIG. 25

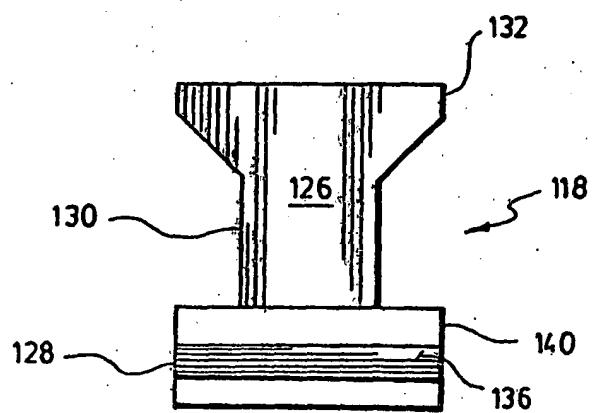


FIG. 26

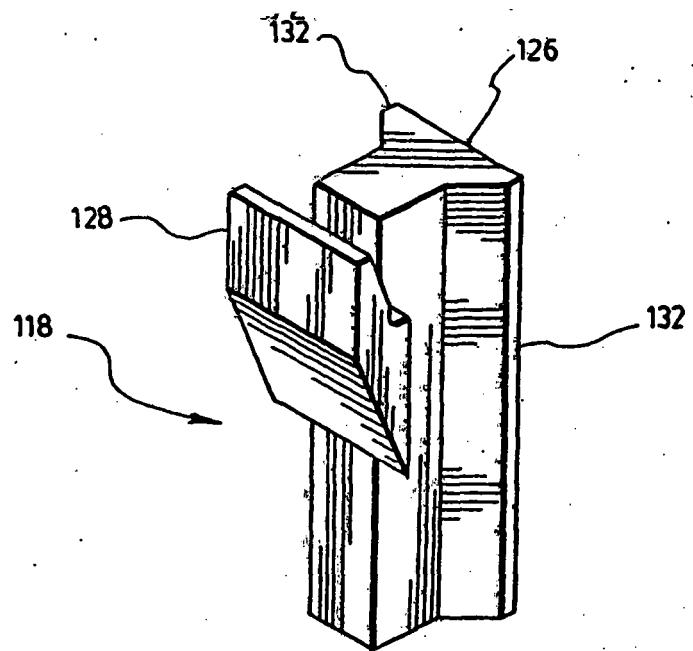


FIG. 27

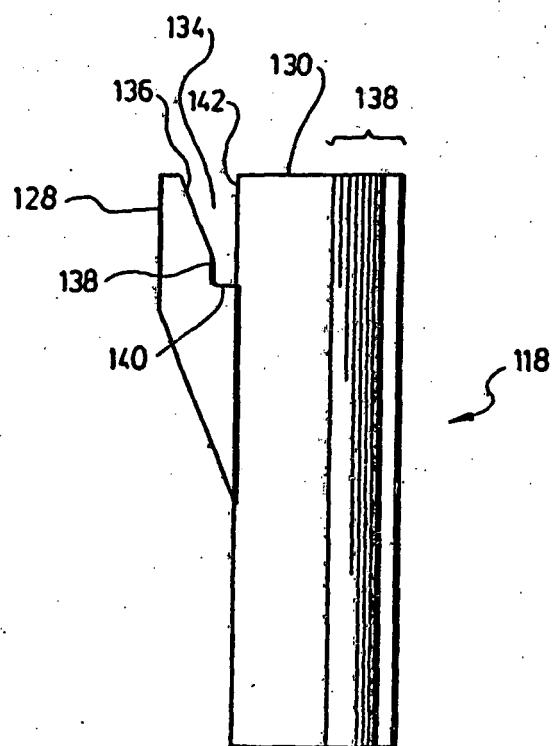


FIG. 28

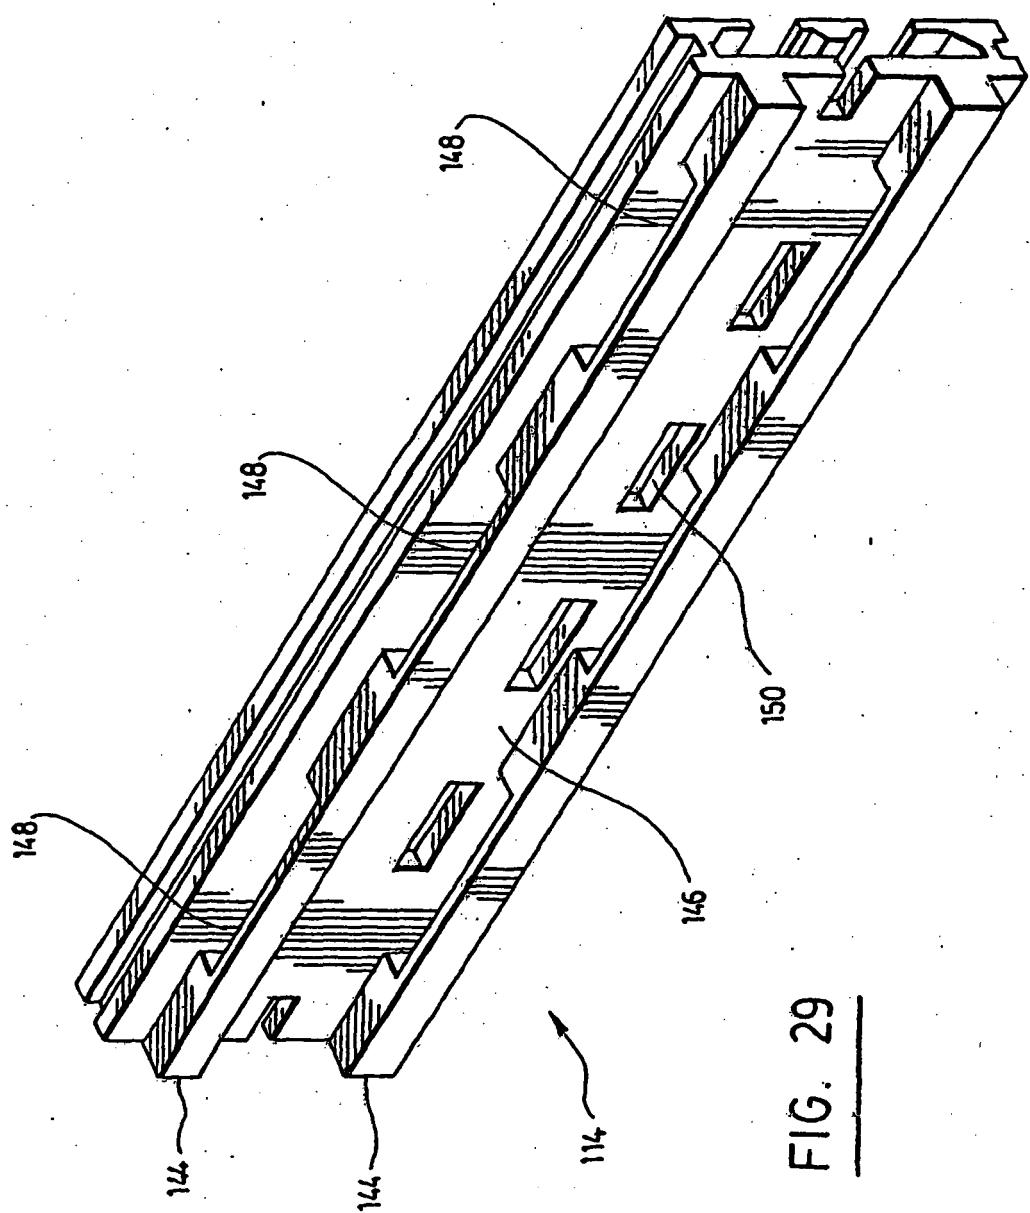


FIG. 29

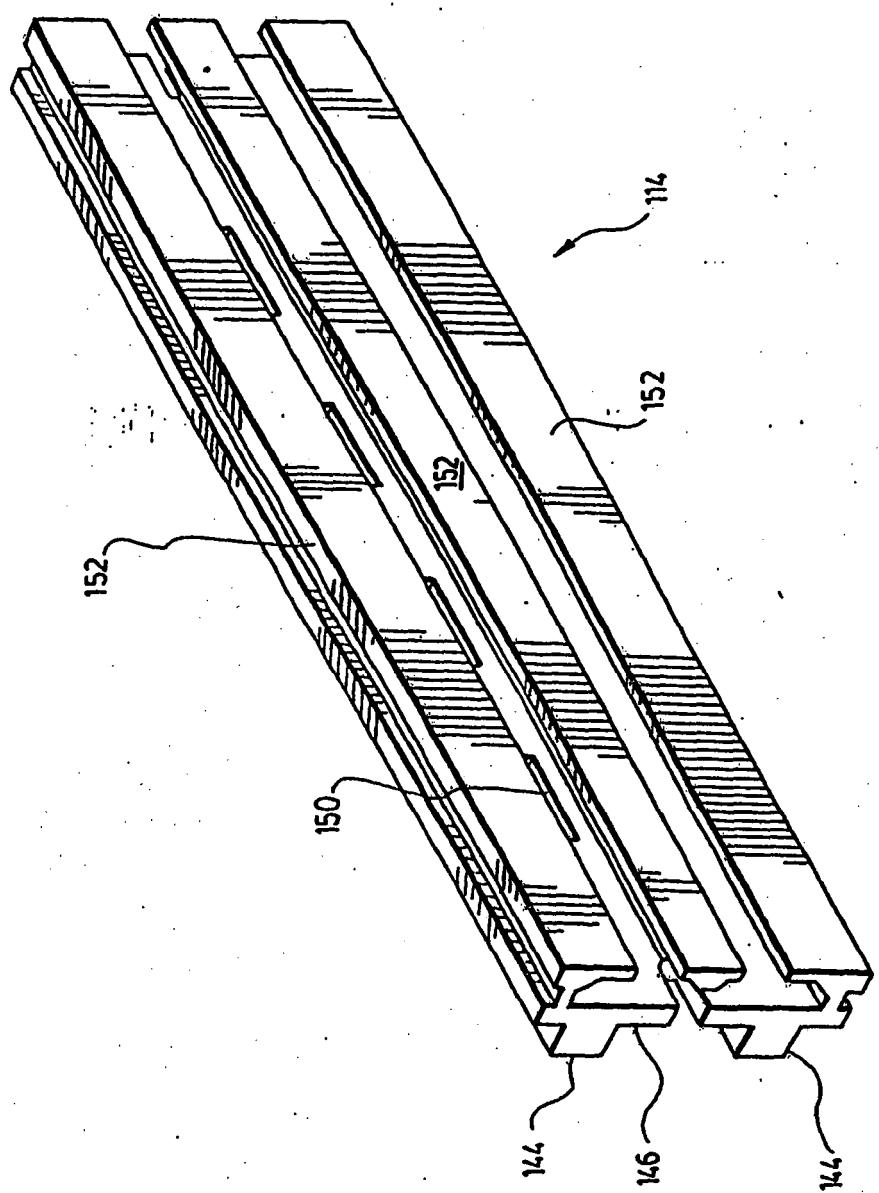


FIG. 30

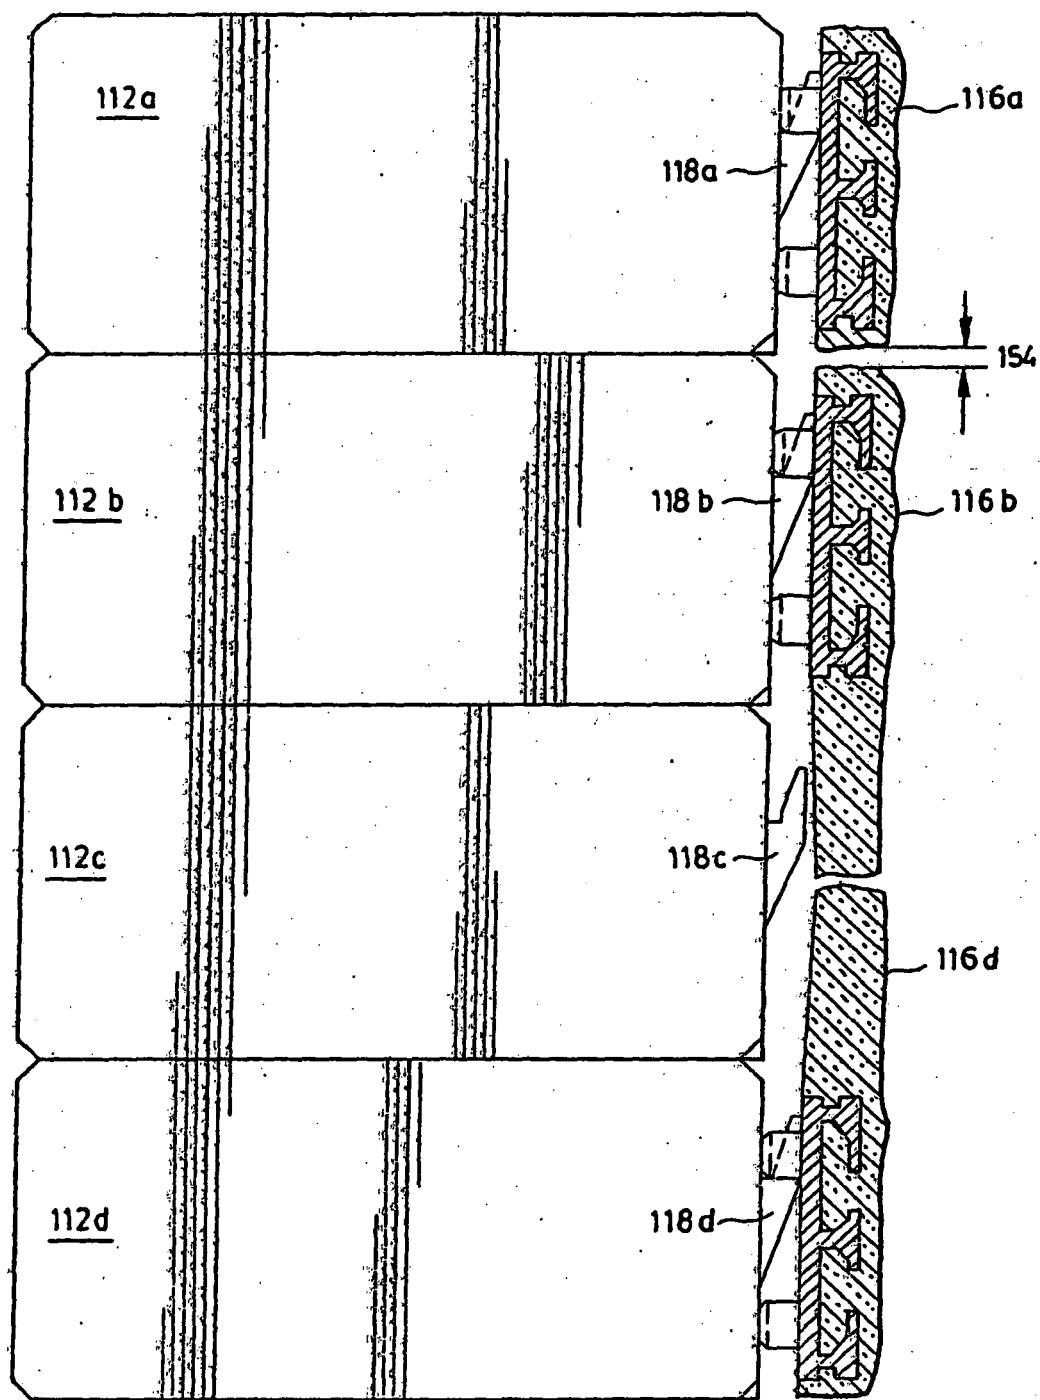


FIG. 31

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- CA 2244348 [0011] [0016]