



(11)

EP 1 862 617 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

15.04.2015 Bulletin 2015/16

(51) Int Cl.:

E05B 63/20 (2006.01)

E05B 63/12 (2006.01)

E05C 3/34 (2006.01)

E05B 17/20 (2006.01)

E05B 3/06 (2006.01)

E05C 9/18 (2006.01)

(21) Application number: **06114769.0**

(22) Date of filing: **31.05.2006**

(54) **Automatic security lock with hook-shape latch reinforcement pins**

Hakenriegelverstärkungsstifte für automatisches Sicherheitsschloss

Tiges de renfort pour pêne à crochet de serrure de sécurité automatique

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**

Designated Extension States:

AL BA HR MK YU

(43) Date of publication of application:

05.12.2007 Bulletin 2007/49

(73) Proprietor: **KALE Kilit ve Kalip Sanayi A.S.**

34610 Istanbul (TR)

(72) Inventor: **Orcan, Metin**

KALE Kilit ve Kalip San. A.S.

34610 Istanbul (TR)

(74) Representative: **Sevinç, Erkan**

Istanbul Patent & Trademark Consultancy Ltd.

Plaza-33, Büyükdere cad. No: 33/16

Sisli

34381 Istanbul (TR)

(56) References cited:

EP-A2- 1 088 955

DE-U1- 9 321 445

TR-U- 200 403 655

US-A1- 2002 017 120

EP-A2- 1 243 729

GB-A- 2 309 996

US-A- 3 695 068

US-A1- 2004 256 860

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field of the Invention

[0001] The present invention relates to a lock, more precisely to an automatic door lock with hook-shaped latches showing improved security characteristics.

Background of the Invention

[0002] Automatic locks are known for their reliability against user carelessness. An automatic lock is by definition automatically locked irrespective of whether a user rotates the lock cylinder. This is the essential prominent advantage over a regular lock. Automatic locks normally require a trigger mechanism in order for actuating locking mechanism. It involves use of a trigger bolt to contact an opposite surface to be moved back in order for driving a set of mechanical elements connected such that latches engage in frame side lock panel slots. To this end, such an automatic lock operates by a trigger latch activating or releasing a mechanical component connected to an actuator mechanism for switching a plurality of latches between a locking and unlocking positions

[0003] Besides, locks offering high security characteristics, that is to say, locks with hook-shaped dual latches engaging in suitable slots within the door frame are well-known in the circles of security lock manufacturers. Those are especially advantageous in that when fully locked, they simply provide multiple axes locking so as to withstand both vertical and horizontal forces produced in association with burglary attempts.

[0004] Multiple patent literature references may be provided herein, all with hook-shaped latches rotated by a set of actuator mechanism driven axles. Among others, one of the patents/patent applications available to the public is the Italian patent ITTO20000226, which is issued in the name of Tesio S.r.l. The same discloses hook-shaped latches in the form of curvilinear projections interlocking with latch slots laid on the frame side lock panel. Said curvilinear latches are rotated by way of axles connected thereto. Rotation of the axles by an actuation mechanism is realized by a movable element commanding an arm incorporating suitable pivots rotating said axles and therefore said curvilinear latches.

[0005] US 2002/017120 A1 discloses a manual lock for a moveable wing comprising a hollow frame supporting an in-fill portion and defined by an interior and an opposed exterior side, the manual lock including an engageable means, a casing, engaging means including at least one engaging member supported by the casing and displaceable to a latched configuration to be engaged with the engageable member.

[0006] GB2309996 A discloses a lock assembly comprising a bolt pivotally mounted upon a support, and a drive member slidable with respect to the support, the bolt being provided with a projection engageable with the drive member to move the bolt between an open position

and a closed position on sliding movement of the drive member, and wherein when the bolt is in its closed position, further movement of the drive member to a locked position restricts pivotal movement of the bolt with respect to the support.

[0007] TR 2004/03655 U discloses a panic lock which comprises a deadbolt driven automatically and becomes locked when the door is closed. The door is unlocked when the door handle inside the door is operated by a user.

[0008] The disclosure in regard to the hook-shaped latches herein differs from the available prior art in that it features a special arrangement designed to prevent burglary attempts specifically aiming at rendering hook-shaped latches nonfunctional by damaging their rotation mechanisms. Although locks with this type of latches are substantially advantageous over a regular linear latch lock, they still incorporate certain vulnerabilities.

[0009] It is a well-known fact that various techniques are used for releasing a door lock in burglary attempts. One of those techniques is to employ a perpetual screw or endless screw, like that of a jack, a screw that is fixed so that it cannot move longitudinally as it rotates. Accordingly, once fixed at two sides of the door frame at a position parallel to the door surface, it remains stationary and forces the door frame to bend toward hollow spaces within the frame. This can eventually bend the frame to the extent that hook-shaped latches reach their limit strength and therefore either their hook ends break through a line defining the outer part hook head or the pivoting pins on which said curvilinear latches are rotatably mounted - and therewith also fixed to the side sheet of the lock case- and the latch actuation pins guided on the latches tend to advance in the frame direction by tearing said lock case side sheet throughout the distance up to the panel on the lock side. In the latter case, it is probable that said pivot axles and guided actuation pins get broken off.

[0010] In both cases, on the other hand, all security aspects of the door will practically become nonfunctional since respectively either the latches will no more be engaging in the slots on the frame side lock panel in the absence of the hooking portions or they will no more be secured neither by pivot axles nor by guided actuation pins.

[0011] The lock case side walls and several individual components of lock hardware are typically secured to each other within the case in several points. The pins on the rotation axes of the hook latches are also secured to the sheet material side wall. This becomes a serious drawback especially in the event of a burglary attempt as exemplified earlier. The linear tension produced by the perpetual screw along the transversal axis of the door in the direction of the door frame especially requires the hook latches to resist against the outward force induced on the hook ends.

[0012] When burglary takes place, the hook ends are in a position interlocked with the slots on the frame side

lock panel. This latter is made of a strong material and will not break off in most cases. As the perpetual screw rotates, however, it will tend to bend outward and the slots on the panel along with the hook ends interlocked therewith will be deformed to the extent that a gap will occur in between the lock side and the frame side panels.

[0013] Break of the hook-shaped latches can be prevented and remedied by way of appropriate material selection. On the other hand, with the assumption that the outer hook portions of the hook latches can resist against breaking off due to appropriate material selection, the break away force will then exert on the axles and on the guided hook latch actuation pins. Upon breaking off of the pivoting pins, whose primary function is not retaining the integrity of the system and resisting against outside forces but to constitute the rotation center thereof, the hook latches will first lose contact with the case side sheet and by a certain damage on the guided actuation pins, the latches will practically be free and not anymore secured to the lock case.

[0014] As will be apparent in the proceeding parts, the present invention solves the specific problem of automatic locks by making use of the lock panel, which is already made of a strong material and which is suitable for resisting against forces that are to cause movement of the latches outside their predetermined outermost limit positions.

[0015] Along with the above information in relation to the security features of the hook-shaped latches according to the present invention, the same brings about an improved security lock capable of automatic operation. This is provided by a set of elements allowing full-locking of the lock mechanism upon insertion of a triggering latch so as to activate respective elements in order for advancing the hook-shaped latches into locked position.

[0016] Automatic locking is arranged by a triggering element allowing an extension part thereof to disengage from a slot on a longitudinal carrier plate, this latter being operated by the door handle to oversee unlocking of the hook-shaped latches. Automatic locking is triggered when said trigger element makes contact with the frame side lock panel.

[0017] The present invention provides a high security automatic lock which can conventionally be opened from outside by way of rotating a key thereof in the lock cylinder or from inside by way of turning the handle. Automatic locks are known in the field for their feature of eliminating risks arising from user carelessness to leave the door unlocked. The present invention therefore provides an automatic lock with high security curvilinear latches.

Objects of the Invention

[0018] Primary object of the present invention is to provide a trigger mechanism high security door lock with hook-shaped latches, the outward movement of which is kept within a predetermined range and can not be removed from the lock case.

[0019] Another object of the present invention is to provide a door lock with hook-shaped latches, whose latches lock into the their corresponding positions automatically when the door is closed and whose latches have reinforcement pins that transfer the load incurred during an attempt to separate the latch from the casing of the lock onto the door-side lock panel as well as onto the frame-side lock panel, whereby the tear force on the rotational axle of the latches are reduced.

Summary of the Invention

[0020] The present invention proposes a trigger mechanism high security lock comprising a two-direction sliding bolt, a trigger latch and a set of separate hook-shaped latches in the form of curvilinear projections operating jointly in the manner to interlock with suitable latch slots on the door frame. Automatic locking is arranged by a triggering element allowing an extension part thereof to disengage from a slot on a carrier plate, this latter being operated by the door handle to oversee unlocking of the hook-shaped latches. According to the present invention, said curvilinear latches are provided with a plurality of pins vertically projecting from the lateral surface thereof in the manner to face either of the case side sheets. In case of an unauthorized attempt to release the lock by bending the frame side lock panel on the door frame outwardly so as to cause the latches to move in the direction of the frame, the vertically projecting pins within the inside of the case will abut against the lock panel on the lock side and prevent further movement of said latches.

Brief Description of the Figures

[0021] Accompanying drawings are given solely for the purpose of exemplifying a locking assembly whose advantages over prior art were outlined above and will be explained in detail hereinafter: The scope of the present invention, which is explained with reference to the drawings below, can not be limited to the disclosure of the drawings that are given solely for the purpose of exemplifying.

Fig. 1 demonstrates a perspective upper view of the lock assembly according to the present invention.

Fig. 2 demonstrates a perspective side view of the lock assembly according to the present invention.

Fig. 3 demonstrates another perspective side view of the lock assembly according to the present invention.

Detailed Description of the Invention

[0022] Referring now to the figures outlined above, the lock assembly in Fig. 1, generally referred to as 11, comprises a plurality of latches (12, 13 and 14) movable rel-

ative to said assembly (11) in the manner to engage in suitable slots on the frame side lock panel and last but not least a trigger latch (15) that activates or releases a carrier plate (16) in contact with an actuator mechanism for switching said rotating curvilinear latches (13, 14) between a locking and an unlocking positions.

[0023] The two-way lock bolt (12) according to the present invention is formed in the manner to be mounted irrespective of the actual closing direction of the door, that is to say, the need to arrange the inclined surface of the bolt considering the closing direction of the door is eliminated. The two-direction symmetrical bolt consists of two half-parts mounted in opposite directions. Hence, neither the closing direction of the door nor the door side on which the lock is to be mounted will not be relevant since both half-parts are suitable for allowing sufficient clearance for door closure in any direction. Both half-parts are rotatably mounted in opposite directions on axles on their bottom portions.

[0024] The two-direction bolt (12) extends into the lock case in the form of a rod with a carrier plate blockage pin (17) thereon. The carrier plate (16), whose details will be disclosed below, is the most essential element of the automatic operation. Said carrier plate blockage pin (17), when full-locking is reached, presses on the lateral surface of said carrier plate (16) and is therefore disallowed from moving back. This ensures protection against one of the most popular types of burglary attempts made in the manner to insert a solid, thin object such as a bank card, in between the door and the door frame along the bolt in order for moving the same back in a door closed without locking.

[0025] The carrier plate (16) according to the present invention extends longitudinally along the lock mechanism. It incorporates means for activating said rotating curvilinear latches (13, 14) and is basically controlled by the handle hub from inside and by the lock cylinder from outside to release the lock. An extension (18) of the handle slot integrated thereto moves said plate (16) by means of a carrier plate control pin (19).

[0026] The automatic operation is triggered by way of said trigger latch (15) being advanced back so as to release an upright extension (20) thereof. Said upright extension (20) normally rests in a carrier plate blockage recess (21) on said carrier plate (16). When the trigger latch (15) makes contact with the frame side lock panel during closure, it is moved back since there exist no corresponding slot on the opposite frame panel and therefore releases said upright extension (20) from said carrier plate blockage recess (21), causing advance of the spring loaded carrier plate to drive said rotating curvilinear latches (13, 14).

[0027] The carrier plate (16) always tends to set the lock mechanism to the locking position. This is achieved through a plurality of spring loaded structures. One of these, referred to as 23, is secured to the lock case lateral surface so as to be compressed by the carrier plate (16) by means of an extension part thereof. The carrier plate

spring (23) is compressed when the mechanism is unlocked and stretched when it is locked. When the handle hub extension (18) drives said carrier plate (16) into the unlocked position longitudinally in the direction of the two-direction bolt (12), said carrier plate blockage pin (17) engages in a recess (24) on said carrier plate (16) and restricts its movement in any direction, therefore keeping said carrier plate spring (23) in its compressed position.

[0028] The carrier plate blockage pin (17) and the trigger latch upright extension (20), respectively engaging in the recess 24 and in the recess 21 ensure that the carrier plate (16) is temporarily fixed until the trigger latch (15) makes contact with the opposite frame side lock panel to release said carrier plate blockage pin (17) and said trigger latch upright extension (20) to let the plate (16) move in the direction of said rotating curvilinear latches (13, 14) by the pre-loaded spring forces to drive said rotating curvilinear latches (13, 14).

[0029] Another spring mechanism, referred to as 25 according to the present invention, is secured to the longitudinal lateral surface of the lock case so as to continuously press on an extension of the handle hub so as to rotate the same in the reverse direction to the unlocking direction thereof. The force exerted by the spring mechanism 25 along with that of the spring 23 provides automatic locking of the carrier (16) upon initiation of triggering.

[0030] According to the present invention, a set of separate hook-shaped rotating curvilinear latches (13, 14) in the form of curvilinear projections operating reciprocally in an integral manner are employed so as to interlock with a suitable latch slot laid on the frame side lock panel. Said rotating curvilinear latches (13, 14) are designed to be operated jointly and to be rotating by way of axles (22) connected thereto. The hook-shaped rotating curvilinear latches (13, 14) are conventionally designed to have a curvilinear side on the outer portion of the head part, the latter extending inward in the form of a right-angled corner and forming therein a space between two blocks. One of those blocks is actually the head portion, which engages into the slot on the lock panel.

[0031] As for the rotating curvilinear latches (13, 14), rotation of the axles (22) so as to effect locking of the latches (13, 14) is realized by an actuation mechanism started by insertion of a key into the keyhole in the manner to advance a rotatable element (not shown) of the lock cylinder, the latter driving said carrier plate (16) to provide locking. The function of a lock cylinder is apparent to the person in the art. Apart from conventional lock cylinders, the cylinder hereof is in the form of a half-cylinder accessible only from inside the house.

[0032] The actuator means for the rotating curvilinear latches (13, 14) is typically comprised of a linearly guided unidirectionally sliding plate (26) with two gripping arms (27) extending to the latches' (13, 14) rotation center (22).

[0033] The linearly guided unidirectionally sliding plate (26) is connected to the carrier plate (16) by means of a plurality of pins (31, 32 and 33) that move back and forth

through channels located on said carrier plate (16) in order for driving said linearly guided unidirectionally sliding plate (26). Those channels (34, 35 and 36) are arranged such that two longitudinally extending channels (34, 36) accommodates pins 33 and 32 and the other channel (35), which is inclined with respect to both the longitudinal axis of said carrier plate (16) and with respect to the longitudinal axis of said linearly guided unidirectionally sliding plate (26), accommodates pin 31. Said pins 32 and 33 are additionally guided within two channels (only channel 37 shown, channel 38 not shown but referred to for clarity) extending perpendicular to said open-end channel 36 and channel 34 on said linearly guided unidirectionally sliding plate (26).

[0034] Said channel 35 incorporates at its far end a curved end part (39) to accommodate said pin 31 in order for temporarily holding it when the spring loaded structures (23, 25) are compressed in locked position.

[0035] According to the present invention, the rotating curvilinear latches (13, 14) are designed to provide a single-turn 90-degree displacement ensuring engagement position into the panel slot in one turn. Turning of an appropriate key in the keyhole causes the axles (22) and a couple of redirection pins (28) that are guided within the rotating curvilinear latches (13, 14), to rotate said latches (13, 14) accordingly. Each of said pins (28) is driven back and forth between two edges of a guiding channel (29), depending on the positions during engaging and disengaging. Synchronous movement of said redirection pin (28) together with said axle (22) leads to a full step 90-degree slip of the rotating curvilinear latches (13, 14) in a reciprocal manner. Each gripping arm (27) extending to each latch (13, 14) comprises an open end recess in order for laterally receiving said axles (22) whose bottom surfaces are secured to a suitable slot on at least one of the lock case sidewalls. When fully locked, the axles (22) are fully encircled with the exception of the recess's open end to limit the movement of the same.

[0036] Beside said recesses on each arm, a slot for vertically accommodating said redirection pin (28), which is only allowed a limited linear movement within said guiding channel (29), is located. Movement of this latter to move the rotating curvilinear latch (13, 14) is directly effected by said gripping arm (27) since it is placed into both the gripping arm (27) slot and the latch channel (29) coaxially. In the very beginning of the locking sequence, each gripping arm (27) reciprocally advances to slip said redirection pins (28) to the channel (29) limits and further advancing of the gripping arms (27) causes the redirection pins (28) to carry said latches (13, 14) around each rotation center (22) to the full-locked position. Single turn 90-degree movement of the latches (13, 14) is not possible without the advance of the redirection pins (28) to the outermost limit position in the guiding channels (29). In other words, rotation is effected by the redirection pins' (28) movement within the channels (29) inclined with regard to the door side lock panel direction. The fact that the location of the rotation center (22) is on the direction

of the inclined channels (29), provides an effective single-turn 90-degree slip. An effective single step full rotation would not be possible in an alternative design in which the rotation centers (22) are not directly located on the channels' (29) longitudinal direction.

[0037] In an automatic lock, to avoid a burglary attempt of the type defined earlier, in which an endless screw is used to bend the frame side lock panel in the direction of the door frame in the manner to load stress on the most critical security components such as the redirection pins (28) and the axles (22), the present invention features a set of special arrangements to keep the redirection pins (28) and the axles (22) away from the induced force components. Accordingly, said rotating curvilinear latches (13, 14) are additionally provided with a plurality of pins (30) vertically projecting from the lateral surfaces of their body portions that remain within the lock case in locked position. In case of an unauthorized attempt to release the lock by bending the frame side lock panel on the door frame outwardly so as to cause the rotating curvilinear latches (13, 14) to move in the direction of the frame, the vertically projecting pins within the inside of the case will abut against the door side lock panel and stop displacement of said latches (13, 14).

[0038] The reinforcement pins (30) are the first barriers to contact the lock panel in any attempt to slip said latches (13, 14) outwardly, that is, in the direction of the door frame. Since they are longitudinally embedded in the rotating curvilinear latch (13, 14) body in a secure manner with the head portions slightly running over the rotating curvilinear latch (13, 14) surfaces in a manner to form a sufficient contact surface with the door side lock panel portion outside the latching slot, letting the latter stop the entire rotating curvilinear latch (13, 14) body moving and resisting against outward forces otherwise exerted on the redirection pins (28) and the axles (22).

[0039] The reinforcement pins (30) are located substantially close to the door side lock panel considering the locked position layout of the rotating curvilinear latches (13, 14). In other words, the distance of the reinforcement pins (30) to the door side lock panel is smaller than the radius of the reinforcement pin (30) itself. More precisely, the smallest distance between a point of the reinforcement pins (30) and the door side lock panel is smaller than the radius of the reinforcement pin (30) itself.

[0040] According to the present invention, reinforcement pins may also be installed on the far end of the rotating curvilinear latch (13, 14) to the door side lock panel. Such pins projecting symmetrically from both surfaces of a rotating curvilinear latch (13, 14) will further delay removal of rotating curvilinear latch (13, 14). In the country of the applicant, it is known that the risk for a burglar to fully release a high security lock sharply decreases as the duration consumed by a burglar in front of a single lock increases.

[0041] In a nutshell, the present invention proposes a locking assembly (11) comprising a plurality of regular and rotating curvilinear latches (12, 13 and 14) movable

relative to said assembly (11) in a manner to engage in suitable slots on a frame side lock panel, a trigger latch (15) that activates or releases a carrier plate (16), a handle hub in control of said carrier plate (16) from the inside, a half-cylinder mechanism in control of said carrier plate (16) from the outside, actuator mechanisms for actuating said regular and rotating curvilinear latches (12, 13 and 14) and transmission mechanisms transferring motion to said plurality of latches (12, 13, and 14), said rotating curvilinear latches (13, 14) being provided with at least one reinforcement pin (30) projecting from the lateral surfaces of the rotating curvilinear latch (13, 14) body portions remaining within the lock case in locked position.

Claims

1. A locking assembly (11) comprising a plurality of rotating curvilinear latches (13, 14) movable relative to said assembly (11) in a manner to engage in corresponding slots on a frame side lock panel, a trigger latch (15) that activates or releases a carrier plate (16), a handle hub in control of said carrier plate (16) from the inside, a half-cylinder mechanism in control of said carrier plate (16) from the outside, actuator mechanisms for actuating said rotating curvilinear latches (13, 14) and transmission mechanisms transferring motion to said plurality of rotating curvilinear latches (13, 14) **characterized in that:** said rotating curvilinear latches (13, 14) are provided with at least one reinforcement pin (30) projecting from the lateral surfaces of the rotating curvilinear latch (13, 14) and leaning onto the interior of the door-side panel, said reinforcement pins (30) projecting laterally from the side faces of said rotating curvilinear latch (13, 14) body form a lateral contact surface with the door side lock panel immediately above and below said latching slot, said reinforcement pins (30) are located substantially close to the door side lock panel with regard to the locked position layout of the rotating curvilinear latches (13, 14).
2. A locking assembly (11) according to Claim 1 wherein the assembly further comprises a latch (12) having two half-parts rotatably mounted in opposite directions on axles on their bottom portions.
3. A locking assembly (11) according to Claim 2 wherein said latch (12) extends into the lock case in the form of a rod with a carrier plate blockage pin (17) thereon, pressing on the lateral surface of said carrier plate (16) to be disallowed from moving back in locked position and engaging in a recess (24) in unlocked position.
4. A locking assembly (11) according to Claim 1 where-

in said handle hub comprises an extension (18) integrated thereto to move said plate (16) by means of a carrier plate control pin (19)

5. A locking assembly (11) according to Claim 1 wherein said trigger latch (15) comprises an upright extension (20) resting in a carrier plate blockage recess (21) in unlocked position and releasing from said recess (21) when the trigger latch (15) makes contact with the frame side lock panel during closure.
6. A locking assembly (11) according to Claim 1 wherein said lock assembly (11) comprises a spring loaded structure (23) secured to the lock case lateral surface so as to be compressed by said carrier plate (16).
7. A locking assembly (11) according to Claim 6 wherein said lock assembly comprises another spring loaded structure (25) secured to the longitudinal lateral surface of the lock case so as to continually press on the handle hub in order for rotating the same in the reverse direction to the unlocking direction of said handle hub.
8. A locking assembly (11) according to Claim 1 wherein said transmission mechanism transferring motion to said plurality of rotating curvilinear latches (13, 14) comprises a linearly guided unidirectionally sliding plate (26) connected to the carrier plate (16) by means of a first and a second pin (respectively 33 and 32) moving back and forth through perpendicularly arranged channels (36, 37 and 34, 38) respectively located on said carrier plate (16) and on said linearly guided unidirectionally sliding plate (26).
9. A locking assembly (11) according to Claim 8 wherein said carrier plate (16) comprises a pin (31) guided within a channel (35) inclined with respect to both the longitudinal axis of said carrier plate (16) and with respect to the longitudinal axis of said linearly guided unidirectionally sliding plate (26).
10. A locking assembly (11) according to Claim 9 wherein said channel (35) incorporates at its far end a curved end part (39) to accommodate said pin (31) in order for temporarily holding it when the spring loaded structures (23, 25) are compressed in locked position.

Patentansprüche

1. Verriegelungsanordnung (11) umfassend mehrere gekrümmte Drehriegel (13, 14), die relativ zu der Anordnung (11) in einer Weise beweglich angeordnet sind, dass sie in entsprechende Schlitze auf einer Seitenrahmenverriegelungsplatte in Eingriff kommen, einen Auslöserriegel (15), der eine Trägerplatte

- (16) aktiviert oder freigibt, eine Griffnabe zur Steuerung der Trägerplatte (16) von innen, einen Halbzylindermechanismus zum Steuern der Trägerplatte (16) von außen, Betätigungsmechanismen zum Betätigen der gekrümmten Drehriegel (13, 14) und Getriebemechanismen zum Übertragen von Bewegung auf die mehreren gekrümmten Drehriegel (13, 14), **dadurch gekennzeichnet, dass** die gekrümmten Drehriegel (13, 14) mit wenigstens einem Verstärkungsstift (30) versehen sind, der sich von der lateralen Oberfläche des gekrümmten Drehriegels erstreckt und sich auf der Innenseite der Türseitenwand abstützt, wobei die Verstärkungsstifte (30), die sich lateral von den Seitenflächen des gekrümmten Drehriegelkörpers (13, 14) erstrecken, einen lateralen Oberflächenkontakt mit der Türseitenverriegelungsplatte unmittelbar über und unter dem Verriegelungsschlitz bilden, wobei sich die Verstärkungsstifte (30) im Wesentlichen nahe der Türseitenverriegelungsplatte hinsichtlich dem geschlossenen Positionszustand der gekrümmten Drehriegel (13, 14) befinden.
2. Verriegelungsanordnung (11) nach Anspruch 1, **dadurch gekennzeichnet, dass** die Anordnung weiter einen Riegel (12) umfasst, der zwei in entgegengesetzte Richtungen drehbar gelagerte Halbkörper auf Achsen auf deren Bodenabschnitten besitzt.
 3. Verriegelungsanordnung (11) nach Anspruch 2, **dadurch gekennzeichnet, dass** sich der Riegel (12) in den Schlosskasten in der Form einer Stange mit einem Trägerplattensperrstift (17) darauf erstreckt, der auf die laterale Oberfläche der Trägerplatte (16) drückt, um in der geschlossenen Position daran gehindert zu werden sich zurückzubewegen und in der offenen Position daran gehindert zu werden in eine Vertiefung (24) einzurasten.
 4. Verriegelungsanordnung (11) nach Anspruch 1, **dadurch gekennzeichnet, dass** die Griffnabe eine daran integrierte Erweiterung umfasst, um die Platte (16) mittels eines Trägerplattensteuerungsstifts (19) zu steuern.
 5. Verriegelungsanordnung (11) nach Anspruch 1, **dadurch gekennzeichnet, dass** der Auslöseriegel (15) eine aufrechte Erweiterung (20) umfasst, die in einer Trägerplattensperrvertiefung (21) in offener Position ruht und sich aus der Vertiefung (21) löst, wenn der Auslöseriegel (15) während des Schließens in Kontakt mit der Seitenrahmenverriegelungsplatte steht.
 6. Verriegelungsanordnung (11) nach Anspruch 1, **dadurch gekennzeichnet, dass** die Verriegelungsanordnung (11) eine federgespannte Struktur (23), die auf der lateralen Schlosskastenoberfläche abgestützt ist, so dass sie durch die Trägerplatte (16) zusammengedrückt wird, enthält.
 7. Verriegelungsanordnung (11) nach Anspruch 6, **dadurch gekennzeichnet, dass** die Verriegelungsanordnung eine weitere federgespannte Struktur (25) umfasst, die auf der longitudinalen lateralen Oberfläche des Schlosskastens gesichert ist, um kontinuierlich auf die Griffnabe zu drücken, um gleichermaßen in entgegengesetzte Entriegelungsrichtung der Griffnabe zu rotieren.
 8. Verriegelungsanordnung (11) nach Anspruch 1, **dadurch gekennzeichnet, dass** der Getriebemechanismus, der Bewegung auf die mehreren gekrümmten Drehriegel (13, 14) überträgt, eine geradlinig geführte, unidirektional gleitende Platte (26) enthält, die mit der Trägerplatte (16) mittels eines ersten und eines zweiten Stifts (respektive 33 und 32) in Verbindung steht, die sich in senkrecht zueinander angeordneten Kanälen (36, 37 und 34, 38) hin und her bewegen, die entsprechend auf der Trägerplatte (16) und auf der geradlinig geführten unidirektional rutschenden Platte (26) angeordnet sind.
 9. Verriegelungsanordnung (11) nach Anspruch 8, **dadurch gekennzeichnet, dass** die Trägerplatte (16) einen Stift (31) enthält, der in einem Kanal (35) geführt wird, der in Bezug zu der Längsachse der Trägerplatte (16) und in Bezug zu der Längsachse der geradlinig geführten unidirektional rutschenden Platte (26) geneigt ist.
 10. Verriegelungsanordnung (11) nach Anspruch 9, **dadurch gekennzeichnet, dass** der Kanal (35) an seinem entfernten Ende ein gekrümmtes Endstück (39) zum Aufnehmen des Stifts (31) enthält, um ihn zeitweise zu halten, wenn die federgespannten Strukturen (23, 25) in verschlossener Position zusammengedrückt werden.

Revendications

1. Ensemble de verrouillage (11) comportant une pluralité de verrous curvilignes rotatifs (13, 14) mobiles par rapport audit ensemble (11) de manière à s'engager dans des fentes correspondantes sur un panneau de verrou côté bâti dormant, un verrou de déclenchement (15) qui active ou libère une plaque de support (16), un moyeu de poignée commandant ladite plaque de support (16) à partir de l'intérieur, un mécanisme de demi-cylindre commandant ladite plaque de support (16) à partir de l'extérieur, des mécanismes d'actionnement pour actionner lesdits verrous curvilignes rotatifs (13, 14) et des mécanismes de transmission transférant un mouvement à ladite pluralité de verrous curvilignes rotatifs (13, 14),

caractérisé en ce que :

- lesdits verrous curvilignes rotatifs (13, 14) sont munis d'au moins une goupille de renforcement (30) faisant saillie à partir des surfaces latérales du verrou curviligne rotatif (13, 14) et en appui sur l'intérieur du panneau côté porte, lesdites goupilles de renforcement (30) faisant latéralement saillie à partir des faces latérales dudit corps de verrou curviligne rotatif (13, 14) forment une surface de contact latérale avec le panneau de verrou côté porte immédiatement au-dessus et en-dessous de ladite fente de verrouillage, lesdites goupilles de renforcement (30) sont positionnées sensiblement près du panneau de verrou côté porte par rapport à l'agencement en position verrouillée des verrous curvilignes rotatifs (13, 14).
2. Ensemble de verrouillage (11) selon la revendication 1, dans lequel l'ensemble comporte en outre un verrou (12) ayant deux demies parties montées de manière rotative dans des directions opposées sur des axes sur leurs parties inférieures.
 3. Ensemble de verrouillage (11) selon la revendication 2, dans lequel ledit verrou (12) s'étend dans le boîtier de verrou sous la forme d'une tige avec une goupille de blocage de plaque de support (17) sur celle-ci, pressant sur la surface latérale de ladite plaque de support (16) pour être empêchée de reculer en position verrouillée et s'engageant dans un évidement (24) en position déverrouillée.
 4. Ensemble de verrouillage (11) selon la revendication 1, dans lequel ledit moyeu de poignée comporte une extension (18) intégrée à celui-ci pour déplacer ladite plaque (16) au moyen d'une goupille de commande de plaque de support (19).
 5. Ensemble de verrouillage (11) selon la revendication 1, dans lequel ledit verrou de déclenchement (15) comporte une extension droite (20) reposant dans un évidement de blocage de plaque de support (21) en position déverrouillée et se libérant dudit évidement (21) lorsque le verrou de déclenchement (15) fait contact avec le panneau de verrou côté bâti dormant pendant la fermeture.
 6. Ensemble de verrouillage (11) selon la revendication 1, dans lequel ledit ensemble de verrou (11) comporte une structure chargée par ressort (23) fixée à la surface latérale de boîtier de verrou de manière à être comprimée par ladite plaque de support (16).
 7. Ensemble de verrouillage (11) selon la revendication 6, dans lequel ledit ensemble de verrou comporte une autre structure chargée par ressort (25) fixée à la surface latérale longitudinale du boîtier de verrou de manière à presser en continu sur le moyeu de poignée afin de faire tourner celui-ci dans la direction inverse jusqu'à la direction de déverrouillage dudit moyeu de poignée.
 8. Ensemble de verrouillage (11) selon la revendication 1, dans lequel ledit mécanisme de transmission transférant un mouvement à ladite pluralité de verrous curvilignes rotatifs (13, 14) comporte une plaque coulissant unidirectionnellement et guidée linéairement (26) reliée à la plaque de support (16) au moyen d'une première goupille et d'une seconde goupille (respectivement 33 et 32) se déplaçant en va-et-vient à travers des canaux agencés perpendiculairement (36, 37 et 34, 38) respectivement situés sur ladite plaque de support (16) et sur ladite plaque coulissant unidirectionnellement et guidée linéairement (26).
 9. Ensemble de verrouillage (11) selon la revendication 8, dans lequel ladite plaque de support (16) comporte une goupille (31) guidée à l'intérieur d'un canal (35) incliné par rapport à la fois à l'axe longitudinal de ladite plaque de support (16) et par rapport à l'axe longitudinal de ladite plaque coulissant unidirectionnellement et guidée linéairement (26).
 10. Ensemble de verrouillage (11) selon la revendication 9, dans lequel ledit canal (35) incorpore, au niveau de son extrémité distante, une partie d'extrémité courbe (39) pour recevoir ladite goupille (31) afin de la maintenir temporairement lorsque les structures chargées par ressort (23, 25) sont comprimées en position verrouillée.

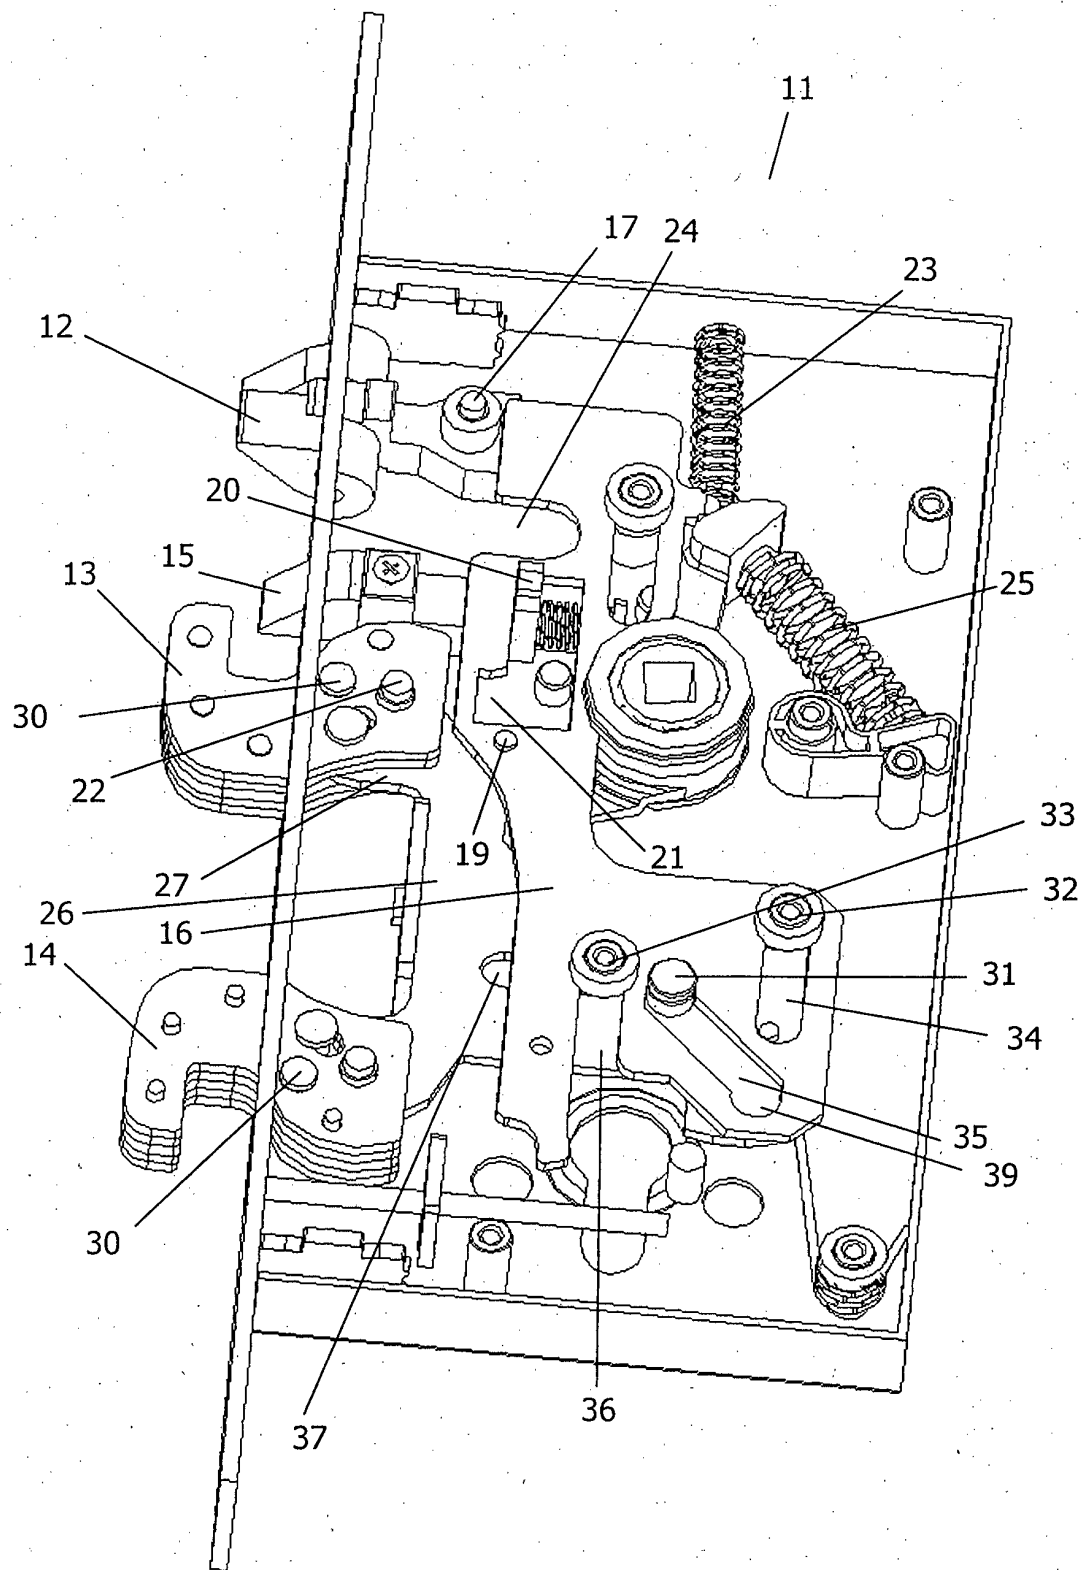


Fig.1

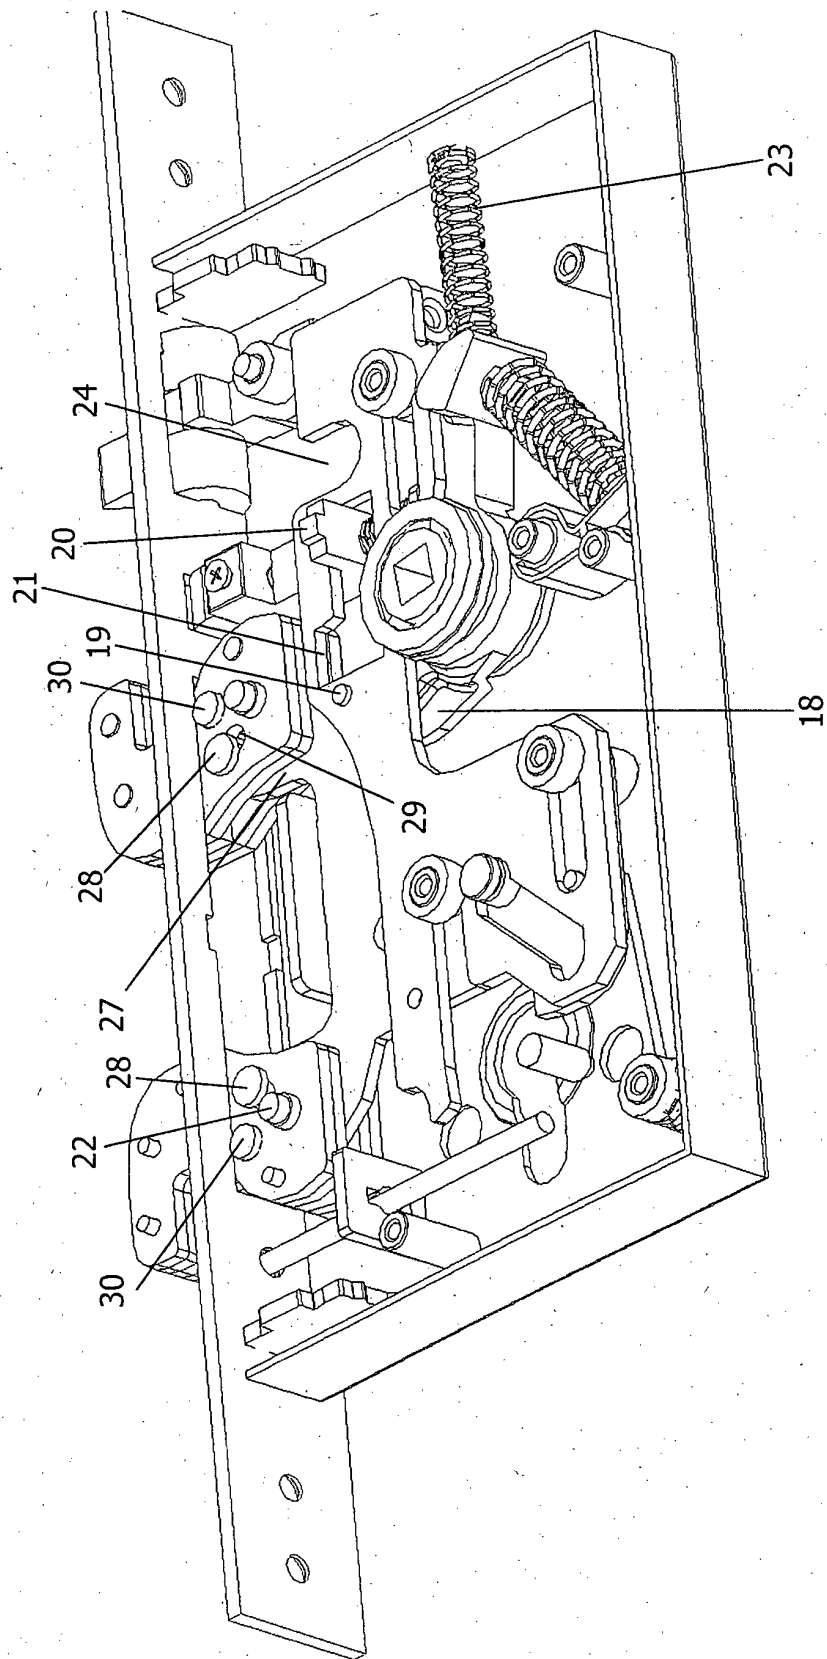


Fig. 2

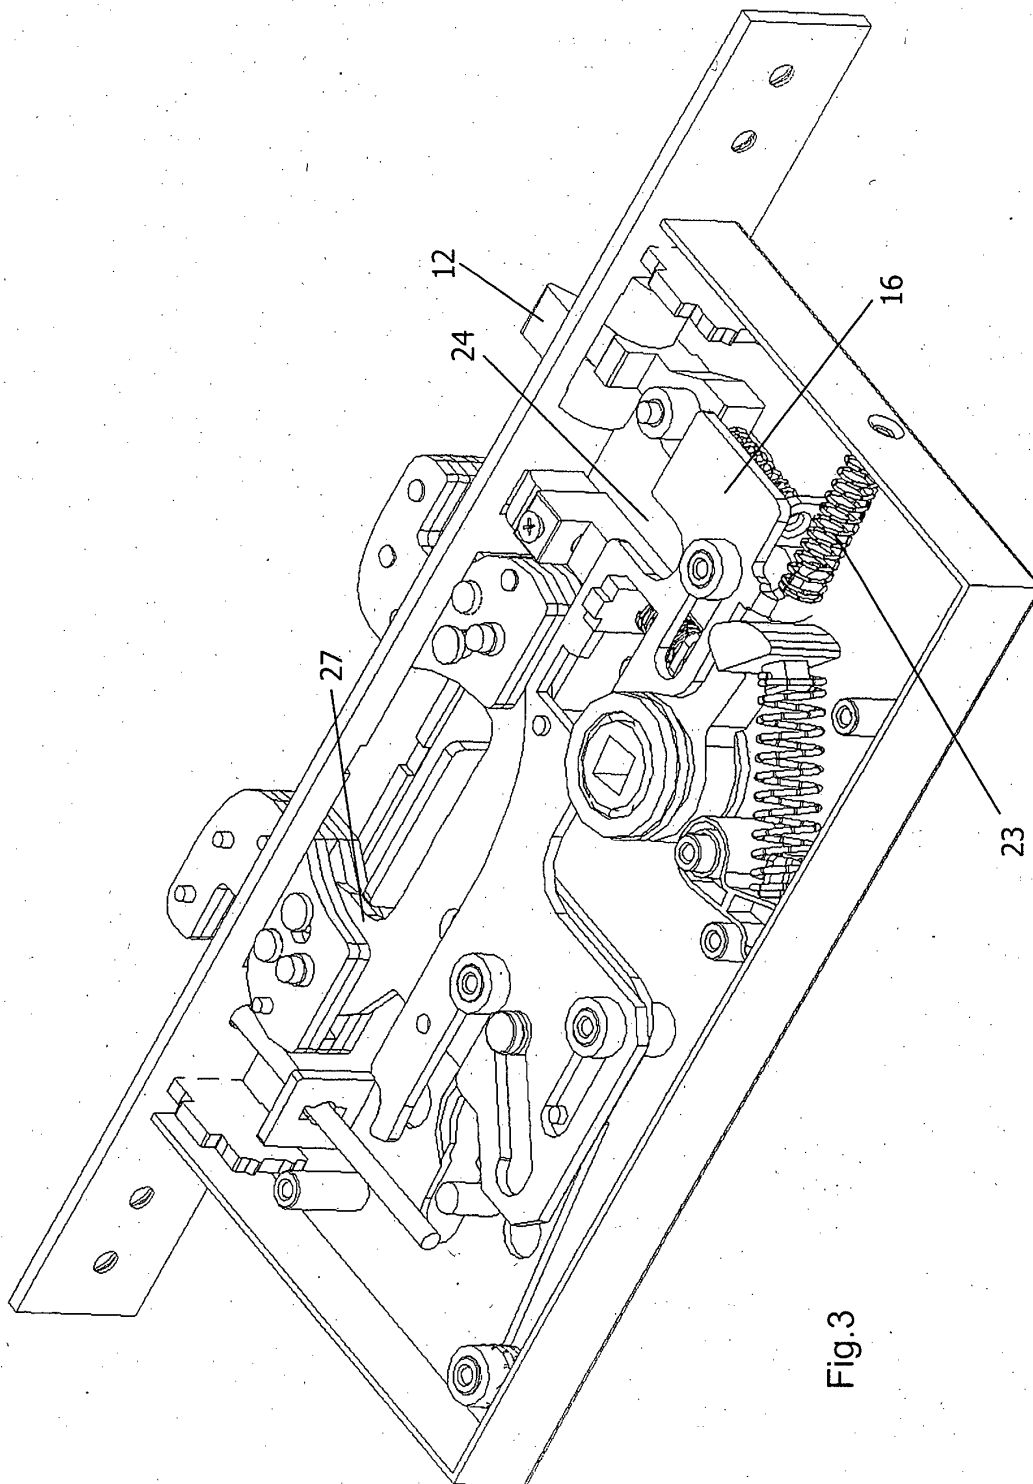


Fig.3

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- IT TO20000226 [0004]
- US 2002017120 A1 [0005]
- GB 2309996 A [0006]
- TR 200403655 U [0007]